



Topology

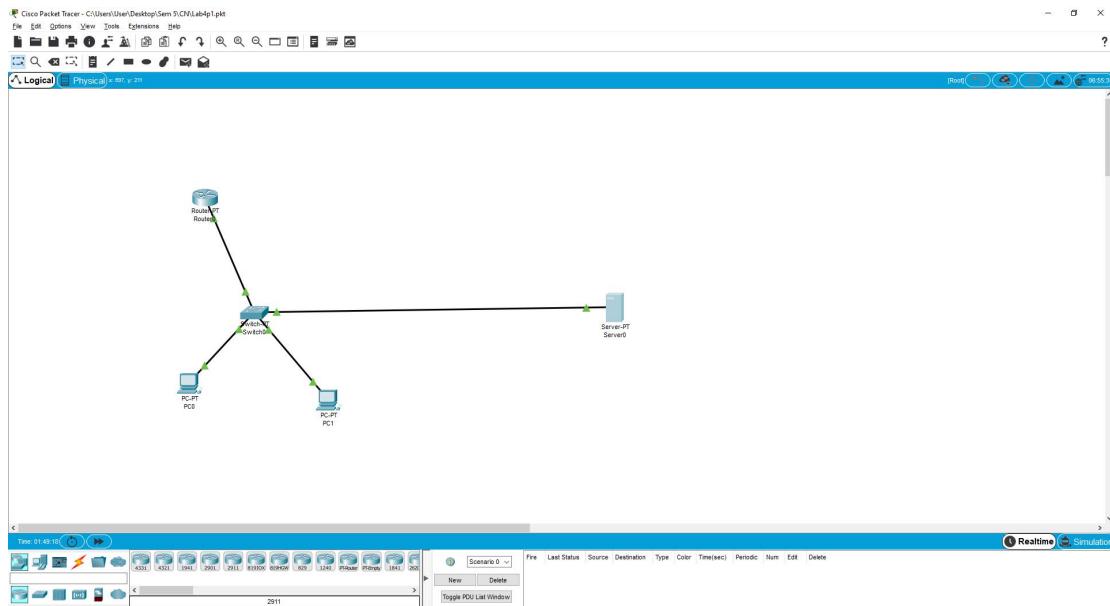

Setting IP using DHCP Pc0

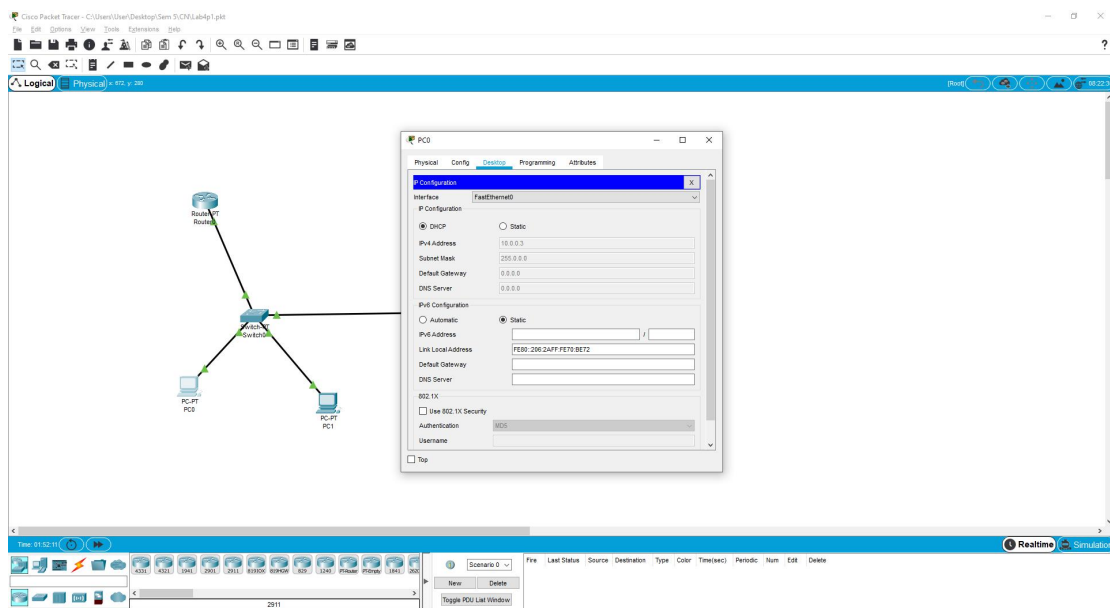

Setting IP using DHCP Pc1

The image shows the Cisco Packet Tracer interface. The main workspace displays a network topology with a central 'Switch' connected to a 'Router' and two PCs, 'PC-PT PC2' and 'PC-PT PC1'. A configuration window for 'PC1' is open, showing the 'Config' tab. The 'IP Configuration' section is selected, and the 'DHCP' radio button is chosen. The 'IPv4 Address' is set to '10.0.0.4', the 'Subnet Mask' is '255.0.0.0', the 'Default Gateway' is '0.0.0.0', and the 'DNS Server' is '0.0.0.0'. The 'IPv6 Configuration' section is also visible, with the 'Static' radio button selected. The 'Link Local Address' is 'FE80:201:0FFF:FE1B:52CE'. The 'Authentication' section shows a 'Username' of 'cisco'.

PC1 Configuration Window:

- Interface: FastEthernet0/24
- IP Configuration:
 - ☒ DHCP
 - ☐ Static
 - IPv4 Address: 10.0.0.4
 - Subnet Mask: 255.0.0.0
 - Default Gateway: 0.0.0.0
 - DNS Server: 0.0.0.0
- IPv6 Configuration:
 - ☐ Automatic
 - ☒ Static
 - IPv6 Address: /
 - Link Local Address: FE80:201:0FFF:FE1B:52CE
 - Default Gateway: /
 - DNS Server: /
- 802.1X:
 - ☐ Use 802.1X Security
 - Authentication: /
 - Username: cisco