

VISVESVARAYA TECHNOLOGICAL UNIVERSITY

“JnanaSangama”, Belgaum -590014, Karnataka.



LAB REPORT on INTERNET OF THINGS

Submitted by

DEEPINI S (1BM21CS050)

in partial fulfillment for the award of the degree of
BACHELOR OF ENGINEERING
in
COMPUTER SCIENCE AND ENGINEERING



B.M.S. COLLEGE OF ENGINEERING
(Autonomous Institution under VTU)
BENGALURU-560019
JUN-2023 to SEP-2023

B. M. S. College of Engineering,
Bull Temple Road, Bangalore 560019
(Affiliated To Visvesvaraya Technological University, Belgaum)
Department of Computer Science and Engineering



CERTIFICATE

This is to certify that the Lab work entitled “Internet Of Things Lab” carried out by **Deepini S (1BM21CS050)**, who is bonafide student of **B. M. S. College of Engineering**. It is in partial fulfillment for the award of **Bachelor of Engineering in Computer Science and Engineering** of the Visvesvaraya Technological University, Belgaum during the year 2023. The Lab report has been approved as it satisfies the academic requirements in respect of a **Internet of things lab - (22CS5PCIOT)** work prescribed for the said degree.

Dr. Gauri Kalnoor

Assistant professor
Department of CSE
BMSCE, Bengaluru

Dr. Jyothi S Nayak

Professor and Head
Department of CSE
BMSCE, Bengaluru

INDEX

| Sl. No. | Date | Program Title | Page No. |
|----------------|-------------|---|-----------------|
| 1. | 15-11-23 | LED Blinking | 2 |
| 2. | 15-11-23 | LED ON/OFF Using Pushbutton | 4 |
| 3. | 15-11-23 | LED Fading using Potentiometer | 6 |
| 4. | 22-11-23 | Nightlight Simulation | 9 |
| 5. | 22-11-23 | PIR with Arduino UNO | 11 |
| 6. | 22-11-23 | Ultrasound with Arduino UNO | 14 |
| 7. | 29-11-23 | Fire Alert System | 18 |
| 8. | 29-11-23 | Automatic irrigation controller simulation | 21 |
| 9. | 06-12-23 | Reading the code present on RFID tag | 23 |
| 10. | 06-12-23 | Access control through RFID | 27 |
| 11. | 27-12-23 | HC-05 Bluetooth at Command prompt | 28 |
| 12. | 10-01-24 | HC-05 Bluetooth Controlled by mobile | 30 |
| 13. | 10-01-24 | Bluetooth-Master Slave | 35 |
| 14. | 17-01-24 | GSM Module | 45 |

1. LED Blinking

Aim:

Turns on an LED on for one second, then off for one second, repeatedly.

Hardware Required:

- Arduino Board
- LED

Circuit diagram:


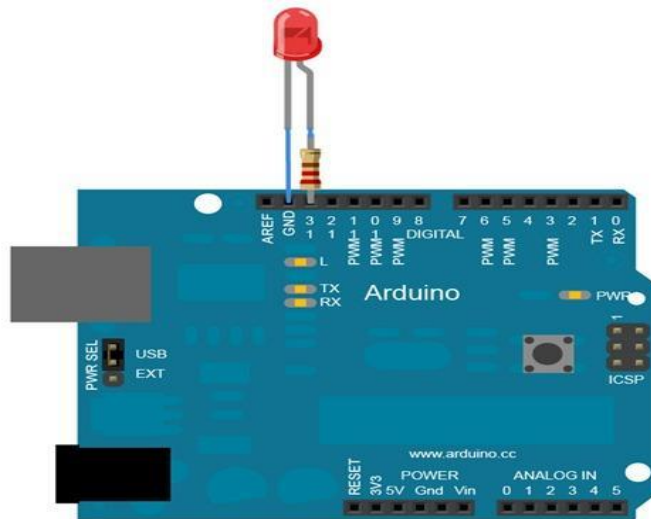


Fig.1.LED blinking

Handwritten code pic:

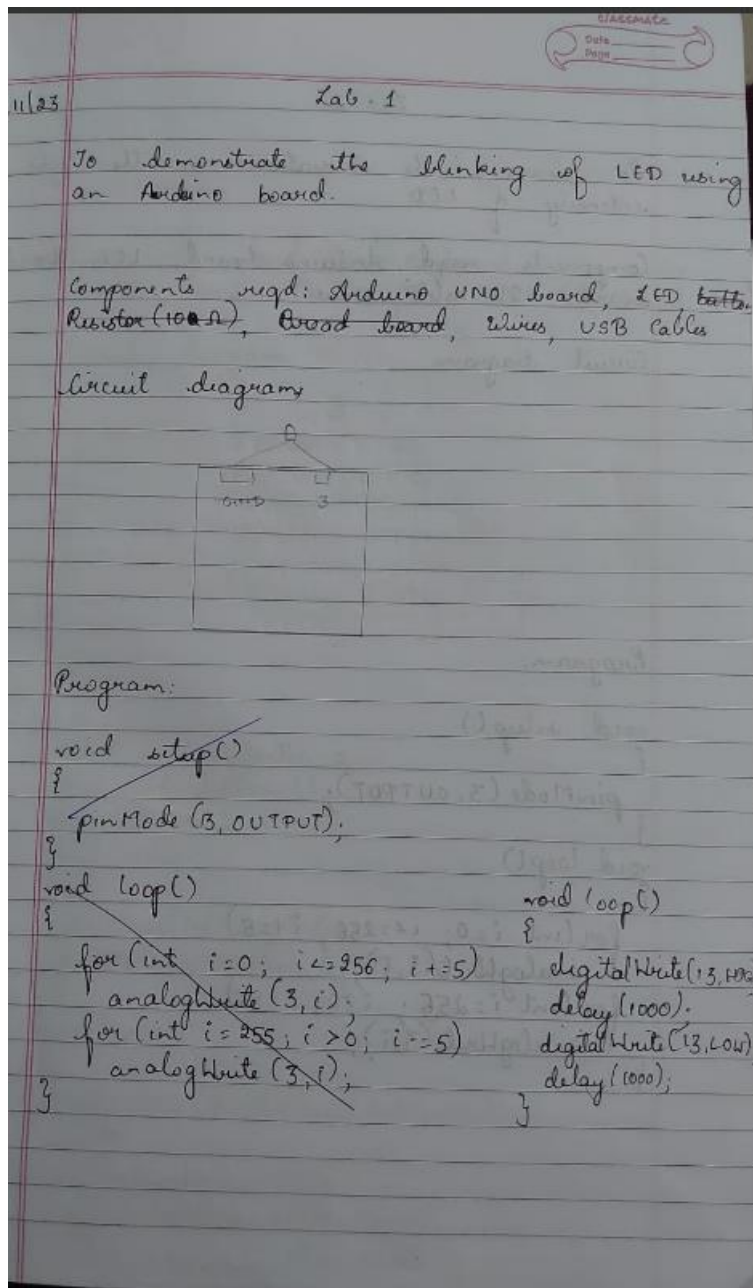

Code:

```

int led = 13;

void setup()
{
  pinMode(led, OUTPUT);
}

void loop() {
  digitalWrite(led, HIGH);

```

```
delay(1000);  
digitalWrite(led, LOW);  
delay(1000);  
}
```

Observation:

The code establishes a basic program to toggle an LED on and off in one-second intervals. Pin 13 is configured as the output for the LED, and the main loop continuously switches the LED on for one second, then off for another second.

2. LED ON/OFF Using Pushbutton

3.

Aim:

Turn an LED ON /OFF using a Pushbutton.

Hardware Required:

- Arduino Board
- LED
- Push button

Circuit diagram:


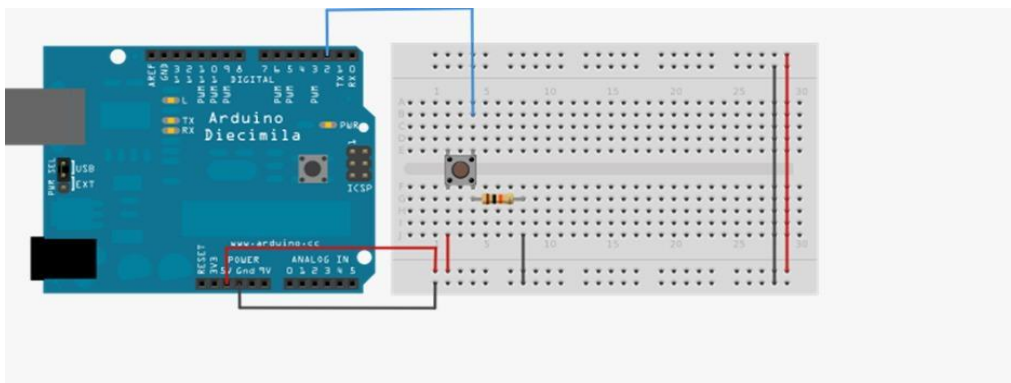


Fig.2.LED on/off using pushbutton

Handwritten code pic:

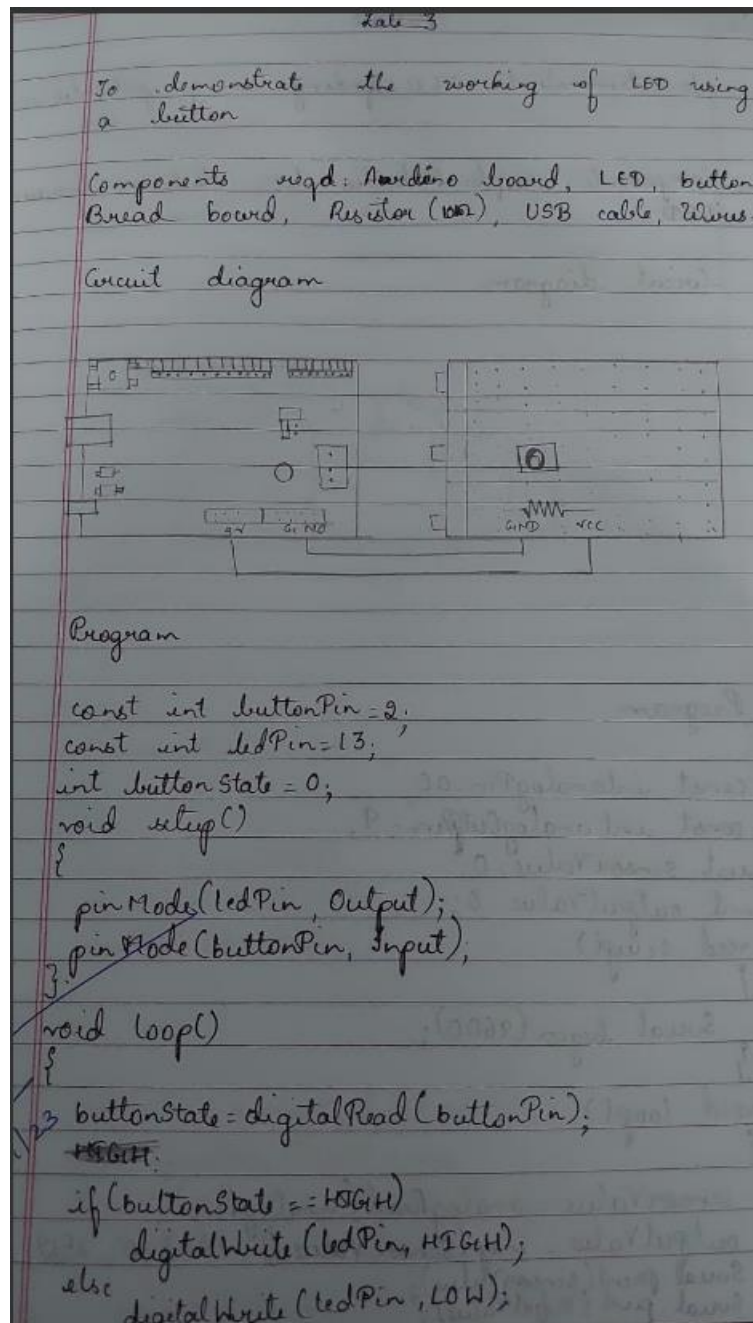

Code:

```
const int buttonPin = 2;
const int ledPin = 13;
int buttonState = 0;
void setup() {
  pinMode(ledPin, OUTPUT);
  pinMode(buttonPin, INPUT); }
```



```
void loop() {  
  buttonState = digitalRead(buttonPin);  
  if (buttonState == HIGH) {  
    digitalWrite(ledPin, HIGH);  
  } else {  
    digitalWrite(ledPin, LOW);  
  }  
}
```

Observation:

The code achieves desired functionality of turning the LED on and off based on the state of the push button. When the button is pressed, the LED lights up. This interactive behavior enhances the user experience, where the LED state is directly controlled by the push button's input.

4. LED Fading using Potentiometer

Aim:

To control the brightness of an LED using a Potentiometer.

Hardware Required:

- Arduino Board
- LED
- Potentiometer

Circuit diagram:


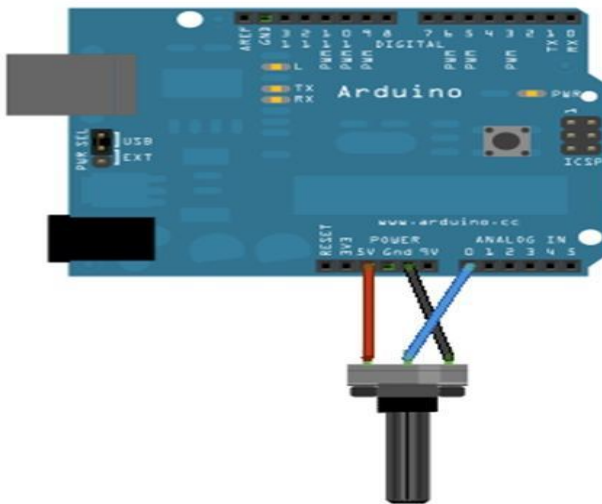


Fig.3-LED fading using potentiometer

Handwritten code pic:

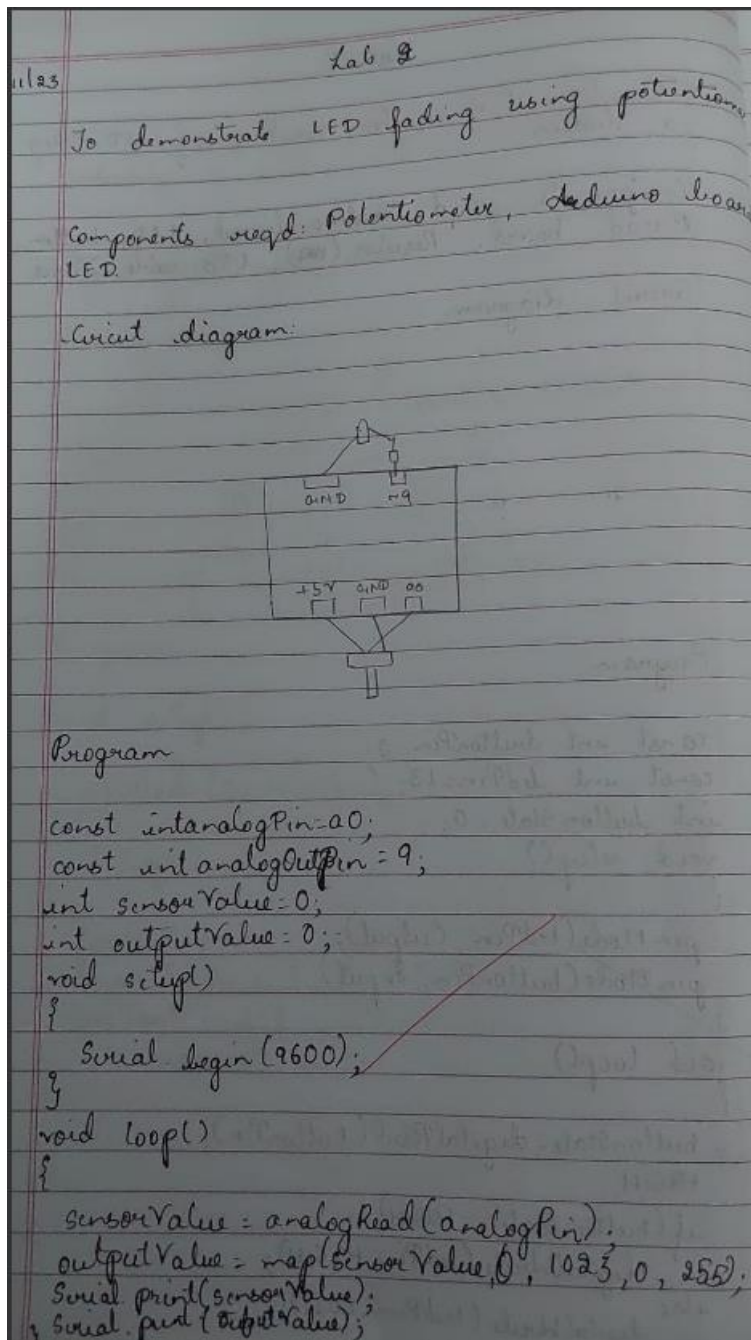

Code:

```

const int potPin = A0;
const int ledPin = 9;
void setup() {
  pinMode(ledPin, OUTPUT);
}
void loop() {

```

```
int potValue = analogRead(potPin);  
int brightness = map(potValue, 0, 1023, 0, 255);  
analogWrite(ledPin, brightness);  
}
```

Observation:

The code effectively achieves the desired outcome, enabling the dynamic control of the LED's brightness through the potentiometer. As the potentiometer is adjusted, the `analogRead` function captures its varying values (ranging from 0 to 1023). The mapping of these values to a brightness scale (0 to 255) results in adjustment of the LED's intensity.

5. Nightlight Simulation

Aim:

Simulating a night light using LDR and PIR

Hardware Required:

- 1 LED
- 1 LDR
- 110K resistor

Connection:

1. Attach one leg of LDR to 5V and another leg to Arduino Analog pin A0
2. Attach one leg of 110K resistor with that leg of LDR connected to A0
3. Attach another leg of resistor to the ground
4. Connect the positive leg of LED to pin 11 and negative to GND

Circuit diagram:

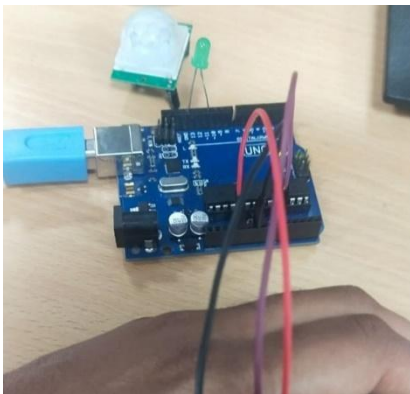


Fig 4.1- when it is bright, the LED is off.


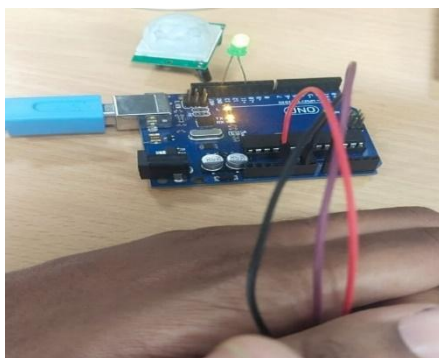


Fig 4.2- when dark, the LED turns on.

Handwritten code pic:

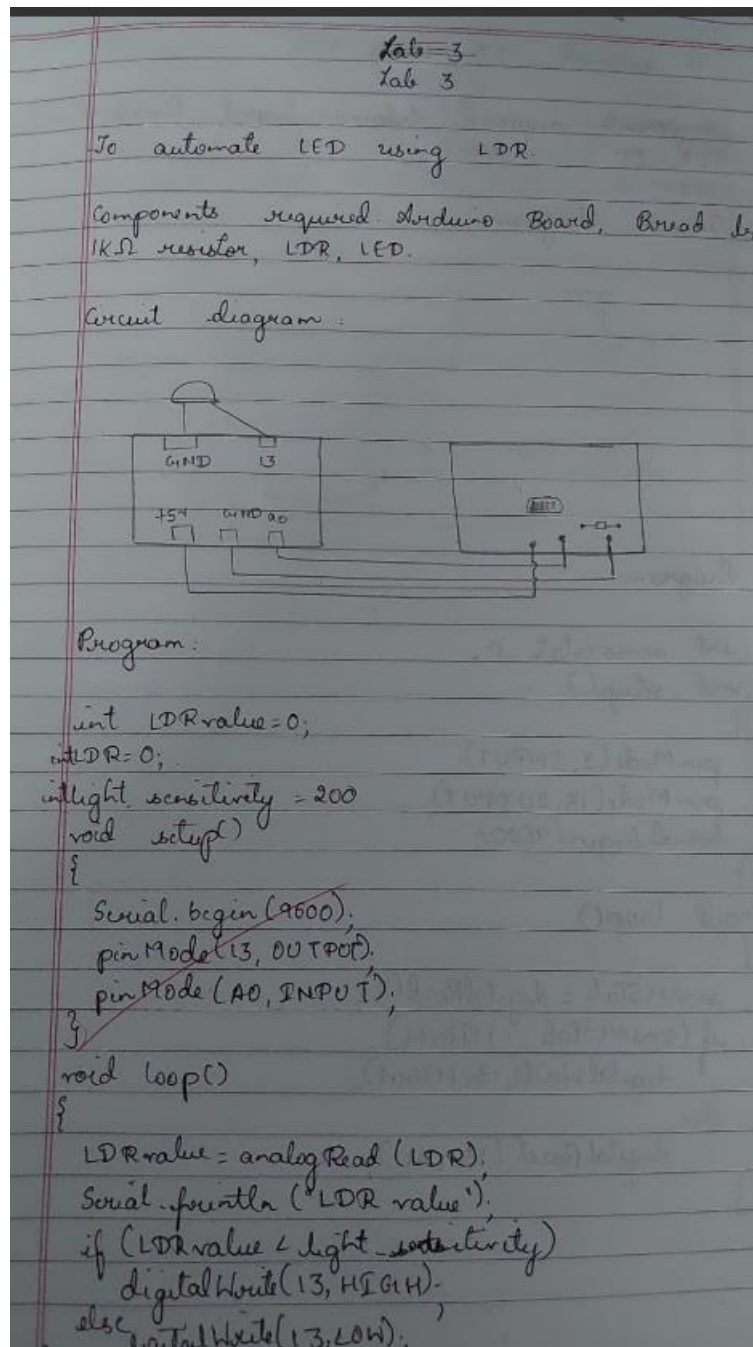

Code:

```
int LDR = 0;
int LDRValue = 0;
int light_sensitivity = 500;
void setup()
```

```
{  
Serial.begin(9600);  
pinMode(11, OUTPUT);  
}  
void loop()  
{  
LDRValue = analogRead(LDR);  
Serial.println(LDRValue);  
delay(50);  
if (LDRValue < light_sensitivity)  
{  
digitalWrite(11, HIGH);  
}  
else  
{  
digitalWrite(11, LOW);  
}  
delay(1000);  
}
```

Observation:

The code successfully achieves the goal of simulating a night light based on the ambient light levels detected by the LDR. The analogRead function captures the LDR values, which are printed to the serial monitor for monitoring. The conditional statement compares these values to a light sensitivity threshold, and if the ambient light falls below this threshold, the LED is turned on, simulating a night light.

6. PIR with Arduino UNO

Aim: To detect the presence of human.

Hardware Required:

- 1 LED
- 1 PIR
- Arduino UNO

Circuit diagram:

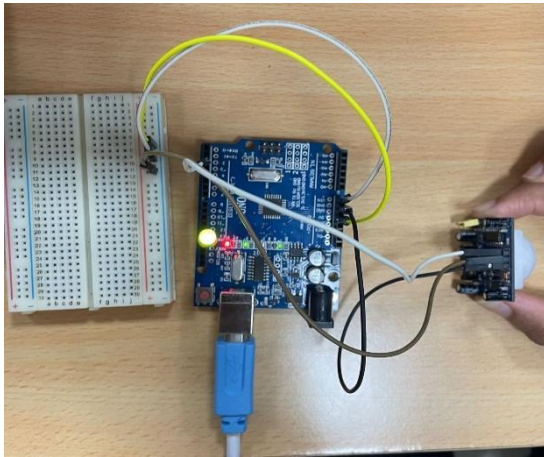



Fig 5- When motion is detected LED is high

Handwritten code pic:

To automate LED using PIR


Components required: Arduino board, Bread board,
PIR, LED.

Circuit diagram:

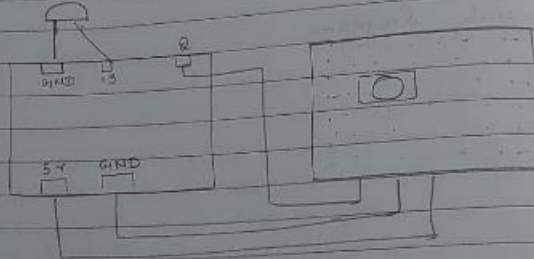

Program:

```
int sensorState = 0;
void setup()
{
  pinMode(2, INPUT);
  pinMode(13, OUTPUT);
  Serial.begin(9600);
}
void loop()
{
  sensorState = digitalRead(2);
  if (sensorState == HIGH)
    digitalWrite(13, HIGH);
  else
    digitalWrite(13, LOW);
}
```

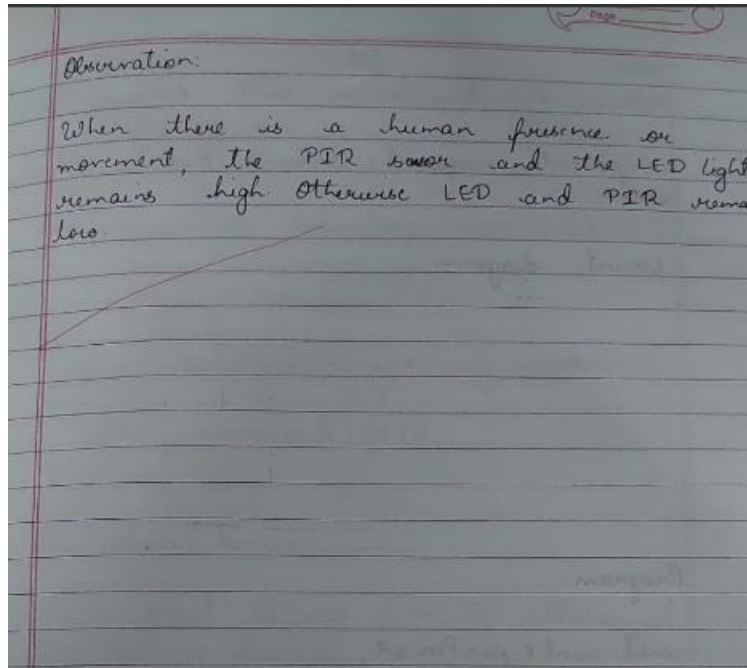**Code:**

```
int sensorState = 0;

void setup()
{
  pinMode(2, INPUT);
  pinMode(13, OUTPUT);
  Serial.begin(9600); }

void loop()
{
  sensorState = digitalRead(2);
  if (sensorState == HIGH) {
    digitalWrite(13, HIGH);
    Serial.println("Sensor activated!");
  } else {
    digitalWrite(13, LOW);
  }
  delay(10); }
```

Observation:

The code effectively utilizes the PIR sensor to detect motion and responds by controlling the state of the LED. When motion is detected, the LED is illuminated, and a message is printed to the serial monitor.

7. Ultrasound with Arduino UNO

Aim: To detect the distance of an object.

Hardware Required:

- Ultrasonic sensor
- jumper wires(female to male)
- Arduino UNO

Circuit diagram:


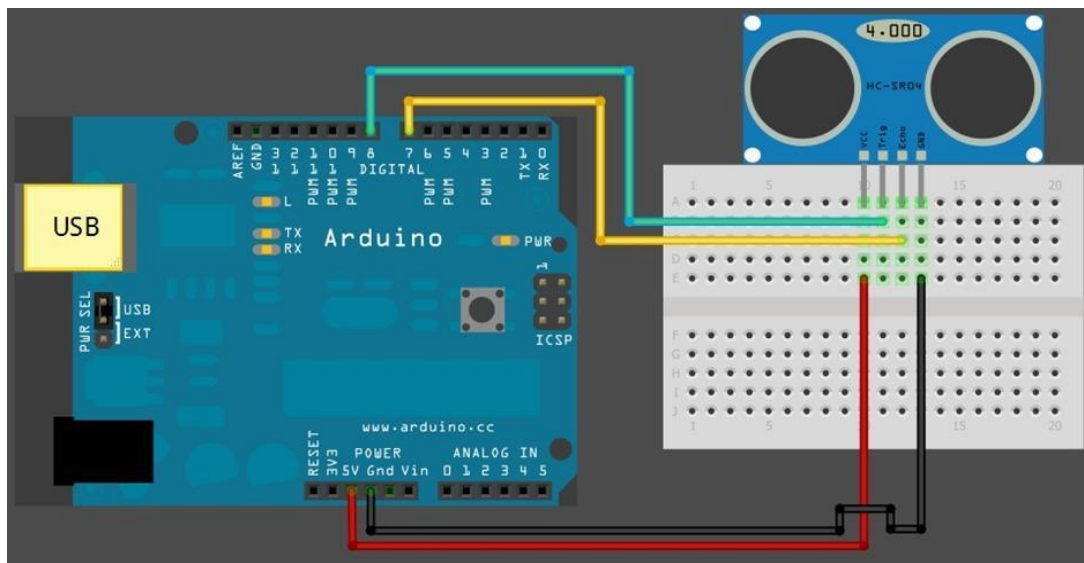


Fig 6-measures the distance of nearest object.

Handwritten code pic:


~~title~~ ^{Lab}
Ultrasonic demonstration with Arduino Uno.
Components required: Arduino Board, Ultrasonic sensor.

Circuit diagram

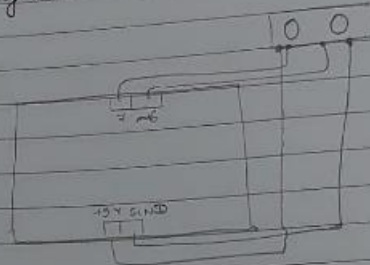

Program:

```
const int pingPin = 7;
const int echoPin = 6;
void setup()
{
    Serial.begin(9600);
    pinMode(pingPin, OUTPUT);
    pinMode(echoPin, INPUT);
}
void loop()
{
    long duration, inches, cm;
    digitalWrite(pingPin, LOW);
    delayMicroseconds(2);
    digitalWrite(pingPin, HIGH);
    duration = pulseIn(echoPin, HIGH);
    inches = microsecondsToInches(duration);
    Serial.print(inches);
```

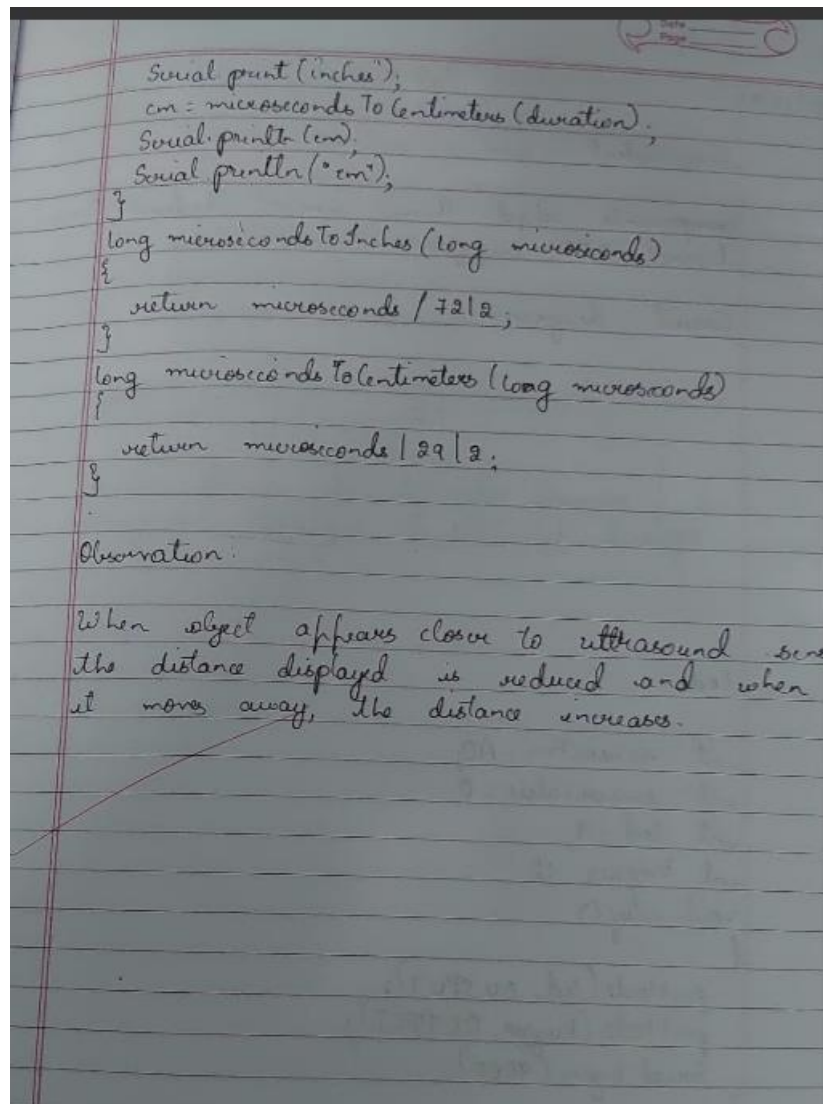

Code:

```
const int pingPin = 7;  
const int echoPin = 6;  
void setup()  
{  
    Serial.begin(9600);  
    pinMode(pingPin, OUTPUT);  
    pinMode(echoPin, INPUT);  
}
```

```

void loop()
{
  long duration, inches, cm;
  digitalWrite(pingPin, LOW);
  delayMicroseconds(2);
  digitalWrite(pingPin, HIGH);
  delayMicroseconds(10);
  digitalWrite(pingPin, LOW);
  duration = pulseIn(echoPin, HIGH);
  inches = microsecondsToInches(duration);
  Serial.print(inches);
  Serial.print("inches");
  cm = microsecondsToCentimeters(duration);
  Serial.print(cm);
  Serial.println("cm");
}

long microsecondsToInches(long microseconds)
{
  return microseconds / 74 / 2; }

long microsecondsToCentimeters(long microseconds)
{ return microseconds / 29 / 2;
}

```

Observation:

The code effectively utilizes the ultrasonic sensor to measure distance and provides readings in both inches and centimeters. In the loop, a pulse is generated by triggering the ultrasonic sensor, and the duration of the pulse is measured using the pulseIn() function.

8. Fire Alert

Aim:

Fire alarm simulation.

Hardware Required:

- Flame sensor (Analogue Output)
- Arduino
- Bread board
- LED
- Buzzer
- Connecting wires

Connections:

Flame sensor interfacing to Arduino

Flame sensor to Arduino

vcc to vcc

gnd to gnd

A0 to A0

Led interfacing to Arduino

LED +ve is connected to 9th pin of Arduino


LED -ve is connected to gnd pin of arduino

Buzzer interfacing to Arduino

Buzzer +ve is connected to 12th pin of Arduino

Buzzer -ve is connected to GND pin of Arduino

Circuit diagram:

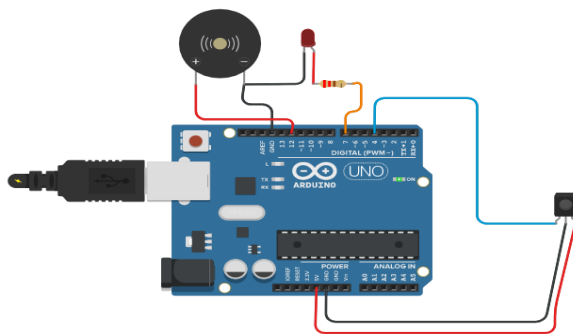

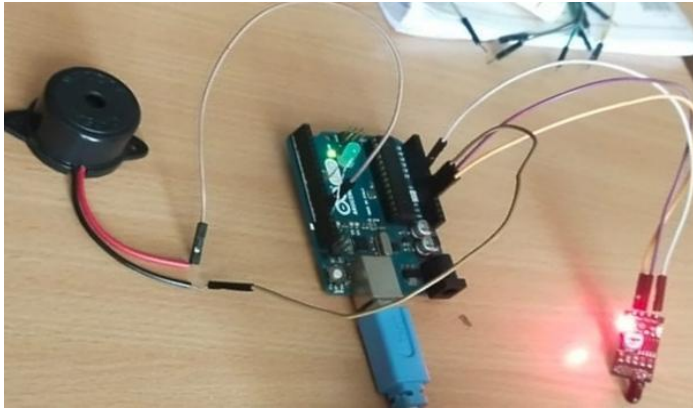


Fig 7- When the fire is detected LED turns on.

Handwritten code pic:


29/12/23

Lab 4

Fire alert


Components used: Flame sensor, Arduino, Breadboard, LED, buzzer

Circuit diagram

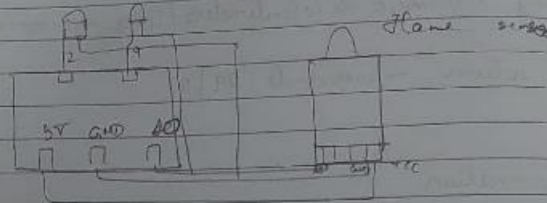

Code:

```
int sensorPin = A0;
int sensorValue = 0;
int led = 9;
int buzzer = 12;
void setup()
{
  pinMode(led, OUTPUT);
  pinMode(buzzer, OUTPUT);
  Serial.begin(9600);
}
void loop()
{
  sensorValue = analogRead(sensorPin);
  if (sensorValue < 100)
  {
    digitalWrite(led, HIGH);
    digitalWrite(buzzer, HIGH);
  }
}
```

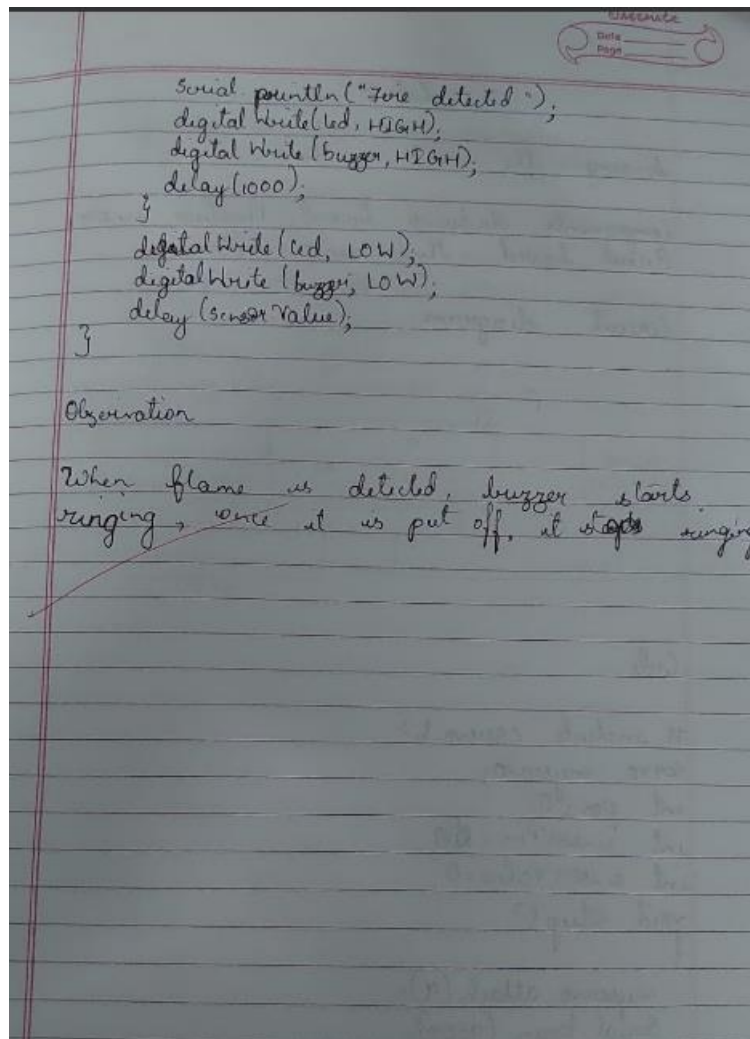

Code:

```
int sensorPin = A0; // select the input pin for the LDR
int sensorValue = 0; // variable to store the value coming from the sensor
int led = 9; // Output pin for LED
int buzzer = 12; // Output pin for Buzzer
void setup() {
  pinMode(led, OUTPUT);
  pinMode(buzzer, OUTPUT);
  Serial.begin(9600);
}
void loop()
{
```

```
sensorValue = analogRead(sensorPin);  
Serial.println(sensorValue);  
if (sensorValue < 100)  
{  
  Serial.println("Fire Detected");  
  Serial.println("LED on");  
  digitalWrite(led,HIGH);  
  digitalWrite(buzzer,HIGH);  
  delay(1000);  
}  
digitalWrite(led,LOW);  
digitalWrite(buzzer,LOW);  
delay(sensorValue);  
}
```

Observation:

The code effectively simulates a fire alarm by monitoring the analog output of the flame sensor. When the sensor value falls below a predefined threshold (100 in this case), indicating the detection of a flame, the LED and buzzer are activated, and the corresponding messages are printed to the serial monitor.

9. Automatic irrigation controller simulation

Aim:

Sensing the soil moisture and sprinkling the Water simulation.

Hardware Required:

- Arduino
- Moisture Sensor
- Breadboard
- Min servo motor

Connections:

Moisture sensor VCC to Arduino 5V

Moisture sensor GND to Arduino GND

Moisture sensor A0 to Arduino A0

Servo motor VCC to Arduino 5V

Servo motor GND to Arduino GND

Servo Motor Signal to Arduino digital pin 9

Circuit diagram:

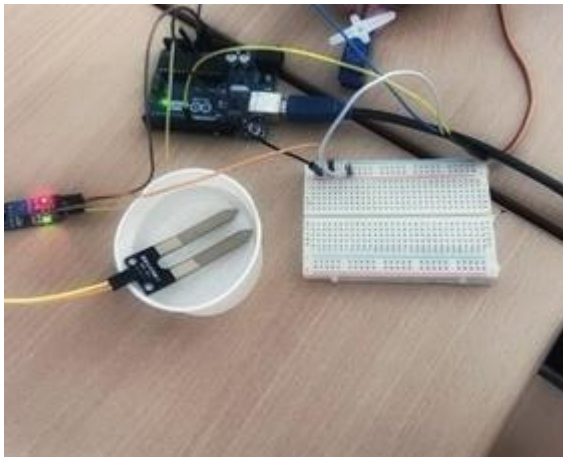


Fig 8- When moisture detected LED High, else Servo motor is on.


Handwritten code pic:

Lab 5

Sensing the soil moisture

Components: Arduino board, Moisture sensor, Bread board, Mini servo motor.

Circuit diagram

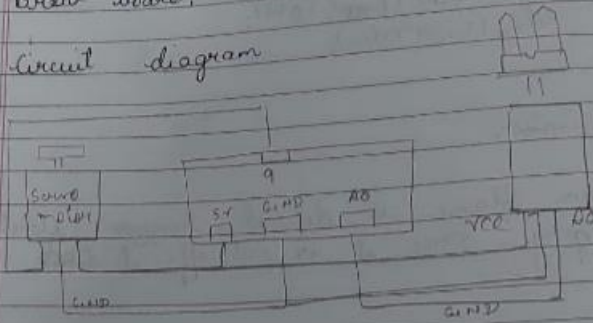


Code:

```
#include <servo.h>
servo myservo;
int pos = 0;
int sensorPin = A0;
int sensorValue = 0;

void setup()
{
  myservo.attach(9);
  Serial.begin(9600);
}

void loop()
{
  sensorValue = analogRead(sensorPin);
  Serial.println(sensorValue);
  if (sensorValue > 500)
```

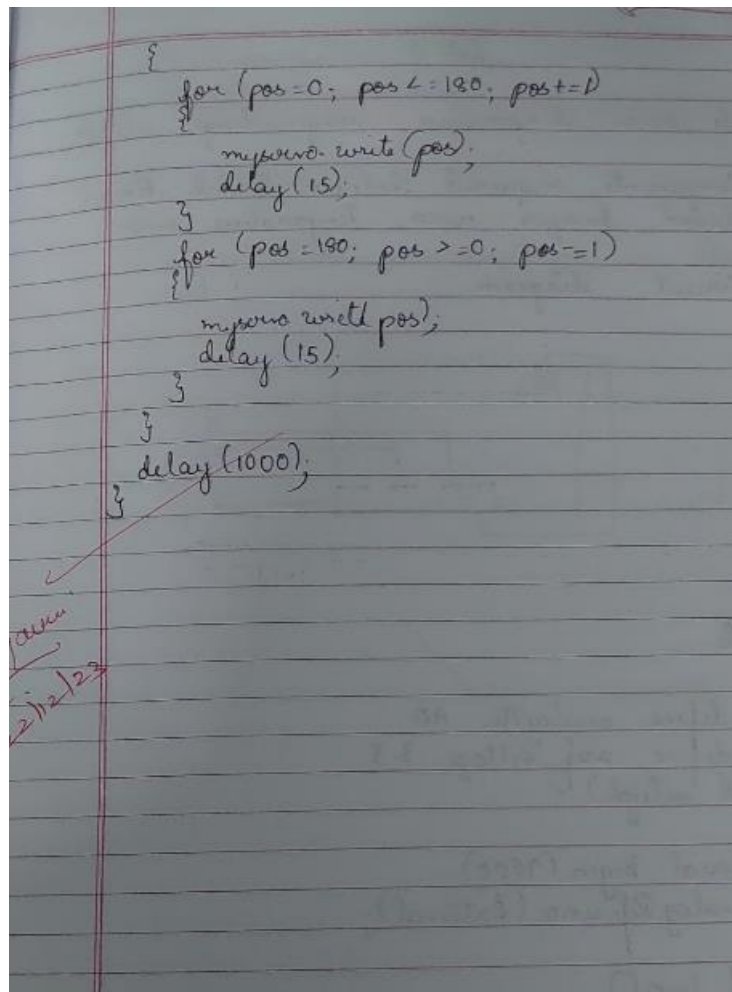

Code:

```
#include <Servo.h>

Servo myservo;

int pos = 0;

int sensorPin = A0;

int sensorValue = 0;

void setup() {
  myservo.attach(9);
  Serial.begin(9600);
}

void loop()
{
```

```
sensorValue = analogRead(sensorPin);  
Serial.println (sensorValue);  
if(sensorValue<500)  
{  
  for (pos = 0; pos < 180; pos += 1)  
  { // goes from 0 degrees to 180 degrees  
    myservo.write(pos);  
    delay(15); // waits 15ms for the servo to reach the position  
  }  
  for (pos = 180; pos > 0; pos -= 1)  
  { // goes from 180 degrees to 0 degrees  
    myservo.write(pos);  
    delay(15); // waits 15ms for the servo to reach the position  
  }  
}  
delay (1000);  
}
```

Observation:

The code simulates an automatic irrigation controller by utilizing a moisture sensor to monitor soil moisture levels. When the moisture level drops below the defined threshold, the servo motor moves to simulate the activation of a sprinkler system.

10. **Reading the code present on RFID tag**

Aim:

The following code will read the code present on RFID tag and print it in serial monitor.


Connection:

5V-Arduino 5V

GND-Arduino GND


Tx-pin 9

Circuit diagram:

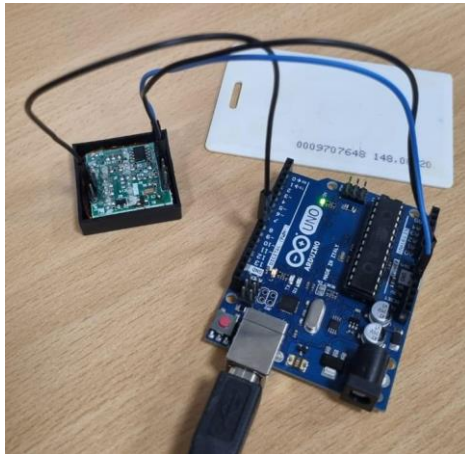

To implement RFID reader & RFID Tag on
Components required: Arduino board, RFID
Reader, RFID Tag.

Circuit diagram

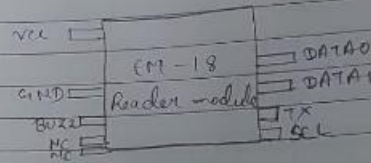

Code:

```
#include <SoftwareSerial.h>
SoftwareSerial mySerial(9, 10);
void setup()
{
    mySerial.begin(9600);
    Serial.begin(9600);
}
void loop()
{
    if (mySerial.available() > 0)
        Serial.write(mySerial.read());
}
```

For multiple tags

```
#include <SoftwareSerial.h>
SoftwareSerial mySerial(9, 10);
int read-count=0, Tag-count=0, i=0, k=0;
char data-temp, RFID data[12], data_scan[6][12];
boolean sleep-control;
```

Code:

```
#include<SoftwareSerial.h>;
SoftwareSerial mySerial(9, 10);
int count = 0; // count = 0
char input[12]; // character array of size 12
boolean flag = 0; // flag =0
```

```
void setup()
{
  Serial.begin(9600);                // begin serial port with baud rate 9600bps
  mySerial.begin(9600); }
void loop()
{  if(mySerial.available())
  {  count = 0;
    while(mySerial.available() && count < 12)
    {
      input[count] =mySerial.read();
      count++;
      delay(5);  }
    Serial.print(input);
  }}
}}
```

Observation:

The output in the serial monitor is the RFID tag number, and it allows for real-time monitoring and verification of the data read from the RFID tag.

11. Access control through RFID

Aim:

The following code will read the code present on RFID tag tapped. If the code matches with the previously known tag (configured in the code), it will grant access (here LED will glow), otherwise access will be denied.

Connection:

5V-Arduino 5V

GND-Arduino GND

Tx-pin 9

Led-pin 12

Circuit diagram:

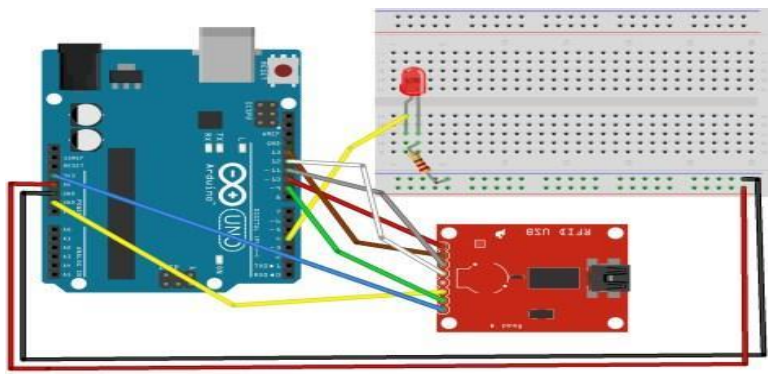


Fig.10.Access control through RFID

Handwritten code pic:

Date _____
 Page _____


```

void setup()
{
  mySerial.begin(9600);
  Serial.begin(9600);
}

void loop()
{
  RecvData();
  StoreData();
  PrintData();
}

void RecvData()
{
  if (mySerial.available() > 0)
  {
    data_tmp = mySerial.read();
    RFID_data[read_count] = data_tmp;
    read_count++;
  }
}

void StoreData()
{
  if (read_count == 12)
  {
    disp_control = true;
    for (k = tag_count; k < tag_count + 1; k++)
    {
      for (j = 0; j < 12; j++)
        data_store[k][j] = RFID_data[j];
    }
    read_count = 0;
    tag_count++;
  }
}
  
```

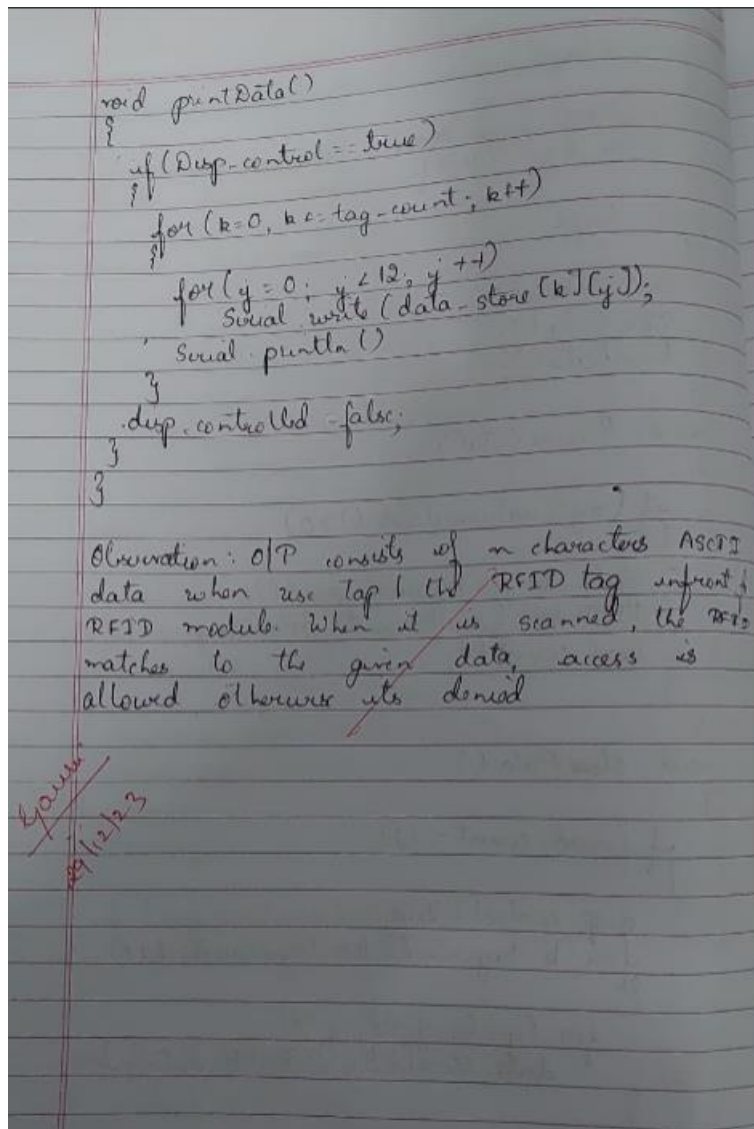

Code:

```

#include<SoftwareSerial.h>;

SoftwareSerial mySerial(9, 10);

#define LEDPIN 12

char tag[] = "5300292DD087;" // Replace with your own Tag ID
char input[12]; // A variable to store the Tag ID being presented
int count = 0; // A counter variable to navigate through the input[] character array
boolean flag = 0; // A variable to store the Tag match status

void setup()
{

```

```

Serial.begin(9600);
mySerial.begin(9600);
pinMode(LEDPIN,OUTPUT); }
void loop()
{
if(mySerial.available())
{   count = 0;
while(mySerial.available() && count < 12)
{
input[count] = mySerial.read();
count++; // increment counter
delay(5);
}
if(count == 12)
{
count =0; // reset counter varibale to 0
flag = 1;
while(count<12 && flag !=0)
{
if(input[count]==tag[count])
flag = 1;
else
flag=0;
count++; // increment i  }}
if(flag == 1) // If flag variable is 1, then it means the tags match
{
Serial.println("Access Allowed!");
digitalWrite(LEDPIN,HIGH);

```

```
delay (2000);  
digitalWrite (LEDPIN,LOW); }  
else  
{  
Serial.println("Access Denied"); // Incorrect Tag Message  
digitalWrite(LEDPIN,LOW);  
delay(2000);  }  
for(count=0; count<12; count++)  
{  
input[count]= 'F' ;  
}  
count = 0; // Reset counter variable  
}  
}
```

Observation:

Upon tapping an RFID tag, the code reads the tag's code and compares it with the predefined tag (tag[]). If the codes match, access is granted, and the LED indicator lights up for a brief period. If there is no match, access is denied, and the LED remains off.

HC-05 Bluetooth Module

HC-05 PinOut (Right) :

- KEY: If brought HIGH before power is applied, forces AT Command Setup Mode.

LED blinks slowly (2 seconds)

- VCC: +5 Power
- GND: System / Arduino Ground
- TXD: Transmit Serial Data from HC-05 to Arduino Serial Receive. NOTE: 3.3V

HIGH level: OK for Arduino

- RXD: Receive Serial Data from Arduino Serial Transmit
- STATE: Tells if connected or not

12. HC-05 at Command prompt

Aim :


The following code will help establish communication between arduino board and HC-05 Bluetooth module

Hardware Required :

- HC-05 Bluetooth module
- Arduino uno
- Jumper wires

Connections:

- 1.Vcc of Bluetooth to 5v of arduino
- 2.GND of Bluetooth to Ground of arduino
3. TXD of Bluetooth to Rx of arduino
4. RXD of Bluetooth to Tx of arduino

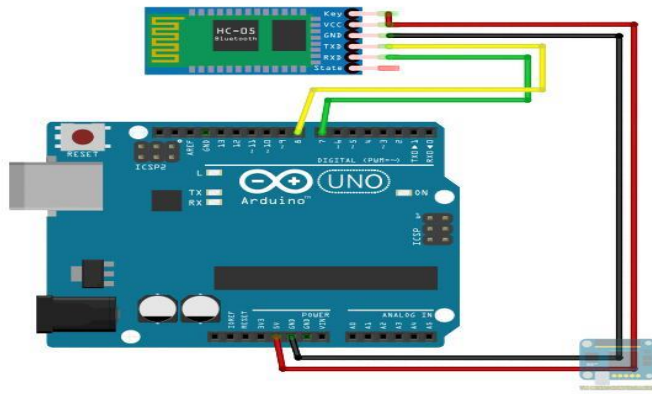


Handwritten code pic:

HC-05 Bluetooth Module

Components required: HC-05 Bluetooth module, Arduino UNO, Jumper Wires

Circuit diagram



Code:

```
#include <SoftwareSerial.h>
SoftwareSerial BTSerial(10, 11);
void setup()
{
    Serial.begin(9600);
    Serial.println("Enter AT commands");
    BTSerial.begin(38400);
}
void loop()
{
    if (BTSerial.available())
        Serial.write(BTSerial.read());
    if (Serial.available())
        BTSerial.write(Serial.read());
}
```

Code:

(For this program to work, HC-05 must be in command mode)

```
#include <SoftwareSerial.h>;
```

```
SoftwareSerial BTSerial(10, 11); // RX | TX
```

```
void setup()
```

```
{
```

```
    Serial.begin(9600);
```

```
Serial.println("Enter AT commands:");  
BTSerial.begin(38400); // HC-05 default speed in AT command mode  
}  
void loop ()  
{  
  if (BTSerial.available())  
    Serial.write(BTSerial.read());  
  if (Serial.available())  
    BTSerial.write(Serial.read()); }  
}
```

13. **HC-05 Controlled by mobile**

Aim :

To control an LED using a Bluetooth module (such as HC-05) in data mode, with commands sent from an Arduino Bluetooth app

Hardware Required :

- HC-05 Bluetooth module
- Led
- Arduino uno
- Jumper wires


Connection:

1. Bluetooth Module (HC-05) to Arduino:


- Connect the TX pin of the HC-05 module to a digital pin on the Arduino (e.g., pin 2).
- Connect the RX pin of the HC-05 module to a digital pin on the Arduino (e.g., pin 3).
- Connect the VCC pin of the HC-05 module to the 5V pin on the Arduino.
- Connect the GND pin of the HC-05 module to the GND pin on the Arduino.


2. LED to Arduino:

- Connect the anode (longer lead) of the LED to the digital pin 13
- Connect the cathode (shorter lead) of the LED to a current-limiting resistor
- Connect the other end of the resistor to the GND pin on the Arduino.

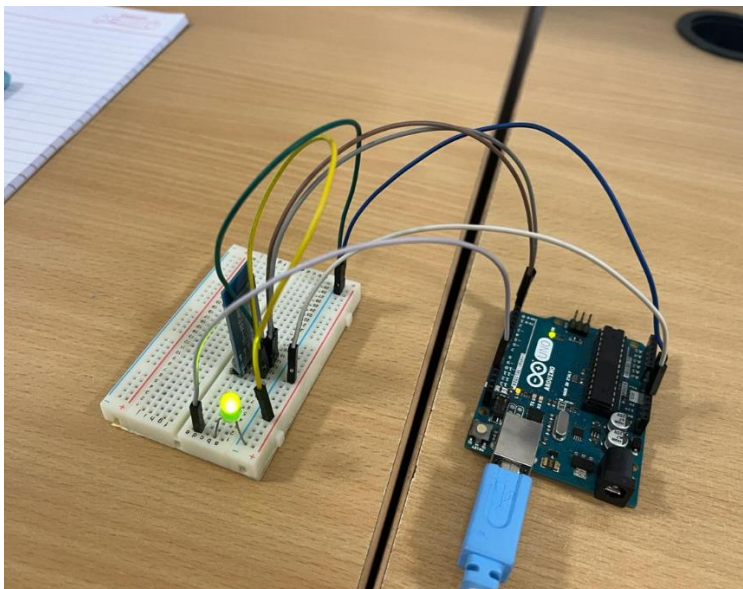

Handwritten code pic:

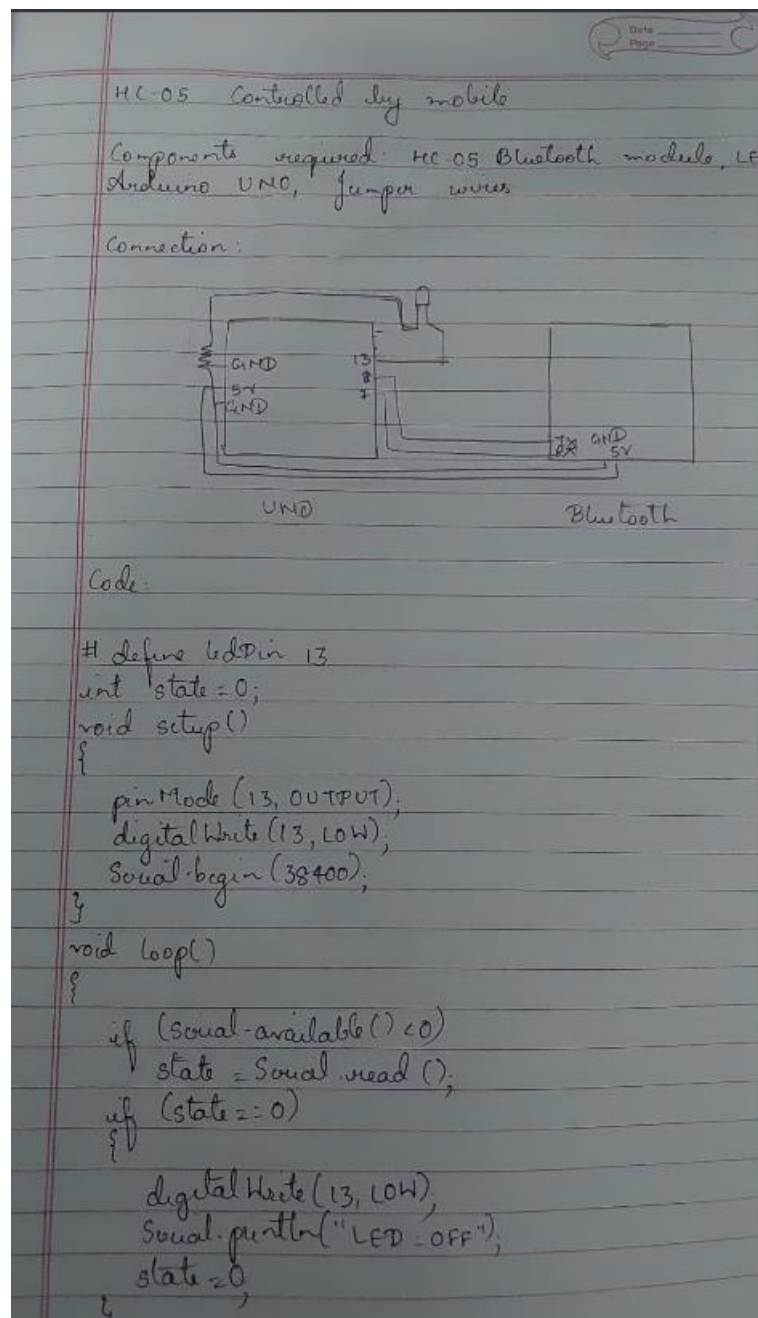

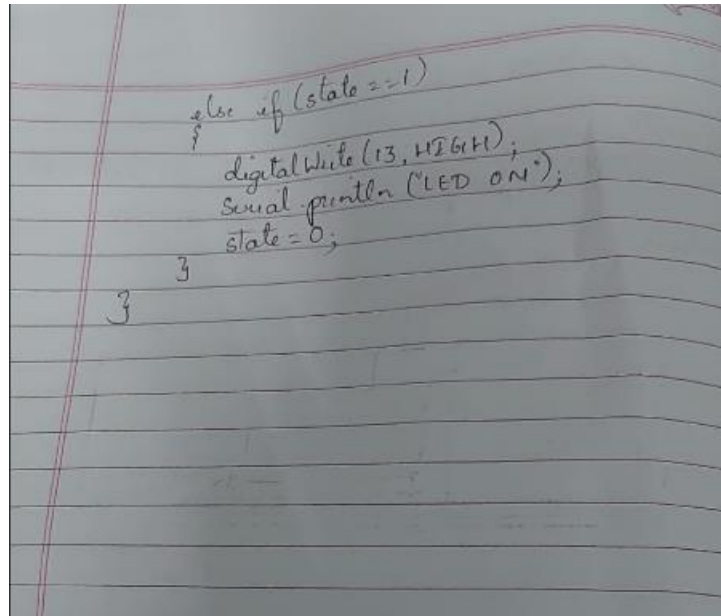

Code:

(For this code to work, HC-05 must be in DATA mode and Arduino Bluetooth App)

```
#define ledPin 13
```

```
int state = 0;
```

```
void setup() {
```

```
    pinMode(ledPin, OUTPUT);
```

```
    digitalWrite(ledPin, LOW);
```

```
    Serial.begin(38400);
```

```
}
```

```
void loop() {
```

```
    if(Serial.available() < 0)
```

```
{
```

```
    state = Serial.read(); // Reads the data from the serial port
```

```
}
```

```
if (state == "0") {
```

```
    digitalWrite(ledPin, LOW); // Turn LED OFF
```

```
    Serial.println("LED: OFF");
```

```
    state = 0;
```

```
}  
else if (state == "1") {  
    digitalWrite(ledPin, HIGH);  
    Serial.println("LED: ON");  
    state = 0; } }
```


13. BT-Master Slave

Aim :

To establish communication between a Bluetooth master device (likely a smartphone or another microcontroller acting as a master) and a Bluetooth slave device (Arduino with HC-05 module) to control an LED wirelessly.

Hardware Required :

For Bluetooth Slave (BT-Slave):

- Arduino Uno
- HC-05 Bluetooth Module
- Jumper Wires

For Bluetooth Master (BT-Master):

- Arduino Uno
- HC-05 Bluetooth Module
- LED
- Resistor
- Jumper Wires

Connections :

1. Bluetooth Slave (BT-Slave) Connections:

HC-05 Bluetooth Module:

- Connect the TX pin to Arduino digital pin 10.
- Connect the RX pin to Arduino digital pin 11.
- Connect the VCC pin to Arduino 5V.
- Connect the GND pin to Arduino GND.

2. Bluetooth Master (BT-Master) Connections:

HC-05 Bluetooth Module:


- Connect the TX pin to Arduino digital pin 10.
- Connect the RX pin to Arduino digital pin 11.
- Connect the VCC pin to Arduino 5V.
- Connect the GND pin to Arduino GND.

3. LED and Resistor:

- Connect the anode (longer lead) of the LED to Arduino digital pin 9.
- Connect the cathode (shorter lead) of the LED to one end of a current-limiting

resistor (220-330 ohms).

- Connect the other end of the resistor to Arduino GND.

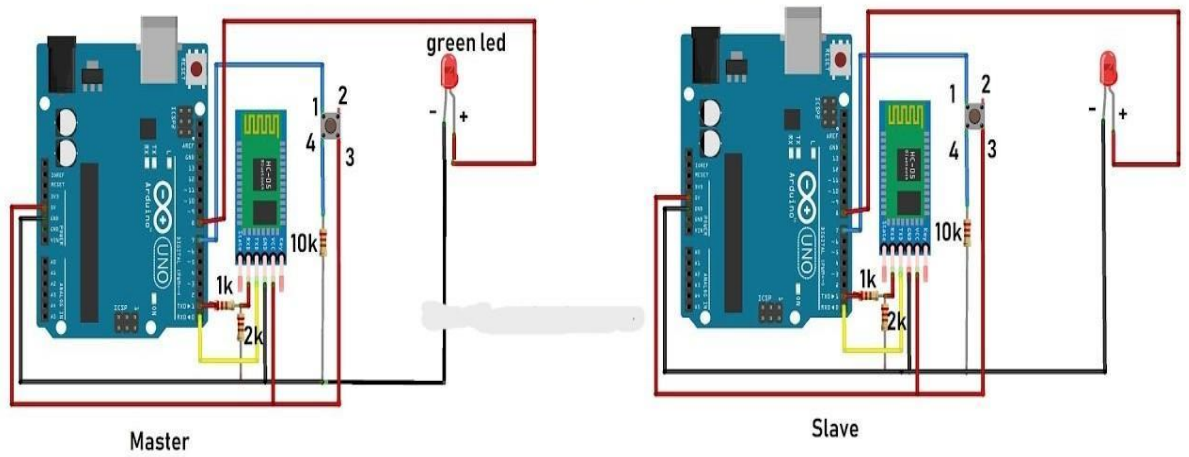


Handwritten code pic:

BT - Master Slave

Components reqd. Arduino UNO, HC-05 Bluetooth Module, Jumper Wires, LCD, Resistor

BT Slave Program

Circuit diagram

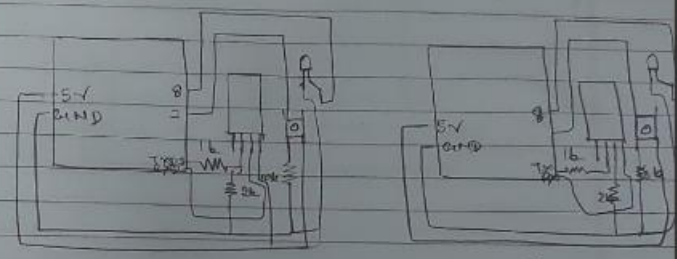


Code: Master

Slave

BT Slave

```
#include <SoftwareSerial.h>
SoftwareSerial BTSerial (10, 11)
String msg;
int p1 = 0;
void setup ()
{
  pinMode (9, OUTPUT);
  digitalWrite (9, LOW);
  Serial.begin (9600);
  BTSerial.begin (38400);
}
void loop ()
{
  if (BTSerial.available () > 0)
    msg = BTSerial.readString();
```

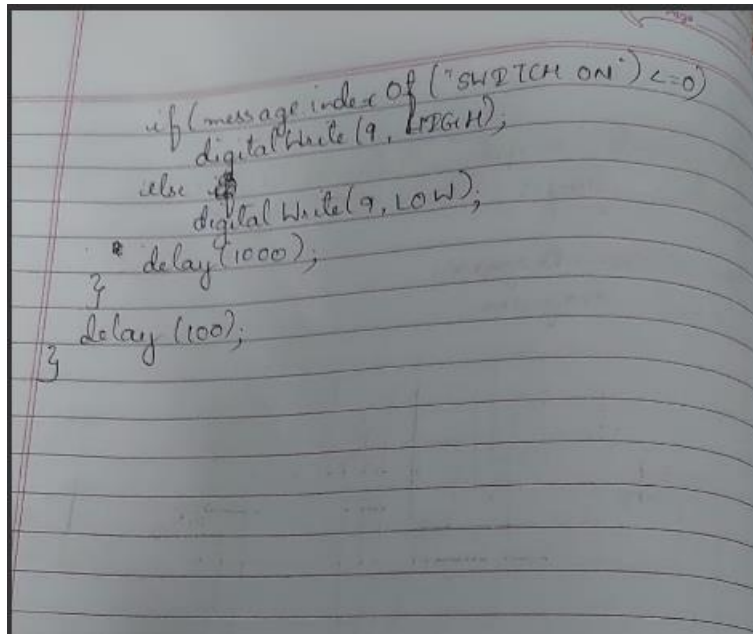

BT-Slave Program:

```
#include <SoftwareSerial.h>;

SoftwareSerial BTSerial(10, 11); // RX | TX

void setup() {
  Serial.begin(9600);
  BTSerial.begin(38400); // HC-05 default speed in AT command mode
}

void loop() {
  if(Serial.available())
  {
    String message = Serial.readString();
    Serial.println (message);
    BTSerial.write(message.c_str());
  } }
```

BT-Master Program:

```
#include <SoftwareSerial.h>;

SoftwareSerial BTSerial(10, 11); // RX | TX
```

```
#define ledPin 9

String message;

int potValue = 0;

void setup() {

  pinMode(ledPin, OUTPUT);

  digitalWrite(ledPin, LOW);

  Serial.begin(9600);

  BTSerial.begin(38400); // HC-05 default speed in AT command mode
}

void loop() {

  if(BTSerial.available() < 0){

    message = BTSerial.readString();

    if(message.indexOf("SWITCH ON")<=0)

    {

      digitalWrite(ledPin, HIGH); // LED ON

    }

    else if(message.indexOf("SWITCH OFF")<=0)

    {

      digitalWrite(ledPin, LOW); // LED OFF

    }

    delay(100); }

  delay(10);

}
```

14.GSM Module

1. GSM Module: Call to a particular number

Aim:


Call using Arduino and GSM Module – to a specified mobile number inside the program.

Hardware Required :


- Arduino Uno
- GSM Module
- SIM Card
- Power Supply
- Jumper wires

Connection:

- 1.Connect the RX pin of the GSM module to pin 2 (TX) on the Arduino.
- 2.Connect the TX pin of the GSM module to pin 3 (RX) on the Arduino.
- 3.Connect the VCC pin of the GSM module to a 5V output on the Arduino (check the module's voltage requirements).
- 4.Connect the GND pin of the GSM module to a GND pin on the Arduino.

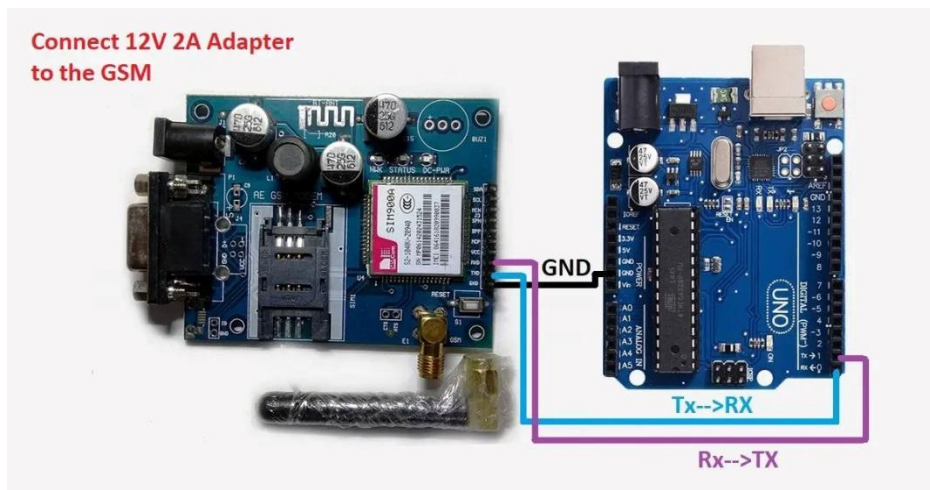

Handwritten code pic:

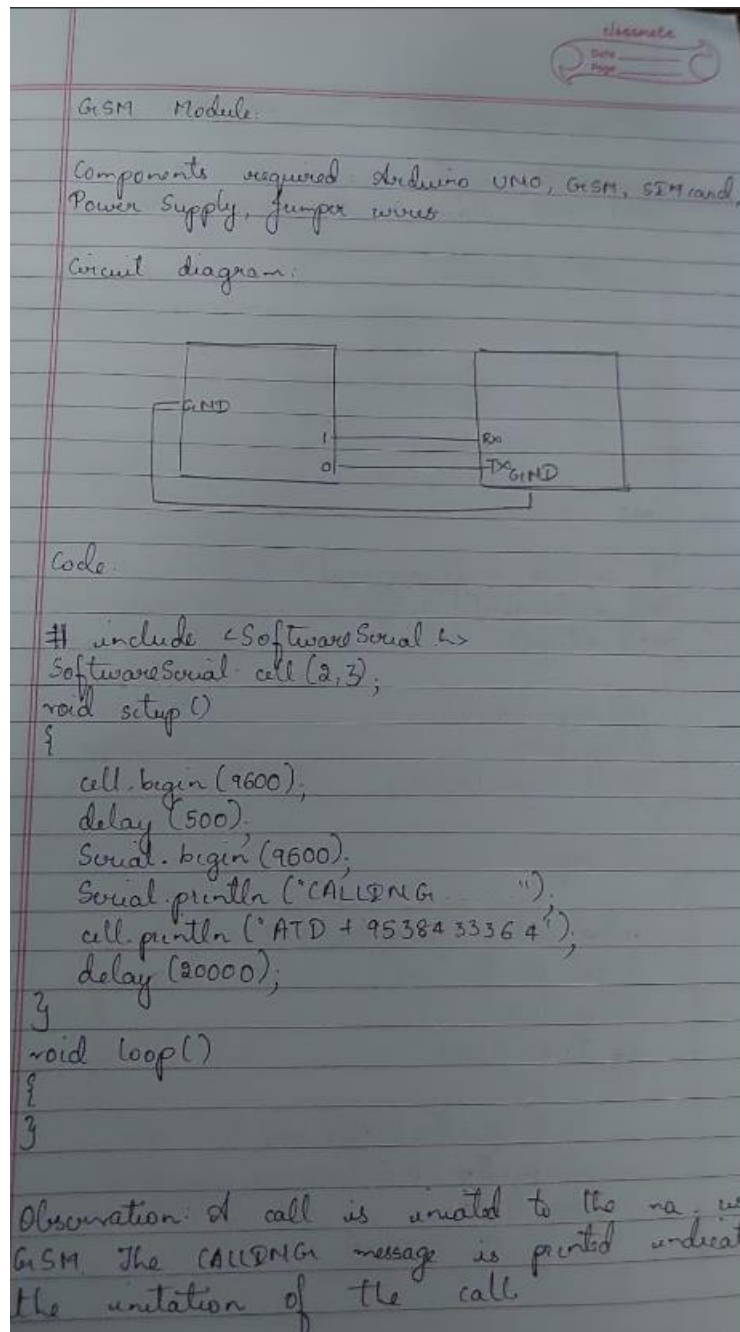

code:

```
#include <SoftwareSerial.h>;

SoftwareSerial cell(2,3); // (Rx, Tx)

void setup() {
    cell.begin(9600);
    delay(500);
    Serial.begin(9600);
```

```
Serial.println("CALLING.....");  
cell.println("ATD+9538433364;"); // ATD – Attention Dial  
delay(20000);  
}  
void loop() {  
}
```

Observation:

The code successfully initiates a call to the specified mobile number using the GSM module. The "CALLING.." message is printed to the Serial Monitor, indicating the initiation of the call. The AT command "ATD+9538433364;" is sent to the GSM module, instructing it to dial the specified number.

2. Call to a particular number on an alert

Aim:

Call a specified mobile number mentioned in the program using Arduino and GSM Module when a flame sensor detects “fire”.

Hardware Required :

- Arduino Uno
- GSM Module
- SIM Card
- Flame Sensor
- Jumper Wires


Connections :

1.GSM Module to Arduino :

- Connect the RX pin of the GSM module to a digital pin 2 on the Arduino.
- Connect the TX pin of the GSM module to another digital pin 3 on the Arduino.
- Connect the VCC pin of the GSM module to a 5V output on the Arduino
- Connect the GND pin of the GSM module to a GND pin on the Arduino.

2.Flame Sensor to Arduino :


- Connect the signal pin of the flame sensor to a digital pin 4 on the Arduino
- Connect the VCC pin of the flame sensor to a 5V output on the Arduino.
- Connect the GND pin of the flame sensor to a GND pin on the Arduino

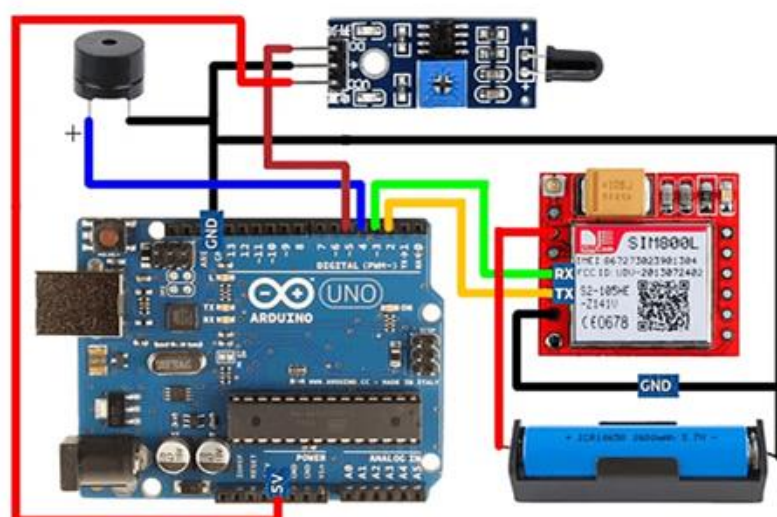

calling a particular no on alert

Components reqd: Arduino UNO, GSM module
SIM card, Flame Sensor, jumper wires

Circuit diagram:

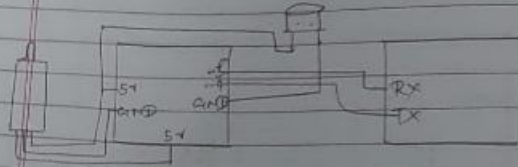

Code:

```
#include <SoftwareSerial.h>
SoftwareSerial cell(2,3);
void setup()
{
  cell.begin(9600);
  delay(500);
  Serial.begin(9600);
}
void loop()
{
  int val = analogRead(A0);
  Serial.println(val);
  delay(1000);
  if (val < 50)
  {
    Serial.println("CALLING");
    cell.println("ATD+919743932606");
    delay(1000);
    cell.println("ATH");
  }
}
```

Connections for flame sensor:

Arduino Flame Sensor

5V VCC

GND GND

A0 A0

Program:

```
#include <SoftwareSerial.h>

SoftwareSerial cell(2,3);

void setup() {
  cell.begin(9600);
  delay(500);
  Serial.begin(9600);
}

void loop() {
  int val = analogRead(A0);
  Serial.println(val);
  delay(1000);
  if (val < 50)
  {
    Serial.println("CALLING.....");
    cell.println("ATD+919742980606;");
    delay(10000);
    cell.println("ATH"); // Attention Hook Control
  }
}
```

3. Sending and Receiving Message

Aim:

1) Send SMS using Arduino and GSM Module – to a specified mobile number inside the

program

2) Receive SMS using Arduino and GSM Module – to the SIM card loaded in the GSM Module.


Hardware Required :

- Arduino Uno
- GSM Module
- SIM Card
- Jumper Wires

Connections :

1.GSM Module to Arduino:


- Connect the RX pin of the GSM module to a digital pin 2 on the Arduino.
- Connect the TX pin of the GSM module to another digital pin 3 on the Arduino.
- Connect the VCC pin of the GSM module to a 5V output on the Arduino
- Connect the GND pin of the GSM module to a GND pin on the Arduino

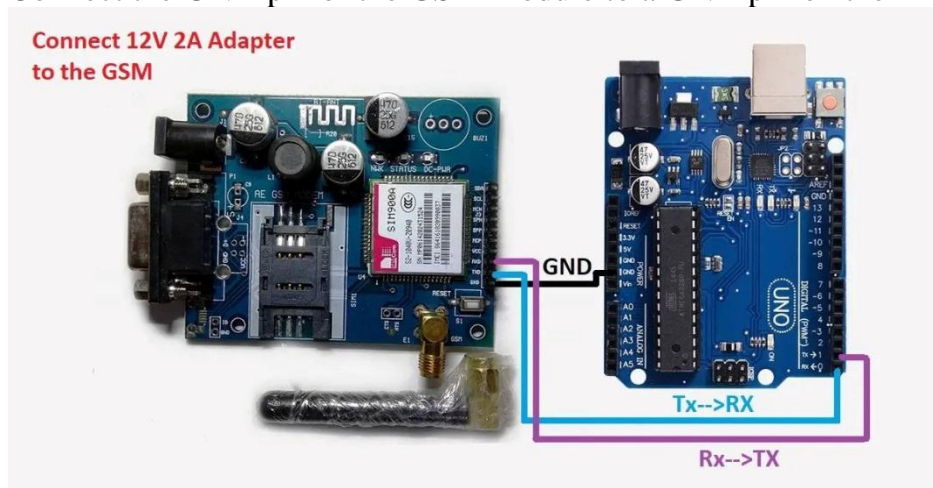

Sending and receiving messages.


Components reqd: Arduino UNO, GSM module, SIM card, jumper wires

Circuit diagram:

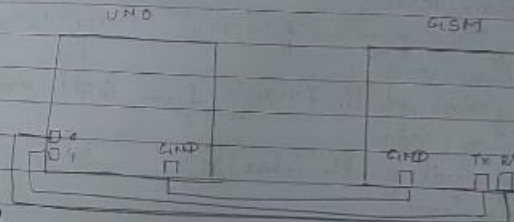

Code:

```
#include <SoftwareSerial.h>
SoftwareSerial mySerial(2,3);
void setup()
{
    mySerial.begin(9600);
    Serial.begin(9600);
    delay(1000);
}
void loop()
{
    if (Serial.available() > 0)
    {
        switch (Serial.read())
        {
            case 's': Send();
                     break;
            case 'r': Receive();
                     break;
        }
    }
}
```

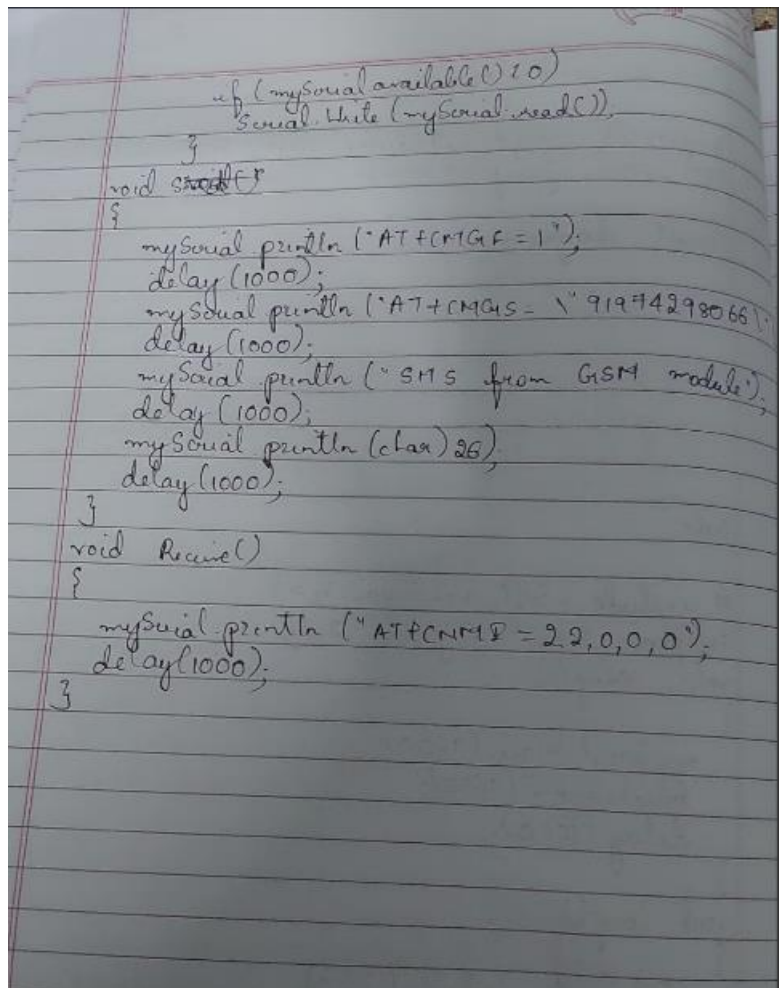

Program:

Note: According to the code, message will be sent and received when 's' and 'r' are pressed

through serial monitor respectively.

```
#include <SoftwareSerial.h>
```

```
SoftwareSerial mySerial(2, 3);
```

```
void setup()
```

```
{
```

```
mySerial.begin(9600); // Setting the baud rate of GSM Module
```

```
Serial.begin(9600); // Setting the baud rate of Serial Monitor (Arduino)
```

```
delay(100);
```

```
}
```

```
void loop()
```

```

{
if (Serial.available()<0)
switch(Serial.read())
{
Case "s":
SendMessage();
break;
case "r":
RecieveMessage();
break;
}
if (mySerial.available()<0)
Serial.write(mySerial.read());
}
voidSendMessage()
{
mySerial.println("AT+CMGF=1"); //Sets the GSM Module in Text Mode
//AT+CMGF,
SMS Format
delay(1000); // Delay of 1000 milli seconds or 1 second
mySerial.println("AT+CMGS=\"+919742980606\"\\r"); // AT+CMGS, Send Message
delay(1000);
mySerial.println("I am SMS from GSM Module");
delay(100);
mySerial.println((char)26);
delay(1000);
}
voidRecieveMessage()
{

```



```
mySerial.println("AT+CNMI=2,2,0,0,0");  
delay(1000);  
}
```


4. Controlling LED through received messages:

Aim:

Use received message through Arduino and GSM Module to control Switching ON / OFF the

LED.

Connection: Attach LED to pin 13 and GND.

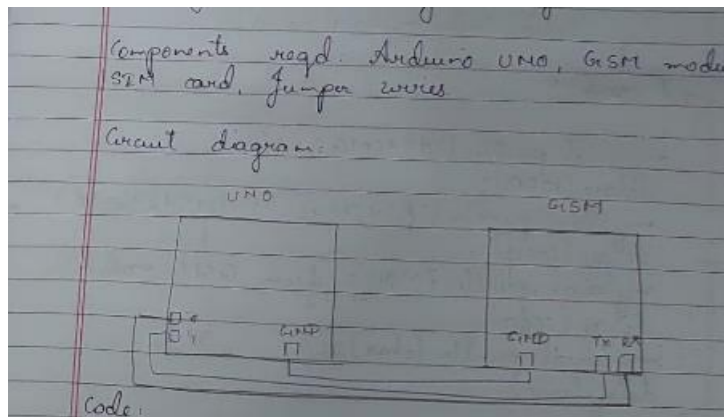

Controlling LED through received msg.

```

#include <SoftwareSerial.h>
SoftwareSerial cell(2,3);
void readfn()
{
    if (cell.available())
    {
        while (cell.available())
        {
            Serial.write (cell.read());
        }
    }
}

void setup ()
{
    pinMode (13, OUTPUT);
    Serial.begin (9600);
    cell.begin (9600);
    cell.println ("AT");
    delay (1000);
    readfn();
    cell.println ("AT+CNMT=1,2,0,0,0");
}

void loop()
{
    if (cell.available())
    {
        String msg = cell.readString ();
        Serial.println (message);
        if (message.indexOf ("SWITCH ON") == 0)
        {
            digitalWrite (13, HIGH);
        }
        else
        {
            digitalWrite (13, LOW);
        }
    }
}

```

Program:

```
#include <SoftwareSerial.h>
```

```
SoftwareSerial cell(2,3);
```

```
Void readfn()
```

```
{
```

```
if (cell.available()) {
```

```
while (cell.available()) {
```

```
Serial.write(cell.read());  
} } }  
void setup() {  
  pinMode(13,OUTPUT);  
  Serial.begin(9600);  
  cell.begin(9600);  
  cell.println("AT");  
  delay(1000);  
  readfn();  
  //New SMS alert  
  cell.println("AT+CNMI=1,2,0,0,0");  
}  
void loop() {  
  if(cell.available())  
  {  
    String message =cell.readString();  
    Serial.println(message);  
    if(message.indexOf("SWITCH ON")=0)  
    {  
      digitalWrite(13,HIGH);  
    }  
    else if(message.indexOf("SWITCH OFF")=0)  
    {  
      digitalWrite(13,LOW);  
    }  
    else{  
      Serial.println ("Nothing to do...");  
    }  
  }  
}
```