LAB7:

Aim : Configure OSPF routing protocol.

Topology:

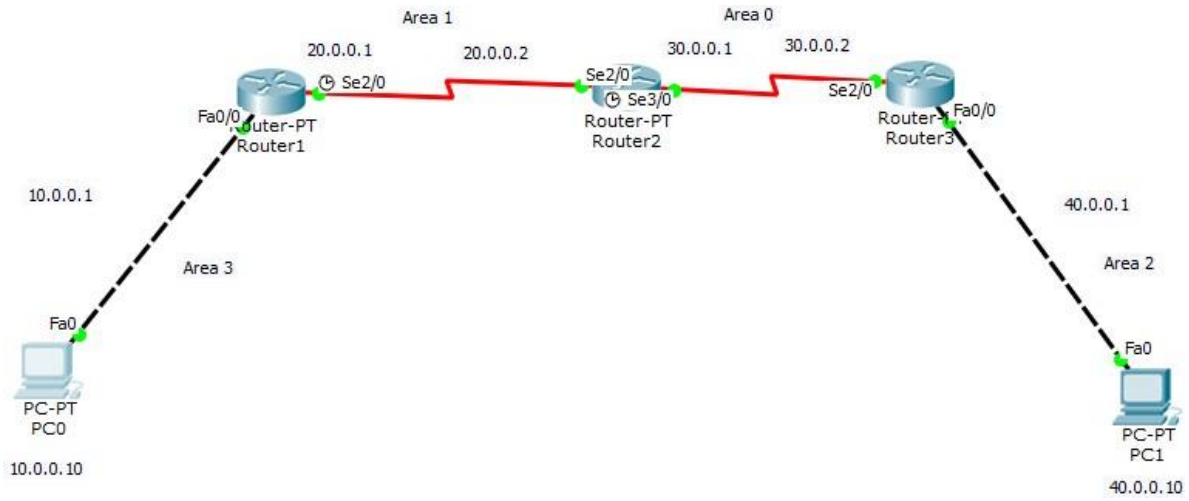

Router 1 :

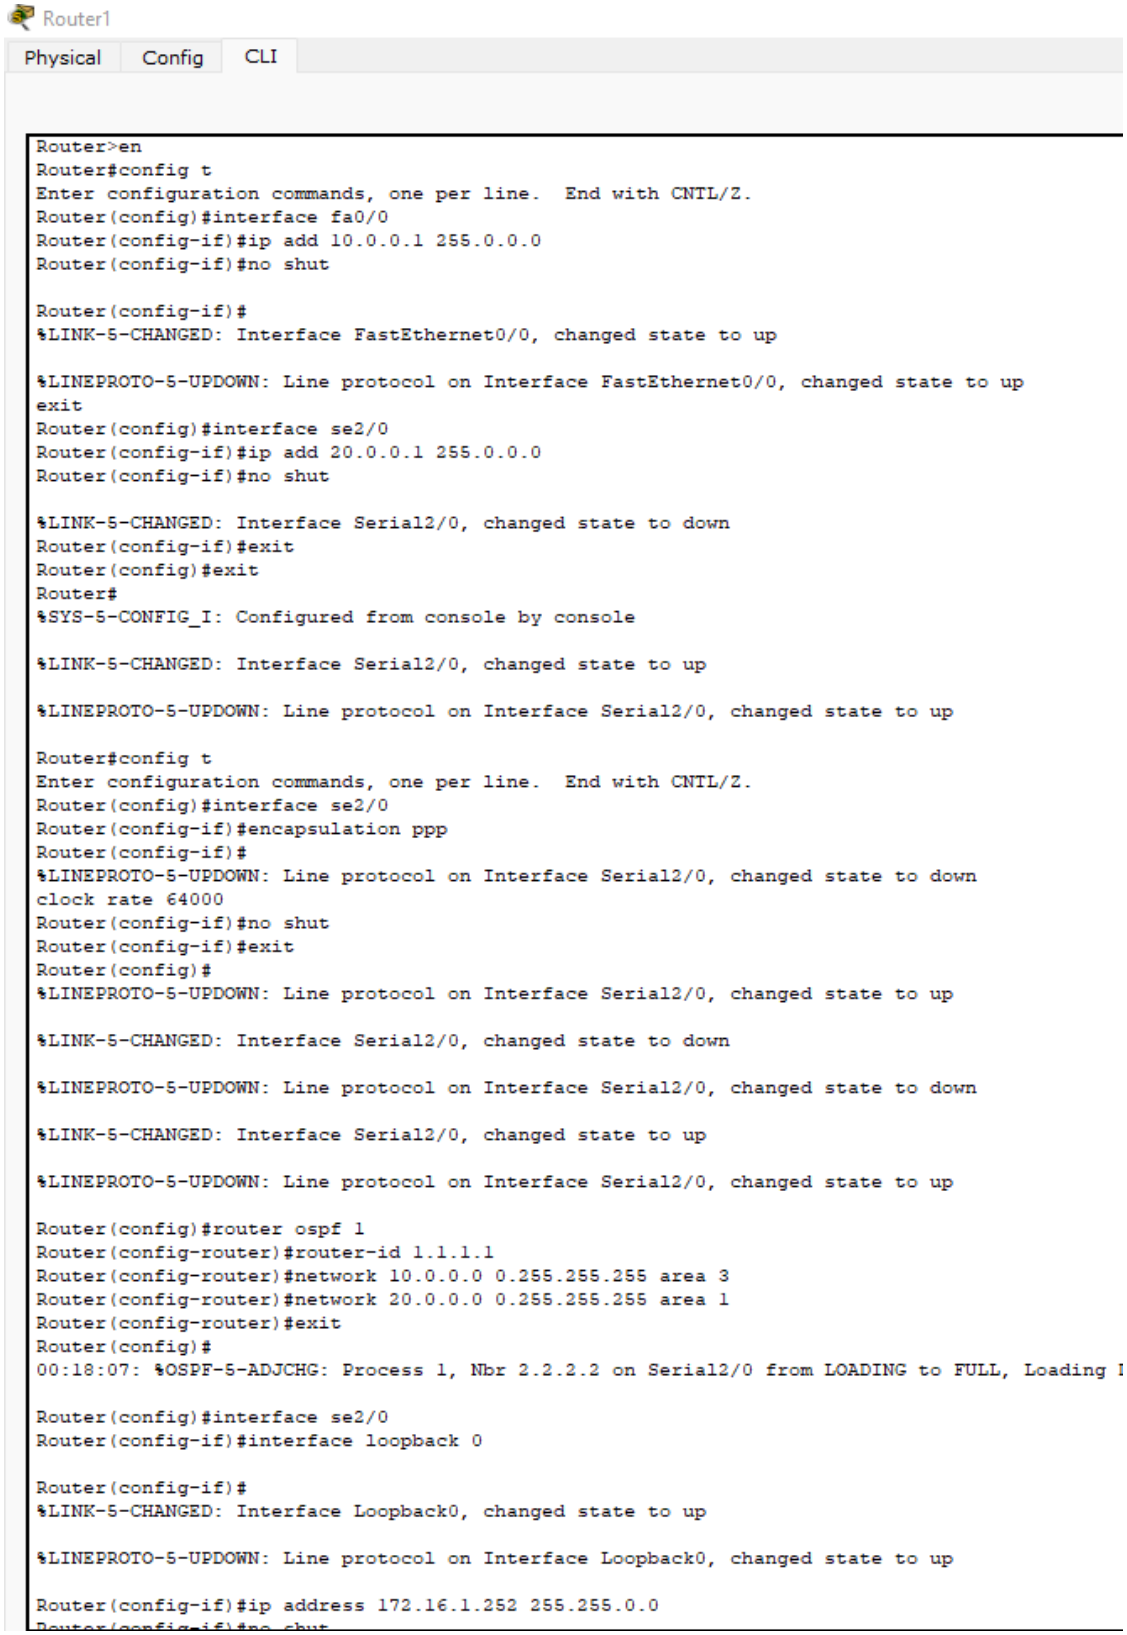
Router1
Physical
Config
CLI
Router>en
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface fa0/0
Router(config-if)#ip add 10.0.0.1 255.0.0.0
Router(config-if)#no shut
Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up
exit
Router(config)#interface se2/0
Router(config-if)#ip add 20.0.0.1 255.0.0.0
Router(config-if)#no shut
%LINK-5-CHANGED: Interface Serial2/0, changed state to down
Router(config-if)#exit
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console
%LINK-5-CHANGED: Interface Serial2/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial2/0, changed state to up
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface se2/0
Router(config-if)#encapsulation ppp
Router(config-if)#
%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial2/0, changed state to down
clock rate 64000
Router(config-if)#no shut
Router(config-if)#exit
Router(config)#
%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial2/0, changed state to up
%LINK-5-CHANGED: Interface Serial2/0, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial2/0, changed state to down
%LINK-5-CHANGED: Interface Serial2/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial2/0, changed state to up
Router(config)#router ospf 1
Router(config-router)#router-id 1.1.1.1
Router(config-router)#network 10.0.0.0 0.255.255.255 area 3
Router(config-router)#network 20.0.0.0 0.255.255.255 area 1
Router(config-router)#exit
Router(config)#
00:18:07: %OSPF-5-ADJCHG: Process 1, Nbr 2.2.2.2 on Serial2/0 from LOADING to FULL, Loading I
Router(config)#interface se2/0
Router(config-if)#interface loopback 0
Router(config-if)#
%LINK-5-CHANGED: Interface Loopback0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface Loopback0, changed state to up
Router(config-if)#ip address 172.16.1.252 255.255.0.0

```
Router(config)#interface se2/0
Router(config-if)#interface loopback 0

Router(config-if)#
%LINK-5-CHANGED: Interface Loopback0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface Loopback0, changed state to up

Router(config-if)#ip address 172.16.1.252 255.255.0.0
Router(config-if)#no shut
Router(config-if)#exit
Router(config)#router ospf 1
Router(config-router)#area 1 virtual-link 2.2.2.2
Router(config-router)#exit
Router(config)#
00:24:20: %OSPF-5-ADJCHG: Process 1, Nbr 2.2.2.2 on OSPF_VL0 from LOADING to FULL, Loading Done
exit
Router#
%SYS-5-CONFIG_I: Configured from console by console
show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route

Gateway of last resort is not set

C    10.0.0.0/8 is directly connected, FastEthernet0/0
     20.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C       20.0.0.0/8 is directly connected, Serial2/0
C       20.0.0.2/32 is directly connected, Serial2/0
O    30.0.0.0/8 [110/128] via 20.0.0.2, 00:00:54, Serial2/0
O IA 40.0.0.0/8 [110/129] via 20.0.0.2, 00:00:54, Serial2/0
C    172.16.0.0/16 is directly connected, Loopback0
Router#
```

Router 2 :

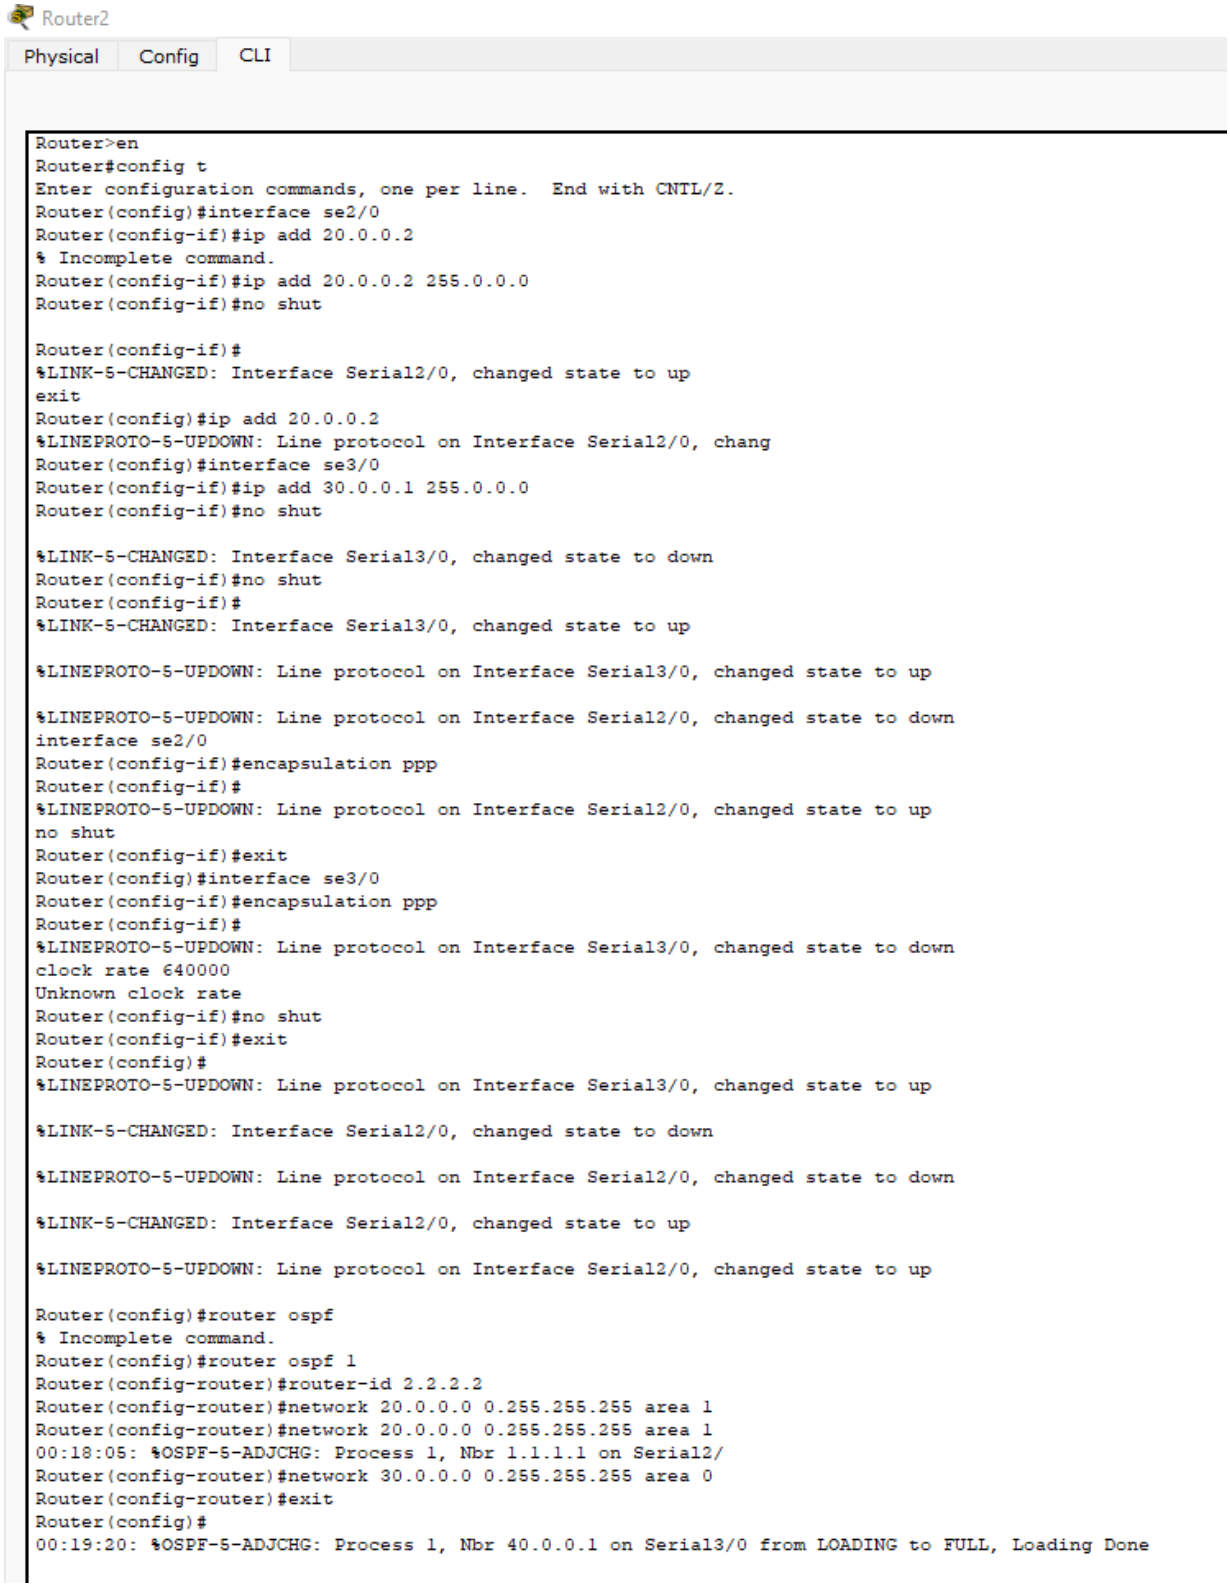
Router2
Physical
Config
CLI
Router>en
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface se2/0
Router(config-if)#ip add 20.0.0.2
% Incomplete command.
Router(config-if)#ip add 20.0.0.2 255.0.0.0
Router(config-if)#no shut
Router(config-if)#
%LINK-5-CHANGED: Interface Serial2/0, changed state to up
exit
Router(config)#ip add 20.0.0.2
%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial2/0, chang
Router(config)#interface se3/0
Router(config-if)#ip add 30.0.0.1 255.0.0.0
Router(config-if)#no shut
%LINK-5-CHANGED: Interface Serial3/0, changed state to down
Router(config-if)#no shut
Router(config-if)#
%LINK-5-CHANGED: Interface Serial3/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial3/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial2/0, changed state to down
interface se2/0
Router(config-if)#encapsulation ppp
Router(config-if)#
%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial2/0, changed state to up
no shut
Router(config-if)#exit
Router(config)#interface se3/0
Router(config-if)#encapsulation ppp
Router(config-if)#
%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial3/0, changed state to down
clock rate 640000
Unknown clock rate
Router(config-if)#no shut
Router(config-if)#exit
Router(config)#
%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial3/0, changed state to up
%LINK-5-CHANGED: Interface Serial2/0, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial2/0, changed state to down
%LINK-5-CHANGED: Interface Serial2/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial2/0, changed state to up
Router(config)#router ospf
% Incomplete command.
Router(config)#router ospf 1
Router(config-router)#router-id 2.2.2.2
Router(config-router)#network 20.0.0.0 0.255.255.255 area 1
Router(config-router)#network 20.0.0.0 0.255.255.255 area 1
00:18:05: %OSPF-5-ADJCHG: Process 1, Nbr 1.1.1.1 on Serial2/
Router(config-router)#network 30.0.0.0 0.255.255.255 area 0
Router(config-router)#exit
Router(config)#
00:19:20: %OSPF-5-ADJCHG: Process 1, Nbr 40.0.0.1 on Serial3/0 from LOADING to FULL, Loading Done

Router2

Physical | Config | CLI

IOS Command Line Interface

```
Router(config)#interface se3/0
Router(config-if)#interface loopback 0

Router(config-if)#
%LINK-5-CHANGED: Interface Loopback0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface Loopback0, changed state to up
ip add 172.16.1.253 255.255.0.0
Router(config-if)#no shut
Router(config-if)#
%LINK-5-CHANGED: Interface Serial3/0, changed state to down

%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial3/0, changed state to down

00:23:22: %OSPF-5-ADJCHG: Process 1, Nbr 40.0.0.1 on Serial3/0 from FULL to DOWN, Neighbor Down: Interface down or detached

%LINK-5-CHANGED: Interface Serial3/0, changed state to up

Router(config-if)#exi
%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial3/0, changed state to up
t
00:23:33: %OSPF-4-ERRRCV: Received invalid packet: mismatch area ID, from backbone area must be virtual-link but not found from 20.0.0.2, Serial2/0

Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console

00:23:41: %OSPF-5-ADJCHG: Process 1, Nbr 40.0.0.1 on Serial3/0 from LOADING to FULL, Loading Done

Router#
00:23:43: %OSPF-4-ERRRCV: Received invalid packet: mismatch area ID, from backbone area must be virtual-link but not found from 20.0.0.2, Serial2/0
config t
Enter configuration commands, one per line.  End with CNTL/Z.
Router(config)#router ospf 1
Router(config-router)#
00:23:53: %OSPF-4-ERRRCV: Received invalid packet: mismatch area ID, from backbone area must be virtual-link but not found from 20.0.0.2, Serial2/0

Router(config-router)#area 1 virtual-link
00:24:03: %OSPF-4-ERRRCV: Received invalid packet: mismatch area ID, from backbone area must be virtual-link but not found from 20.0.0.2, Serial2/0
1.1.1.1
Router(config-router)#
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#c
00:24:18: %OSPF-5-ADJCHG: Process 1, Nbr 1.1.1.1 on OSPF_VL0 from LOADING to FULL, Loading Done

% Ambiguous command: "c"
Router#show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route

Gateway of last resort is not set

     20.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C       20.0.0.0/8 is directly connected, Serial2/0
C       20.0.0.1/32 is directly connected, Serial2/0
     30.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
```

```
Router#config t
Enter configuration commands, one per line.  End with CNTL/Z.
Router(config)#router ospf 1
Router(config-router)#area 1 virtual-link 1.1.1.1
Router(config-router)#exit
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console
show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route

Gateway of last resort is not set

O IA 10.0.0.0/8 [110/65] via 20.0.0.1, 00:00:34, Serial2/0
     20.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C       20.0.0.0/8 is directly connected, Serial2/0
C       20.0.0.1/32 is directly connected, Serial2/0
     30.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C       30.0.0.0/8 is directly connected, Serial3/0
C       30.0.0.2/32 is directly connected, Serial3/0
O IA 40.0.0.0/8 [110/65] via 30.0.0.2, 00:01:24, Serial3/0
C    172.16.0.0/16 is directly connected, Loopback0
Router#
```

Router 3 :


Router3
Physical
Config
CLI
IOS Commar
Router>en
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface fa0/0
Router(config-if)#ip add 40.0.0.1 255.0.0.0
Router(config-if)#no shut
Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up
exit
Router(config)#interface se2/0
Router(config-if)#ip add 30.0.0.2 255.0.0.0
Router(config-if)#no shut
Router(config-if)#
%LINK-5-CHANGED: Interface Serial2/0, changed state to up
exit
Router(config)#
%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial2/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial2/0, changed state to down
Router(config)#interface se2/0
Router(config-if)#encapsulation ppp
Router(config-if)#
%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial2/0, changed state to up
no shut
Router(config-if)#exit
Router(config)#router ospf 1
Router(config-router)#network 30.0.0.0 0.255.255.255 area 0
Router(config-router)#
00:18:56: %OSPF-5-ADJCHG: Process 1, Nbr 2.2.2.2 on Serial2/0 from LOADING to FULL, Loading Done
Router(config-router)#network 40.0.0.0 0.255.255.255 area 2
Router(config-router)#exit
Router(config)#interface se2/0
Router(config-if)#interface loopback 0
Router(config-if)#
%LINK-5-CHANGED: Interface Loopback0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface Loopback0, changed state to up
ip add 172.16.1.254 255.255.0.0
Router(config-if)#no shut
Router(config-if)#
%LINK-5-CHANGED: Interface Serial2/0, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial2/0, changed state to down
00:22:58: %OSPF-5-ADJCHG: Process 1, Nbr 2.2.2.2 on Serial2/0 from FULL to DOWN, Neighbor Down: Interface down or detached
%LINK-5-CHANGED: Interface Serial2/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial2/0, changed state to up
00:23:18: %OSPF-5-ADJCHG: Process 1, Nbr 2.2.2.2 on Serial2/0 from LOADING to FULL, Loading Done
Router(config-if)#exit
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console

```
Router#
%SYS-5-CONFIG_I: Configured from console by console
show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route

Gateway of last resort is not set

O IA 10.0.0.0/8 [110/129] via 30.0.0.1, 00:05:53, Serial2/0
O IA 20.0.0.0/8 [110/128] via 30.0.0.1, 00:06:30, Serial2/0
     30.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C       30.0.0.0/8 is directly connected, Serial2/0
C       30.0.0.1/32 is directly connected, Serial2/0
C    40.0.0.0/8 is directly connected, FastEthernet0/0
C    172.16.0.0/16 is directly connected, Loopback0
Router#
```

Command Prompt:

P0:

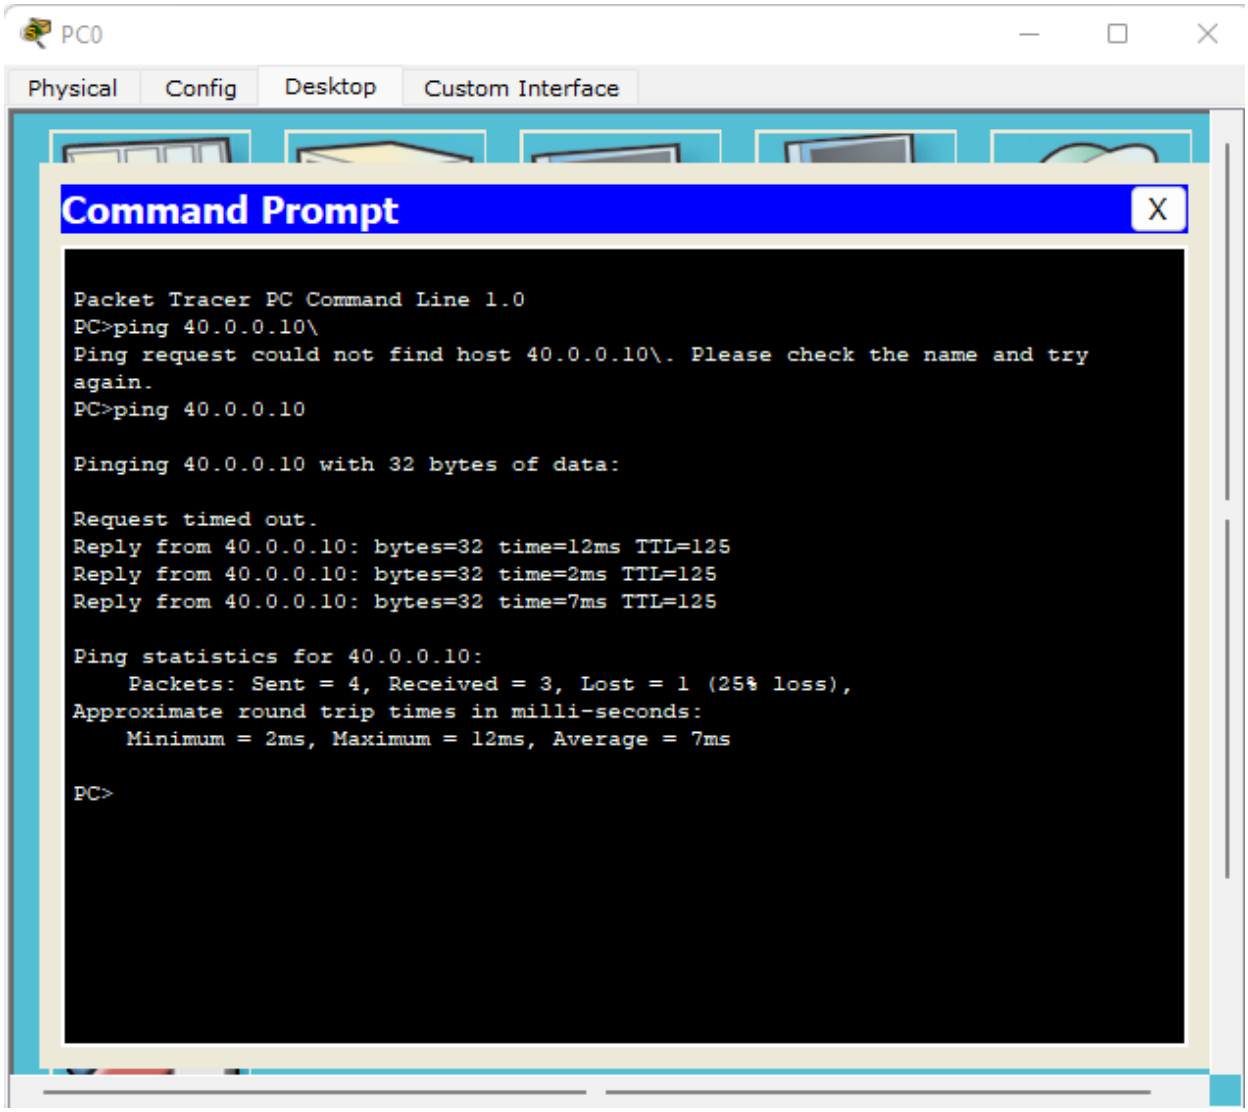

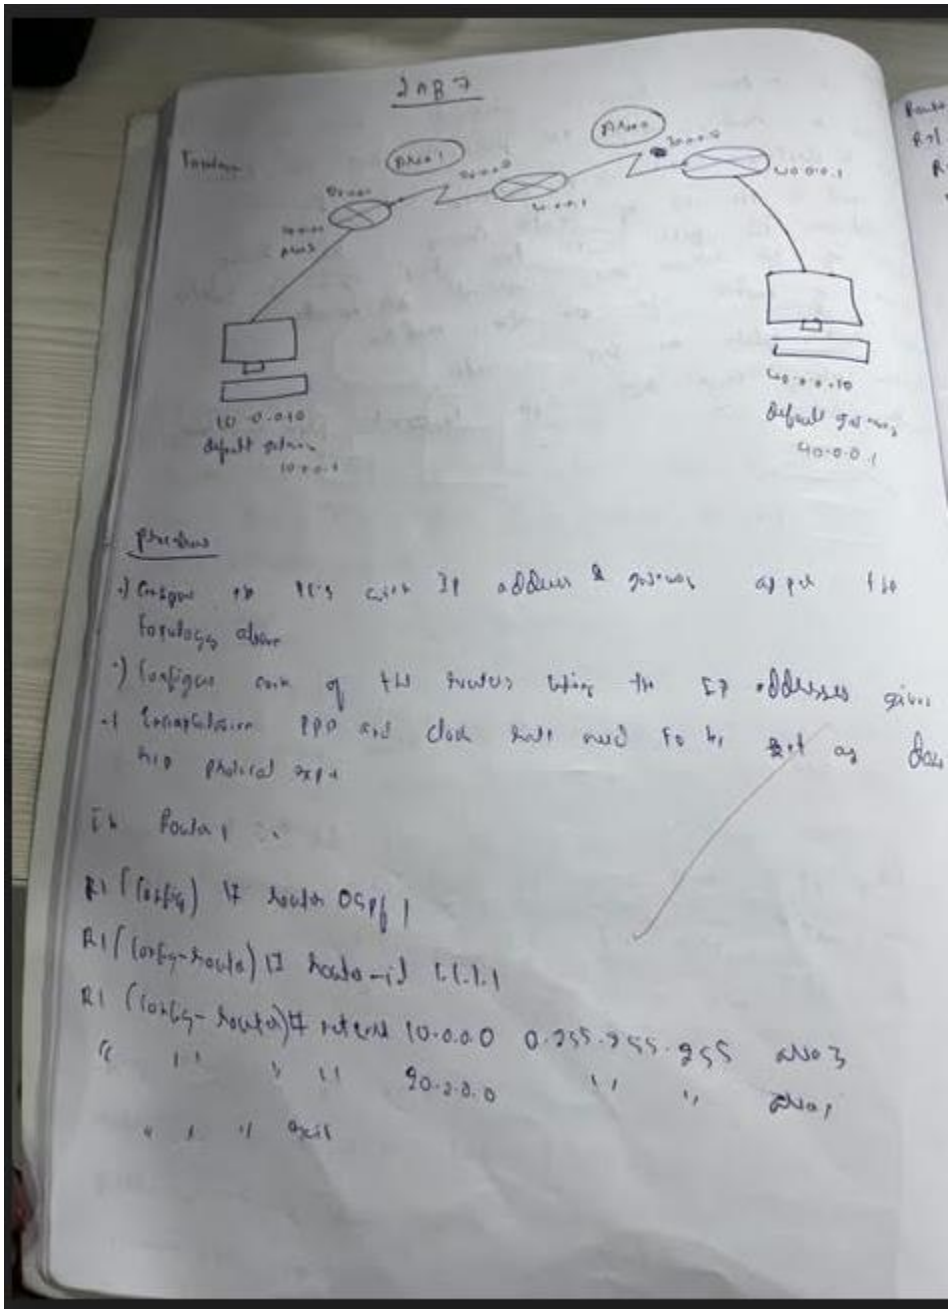

Procedure

1) Configure the IP's with IP address & subnet mask for the topology above

2) Configure each of the routers using the IP addresses given

3) Configure PPP and clock rate need to be set as DCE on the Serial 0/0/0

In Router 1 :-

R1 (config) # router ospf 1

R1 (config-router) # router-id 1.1.1.1

R1 (config-router) # network 10.0.0.0 0.255.255.255 area 3

" " " 90.2.0.0 " " area 1

" " " exit

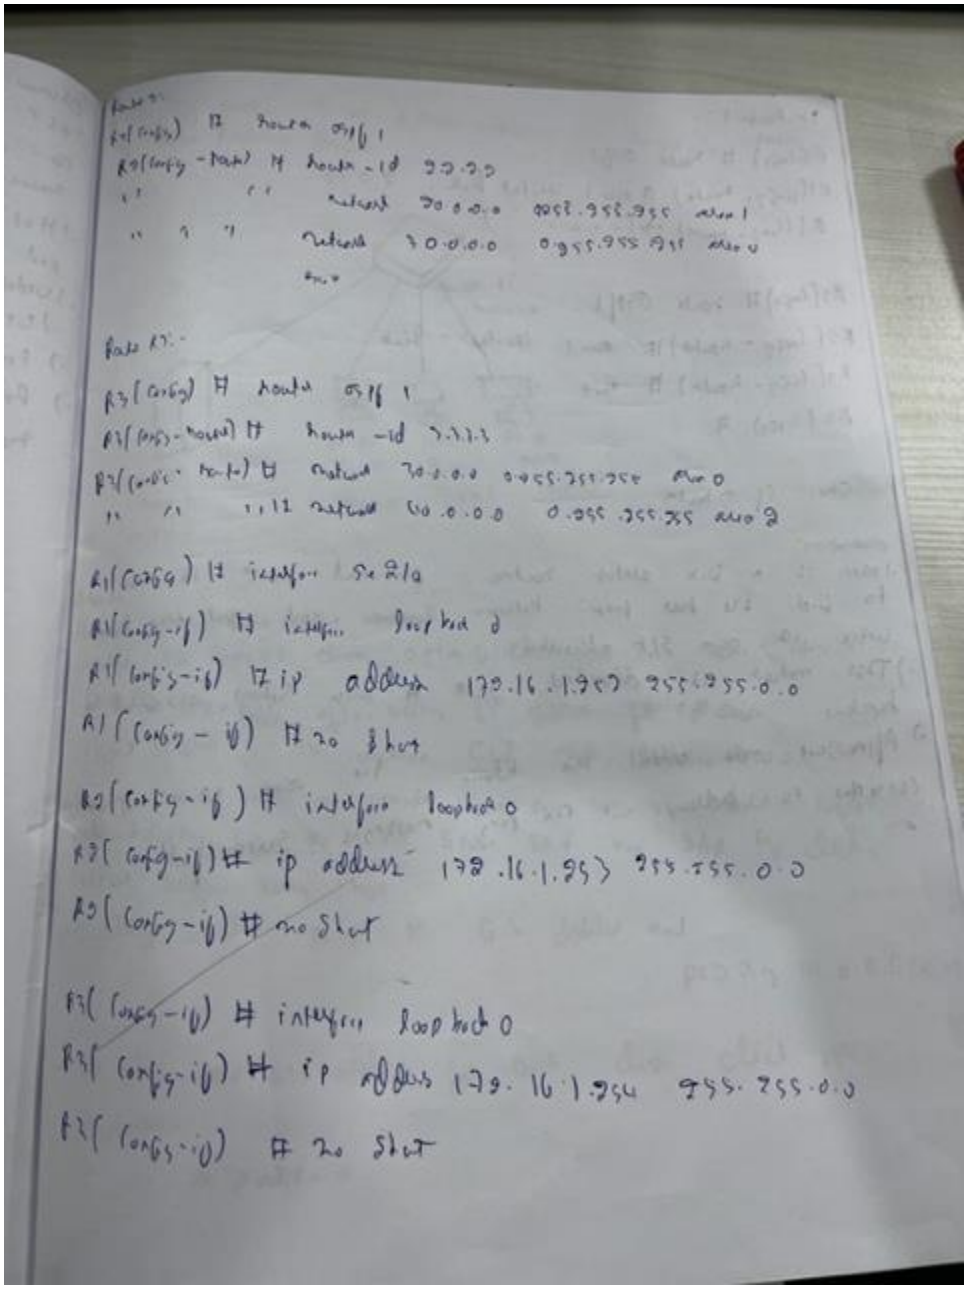

In Router 1 :-

R1(config) # router ospf 1
R1(config-router) # area 1 virtual-link 2.2.2.2
R1(config-router) # [illegible] ?

R2(config) # router ospf 1
R2(config-router) # area 1 virtual-link
R2(config-router) # exit
R2(config) #

Show ip - route

observation:
•) OSPF is a link state routing protocol which is used to find the best path between source and destination router using its own SPF algorithm
•) This network is divided into 4 area where area 0 is the backbone
•) After we make virtual link between the area which is not connected to backbone, we can ping messages successfull