


WEEK 3

Configure default route, static route to the Router.


OBSERVATION:

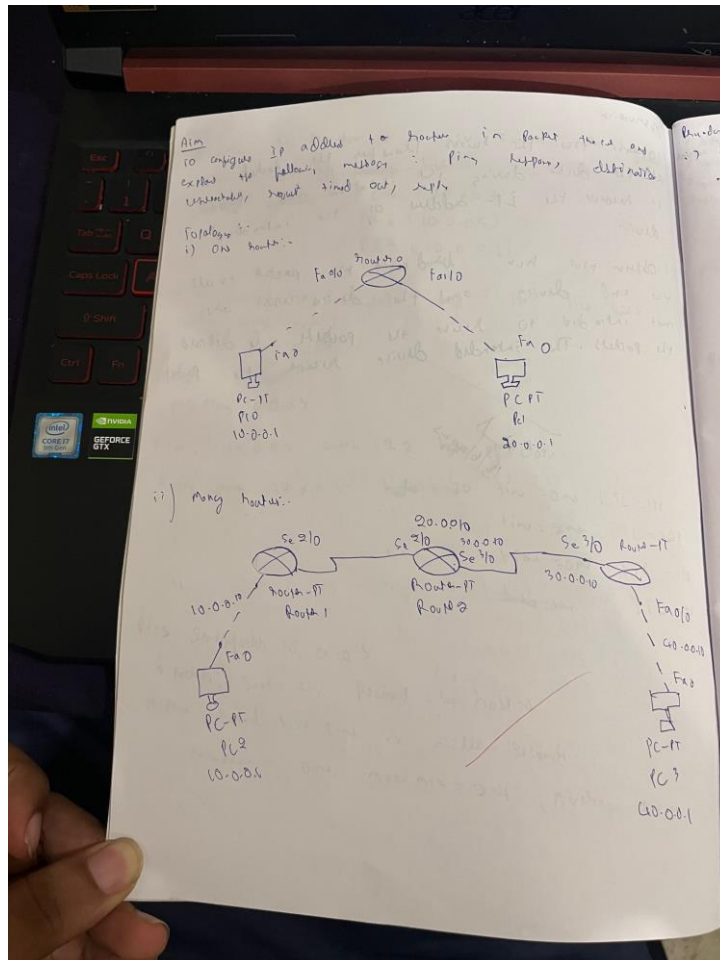


allowed for a

2008

TOPOLOGY:

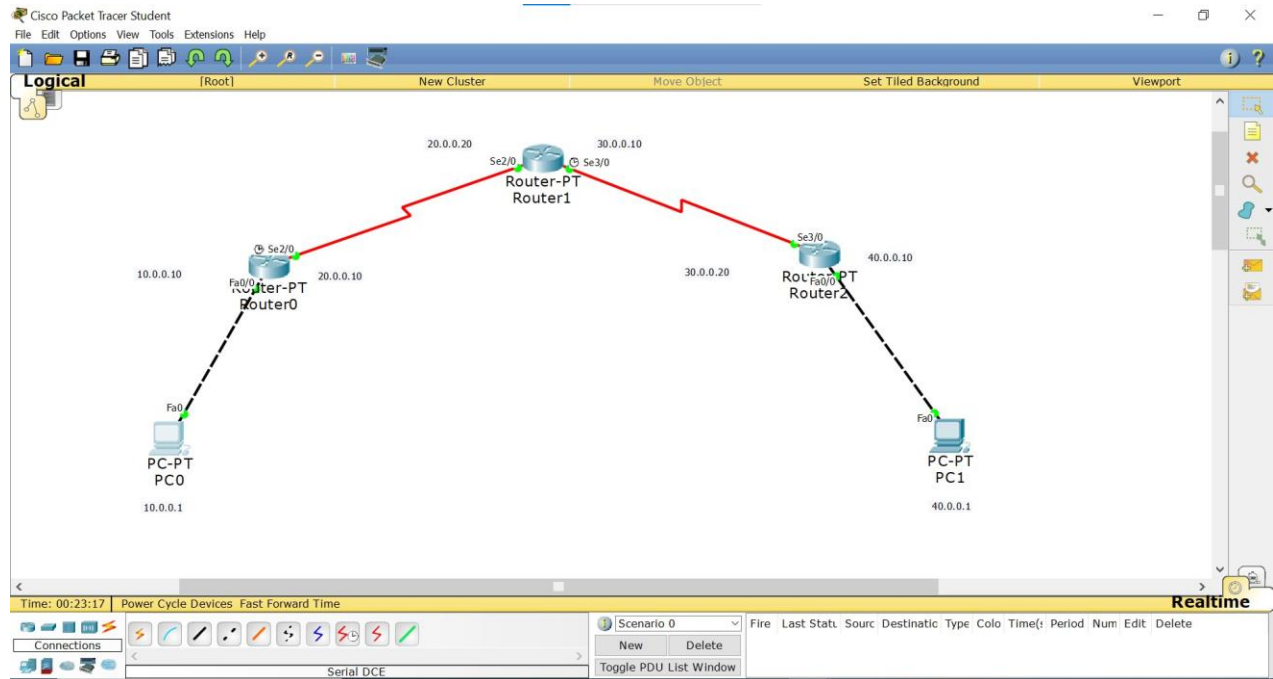

OUTPUT:

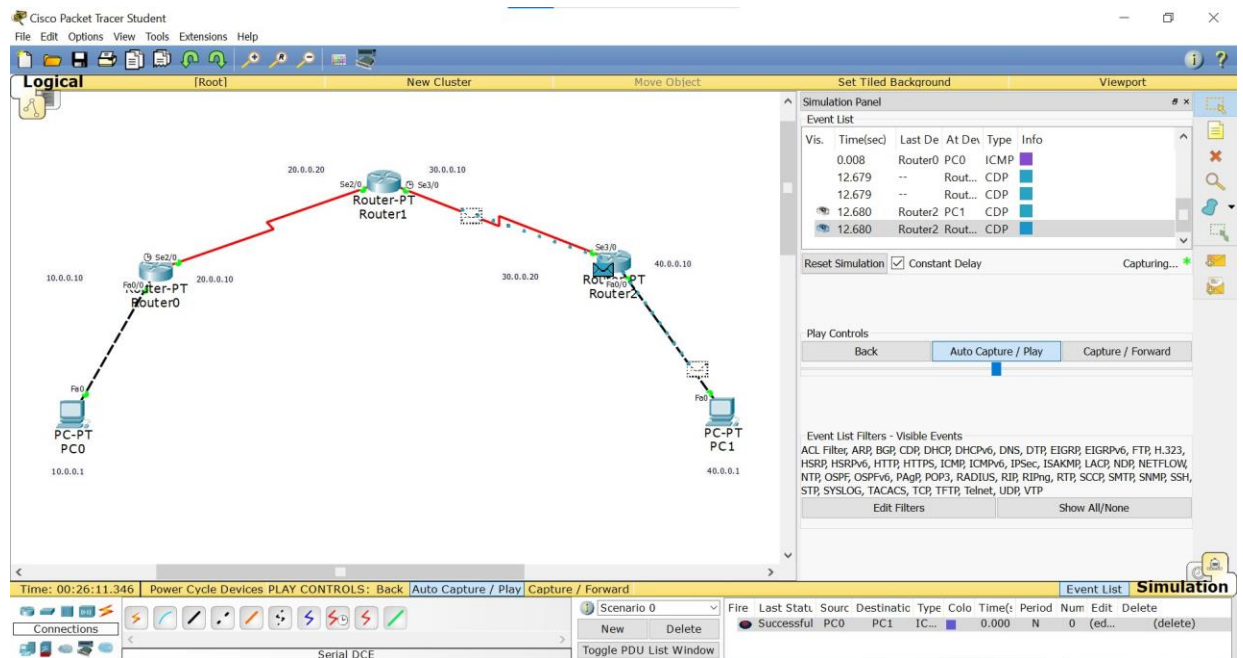

Command Prompt

```
Packet Tracer PC Command Line 1.0
PC>ping 40.0.0.1

Pinging 40.0.0.1 with 32 bytes of data:

Request timed out.
Reply from 40.0.0.1: bytes=32 time=2ms TTL=125
Reply from 40.0.0.1: bytes=32 time=16ms TTL=125
Reply from 40.0.0.1: bytes=32 time=2ms TTL=125

Ping statistics for 40.0.0.1:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 2ms, Maximum = 16ms, Average = 6ms

PC>ping 40.0.0.1

Pinging 40.0.0.1 with 32 bytes of data:

Reply from 40.0.0.1: bytes=32 time=21ms TTL=125
Reply from 40.0.0.1: bytes=32 time=9ms TTL=125
Reply from 40.0.0.1: bytes=32 time=2ms TTL=125
Reply from 40.0.0.1: bytes=32 time=4ms TTL=125

Ping statistics for 40.0.0.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 2ms, Maximum = 21ms, Average = 9ms

PC>|
```