


LAB6:


Aim: Configure RIP routing Protocol in Routers.

Topology:

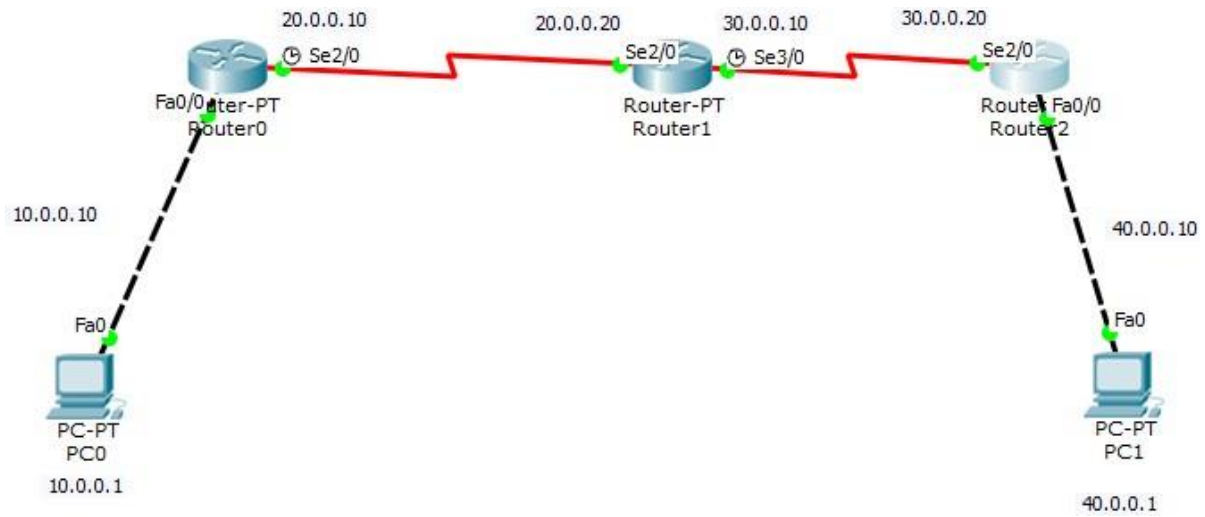

Configuration:

Router 0 :

 Router0

| | | |
|----------|--------|-----|
| Physical | Config | CLI |
|----------|--------|-----|

```
Router>en
Router#config t
Enter configuration commands, one per line.  End with CNTL/Z.
Router(config)#interface fa0/0
Router(config-if)#ip address 10.0.0.10 255.0.0.0
Router(config-if)#no shut

Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up
exit
Router(config)#interface se2/0
Router(config-if)#ip address 20.0.0.10 255.0.0.0
Router(config-if)#encapsulation ppp
Router(config-if)#clock rate 64000
Router(config-if)#no shut

%LINK-5-CHANGED: Interface Serial2/0, changed state to down
Router(config-if)#exit
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console
show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route

Gateway of last resort is not set

C      10.0.0.0/8 is directly connected, FastEthernet0/0
Router#
%LINK-5-CHANGED: Interface Serial2/0, changed state to up
```

Router 1 :



Physical Config CLI

```
Router>en
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface se2/0
Router(config-if)#ip address 20.0.0.20 255.0.0.0
Router(config-if)#encapsulation ppp
Router(config-if)#no shut

Router(config-if)#
%LINK-5-CHANGED: Interface Serial2/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial2/0, changed state to up
exit
Router(config)#interface se3/0
Router(config-if)#ip address 30.0.0.10 255.0.0.0
Router(config-if)#encapsulation ppp
Router(config-if)#clock rate 64000
Router(config-if)#no shut


%LINK-5-CHANGED: Interface Serial3/0, changed state to down
Router(config-if)#exit
Router(config)#show ip route
^
% Invalid input detected at '^' marker.

Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console
show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
        D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
        N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
        E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
        i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
        * - candidate default, U - per-user static route, o - ODR
        P - periodic downloaded static route

Gateway of last resort is not set

    20.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C       20.0.0.0/8 is directly connected, Serial2/0
C       20.0.0.10/32 is directly connected, Serial2/0
Router#
%LINK-5-CHANGED: Interface Serial3/0, changed state to up
```

Router 2 :



Physical Config CLI

```
Router>en
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface se2/0
Router(config-if)#ip address 30.0.0.20 255.0.0.0
Router(config-if)#encapsulation ppp
Router(config-if)#no shut

Router(config-if)#
%LINK-5-CHANGED: Interface Serial2/0, changed state to up
exit
%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial2/0, changed state to up

Router(config)#interface fa0/0
Router(config-if)#ip address 40.0.0.10 255.0.0.0
Router(config-if)#no shut

Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up
exit
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console
show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route

Gateway of last resort is not set

      30.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C       30.0.0.0/8 is directly connected, Serial2/0
C       30.0.0.10/32 is directly connected, Serial2/0
C       40.0.0.0/8 is directly connected, FastEthernet0/0
```


RIP routing:

Router 0:

```
Router#
%LINK-5-CHANGED: Interface Serial2/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial2/0, changed state to up
config t
Enter configuration commands, one per line.  End with CNTL/Z.
Router(config)#router rip
Router(config-router)#network 10.0.0.0
Router(config-router)#network 20.0.0.0
Router(config-router)#exit
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console
show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route

Gateway of last resort is not set

C    10.0.0.0/8 is directly connected, FastEthernet0/0
     20.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    20.0.0.0/8 is directly connected, Serial2/0
C    20.0.0.20/32 is directly connected, Serial2/0
R    30.0.0.0/8 [120/1] via 20.0.0.20, 00:00:18, Serial2/0
R    40.0.0.0/8 [120/2] via 20.0.0.20, 00:00:18, Serial2/0
Router#
```

Router 1:

```
Router#
%LINK-5-CHANGED: Interface Serial3/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial3/0, changed state to up
config t
Enter configuration commands, one per line.  End with CNTL/Z.
Router(config)#router rip
Router(config-router)#network 20.0.0.0
Router(config-router)#network 30.0.0.0
Router(config-router)#exit
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console
show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route

Gateway of last resort is not set

R    10.0.0.0/8 [120/1] via 20.0.0.10, 00:00:20, Serial2/0
    20.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    20.0.0.0/8 is directly connected, Serial2/0
C    20.0.0.10/32 is directly connected, Serial2/0
    30.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    30.0.0.0/8 is directly connected, Serial3/0
C    30.0.0.20/32 is directly connected, Serial3/0
R    40.0.0.0/8 [120/1] via 30.0.0.20, 00:00:19, Serial3/0
Router#
```

Router 2:

```
Router#config t
Enter configuration commands, one per line.  End with CNTL/Z.
Router(config)#network 30.0.0.0
      ^
% Invalid input detected at '^' marker.


Router(config)#router rip
Router(config-router)#network 30.0.0.0
Router(config-router)#network 40.0.0.0
Router(config-router)#exit
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console
show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route

Gateway of last resort is not set


R    10.0.0.0/8 [120/2] via 30.0.0.10, 00:00:14, Serial2/0
R    20.0.0.0/8 [120/1] via 30.0.0.10, 00:00:14, Serial2/0
     30.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C     30.0.0.0/8 is directly connected, Serial2/0
C     30.0.0.10/32 is directly connected, Serial2/0
C     40.0.0.0/8 is directly connected, FastEthernet0/0
Router#
```

Command Prompt:

P0:

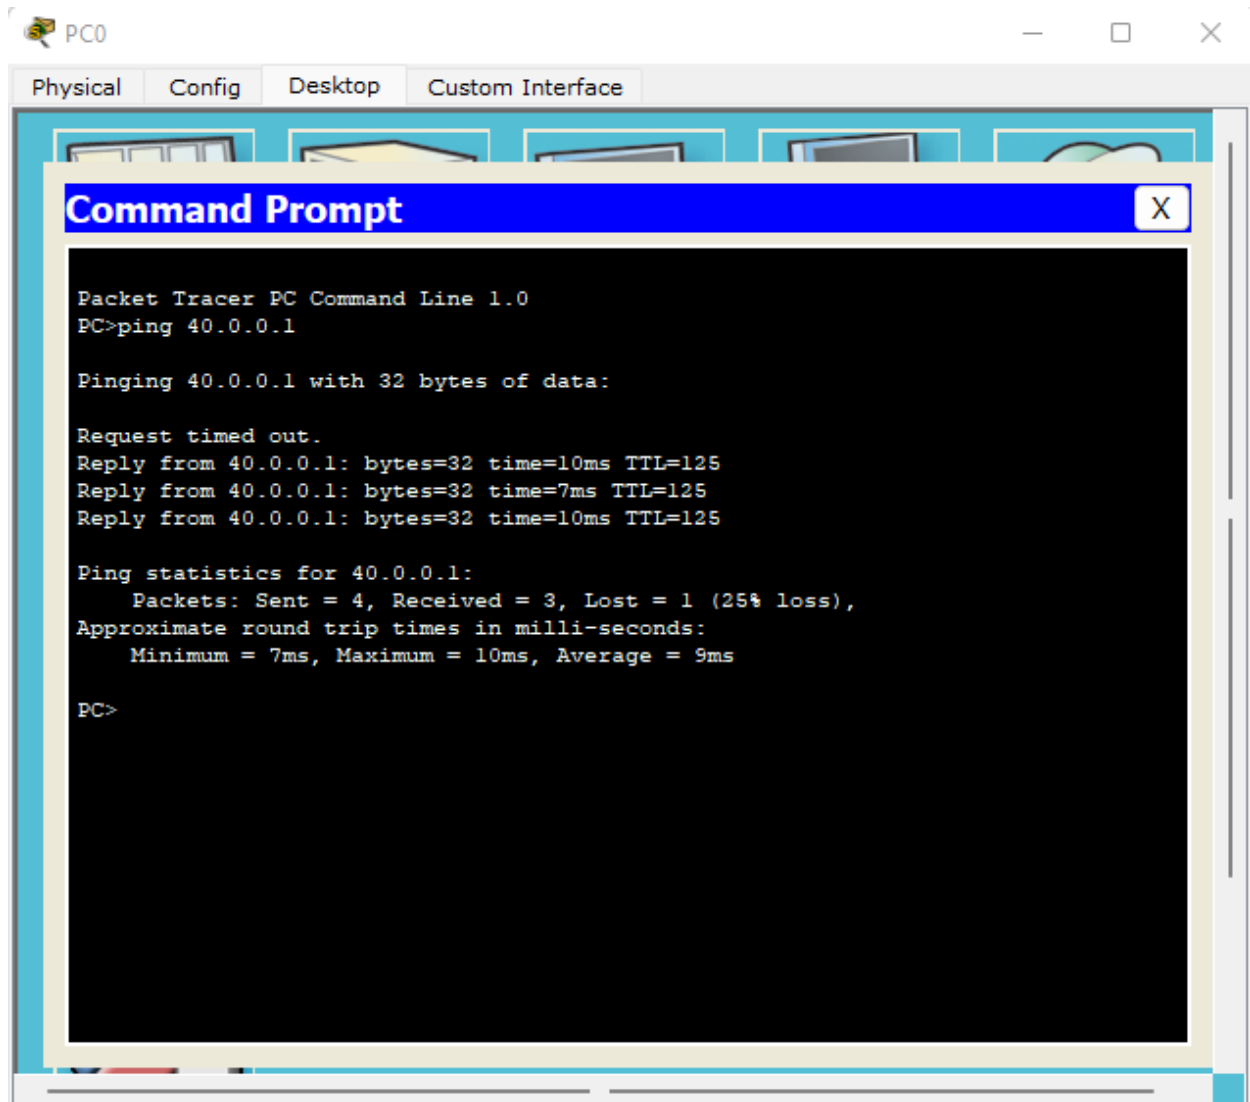


P1:

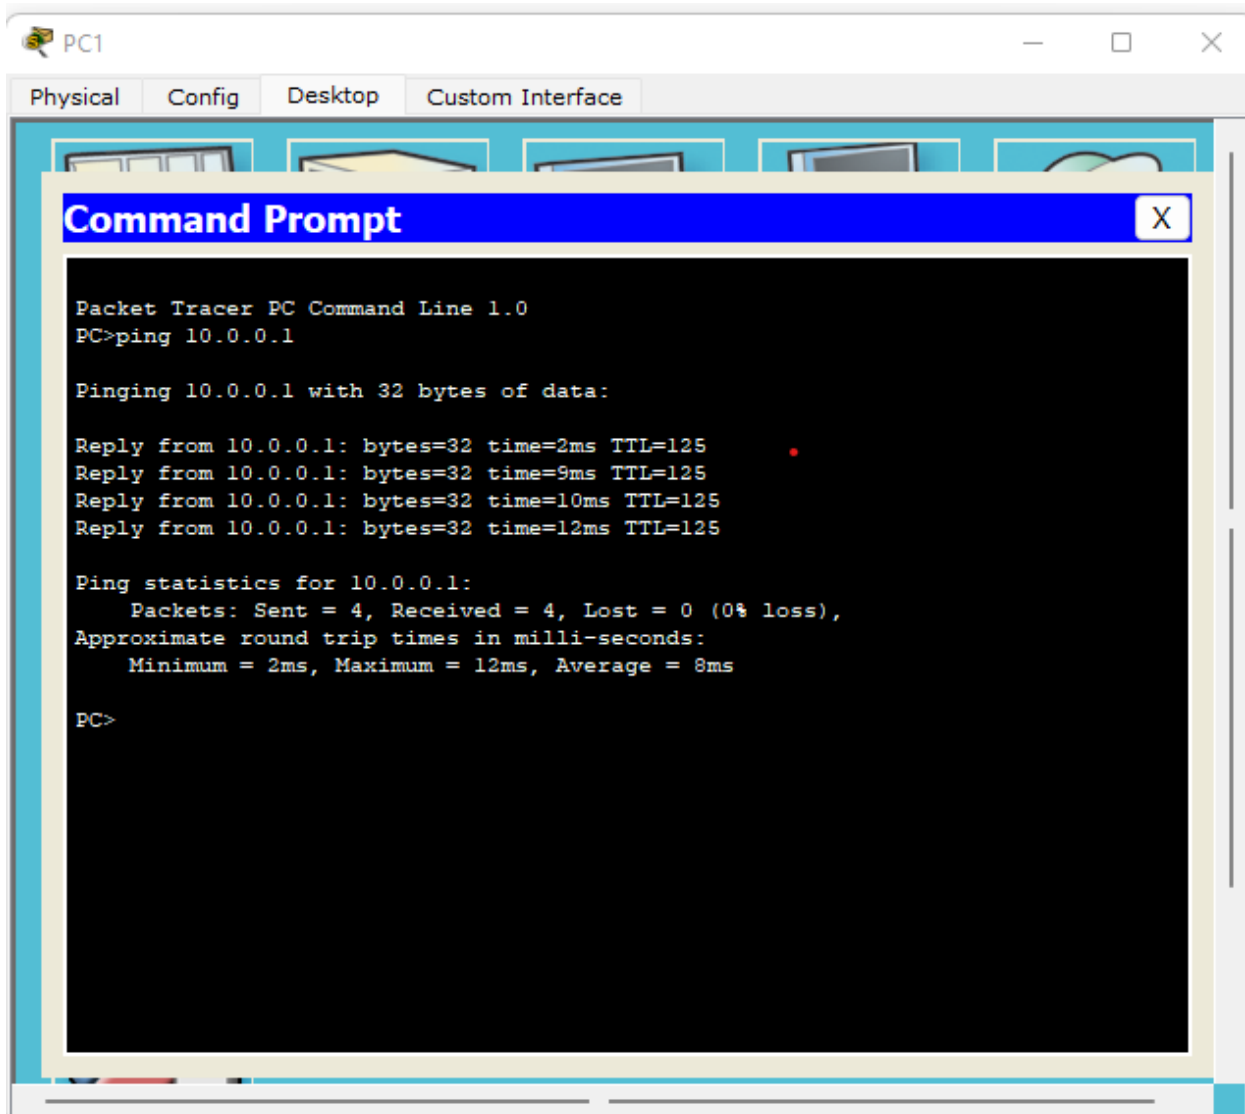

Lab - 6

Plan: Configure RIP handling Protocol in Routers

Topology:

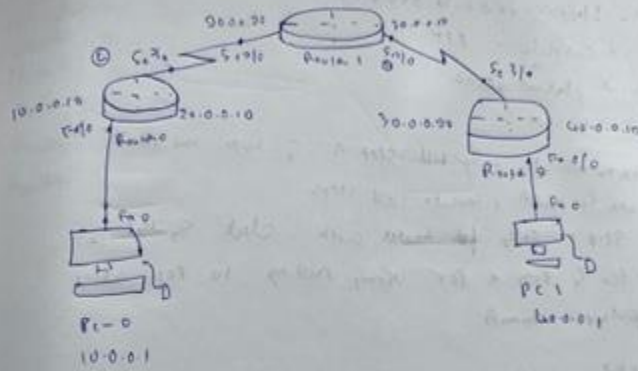

Procedure

- 1) Create a network using 3 routers and 2 PC's. Connect routers using serial DCE cable and PC - Router using Copper Crossover cable
- 2) Set IP address and gateway no for both PC's
 10.0.0.1 - IP 10.0.0.10 gateway - PC0
 40.0.0.1 - IP 40.0.0.10 gateway - PC1
- 3) Enter commands in Router - CLI

Step 1: R1

2: Enable

3: Config

4) Interface fastethernet 0/0

5- I address 10.0.0.10 to 150.0.0.0

6- No. of steps

7- No. of steps

8- I address 10.0.0.10 to 150.0.0.0

9- I address 10.0.0.10 to 150.0.0.0

10- I address 10.0.0.10 to 150.0.0.0

11- clock 60000

12- No. of steps

For router to router only fill step 9 & 10 no step

For router to router, execute all steps

Execute step 11 only for router with clock signal

Go to PC & ping a PC using routing to PC while ping duration connects.

Ping output:

PC> Ping 10.0.0.1

Pinging 10.0.0.1 with 32 bytes of data:

Request timed out.

Reply from 10.0.0.1: bytes=32 time=8ms TTL=125

" " " " time=8ms TTL=125

" " " " time=10ms TTL=125

Ping statistics for 10.0.0.1:

Round-trip times: Sent=4, Received=3, Lost=1 (25% loss)

Approximate round-trip times in milliseconds:

Observation

- 1) AIP is a dynamic learning protocol that can learn route as a routing metric to find the best path between source & destination. It is a distance vector protocol.
- 2) Hop count is the no. of routers coming in b/w source and destination. The path with least hop count is selected.
- 3) Updates of the network are generated periodically.
- 4) Changes of routing info are always broadcast.
- 5) Full routing tables are sent in updates.
- 6) Routers always share routing info received from neighbour routers.