


LAB 3

Configure default route to the Router.

TOPOLOGY:

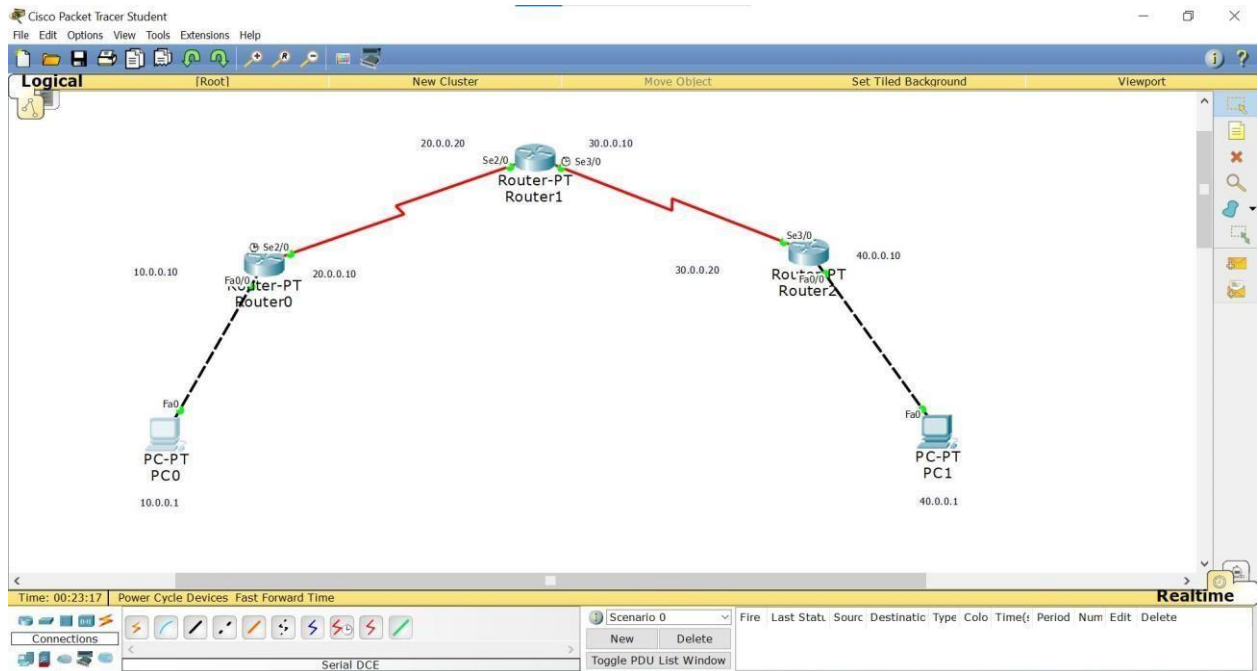

OUTPUT:

Simulation Panel

Vis.	Time(sec)	Last De	At Dev	Type	Info
	0.008		Router0 PC0	ICMP	
	12.679	--	Rout...	CDP	
	12.679	--	Rout...	CDP	
	12.680		Router2 PC1	CDP	
	12.680		Router2 Rout...	CDP	

Event List Filters - Visible Events
ACL Filter, ARP, BGP, CDP, DHCP, DHCPv6, DNS, DTP, EIGRP, EIGRPv6, FTP, H.323, HSRP, HSRPv6, HTTP, HTTPS, ICMP, ICMPv6, IPsec, ISAKMP, LACP, NDR, NETFLOW, NTP, OSPF, OSPFv6, PAgP, POP3, RADIUS, RIP, RIPng, RTP, SCCP, SMTP, SNMP, SSH, STP, SYSLOG, TACACS, TCP, TFTP, Telnet, UDP, VTP

Event List Simulation

Fire	Last Stat	Sourc	Destinatic	Type	Colo	Time(s)	Period	Num	Edit	Delete
	Successful	PC0	PC1	IC...		0.000	N	0	(ed...)	(delete)

PC0

Physical Config Desktop Custom Interface

Command Prompt

```
Packet Tracer PC Command Line 1.0
PC>ping 40.0.0.1

Pinging 40.0.0.1 with 32 bytes of data:

Request timed out.
Reply from 40.0.0.1: bytes=32 time=2ms TTL=125
Reply from 40.0.0.1: bytes=32 time=16ms TTL=125
Reply from 40.0.0.1: bytes=32 time=2ms TTL=125

Ping statistics for 40.0.0.1:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 2ms, Maximum = 16ms, Average = 6ms

PC>ping 40.0.0.1

Pinging 40.0.0.1 with 32 bytes of data:

Reply from 40.0.0.1: bytes=32 time=21ms TTL=125
Reply from 40.0.0.1: bytes=32 time=9ms TTL=125
Reply from 40.0.0.1: bytes=32 time=2ms TTL=125
Reply from 40.0.0.1: bytes=32 time=4ms TTL=125

Ping statistics for 40.0.0.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 2ms, Maximum = 21ms, Average = 9ms

PC>|
```