

Лабораторная работа №7

Учет физических параметров сети

Поляков Г. С.

12 марта 2025


Российский университет дружбы народов, Москва, Россия


Информация

- Поляков Глеб Сергеевич
- Студент
- Российский университет дружбы народов


Выполнение работы

Схема сети

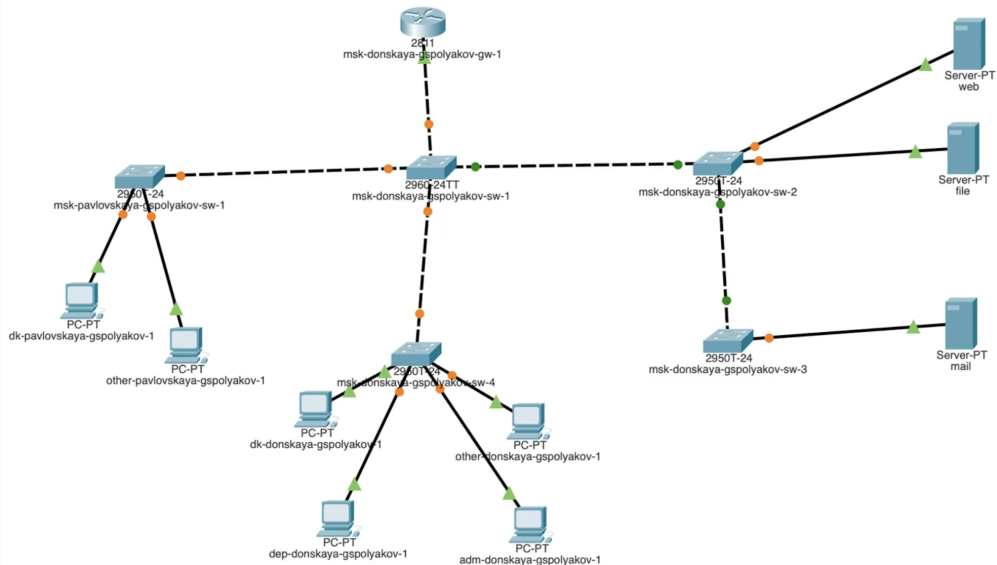


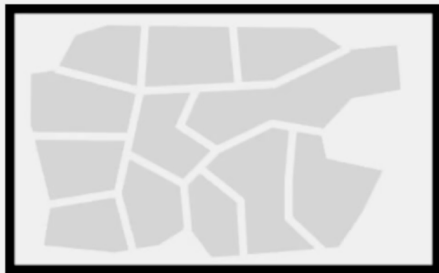

Moscow

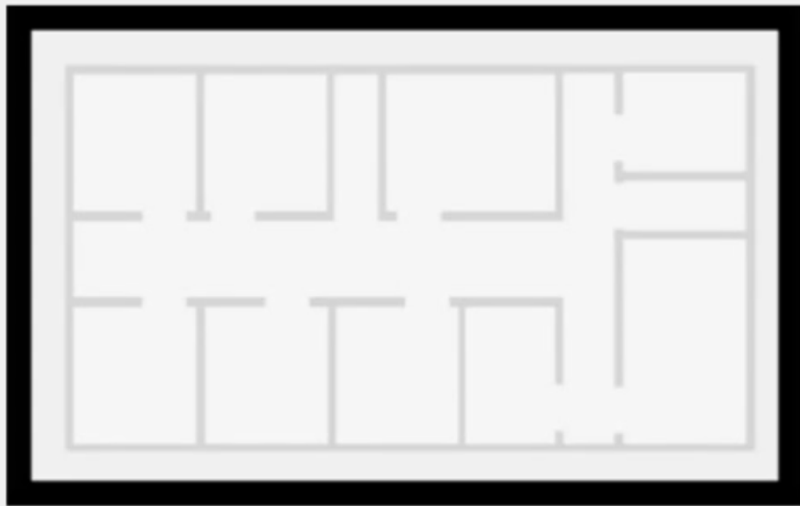


Donskaya

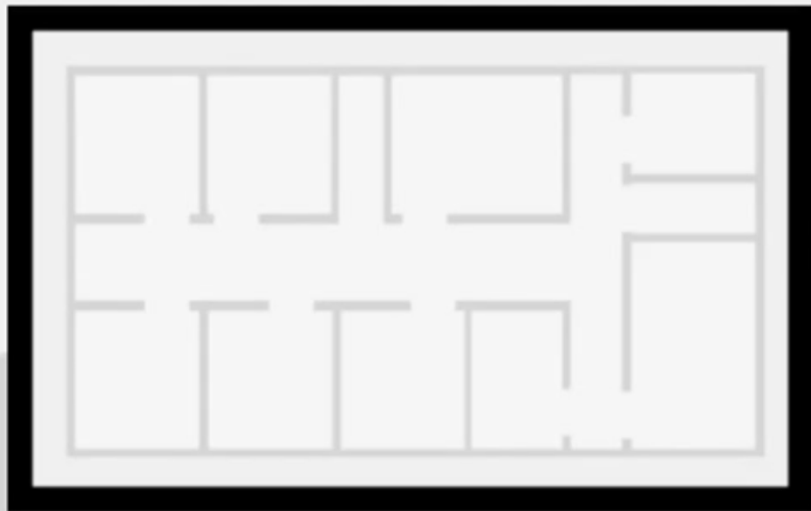

Pavlovskaya

<< Cable Conduit to Generic Container

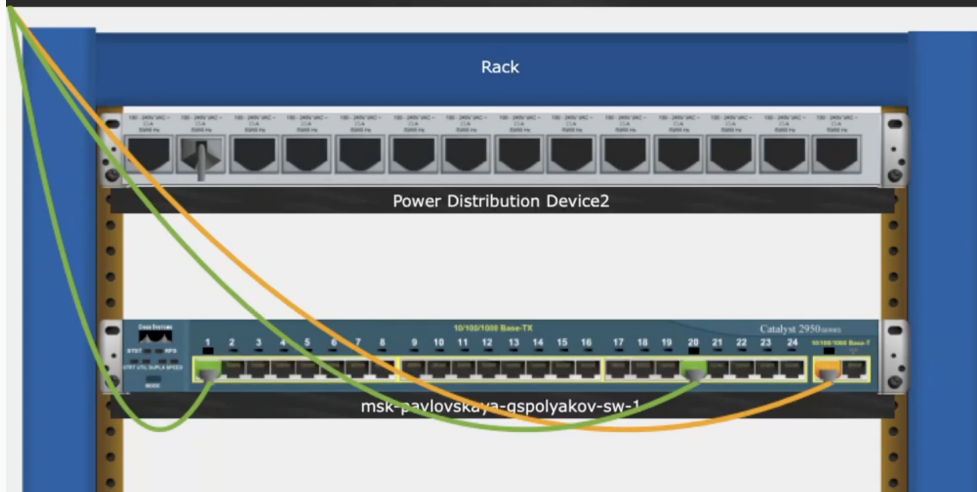

```
msk-pavlovskaya-gspolyakov-sw-1#ping 10.128.3.2
```


```
Type escape sequence to abort.
```


```
Sending 5, 100-byte ICMP Echos to 10.128.3.2, timeout is 2 seconds:
```

```
!!!!
```

```
Success rate is 100 percent (5/5), round-trip min/avg/max = 0/8/30 ms
```

Проверка соединения

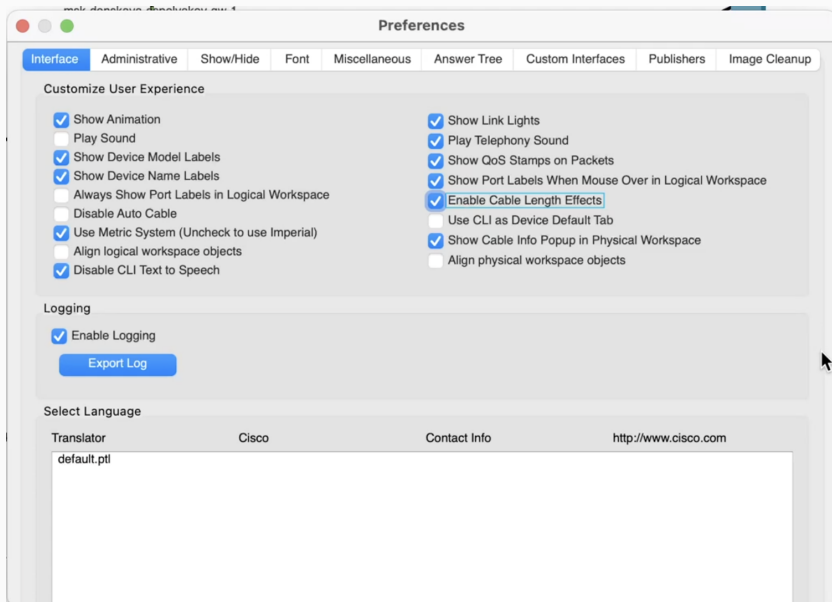

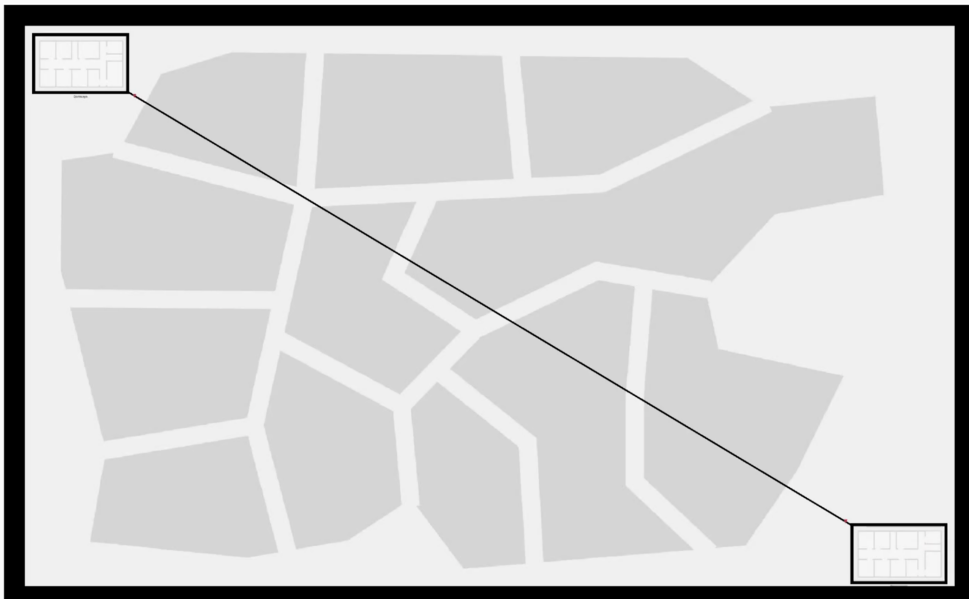

```
msk-donskaya-gspolyakov-sw-1#ping 10.128.3.2
```


```
Type escape sequence to abort.
```

```
Sending 5, 100-byte ICMP Echos to 10.128.3.2, timeout is 2 seconds:
```

```
.....
```

```
Success rate is 0 percent (0/5)
```

Проверка соединения

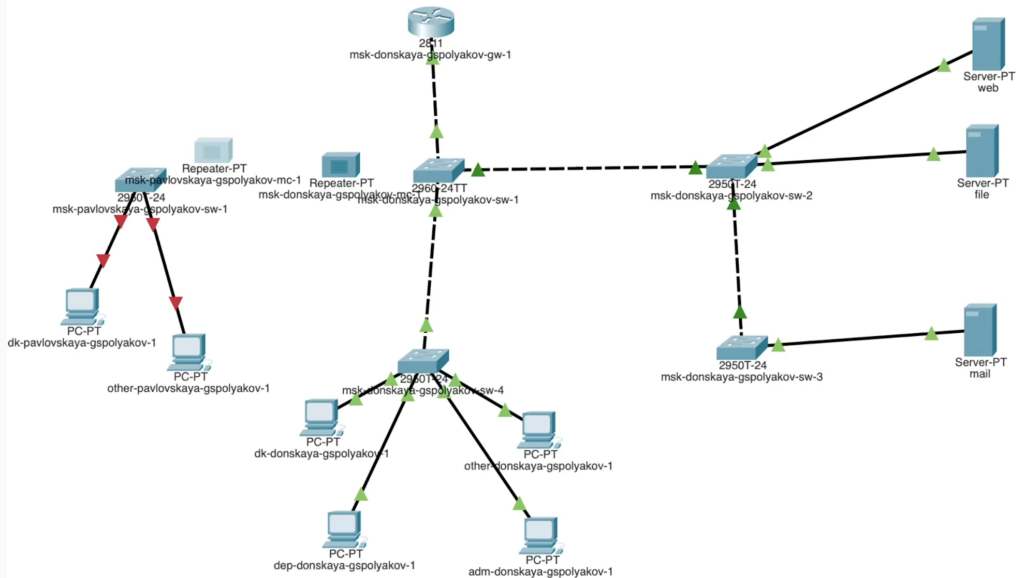

msk-donskaya-gspolyakov-mc-1

Physical

Config

Attributes

Physical Device View

Zoom In

Original Size

Zoom Out



Customize Icon in Physical View

Customize Icon in Logical View

MODULES

PT-REPEATER-NM-1CE

PT-REPEATER-NM-1CFE

PT-REPEATER-NM-1CGE

PT-REPEATER-NM-1FFE

PT-REPEATER-NM-1FGE


PT-REPEATER-NM-COVER

The PT-REPEATER-NM-1FFE Module provides one Fast-Ethernet interface for use with fiber media. Ideal for a wide range of LAN applications, the Fast Ethernet network modules support many internetworking features and standards. Single port network modules offer autosensing 10/100BaseTX or 100BaseFX Ethernet.



Top

Подключение через репитеры

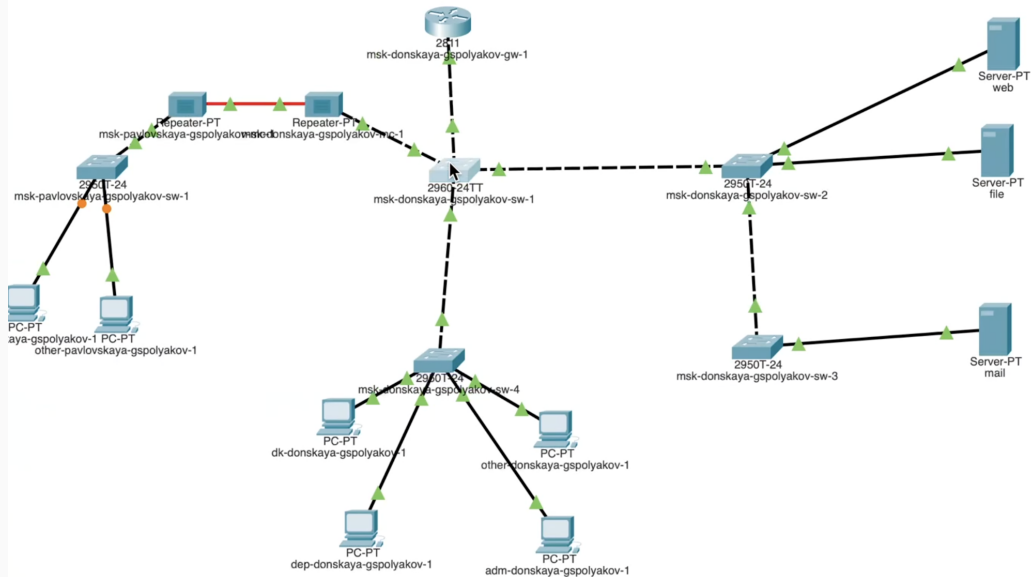


```
Sending 5, 100-byte ICMP Echos to 10.128.1.6, timeout is 2 seconds:  
!!!!  
Success rate is 100 percent (5/5), round-trip min/avg/max = 0/4/20 ms  
msk-donskaya-gspolyakov-sw-1#
```