
M460L ·RTO-144 CONNECTIONS

PREAMP ·series S460 ·line in 600 Ω, out 600 Ω

REAR CONNECTOR


P1 — REAR VIEW · CARD EDGE · 44 CONTACTS

TOP ROW 1–22: COMPONENT SIDE · BOTTOM ROW A–Z: SOLDER SIDE

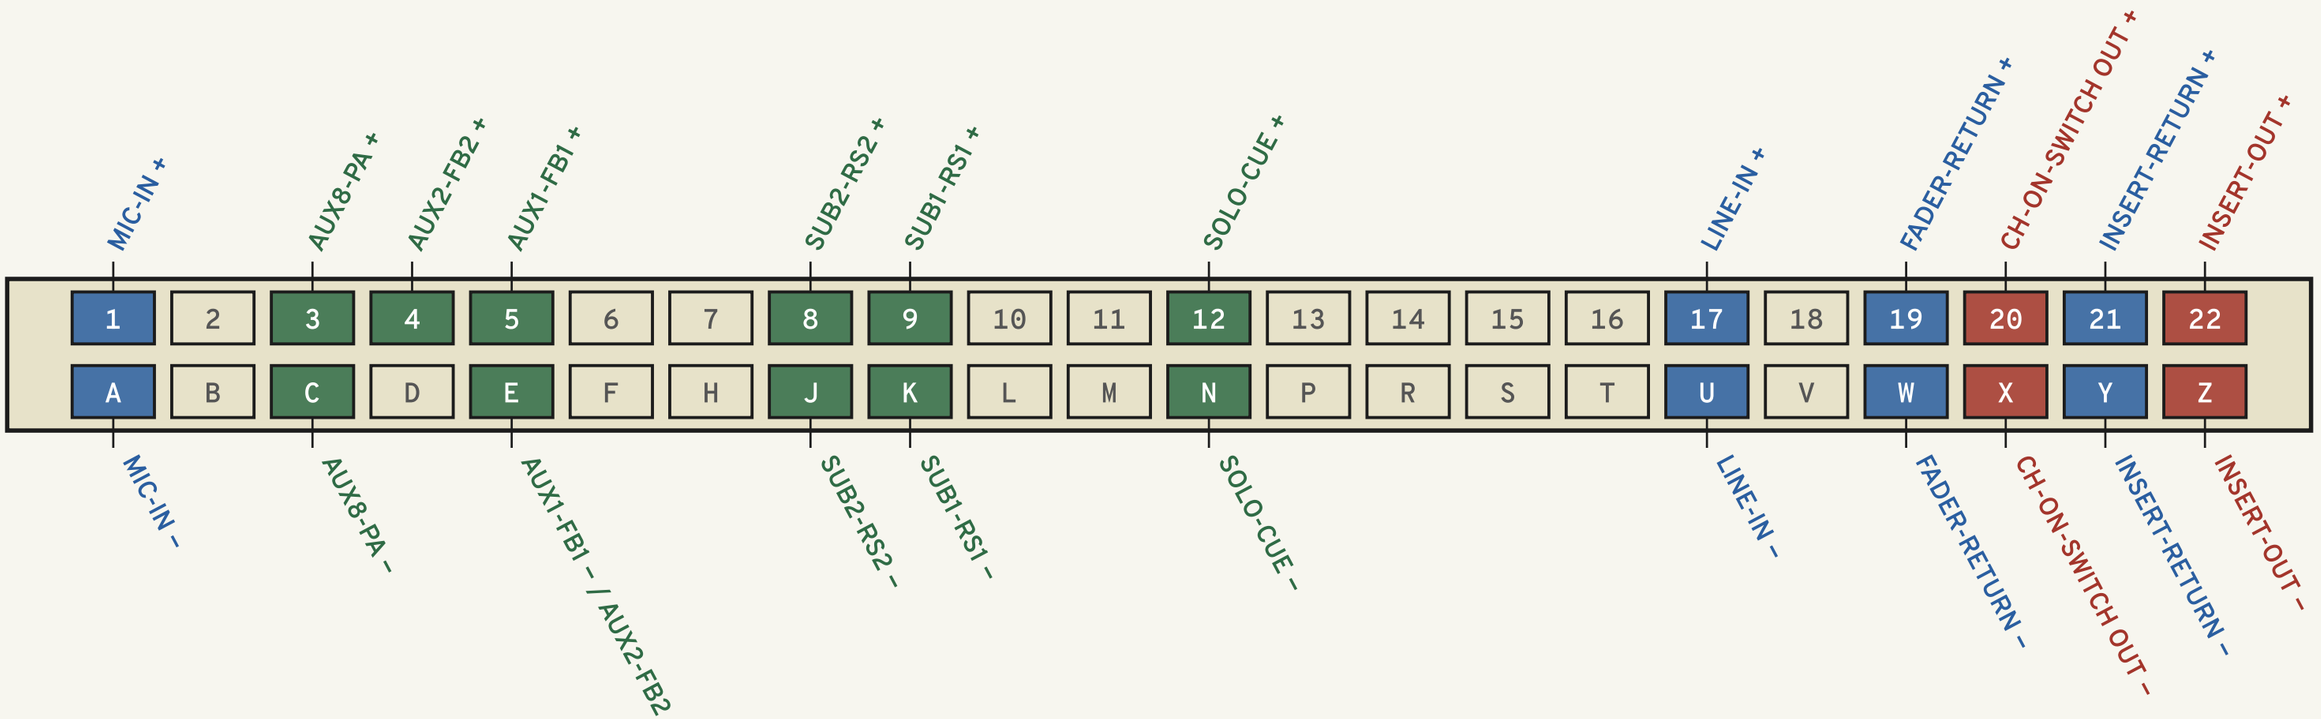

P2 — REAR VIEW · CARD EDGE · 44 CONTACTS

TOP ROW 1–22: COMPONENT SIDE · BOTTOM ROW A–Z: SOLDER SIDE

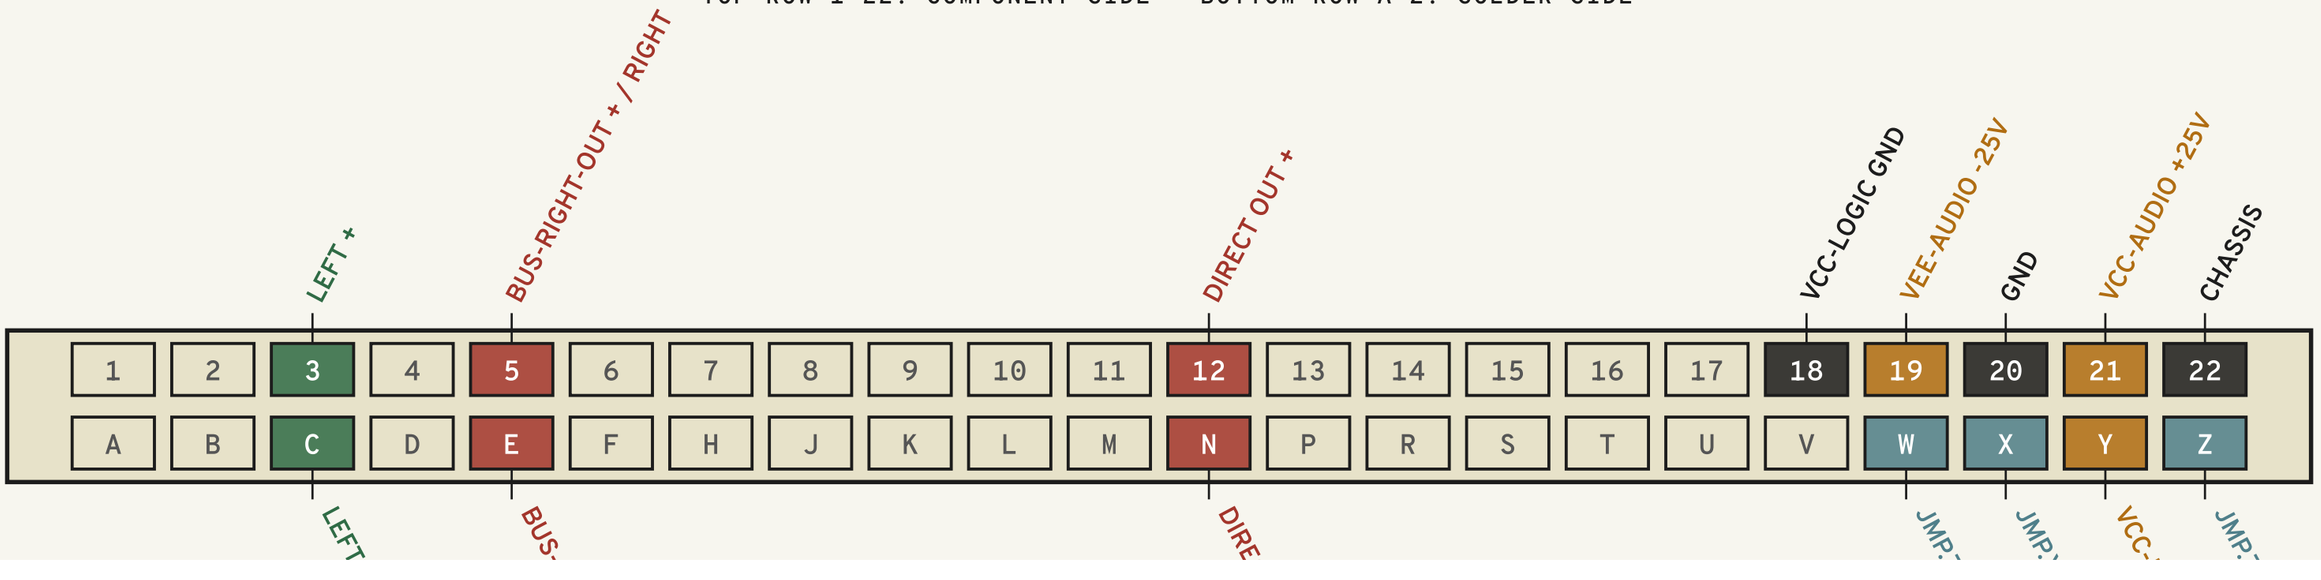

RIGHT-OUT – / RIGHT

CT OUT –

Z.W


X.18

LOGIC +24V

Z.W

Input Output Bus Power Ground / chassis Jumper

INPUTS AND OUTPUTS

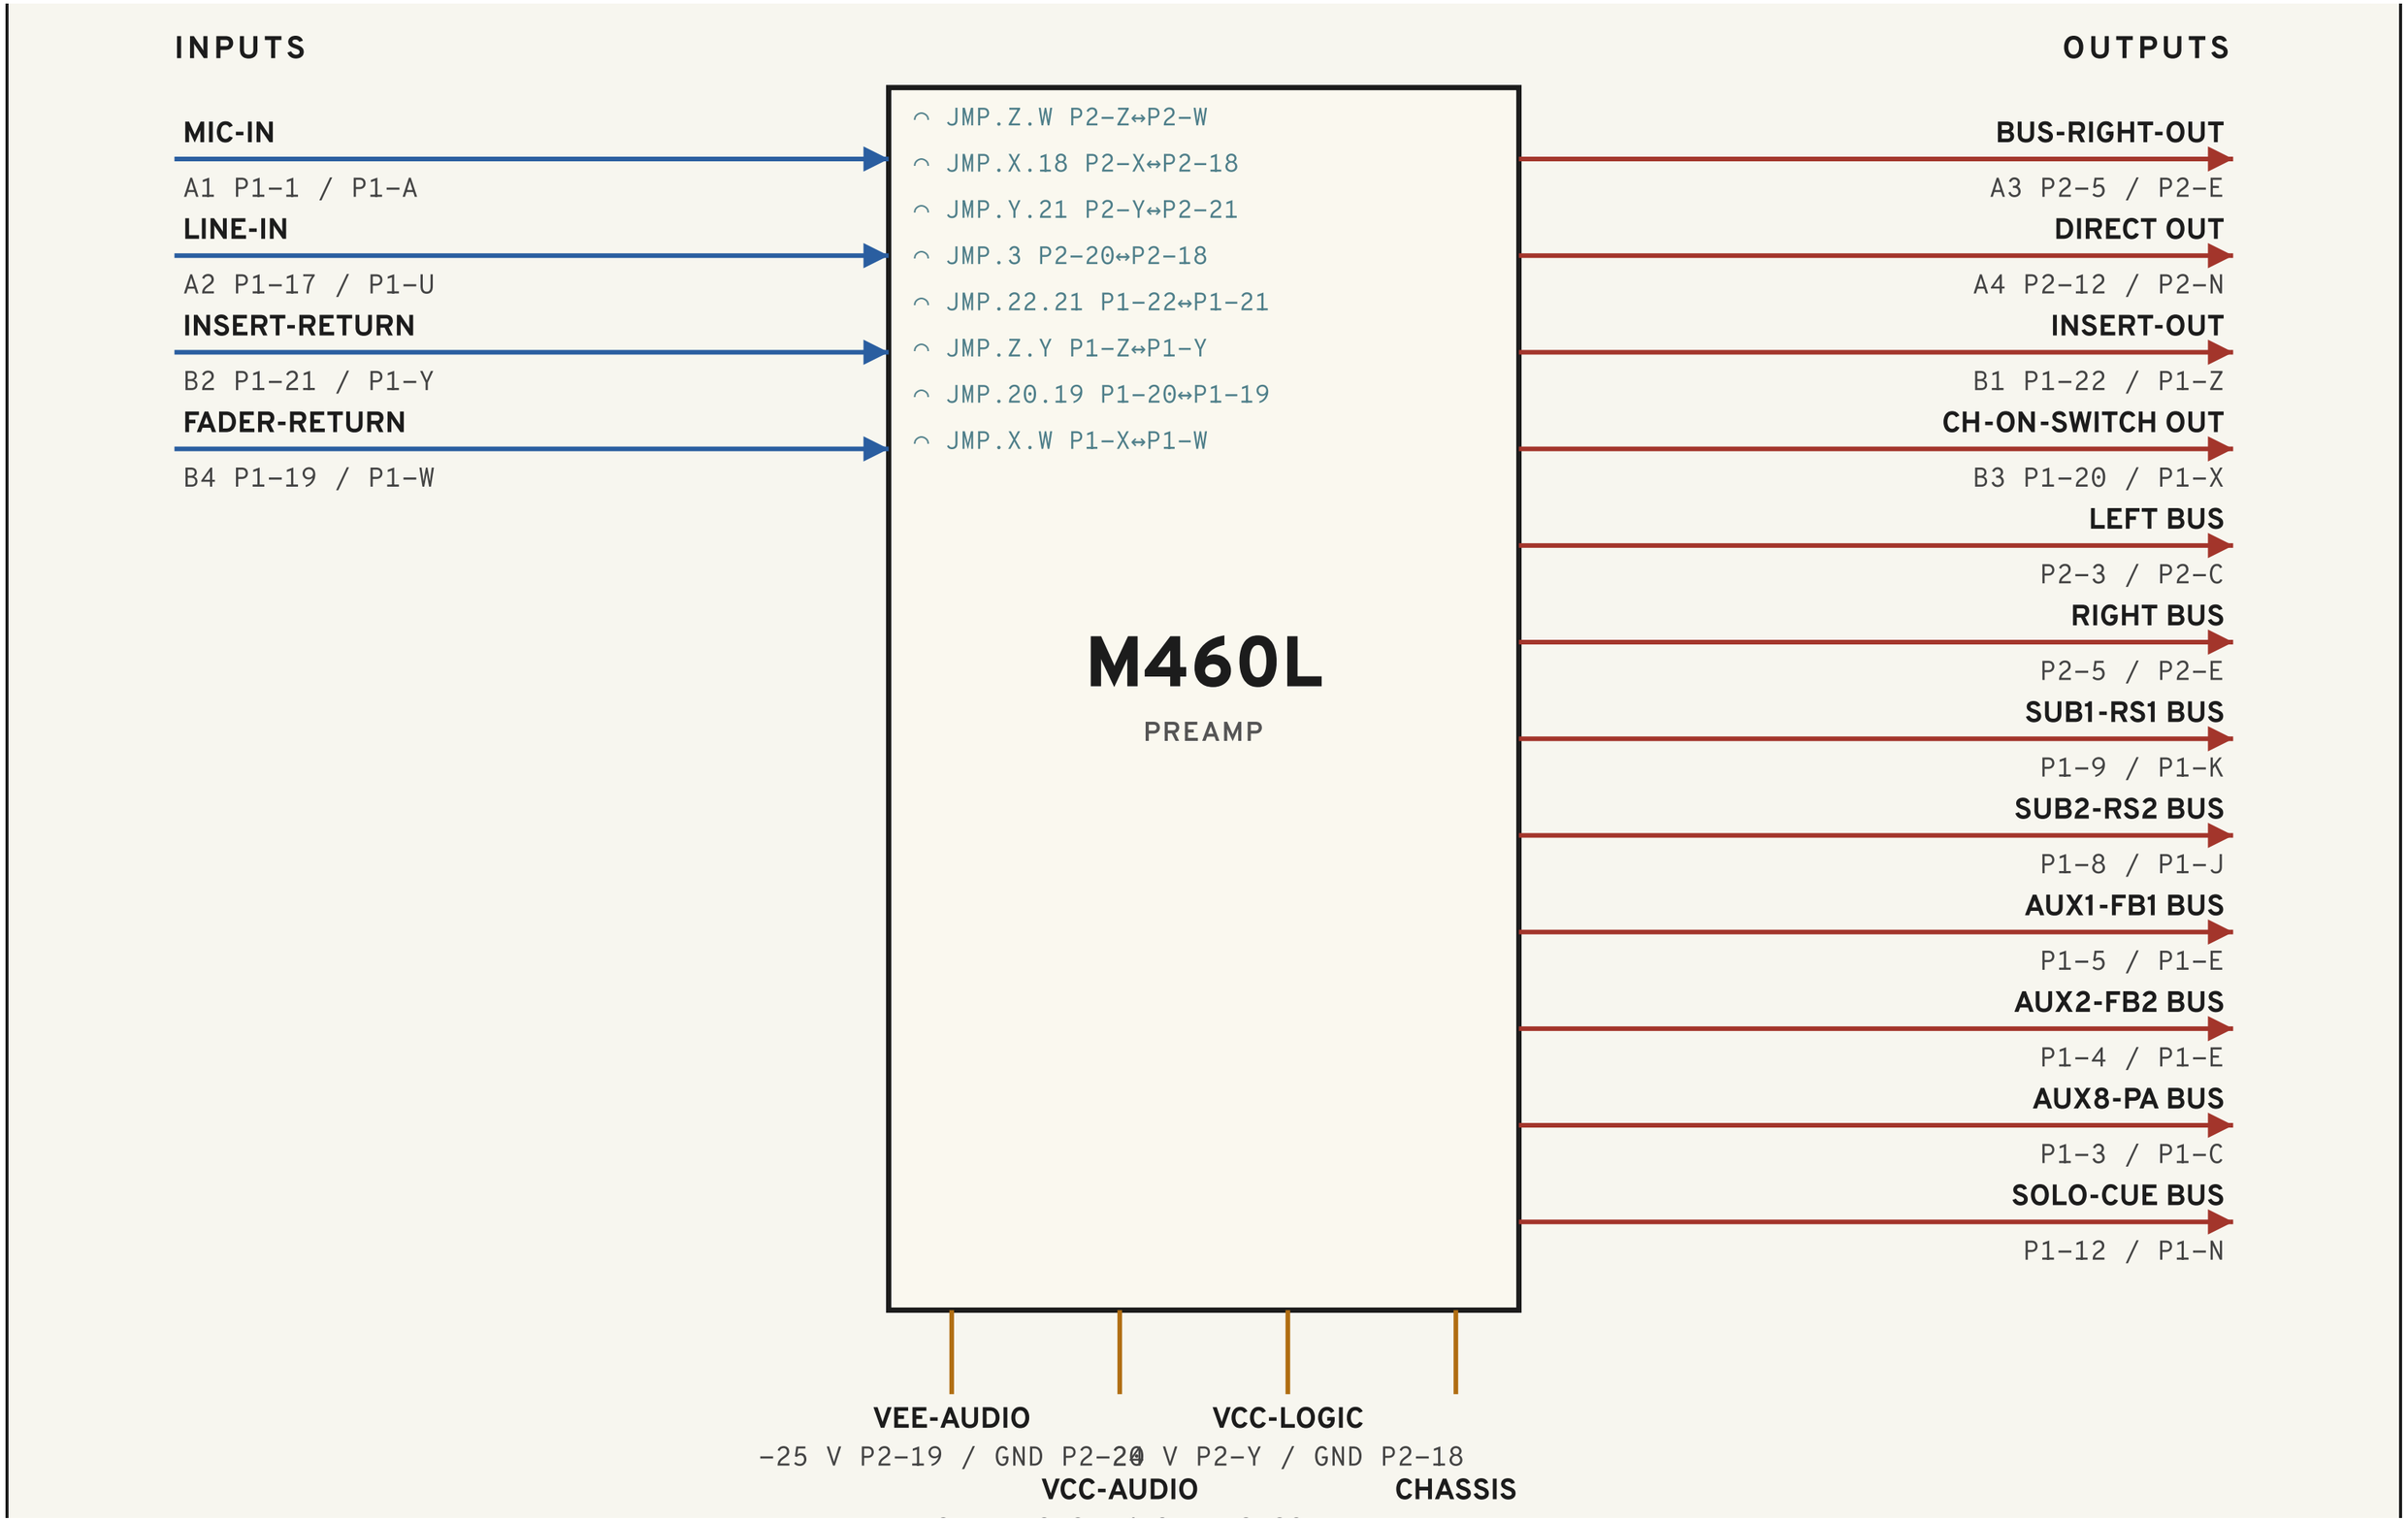
INPUTS
MIC-IN
A1 P1-1 / P1-A
LINE-IN
A2 P1-17 / P1-U
INSERT-RETURN
B2 P1-21 / P1-Y
FADER-RETURN
B4 P1-19 / P1-W
JMP.Z.W P2-Z↔P2-W
JMP.X.18 P2-X↔P2-18
JMP.Y.21 P2-Y↔P2-21
JMP.3 P2-20↔P2-18
JMP.22.21 P1-22↔P1-21
JMP.Z.Y P1-Z↔P1-Y
JMP.20.19 P1-20↔P1-19
JMP.X.W P1-X↔P1-W
M460L
PREAMP
OUTPUTS
BUS-RIGHT-OUT
A3 P2-5 / P2-E
DIRECT OUT
A4 P2-12 / P2-N
INSERT-OUT
B1 P1-22 / P1-Z
CH-ON-SWITCH OUT
B3 P1-20 / P1-X
LEFT BUS
P2-3 / P2-C
RIGHT BUS
P2-5 / P2-E
SUB1-RS1 BUS
P1-9 / P1-K
SUB2-RS2 BUS
P1-8 / P1-J
AUX1-FB1 BUS
P1-5 / P1-E
AUX2-FB2 BUS
P1-4 / P1-E
AUX8-PA BUS
P1-3 / P1-C
SOLO-CUE BUS
P1-12 / P1-N
VEE-AUDIO
-25 V P2-19 / GND P2-20
VCC-AUDIO
VCC-LOGIC
0 V P2-Y / GND P2-18
CHASSIS

25 V P2-21 / GND P2-20 P2-22

AUDIO CONNECTIONS · RTO-144 A / B

PORT	SIGNAL	DIR	PIN +	PIN −	PAD +	PAD −
A1	MIC-IN	in	P1-1	P1-A	P1-1.A.1.P	P1-A.A.1.N
A2	LINE-IN	in	P1-17	P1-U	P1-17.A.2.P	P1-U.A.2.N
A3	BUS-RIGHT-OUT	out	P2-5	P2-E	P2-5.A.3.P	P2-E.A.3.N
A4	DIRECT OUT	out	P2-12	P2-N	P2-12.A.4.P	P2-N.A.4.N
B1	INSERT-OUT	out	P1-22	P1-Z	P1-22.B.1.P	P1-Z.B.1.N
B2	INSERT-RETURN	in	P1-21	P1-Y	P1-21.B.2.P	P1-Y.B.2.N
B3	CH-ON-SWITCH OUT	out	P1-20	P1-X	P1-20.B.3.P	P1-x.B.3.N
B4	FADER-RETURN	in	P1-19	P1-W	P1-19.B.4.P	P1-W.B.4.N

JUMPERS

FUNCTION	DESIGNATION	FROM	TO
CH ON LAMP	JMP.Z.W	P2-Z	P2-W
CH ON GND	JMP.X.18	P2-X	P2-18
24V Jumper	JMP.Y.21	P2-Y	P2-21
CH ON GND	JMP.3	P2-20	P2-18
Insert +	JMP.22.21	P1-22	P1-21
Insert -	JMP.Z.Y	P1-Z	P1-Y
Fader +	JMP.20.19	P1-20	P1-19
Fader -	JMP.X.W	P1-X	P1-W

Source: Ward-Beck Systems - Module RTO-144 Jumper calculator.xlsx (Database tab). Pin direction is inferred from the signal name. Verify against the module schematic before wiring.

BUS CONNECTIONS

BUS	DIR	SIGNAL	PIN +	PIN −
LEFT	out	BUS-LEFT-OUT	P2-3	P2-C
RIGHT	out	BUS-RIGHT-OUT	P2-5	P2-E
SUB1-RS1	out	BUS-SUB1-RS1-OUT	P1-9	P1-K
SUB2-RS2	out	BUS-SUB2-RS2-OUT	P1-8	P1-J
AUX1-FB1	out	BUS-FB1-OUT	P1-5	P1-E
AUX2-FB2	out	BUS-FB2-OUT	P1-4	P1-E
AUX8-PA	out	BUS-AUX8-PA-OUT	P1-3	P1-C
SOLO-CUE	out	BUS-SOLO-CUE-OUT	P1-12	P1-N

POWER · BENCH PSU

RAIL	STYLE	VOLTS	MAX A	SUPPLY	GROUND	LINK
VEE-AUDIO	NEW	-25	0.1	P2-19	P2-20	2
VCC-AUDIO	NEW	25	0.2	P2-21	P2-20	1
VCC-LOGIC	NEW	24	0.1	P2-Y	P2-18	—

WBS **WARD-BECK SYSTEMS LTD.**

TITLE	M460L RTO-144 CONNECTIONS		
DRN.	MAKE_RTO144.PY	DATE	OCT 17 2026