
M460T ·RTO-144 CONNECTIONS

M460T - Input Module - Pin Outs ·out 600 Ω

REAR CONNECTOR


P1 — REAR VIEW · CARD EDGE · 44 CONTACTS

TOP ROW 1–22: COMPONENT SIDE · BOTTOM ROW A–Z: SOLDER SIDE

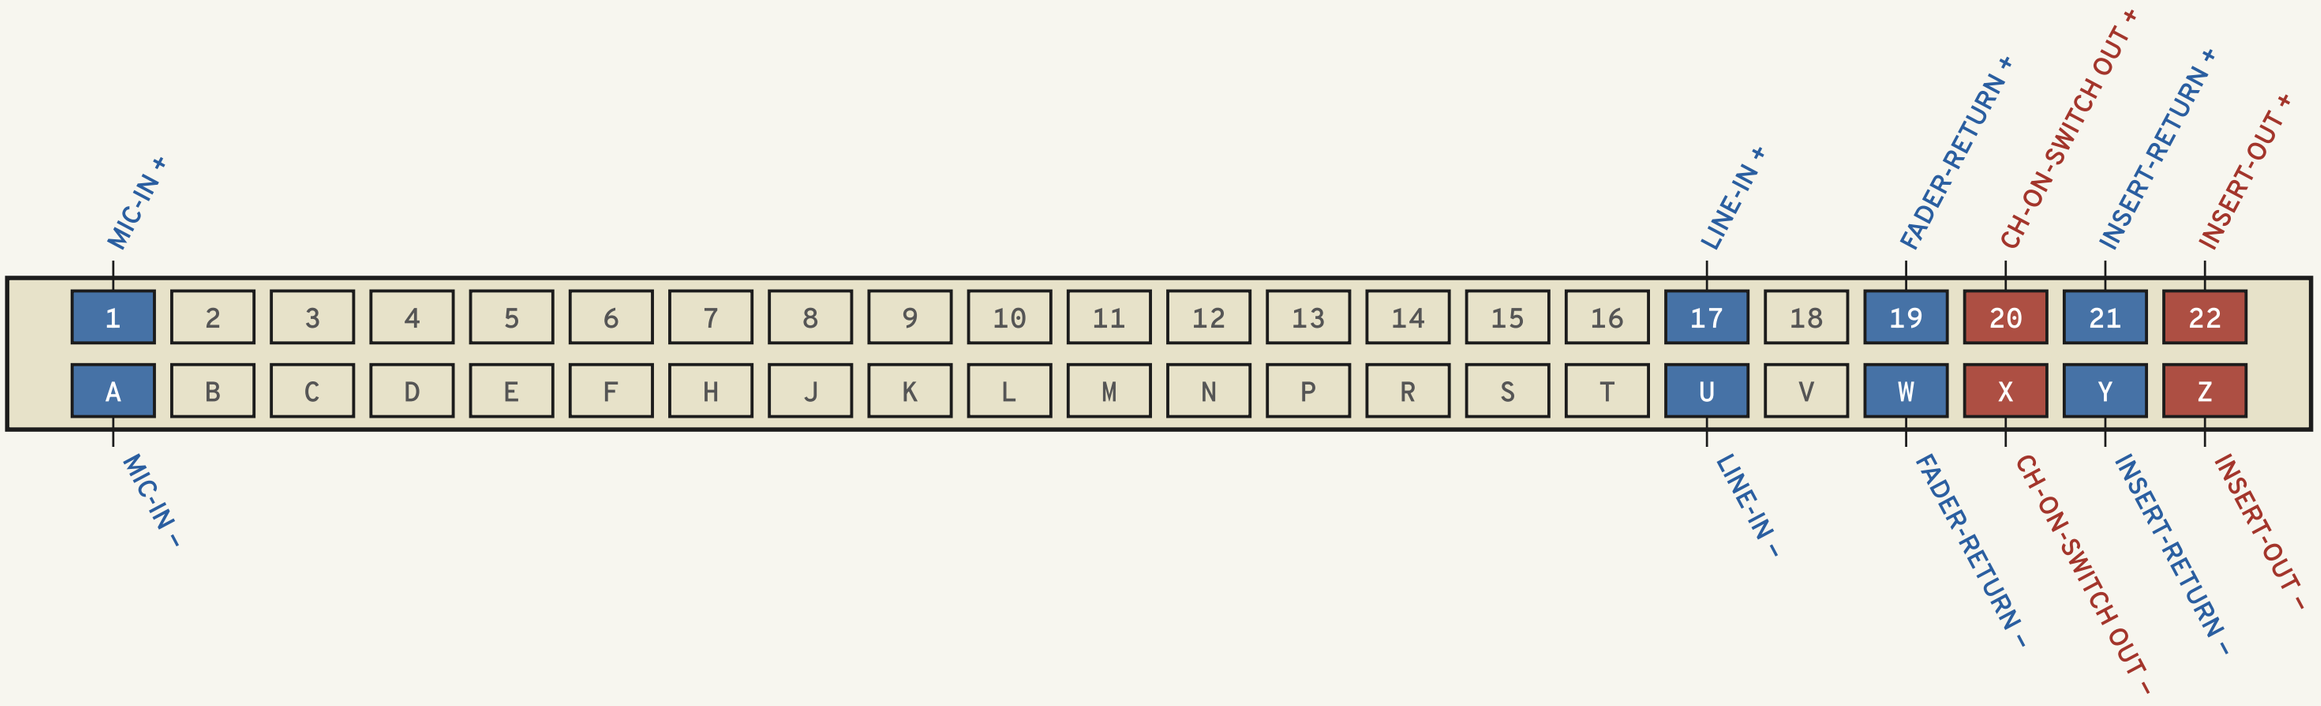


P2 — REAR VIEW · CARD EDGE · 44 CONTACTS

TOP ROW 1–22: COMPONENT SIDE · BOTTOM ROW A–Z: SOLDER SIDE

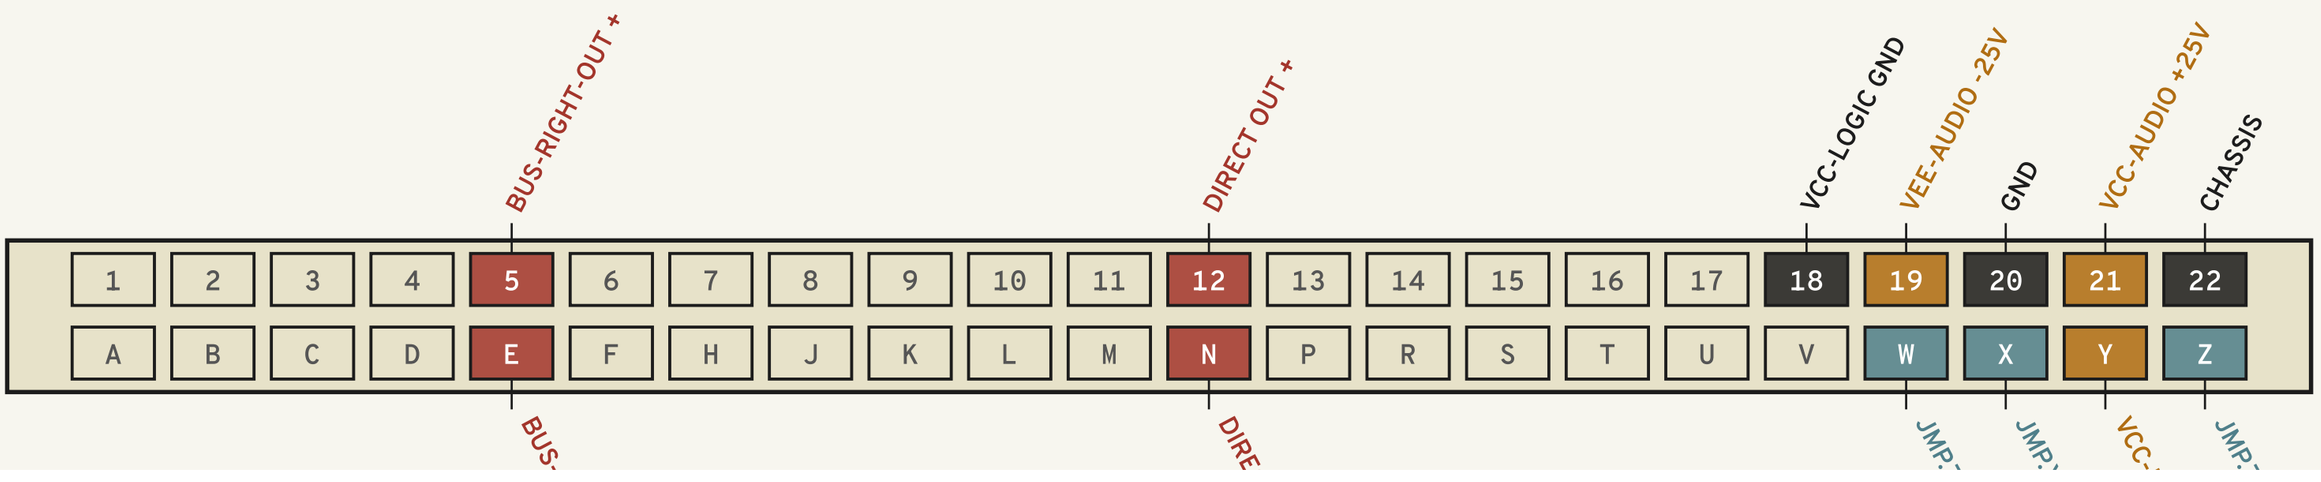

Input Output Power Ground / chassis Jumper

INPUTS AND OUTPUTS

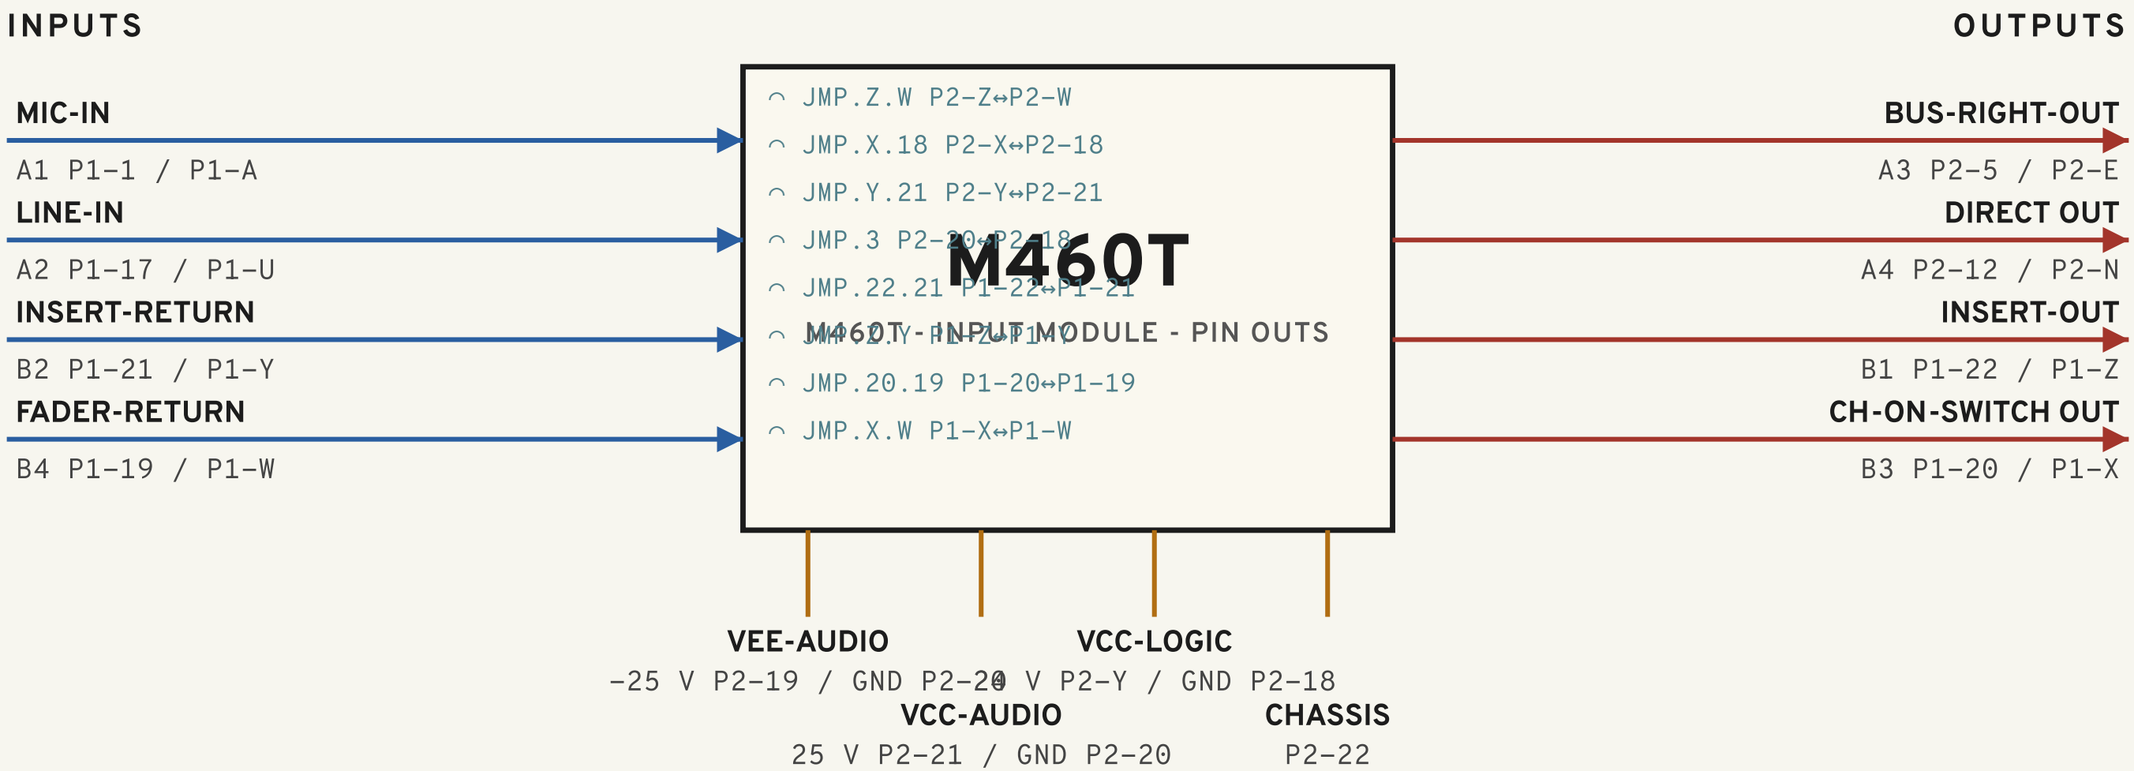

AUDIO CONNECTIONS · RTO-144 A / B

PORT	SIGNAL	DIR	PIN +	PIN −	PAD +	PAD −
A1	MIC-IN	in	P1-1	P1-A	P1-1.A.1.P	P1-A.A.1.N
A2	LINE-IN	in	P1-17	P1-U	P1-17.A.2.P	P1-U.A.2.N
A3	BUS-RIGHT-OUT	out	P2-5	P2-E	P2-5.A.3.P	P2-E.A.3.N

POWER · BENCH PSU

RAIL	STYLE	VOLTS	MAX A	SUPPLY	GROUND	LINK
VEE-AUDIO	NEW	-25	0.1	P2-19	P2-20	2
VCC-AUDIO	NEW	25	0.2	P2-21	P2-20	1
VCC-LOGIC	NEW	24	0.1	P2-Y	P2-18	—

JUMPERS

FUNCTION	DESIGNATION	FROM	TO
CH ON LAMP	JMP.Z.W	P2-Z	P2-W
CH ON GND	JMP.X.18	P2-X	P2-18
24V Jumper	JMP.Y.21	P2-Y	P2-21
CH ON GND	JMP.3	P2-20	P2-18
Insert +	JMP.22.21	P1-22	P1-21
Insert -	JMP.Z.Y	P1-Z	P1-Y

PORT	SIGNAL	DIR	PIN +	PIN −	PAD +	PAD −
A4	DIRECT OUT	out	P2-12	P2-N	P2-12.A.4.P	P2-N.A.4.N
B1	INSERT-OUT	out	P1-22	P1-Z	P1-22.B.1.P	P1-Z.B.1.N
B2	INSERT-RETURN	in	P1-21	P1-Y	P1-21.B.2.P	P1-Y.B.2.N
B3	CH-ON-SWITCH OUT	out	P1-20	P1-X	P1-20.B.3.P	P1-x.B.3.N
B4	FADER-RETURN	in	P1-19	P1-W	P1-19.B.4.P	P1-W.B.4.N

Source: Ward-Beck Systems - Module RTO-144 Jumper calculator.xlsx (Database tab). Pin direction is inferred from the signal name. Verify against the module schematic before wiring.

FUNCTION	DESIGNATION	FROM	TO
Fader +	JMP.20.19	P1-20	P1-19
Fader -	JMP.X.W	P1-X	P1-W

WBS	WARD-BECK SYSTEMS LTD.		
TITLE	M460T RTO-144 CONNECTIONS		
DRN.	MAKE_RTO144.PY	DATE	OCT 17 2026