

The University of Azad Jammu and Kashmir, Muzaffarabad



Jawahir Ali

2024-SE-34

Computer Networks

Engr. Dr. Asma Javaid

Lab 07

Switching and ARP (MAC Address Learning)

Department Of Software Engineering

Switching and ARP (MAC Address Learning)

Objective

The objective of this lab is to understand the working of network switches and the ARP (Address Resolution Protocol). The lab also aims to study how switches learn MAC addresses dynamically and store them in the MAC address table for frame forwarding.

Introduction


A network switch is a Layer 2 networking device used to connect multiple devices in a Local Area Network (LAN). A switch forwards frames based on MAC addresses instead of broadcasting data to every device. When a switch receives a frame and does not know the destination MAC address, it floods the frame to all ports except the source port.

ARP (Address Resolution Protocol) is used to map an IP address to a MAC address before communication occurs between devices in a network. During communication, the switch learns the MAC addresses of connected devices and stores them in the MAC address table, also called the CAM table.

Task: -

Step 1: Create network topology.


- 2 PCs
- 1 Switch
- Straight-through cables

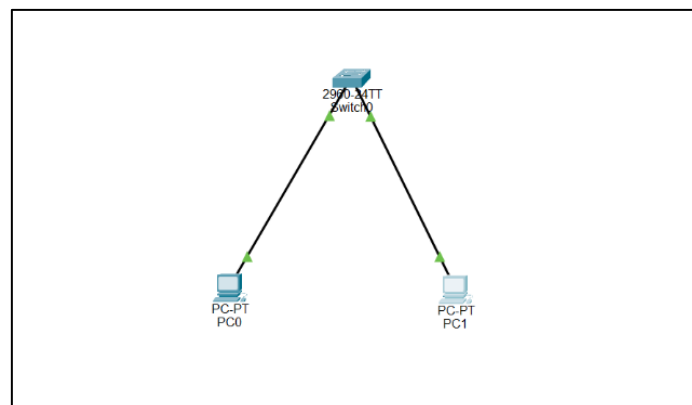

Step 2: IP Configuration

IP addresses were assigned to both PCs in the same network.

- PC0 → 192.168.1.1
- PC1 → 192.168.1.2

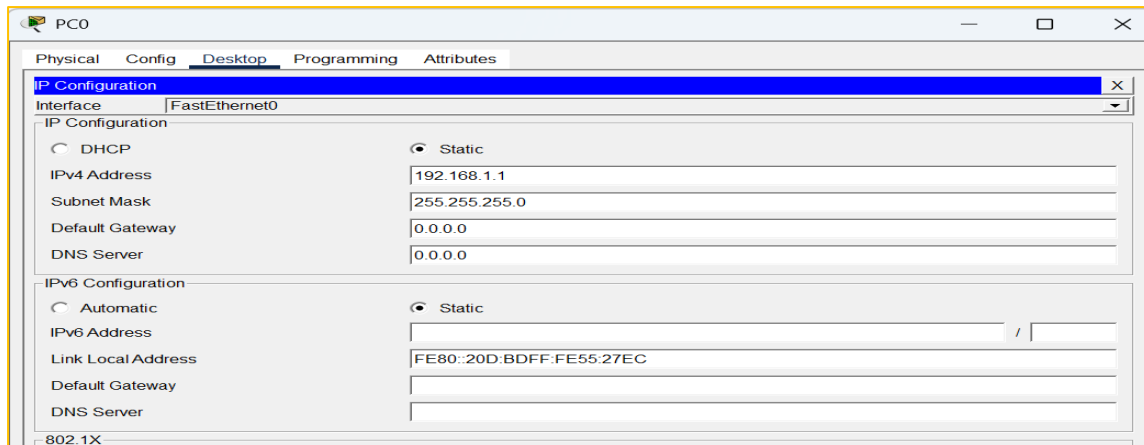



Step 3: Checking MAC Address Table Before Communication

The switch CLI was opened, and the following command was executed:

show mac address-table

Initially, the MAC address table was empty or contained limited entries because communication had not started yet.

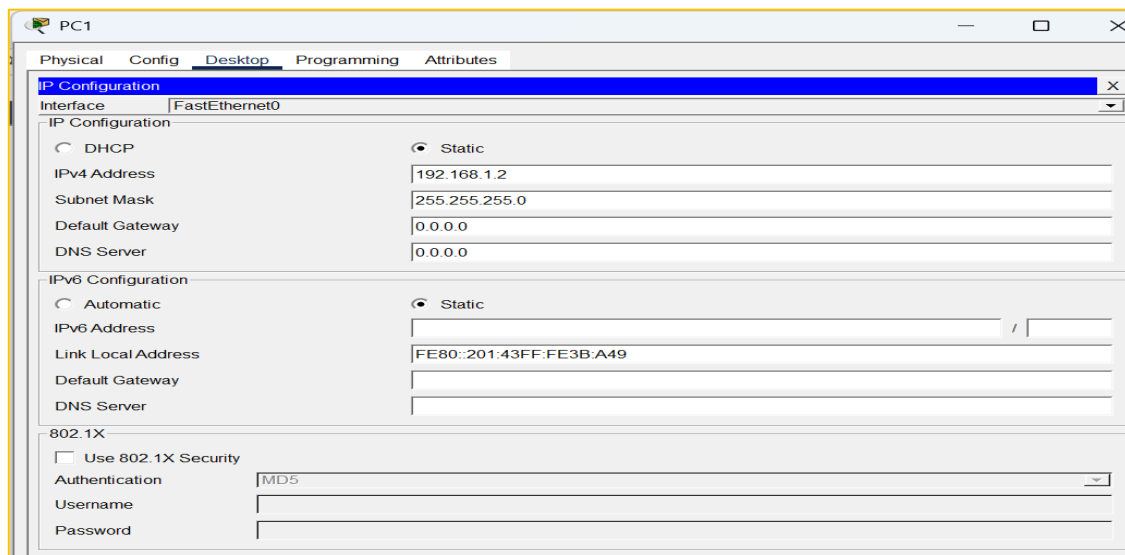

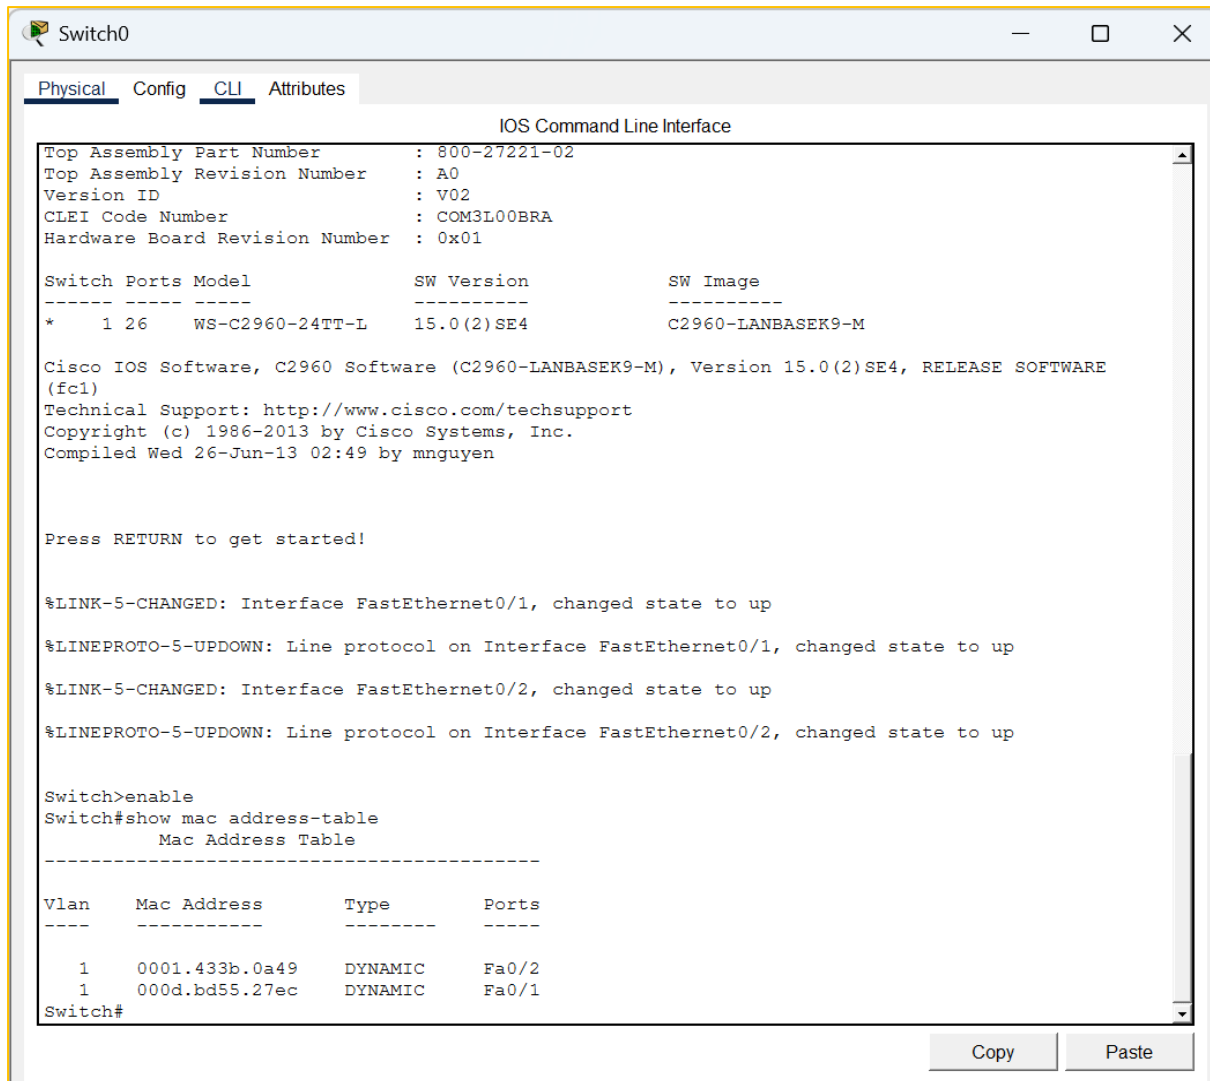


Step 4: Ping Communication

A ping request was sent from PC0 to PC1 using the following command:

ping 192.168.1.2

During this process, ARP was used to resolve the destination MAC address.

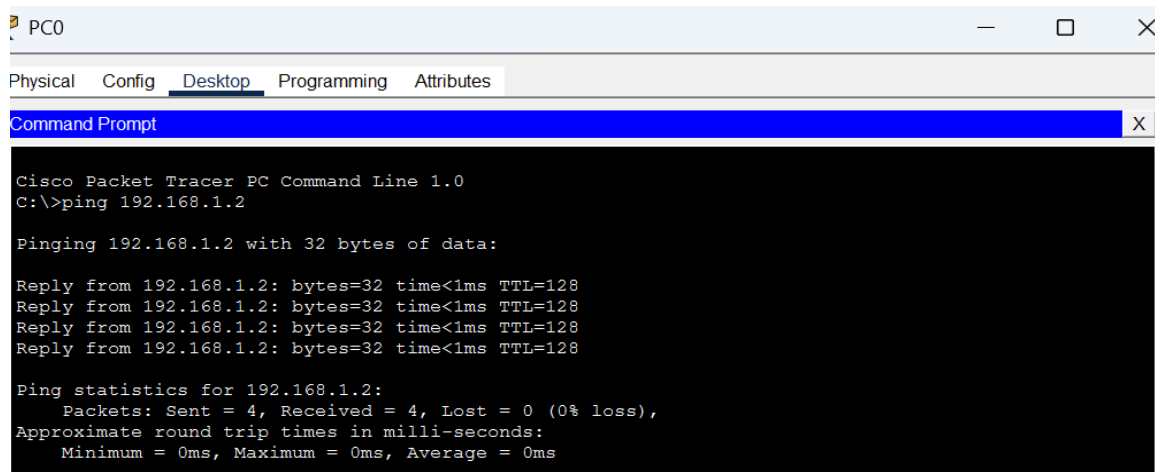


Step 5: Verifying MAC Address Table After Communication

After successful communication, the switch learned the MAC addresses dynamically. The MAC table was checked again using:

show mac address-table

The learned MAC addresses of both PCs were displayed in the table.

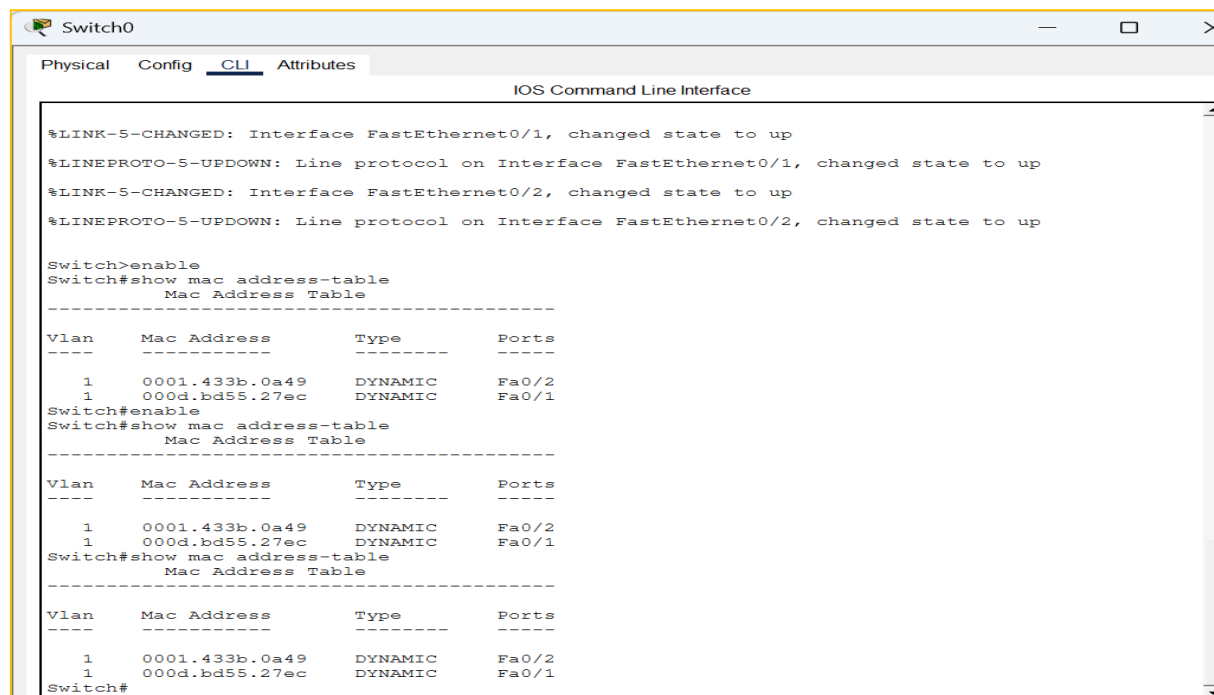

The screenshot shows a network switch CLI window titled "Switch0". The window has tabs for "Physical", "Config", "CLI", and "Attributes". The "CLI" tab is active, showing the "IOS Command Line Interface". The output of the command `show mac address-table` is displayed, showing the MAC address table for Vlan 1. The table has four columns: Vlan, Mac Address, Type, and Ports. The output shows two dynamic MAC addresses: 0001.433b.0a49 on Fa0/2 and 000d.bd55.27ec on Fa0/1. The output is repeated three times, indicating that the command was entered multiple times.

```
Switch0
Physical Config CLI Attributes
IOS Command Line Interface

%LINK-5-CHANGED: Interface FastEthernet0/1, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to up
%LINK-5-CHANGED: Interface FastEthernet0/2, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/2, changed state to up

Switch>enable
Switch#show mac address-table
      Mac Address Table
-----
Vlan    Mac Address      Type        Ports
----    -
1       0001.433b.0a49   DYNAMIC     Fa0/2
1       000d.bd55.27ec   DYNAMIC     Fa0/1
Switch#enable
Switch#show mac address-table
      Mac Address Table
-----
Vlan    Mac Address      Type        Ports
----    -
1       0001.433b.0a49   DYNAMIC     Fa0/2
1       000d.bd55.27ec   DYNAMIC     Fa0/1
Switch#show mac address-table
      Mac Address Table
-----
Vlan    Mac Address      Type        Ports
----    -
1       0001.433b.0a49   DYNAMIC     Fa0/2
1       000d.bd55.27ec   DYNAMIC     Fa0/1
Switch#
```


Step 6: Clearing MAC Address Table

The dynamic MAC entries were cleared using:

clear mac address-table dynamic

The table was verified again using:

show mac address-table

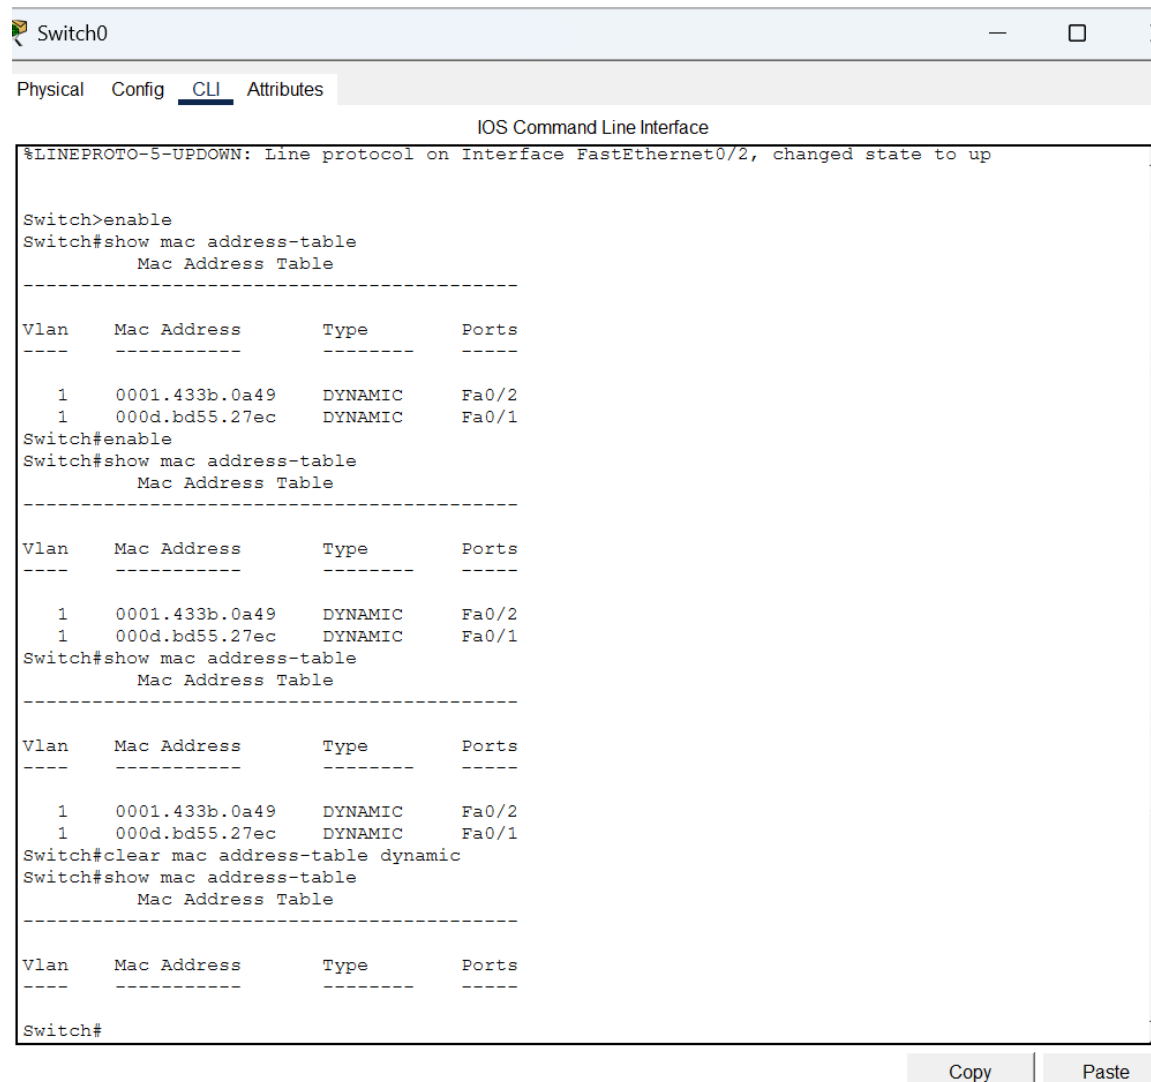

```
Switch0
Physical Config CLI Attributes
IOS Command Line Interface
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/2, changed state to up

Switch>enable
Switch#show mac address-table
      Mac Address Table
-----
Vlan    Mac Address      Type      Ports
----    -
1       0001.433b.0a49    DYNAMIC   Fa0/2
1       000d.bd55.27ec    DYNAMIC   Fa0/1
Switch#enable
Switch#show mac address-table
      Mac Address Table
-----
Vlan    Mac Address      Type      Ports
----    -
1       0001.433b.0a49    DYNAMIC   Fa0/2
1       000d.bd55.27ec    DYNAMIC   Fa0/1
Switch#show mac address-table
      Mac Address Table
-----
Vlan    Mac Address      Type      Ports
----    -
1       0001.433b.0a49    DYNAMIC   Fa0/2
1       000d.bd55.27ec    DYNAMIC   Fa0/1
Switch#clear mac address-table dynamic
Switch#show mac address-table
      Mac Address Table
-----
Vlan    Mac Address      Type      Ports
----    -
Switch#
```

Copy | Paste

Observations

- Initially, the switch MAC address table was empty.
- During the first ping, ARP requests were broadcasted in the network.
- The switch dynamically learned the MAC addresses of connected devices.
- After communication, the MAC address table contained MAC entries of both PCs.
- Clearing the table removed all dynamically learned entries.

Result

The lab was performed successfully. The working of switching, ARP communication, and MAC address learning was observed practically using Cisco Packet Tracer. The switch successfully learned MAC addresses dynamically and stored them in the MAC address table.

Conclusion

This lab provided practical understanding of switching and ARP operations in a LAN environment. It demonstrated how switches use MAC addresses to forward frames efficiently and how ARP resolves IP addresses into MAC addresses before communication. The behavior of the MAC address table was also studied, including learning and clearing MAC entries. The experiment improved understanding of Layer 2 communication and switching behavior in computer networks.