Bittle X Pi Add-on v0.7 - Build Guide

Version 0.7, 2026-10-14. A sample add-on for the Bittle X platform v1.0 (../bittle_platform). It carries a Raspberry Pi Zero 2 W with a PiSugar 2 (1200 mAh), an NS4168 I2S amp with a 3 W speaker, and an SPH0645 I2S mic. It clicks onto the platform pegs. No tools, glue, tape or supports are necessary.



The add-on on the platform (lid in place).

1. Parts to print

File (stl/print/)	Material	Orientation	Supports	Cura profile	Mass
pod_tray.stl	PLA or PETG	floor on the bed	none	Bittle Pi Pod - PLA 0.25	11 g
pod_lid.stl	PLA	upside down: flat top on the bed	none	Bittle Pi Pod 0.25, or Bittle Fine 0.10 for the best surface	29 g
usb_plug.stl (optional)	TPU	flange on the bed	none	TPU, 20 mm/s	0.3 g
cover_pegs.stl (../bittle_platform)	PLA	stand on the rear end	tree, from the bed	Bittle Cover - PLA 0.25	11 g

Print quality. Every surface of the add-on parts is at 45 deg or less from vertical, or is a short bridge:

1 Tray: 14 mm² of overhang in total. These are the flat bottoms (1.2 to 1.5 wide) of the teardrop pins for the speaker and the amp.

2 Lid: 57 mm² in total. These are the tops (in the print) of the charge window, the switch slot and the button slit: bridges of 7 to 9 mm. The profiles have the bridge settings on.

3 The mic holes in the lid front are diamonds, so they print clean without a bridge.

4 The slots for the mic board and the speaker ear plate are vertical in the print. They have no ceilings.

5 Keep the seam at the back (the profiles do this).

2. Electronics

Part	Notes
Raspberry Pi Zero 2 W	No header. Solder the wires to the pads, flat along the GPIO edge.
PiSugar 2, 1200 mAh	Under the Pi (pogo pins and its screws). The charge port, button and switch face the right side.
NULLLAB NS4168 I2S amp	38.4 x 22.4 mm board, on edge, on two pins left of the stack.
NULLLAB 3 W 4 ohm speaker	Ear plate 45 x 31 x 1.5, body 27 x 30 x 14.3 (ruler). On two pins at the rear, sound to the rear grille.
HiLetgo SPH0645 I2S mic	16.7 x 12.7 x 1.8 board, on edge at the front left, port forward. Solder the wires at the top edge.
5 Dupont jumpers	Straight plugs on the BiBoard header (GND, +5V, TX2, RX2) in the cover slot.

3. Assembly

The 3D viewer shows each step with animation: https://beetlebugorg.github.io/bittlex/viewer/#step=1. Each step below has a link to its view.

1 Print the platform cover and fit it on the robot in place of the stock cover. (viewer step 2)

2 Solder the wires to the Pi, the amp and the mic (section 4).

3 Push the mic board down into the slot at the front left of the tray, port to the front, wire pads at the top. (viewer step 5)

4 Push the amp onto its two pins, components to the left. (viewer step 6)

5 Hang the speaker on the two pins of the rear wall, ear plate to the front. (viewer step 7)

6 Put the Pi + PiSugar 2 stack into the tray, battery down, ports to the right. (viewer step 8)


7 Put the tray on the cover 7 mm forward of its place, over the pegs. Push it 7 mm rearward until it clicks. (viewer step 3) (viewer step 4)

8 Push the Dupont plugs onto the BiBoard header. Route the wires over the Pi. (viewer step 9)


9 Push the lid down until the 4 snaps engage. The lid also stops the tray from sliding forward. (viewer step 10)

10 Optional: push the TPU plug into the charge window. (viewer step 11)

11 To remove: pull the lid up, slide the tray 7 mm forward and lift it.

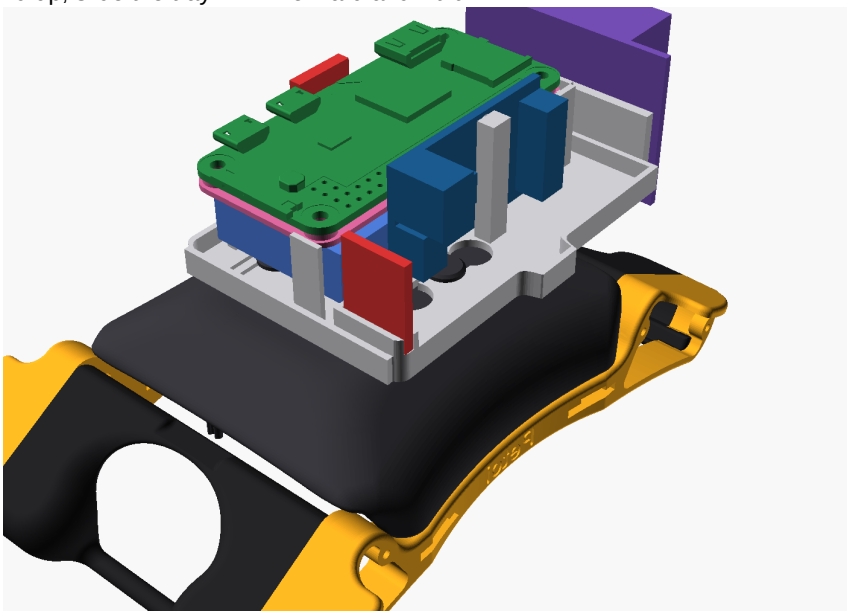

The tray without the lid: the stack, the amp (left), the mic (front left) and the speaker (rear).

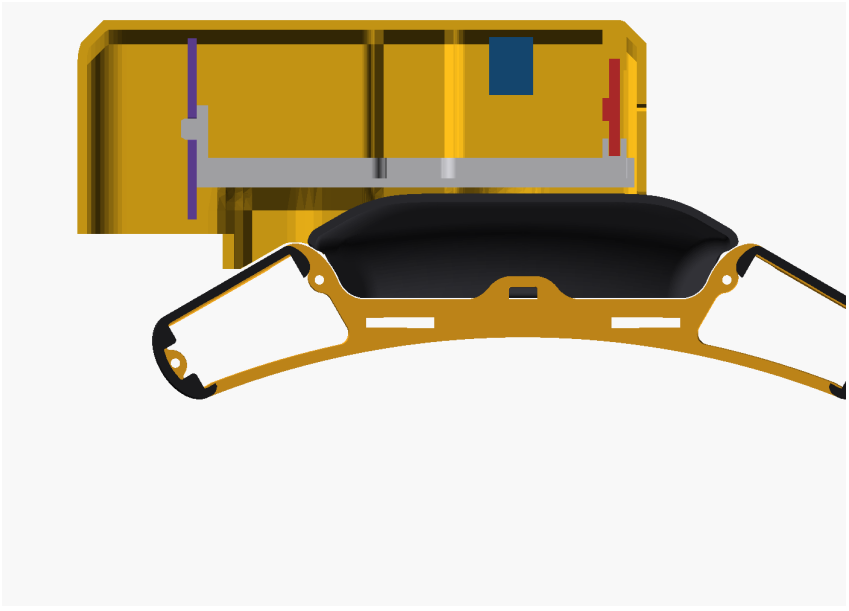

Section through the mic (right: front). The mic stands in its slot, the lid stub holds its top edge. The speaker hangs on the rear pins (left).

4. Wiring

Signal	Pi Zero 2 W	To
UART TX / RX	GPIO14 pin 8 / GPIO15 pin 10	BiBoard RX2 / TX2
GND	pin 6	BiBoard GND
I2S BCLK	GPIO18 pin 12	amp BCLK and mic BCLK
I2S LRCLK	GPIO19 pin 35	amp LRCLK and mic LRCL
I2S out / in	GPIO21 pin 40 / GPIO20 pin 38	amp DIN / mic DOUT (mic SEL to GND)
Power	5V pin 2, 3V3 pin 1, GND pin 9	amp 5V, mic 3V. Do not connect BiBoard 5V to the Pi.
Speaker	-	amp + / - to the speaker

5. Files

File	Content
stl/print/	the parts in print orientation
cad/pod_tray.step, cad/usb_plug.step	exact CAD (the lid is a mesh: its lower edge follows the robot)
stl/installed/, stl/models/	the parts and the electronics in the robot frame
pod.py	all dimensions, the build and the checks (fit, slide path, loose pieces, overhang)
render.py, docs.py	the pictures and this guide

Open items: the speaker sound face is assumed opposite the ears. The mic port is assumed at the board center; the 7 holes cover ±2.2 mm. The BiBoard header height is an estimate (a photo of the robot shows it lower, so there is more room).

6. License

The printed parts, the drawings and this guide are CC BY 4.0, and the code is MIT (Jeremy Collins). The Pi Zero and PiSugar 2 fit models are from github.com/PiSugar/PiSugar (GPL-3.0). The Petoi parts are from github.com/PetoiCamp/NonCodeFiles, without a stated license. LICENSE.md and ATTRIBUTION.md in the repository give the details.