

## **HAB2 Minimum Parts Tracker Build**

This describes the build of the HAB2 tracker board as a minimum component count high altitude balloon tracker which will be powered by 2 x AAA Energizer Lithium batteries. I will first list the components and what they are for, most can be omitted for this build.

PCB – This is needed, obviously, you can fit an SMA or U.FL socket for the antenna and also form a  $\frac{1}{4}$  wave vertical with radials from guitar wire.

For such a minimum component count tracker powered with 2 x AAA Energizer Lithium batteries there is no need for the regulator on the Arduino Pro Mini as the voltage from the batteries will stay above 2.8V for most of their life, this is enough to run both the LoRa module and the Ublox GPS. These batteries are also rated to operate at -40C. To build such a tracker you only need to **fit the components in red**, put a wire link in place of D1 and a solder bridge on LK1. Follow the instructions 'Modifying the Pro Mini for Low Power Operation' to disconnect the LEDs and regulator on the Pro Mini. Fitting LED1 and R5 on the tracker board is not needed but is recommended, it makes testing the board during build easier.

**ANT1** – Edge SMA, or just an angles SMA or **guitar wire**

**ANT2** – Ceramic stick GPS antenna or better use **guitar wire**

**BATCON** – Where the battery goes, 2 pin 0.1" header or better **solder direct wires**

**C1** - **Ceramic decoupler, recommended, 100nF OK, 4.7uF better**

**C2** - Omitted

**C3** - Large value tantalum capacitor, can be omitted

**D1A** – Surface mount diode, reverse protection for battery, fit if not using 2 x AAAs

**D1B** – Optional diode to D1A, **fit wire link** if using 2 x AAAs

**D2** – For optional watchdog IC, can be omitted

**FS1** – Fit this

**IC1** – Optional I2C FRAM

**IC2** – Optional Watchdog device

**IC3** – **The Arduino Pro Mini – this is needed!**

**IC4** – **The LoRa device**

**L1** – **Antistatic protection for GPS antenna input, recommended.**

**LED1** - For indication only, can be omitted

**LED2** - For GPS indication only can be omitted

**R1** - Needed if reading battery voltage on RAW pin of Pro Mini

**R2** - Needed if reading battery voltage on RAW pin of Pro Mini

**R3** - For LED2

**R5** - For LED1

**UBLOX\_MAX8Q** – **Needed**

## Assembly – for 2 x AAA battery operation.


**Note:** The UBLOX GPS is very sensitive to static damage on its antenna input, be sure to take proper anti-static precautions when fitting and handling this component, both during assembly and afterwards.

The pictures show the build of a RFM96 based tracker @ 868Mhz. The build for the Dorji DRF127x version of the HAB2 board only differs in the fitting of the LoRa module.


Read the instructions below before attempting to solder any components, the board has the Pro Mini on one side and the LoRa device on the other, get the assembly sequence wrong and you may not be able to solder these components in place properly.

Make sure your USB to Serial programming adapter used for programming the Pro Mini is set to 3.3V mode, do not use a 5V version, you may well destroy the LoRa device and GPS.

Modify the 3.3V Pro Mini as per the 'Modifying the Pro Mini for Low Power Operation' instructions. This removes the regulator and some resistors, see below.

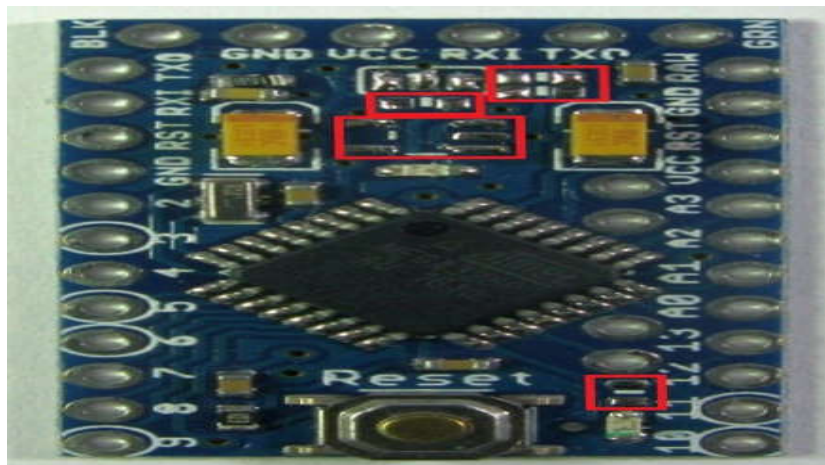

Fit the 5 pin angled header for the programming connection on the Pro Mini.

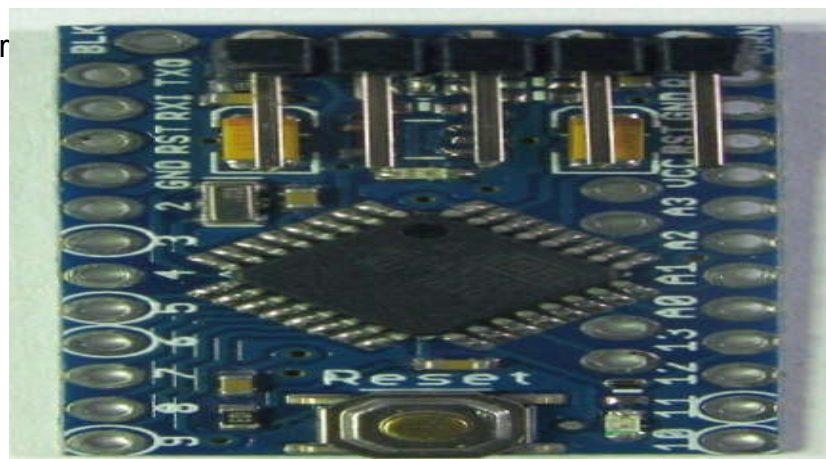

Check that you can program the Pro Mini by uploading the 'LoRa\_Module\_Test' program. Ensure that the frequency for this program is appropriate for the module you are using. LoRa modules come in 434Mhz, 868Mhz and 915Mhz versions. This line in the test program sets the frequency;

```
const unsigned long Frequency = 434400000;    //frequency of transmissions in hertz
```

Clearly there is no LoRa module connected to our Pro Mini at this point, so the test will fail and this should be reported to the Serial Monitor output, like this, note the LoRa device registers are all 0s and the message **LoRa Device Not Found**;

```
LoRa_Module_Test
V1.0
26/11/2017
Stuart Robinson
```

```
LED Flash
```

```
Checking LoRa Device
```

```
Registers after reset - LoRa Registers
```

Reg	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
0x00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00
0x10	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00
0x20	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00
0x30	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00
0x40	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00
0x50	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00
0x60	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00
0x70	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00


```
Frequency 0.000MHz
```

```
Device Not Found
```


So we have checked that the Pro Mini can be programmed. Next we need to fit the Pro Mini in place and optionally add the LED (recommended). Be careful to fit the headers in the order indicated, if you do not you may not be able to solder the Pro Mini or LoRa module in place properly.

Solder the 0.1" pin headers (with the plastic separator) for the Pro Mini in place, 2 x 12pin, 1 x 2 pin, the 2 pin header is to connect up the Pro Minis I2C pins on A4 and A5. **Do not solder the Pro Mini itself in place yet.**

See pictures below, I used the Pro Mini and an elastic band to hold the headers in place whilst soldering. You can cut the pins so that there just about flush with the PCB on one side and the Pro Mini on the other.

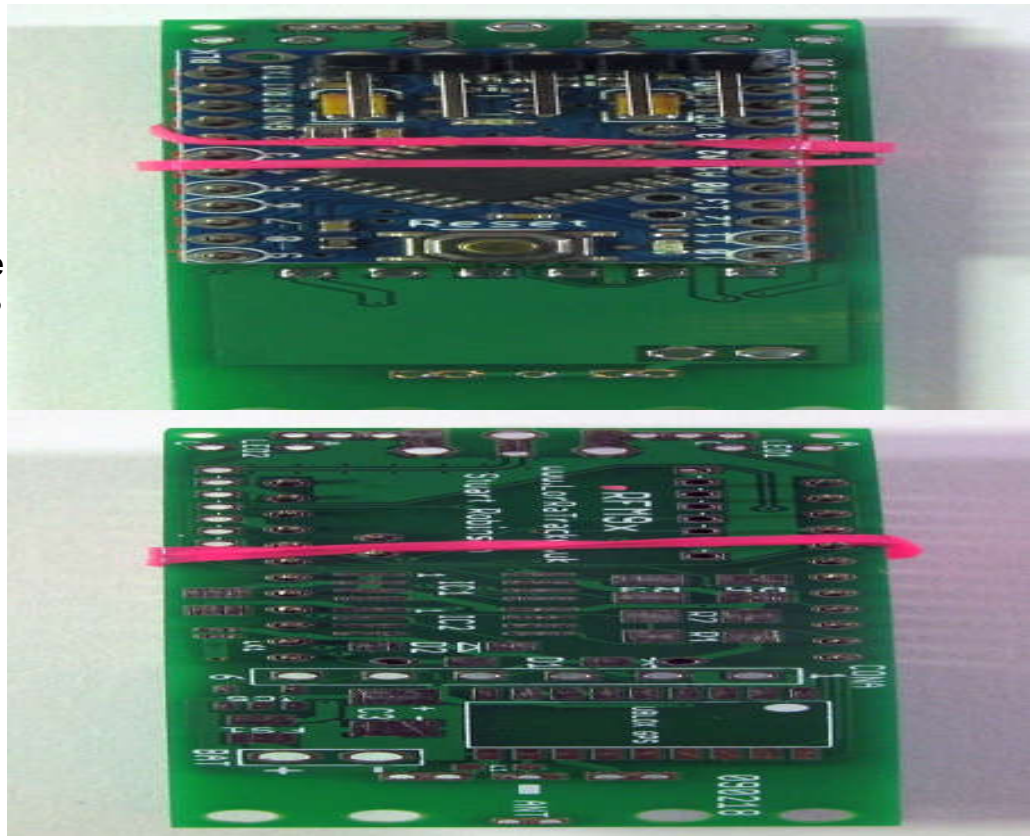

Solder the 2mm pin headers (2 x 8 pin) for the RFM9x LoRa device or the 0.05" pin headers (1 x 13 pin, 1 x 2 pin) in place for the DRF1278F, **do not solder the LoRa device in place yet.**

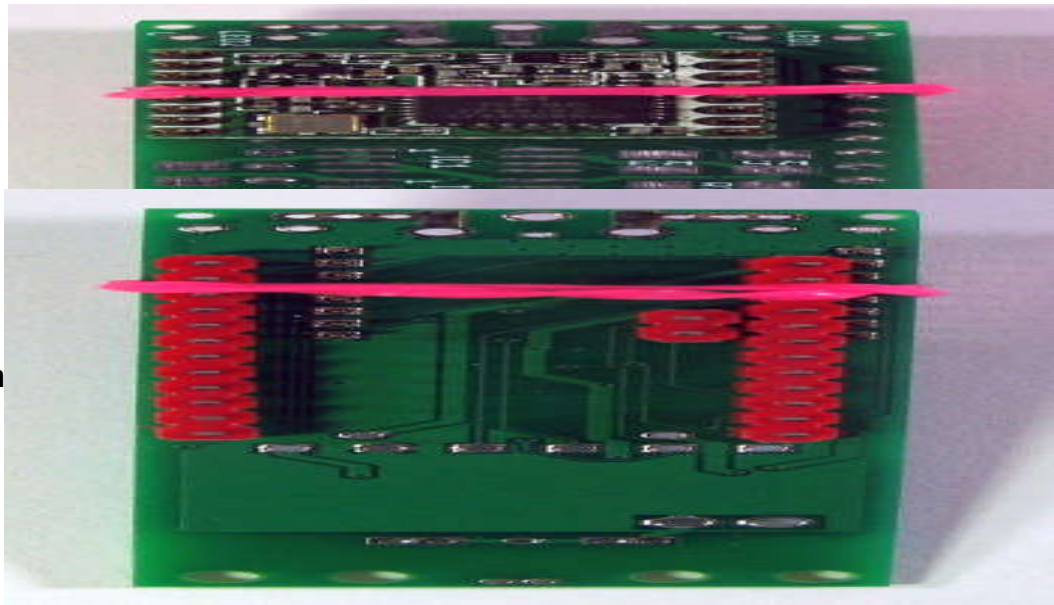



This is a minimum component count tracker, we don't need the reverse protection diode D1 so fit a shorting link in its place now. This can be done later when the Pro Mini is fitted but it is easier to fit now. Add the wire link where normally D1B fits.

Solder LED1 and R5 in place. Solder the Pro Mini in place. Plug the programming lead back in and the previously loaded 'LoRa\_Module\_Test' will start. The LED should flash slowly twice, then there will be a rapid series of LED flashes, this is the program warning you it cannot find a LoRa module. There will be messages indicating the failure on the serial monitor.

Fit C1 (100nF). C3 can be fitted if you feel the need, but the tracker should work without it. I normally fit something like a 100uF tantalum as a 'just in case'



Connect a length of wire appropriate for the frequency, 17.5cm for 434Mhz and 8.6cm for 868Mhz to the centre pin of the antenna connector. This will act as a temporary antenna, it will be replaced later with a  $\frac{1}{4}$  wave with radials antenna. Do not operate the LoRa device with no antenna connected. Solder the LoRa module in place, note

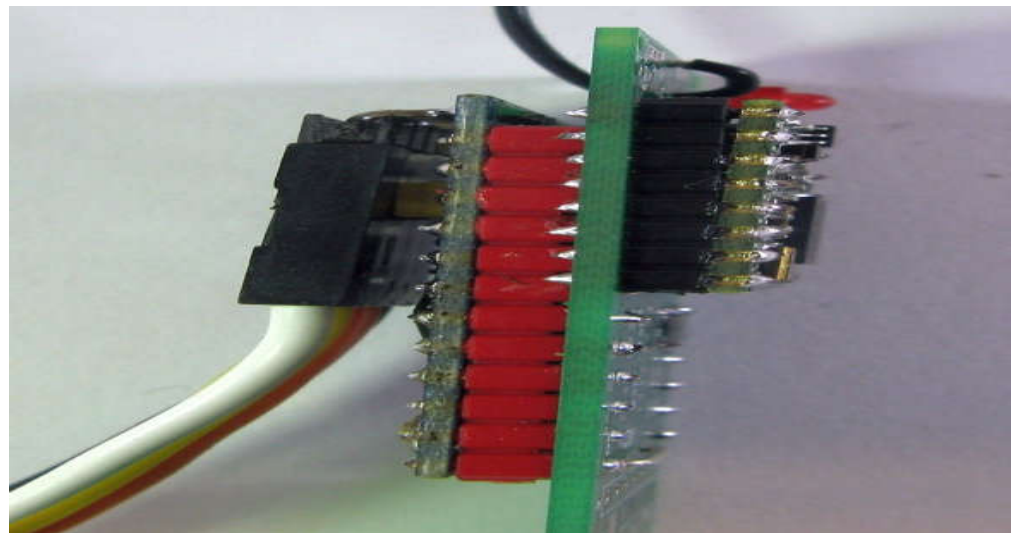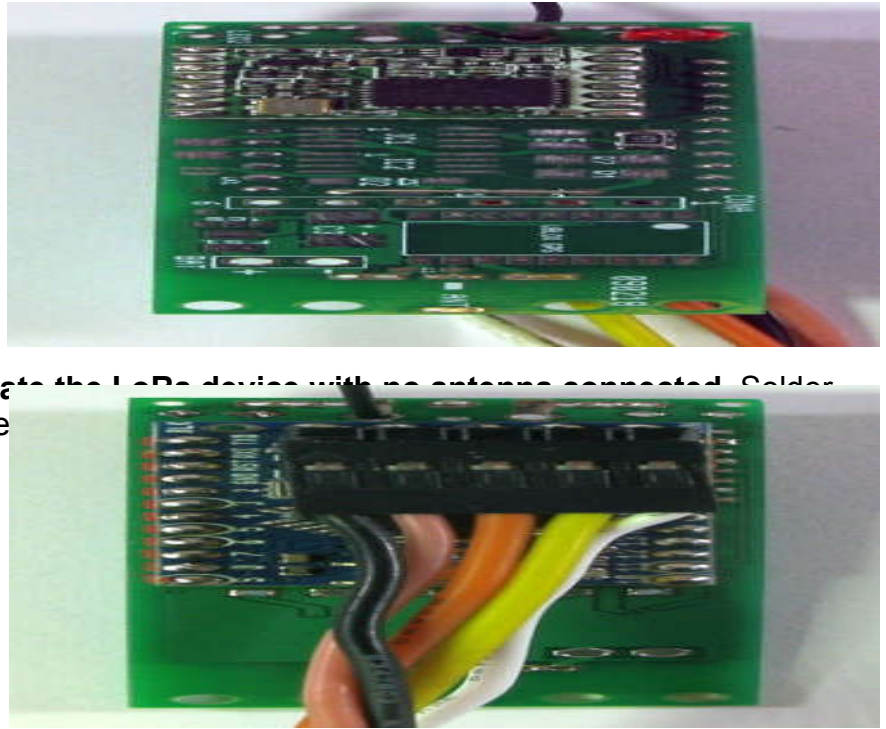

Note the spaces between the boards formed by the plastic separators on the pin headers.

When you reconnect the programmer the program should now not have the rapid LED flashes, and the serial monitor output should show the register contents, see print out;

```
LoRa_Module_Test
V1.0
26/11/2017
Stuart Robinson
```

LED Flash

Checking LoRa Device

```
Registers after reset - LoRa Registers
Reg    0  1  2  3  4  5  6  7  8  9  A  B  C  D  E  F
0x00  00 09 1A 0B 00 52 6C 80 00 4F 09 2B 20 08 02 0A
0x10  FF 70 15 0B 28 0C 12 47 32 3E 00 00 00 00 00 40
0x20  00 00 00 00 05 00 03 93 55 55 55 55 55 55 55 55
0x30  90 40 40 00 00 0F 00 00 00 F5 20 82 F2 02 80 40
0x40  00 00 12 24 2D 00 03 00 04 23 00 09 05 84 32 2B
0x50  14 00 00 11 00 00 00 0F E0 00 0C F2 07 00 5C 78
0x60  00 19 0C 4B CC 0E 7F 20 04 47 AF 3F 58 3F 90 0B
0x70  D0 01 10 00 00 00 00 00 00 00 00 00 00 00 00 00
Frequency 434.000MHz
```

Device Present

```
Registers after setup - LoRa Registers
Reg    0  1  2  3  4  5  6  7  8  9  A  B  C  D  E  F
0x00  D2 88 1A 0B 00 52 D9 00 00 4F 09 2B 23 01 80 00
0x10  00 00 00 00 00 00 00 00 10 00 00 00 00 78 77 64
0x20  00 08 01 FF 00 00 00 00 00 00 00 00 00 50 14 45
0x30  55 C3 05 27 1C 0A 03 0A 42 12 49 1D 00 AF 00 00
0x40  00 00 12 24 2D 00 03 00 04 23 00 09 05 84 32 2B
0x50  14 00 00 11 00 00 00 0F E0 00 0C 00 01 00 5C 78
0x60  00 19 0C 4B CC 00 01 20 04 47 AF 00 00 00 00 0B
0x70  D0 01 11 00 00 00 00 00 00 00 00 00 00 00 00 00
Frequency 868.000MHz
Transmit FM Tone - Done
```

```
$LoRaTracker1,1,10:10:10,51.48230,-3.18136,10,5,3999,-10,10,2,129,2000.0,5*9A96
TX Time 218mS
```

Note that it is normal for an 868Mhz module to have a set frequency of 434Mhz on power up or reset. Also note that the test program sends a test HAB packet;

```
$LoRaTracker1,1,10:10:10,51.48230,-3.18136,10,5,3999,-10,10,2,129,2000.0,5*9A96
```

The fields are;

PayloadID,Sequence,Time,Lat,Lon,Alt,Sats,SupplyVolts,Temperature,Resets,Config0byte, StatusByte,Hertzoffset,GPSFixTime,Checksum

This program can therefore be used to test a receiver, the location and LoRa parameters are defined at the start of the program listing.



The Ublox 8 GPS antenna input is sensitive to static damage so remember to take anti static precautions whilst soldering the GPS in position and any subsequent handling of the board. As an added precaution you can fit L1 which acts to connect DC wise the antenna input to ground. So solder the GPS in place, some 'no clean' flux put on the solder pads on the GPS as PCB will make the soldering easier. Fit the ceramic chip antenna or for a better performing antenna fit a 4.76cm length of guitar wire, I have used Ernie Ball Custom Gauge 9 to 13.

With the GPS and antenna in place load the test program; 'EchoGPS\_UBLOX\_I2C\_Test'

Using the GPS's I2C interface this will turn off GLONASS mode, turn off GPGLL, GPGLS, GPGSA NMEA sentences, configure the GPS for high altitude use and check that the correct navigation mode is set. You should see the message 'Dynamic Model is 6' (this is needed for above 18000M operation) then start copying the output of the GPS to the serial monitor. Note that due to a recent change in the GPS library used there is no particular need to turn off GLONASS mode, but the command has been left in for compatibility reasons. Typical terminal monitor output;

*EchoGPS\_UBLOX\_I2C\_Test*

*V1.1*

*28/11/2017*

*Stuart Robinson*

*GPS GLONASS\_Off B5 62 6 3E C 0 0 0 20 1 6 8 E 0 0 0 1 1 8F B2*

*Ack B5 62 05 01 02 00 06 3E 4C 75*

*GPS GPGLL\_Off B5 62 6 1 8 0 F0 1 0 0 0 0 0 0 0 2A*

*Ack B5 62 05 01 02 00 06 01 0F 38*

*GPS GPGLS\_Off B5 62 6 1 8 0 F0 5 0 0 0 0 0 0 4 46*

*Ack B5 62 05 01 02 00 06 01 0F 38*

*GPS GPGSA\_Off B5 62 6 1 8 0 F0 2 0 0 0 0 0 0 1 31*

*Ack B5 62 05 01 02 00 06 01 0F 38*

*GPS SetNavigation B5 62 6 24 24 0 FF FF 6 3 0 0 0 0 10 27 0 0 5 0 FA 0 FA 0 64 0 2C 1 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 16 DC*

*Ack B5 62 05 01 02 00 06 24 32 5B*

*GPS Save B5 62 6 9 D 0 0 0 0 0 FF FF 0 0 0 0 0 0 1 1B A9 0*

*Ack B5 62 05 01 02 00 06 09 17 40*

*GPS PollNavigation B5 62 6 24 0 0 2A 84*

*Ack B5 62 06 24 24 00 FF FF 06 03 00 00 00 00 10 27 00 00 05 00 FA 00 FA 00 64 00 2C 01 00 00 00 00 00 C8 00 00 00 00 00 00 00 DE 1C*

*Dynamic Model is 6*

*Starting GPS Read*

*µb\$2[\$GPTXT,01,01,02,ANTSTATUS=INIT\*25*

*\$GPRMC,,V,,,,,,,,,N\*53*

*\$GPGGA,,,,,0,00,99.99,,,,, \*48*

*\$GPGSV,1,1,00\*79*

*\$GPTXT,01,01,02,ANTSTATUS=OK\*3B*

*\$GPRMC,,V,,,,,,,,,N\*53*

*\$GPGGA,,,,,0,00,99.99,,,,, \*48*

*\$GPGSV,1,1,00\*79*

*\$GPRMC,,V,,,,,,,,,N\*53*

*\$GPGGA,,,,,0,00,99.99,,,,, \*48*

*\$GPGSV,1,1,00\*79*

Load the test program; 'EchoGPS\_UBLOX\_Softwareserial\_Test' to run the same test but using the serial interface of the GPS.

Put the tracker outside (you will be unlikely to get a fix indoors) still connected to the program lead either with a long USB cable or a PC laptop so that you can monitor the GPS output.

Place the tracker in a location where it has a reasonably clear view of the sky and horizon. You should see the terminal output progress through programming the GPS, and eventually confirm that navigation model 6 is set. After a few minutes the GPS output should change and you will see the latitude and longitude fields filled in. This indicates your GPS has now has a fix, so we can be sure the GPS is working. I would caution against omitting this testing step, knowing the GPS is actually working makes it much easier to troubleshoot potential issues with the completed tracker.


Note that the antennas used for the Ublox GPS are not that effective compared to the large ceramic patch antennas on some GPS's. This can result in extended initial fix times, particularly if the tracker does not have an unobstructed view of the horizon. Once in flight however the GPS will be above ground clutter and maintaining a good GPS fix is not a problem.

Fit R1 and R2. When your ready to put the tracker in the air you would connect the battery to the two 'BAT' pins by the GPS. You can fit a 2 way 0.1" angled pin header here temporarily as the holes are oversized to allow for the pin header to be easily removed and battery leads to be soldered in direct which is more reliable than a plug in connector.


A pair of AA Alkalines in a switch box is a handy and low cost way of testing the completed tracker board, although note that whilst AA alkalines are 1.5V when new they do fall to around 1.2V when half discharged. A good rechargeable battery to use for extended testing is the NiZn re-chargeable batteries which have a voltage of around 1.5V each. Do not power this minimum parts build tracker from more than two alkalines or rechargeable batteries, the LoRa device has a voltage maximum of 3.6V only. Be careful not to reverse the connection to the battery, the reverse polarity protection diode has not been fitted.


Program the Pro Mini with the provided 'LoRaTracker\_HAB2' sketch and observe the initial Serial Monitor output, if the GPS programs correctly and navigation model 6 has been set you should hear a tone on a UHF hand-held or SDR in FM mode connected to a PC on the selected tracker frequency.

Connect the battery to the tracker and place it outside. Monitor with a matching receiver, within a couple of minutes the GPS should get a fix and you should start receiving packets.

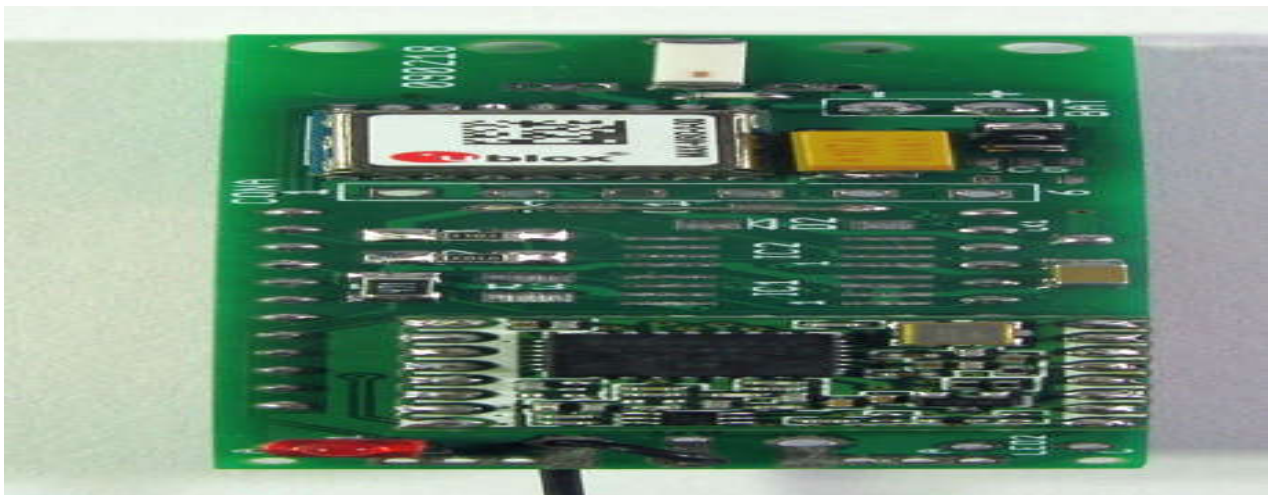


**Completed Tracker**

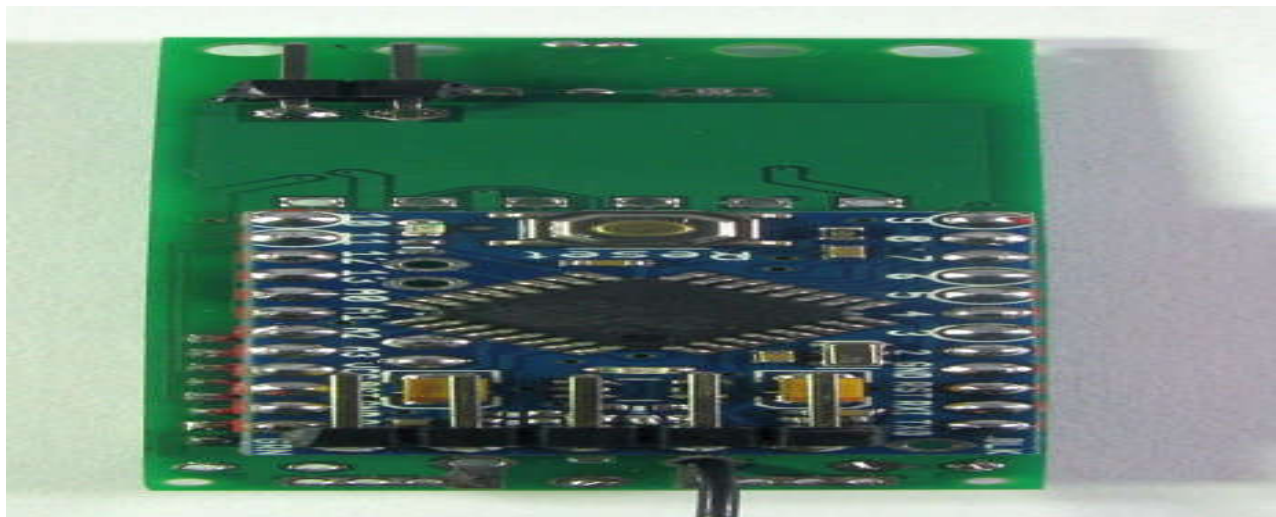

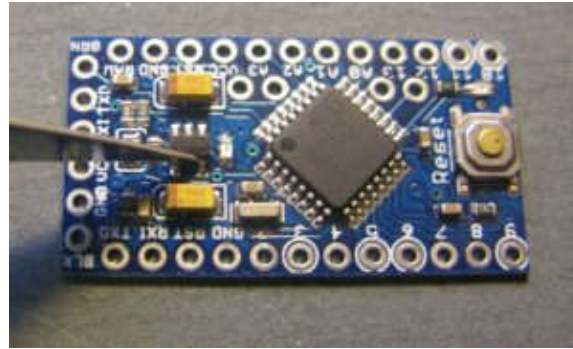

**Modifying the Pro Mini for Low Power Operation** This tracker is being built for a Pico balloon and as we are going to power it direct from 2 x AAA Lithium batteries (3V), we will need to remove the regulator from the Pro Mini. The two LEDs on the Pro Mini will be also be removed as they just waste power. The easiest way to remove the regulator and not damage the board is to use a very sharp scalpel to cut through the regulator leads at the point they join the regulator body.

Removing the LEDs can be tricky, so its easier to remove the series resistors for the LEDs instead. This version of Pro Mini also has a resistor feedback network for the regulator across VCC, these consume power so should be removed. Just push the resistors aside with a soldering iron. The picture shows the Pro Mini with unwanted parts removed, locations of the removed components are marked in red.

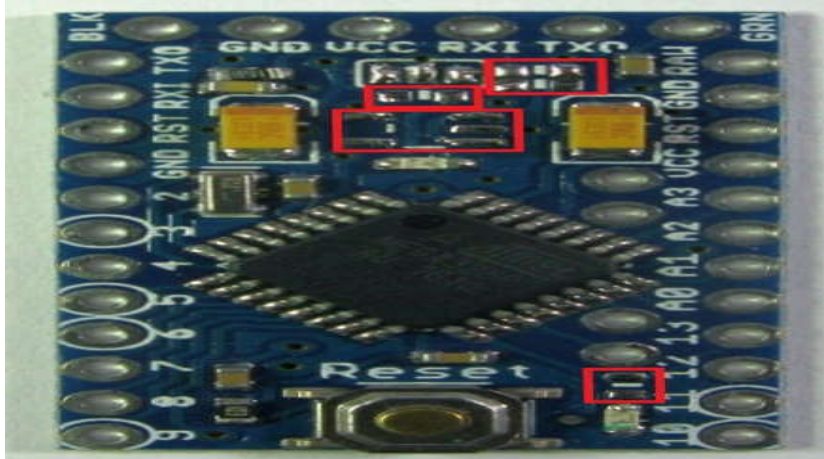

We need to reprogram the brown out level for the processor, as default the extended fuse is set to 0x05 on the above Pro Minis giving a brown out level detect of 2.7V. This is OK if your using the 3.3V regulator with an external supply, but it too close for a processor running at 2.8V to 3V. I used AVRDUDESS with a USBTiny programmer to reset the fuse to 0x06, giving a 1.8V brownout level. There are plenty of tutorials on the Internet on how

