



3. How to configure DHCP within a LAN and Outside a LAN in a packet Tracer

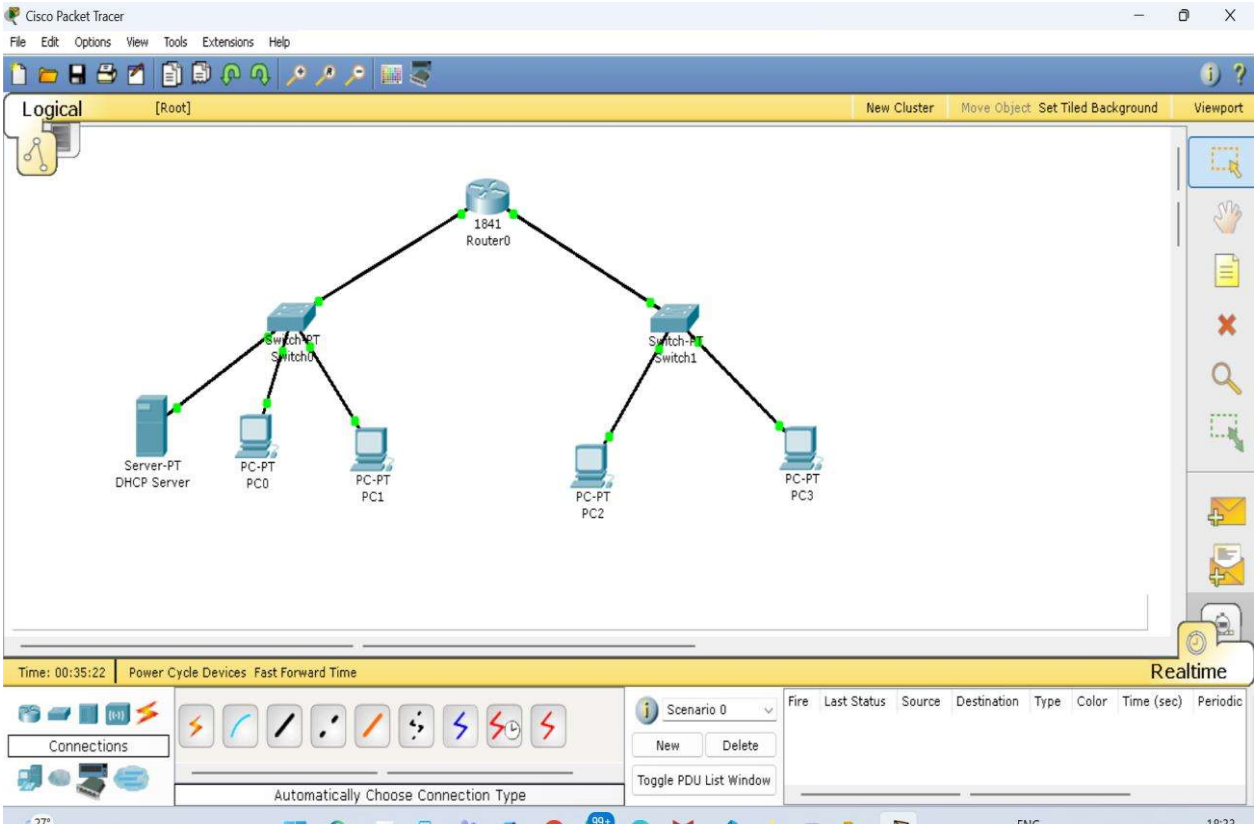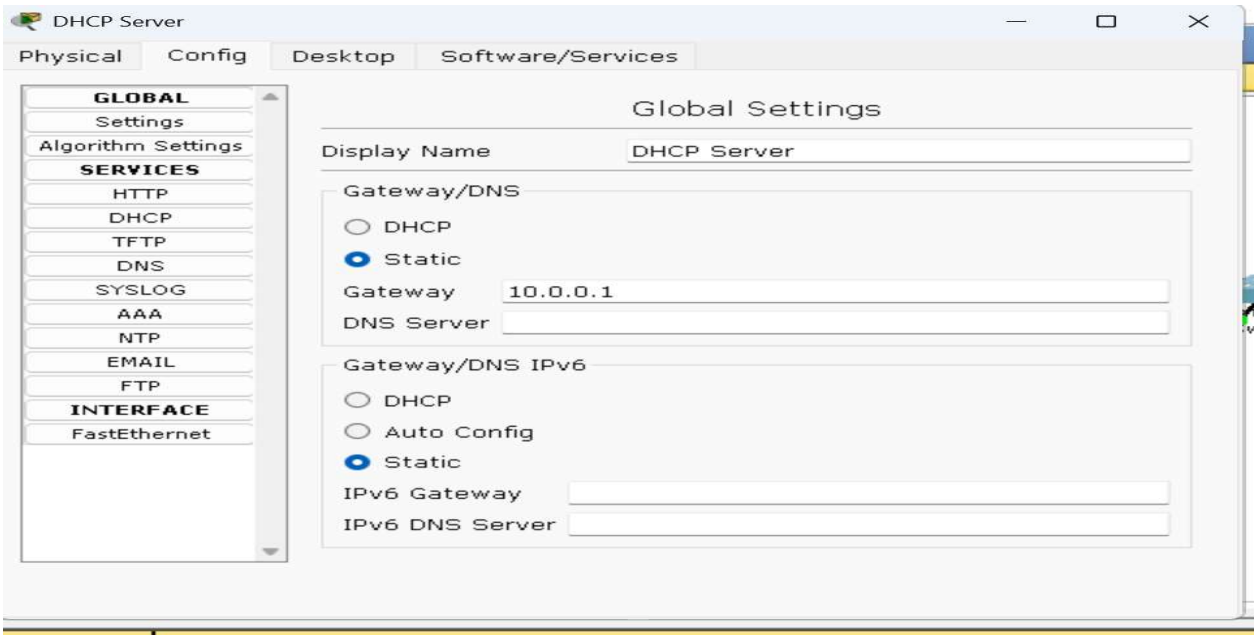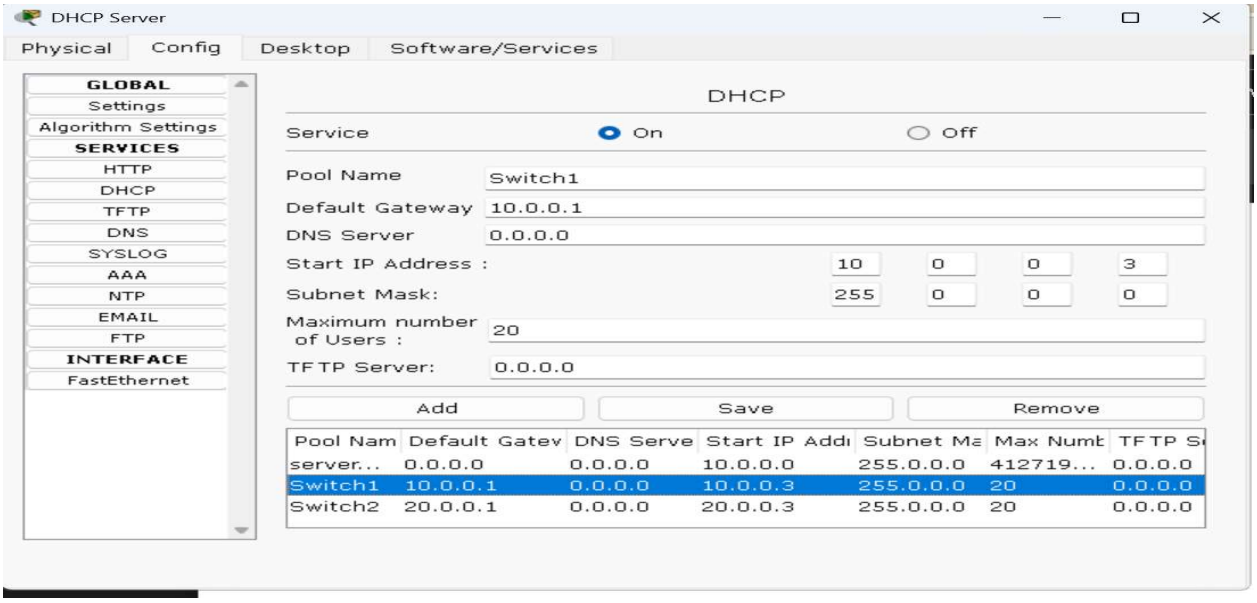


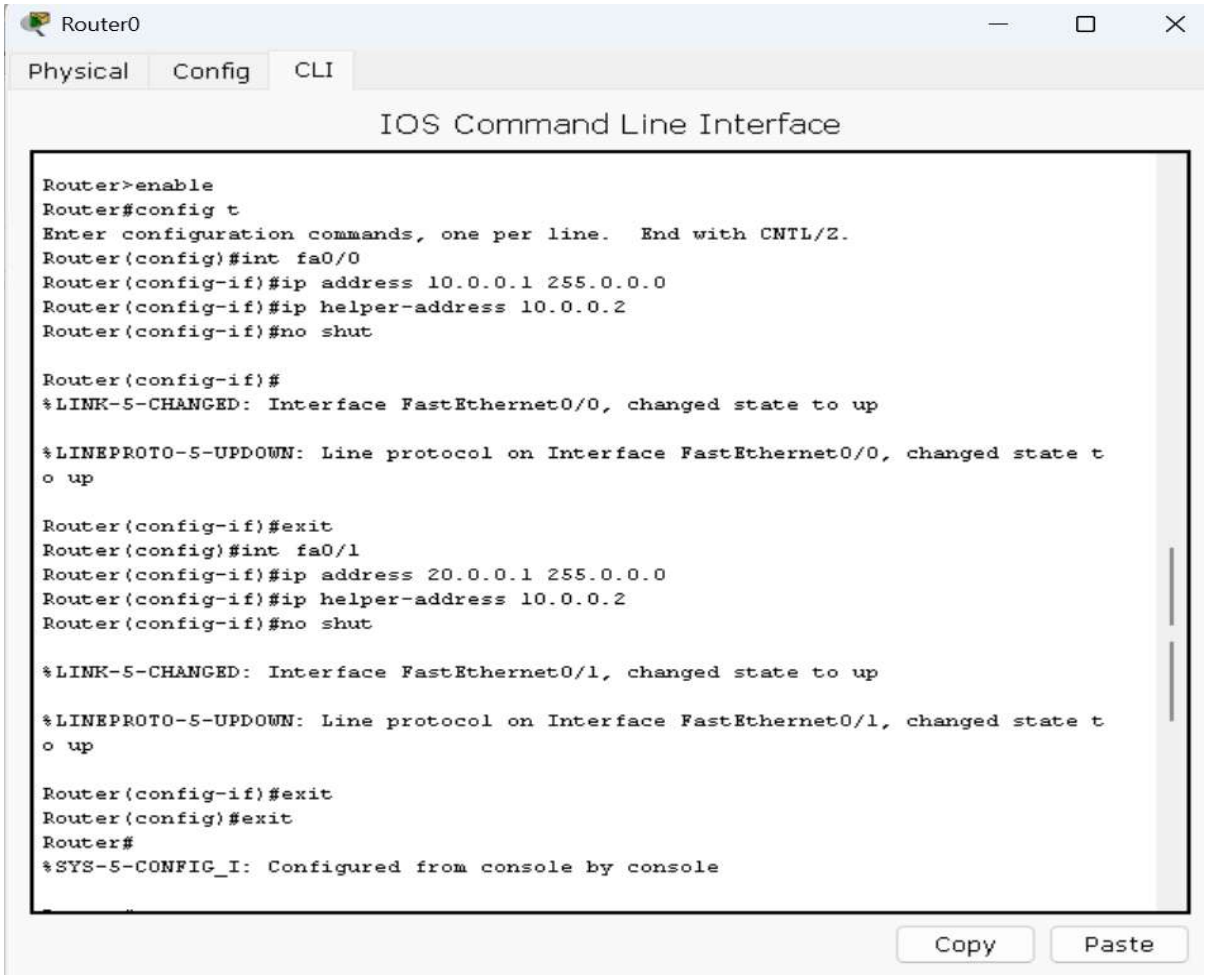


DHCP Server
Physical
Config
Desktop
Software/Services
GLOBAL
Settings
Algorithm Settings
SERVICES
HTTP
DHCP
TFTP
DNS
SYSLOG
AAA
NTP
EMAIL
FTP
INTERFACE
FastEthernet
DHCP
Service
On
Off
Pool Name
Switch1
Default Gateway
10.0.0.1
DNS Server
0.0.0.0
Start IP Address :
10
0
0
3
Subnet Mask:
255
0
0
0
Maximum number of Users :
20
TFTP Server:
0.0.0.0
Add
Save
Remove
Pool Nam
Default Gatev
DNS Serve
Start IP Addı
Subnet Ma
Max Numb
TFTP S
server...
0.0.0.0
0.0.0.0
10.0.0.0
255.0.0.0
412719...
0.0.0.0
Switch1
10.0.0.1
0.0.0.0
10.0.0.3
255.0.0.0
20
0.0.0.0
Switch2
20.0.0.1
0.0.0.0
20.0.0.3
255.0.0.0
20
0.0.0.0



Router0
Physical
Config
CLI
IOS Command Line Interface
Router>enable
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#int fa0/0
Router(config-if)#ip address 10.0.0.1 255.0.0.0
Router(config-if)#ip helper-address 10.0.0.2
Router(config-if)#no shut
Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state t
o up
Router(config-if)#exit
Router(config)#int fa0/1
Router(config-if)#ip address 20.0.0.1 255.0.0.0
Router(config-if)#ip helper-address 10.0.0.2
Router(config-if)#no shut
%LINK-5-CHANGED: Interface FastEthernet0/1, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state t
o up
Router(config-if)#exit
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console
Copy
Paste


PC0
Physical
Config
Desktop
Software/Services
IP Configuration
DHCP
Static
IP Address
10.0.0.5
Subnet Mask
255.0.0.0
Default Gateway
0.0.0.0
DNS Server
Web Browser
Cisco IP Communicator
E Mail
PPPoE Dialer
Text Editor

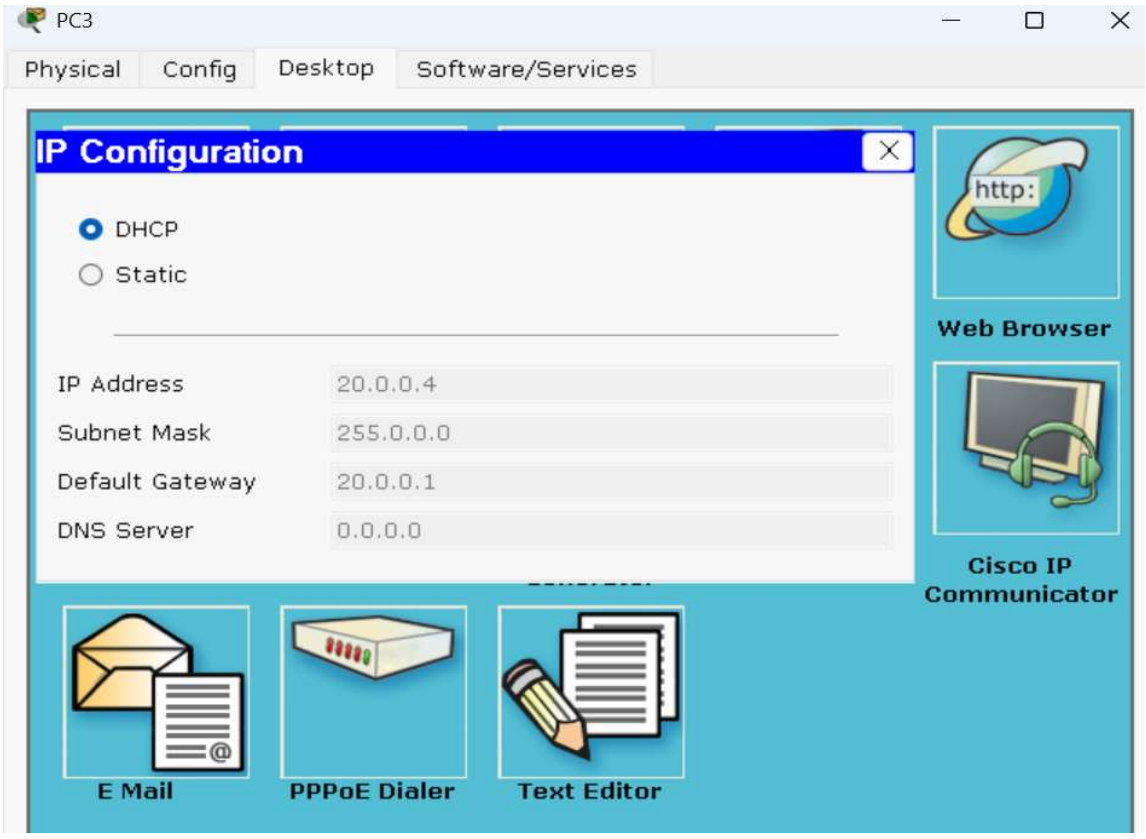
PC3
Physical
Config
Desktop
Software/Services
IP Configuration
DHCP
Static
IP Address
20.0.0.4
Subnet Mask
255.0.0.0
Default Gateway
20.0.0.1
DNS Server
0.0.0.0
Web Browser
Cisco IP Communicator
E Mail
PPPoE Dialer
Text Editor

3) How to configure DHCP within a LAN in a packet Tracer.

Step 1 : Create a LAN like this,

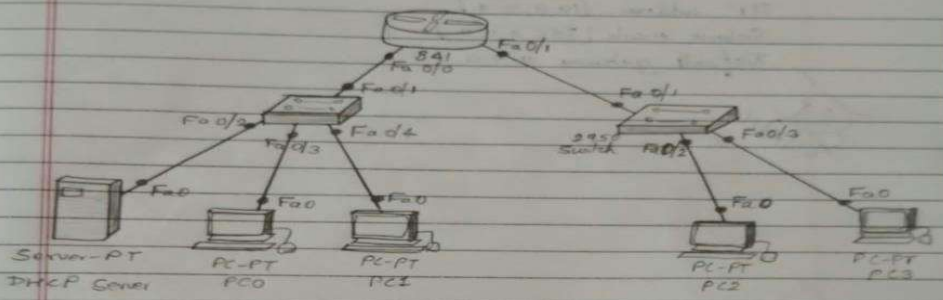

Step 2 : Click on DHCP server → Assign gateway in our example 10.0.0.1.

Step 3 : Configure IP address as 10.0.0.2 and subnetmask

Step 4 : Create Server Pools for the two networks.
Config — Services — DHCP.

Step 5 : Configure router through CLI. To help dhcp you have to add ip helper address as DHCP server address.

Step 6 : Now select the DHCP option in IP configuration of each PCs. Observe within LAN and outside LAN.

Output:-

PC ,

IP Configuration

• DHCP • Static

IP address [10.0.0.4]

Subnet mask [255.0.0.0]

Default gateway 0.0.0.0

DHCP request successful

05/10/26