


4. How to Configure Static Route and Default Route to the Routers

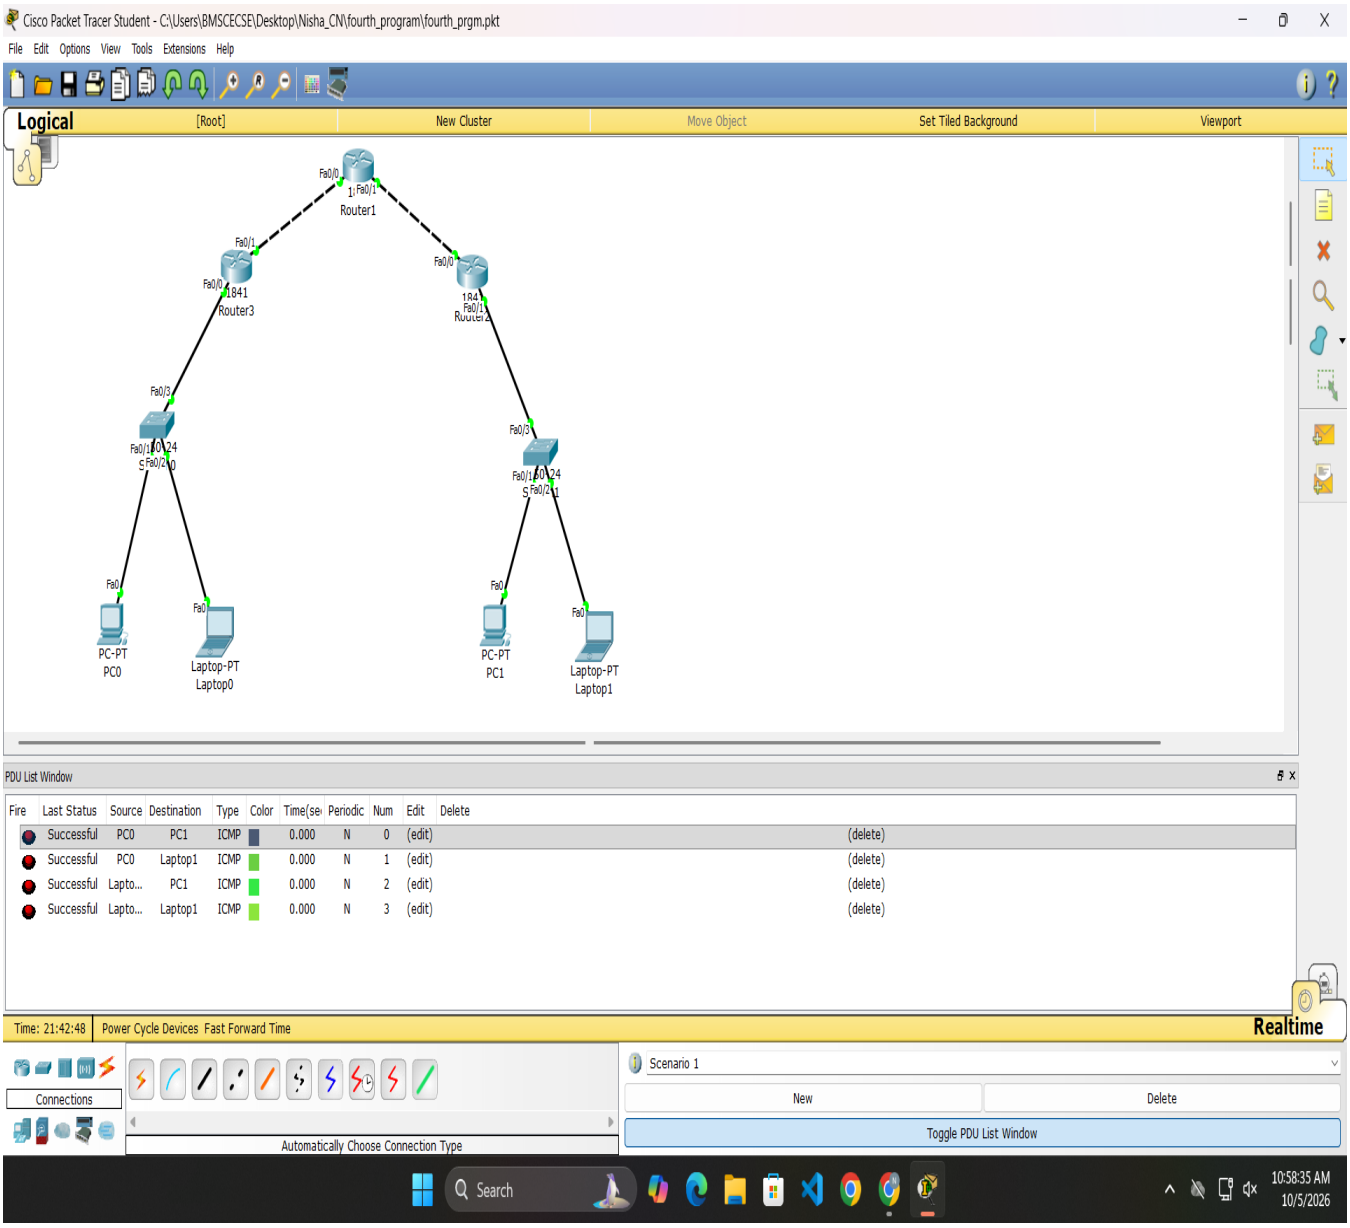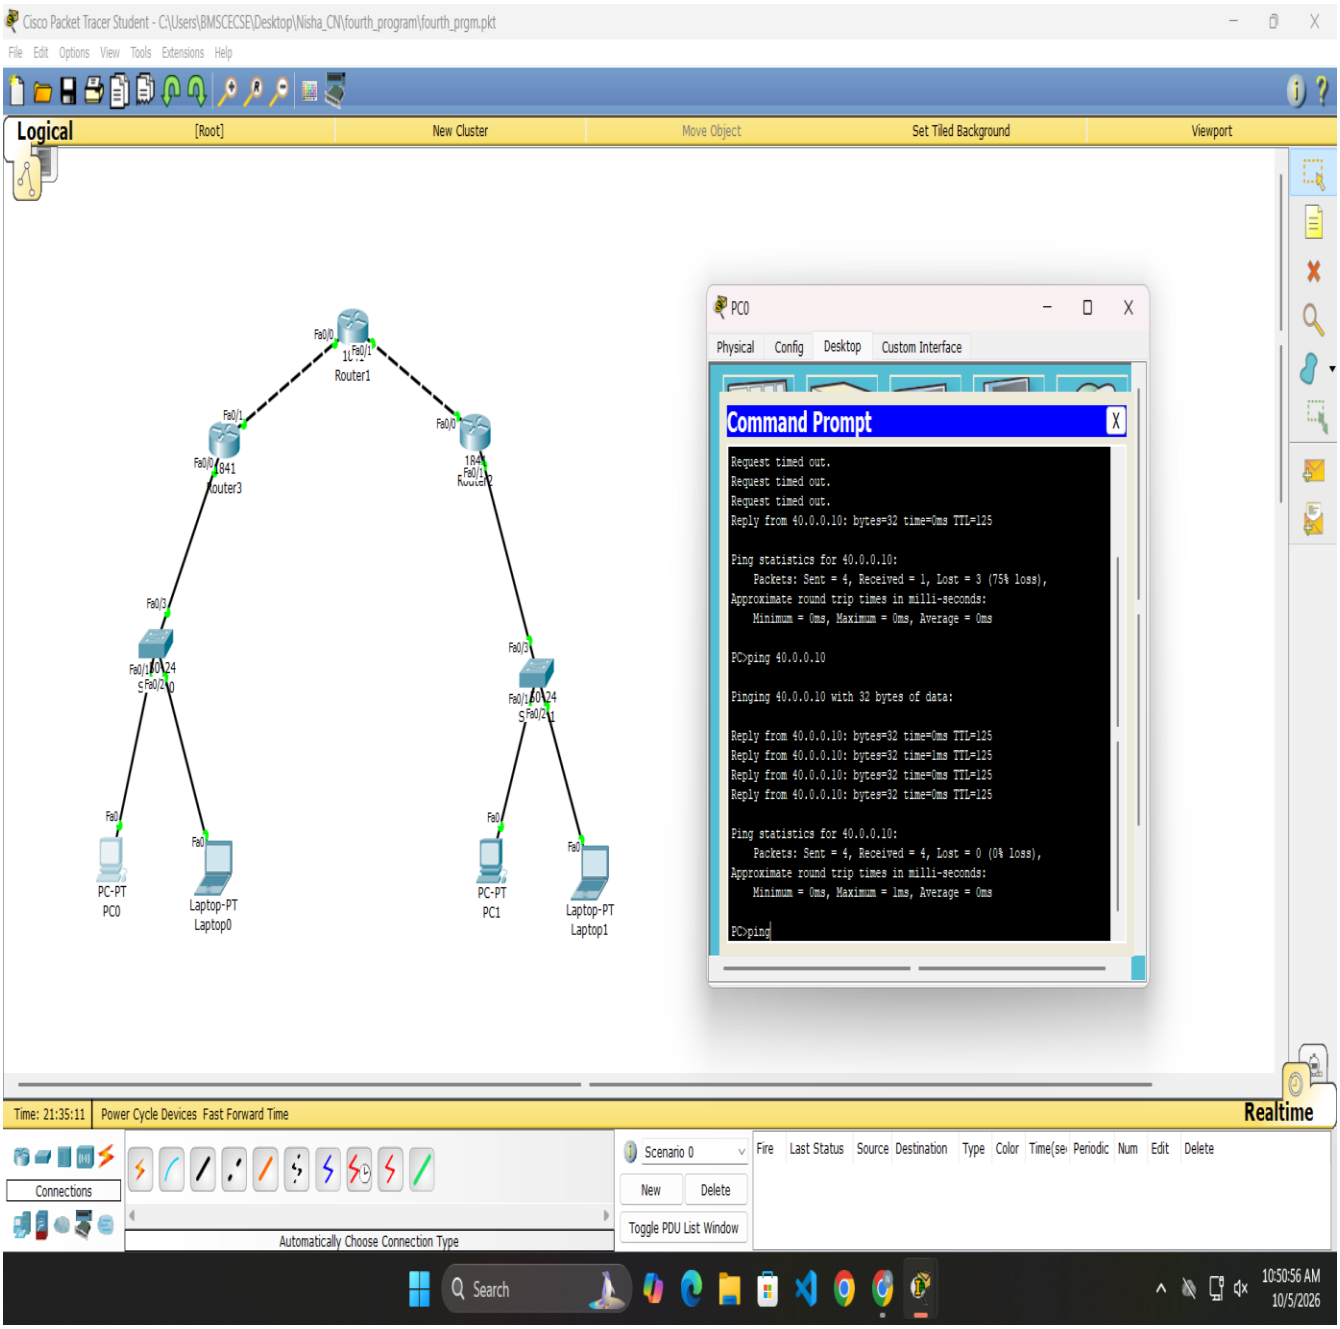


Cisco Packet Tracer Student - C:\Users\BMSCECSE\Desktop\Nisha_CN\fourth_program\fourth_prgm.pkt
File Edit Options View Tools Extensions Help
Logical
[Root]
New Cluster
Move Object
Set Tiled Background
Viewport
Router1
Router3
Router2
PC-PT PC0
Laptop-PT Laptop0
PC-PT PC1
Laptop-PT Laptop1
PC0
Physical
Config
Desktop
Custom Interface
Command Prompt
Request timed out.
Request timed out.
Request timed out.
Reply from 40.0.0.10: bytes=32 time=0ms TTL=125
Ping statistics for 40.0.0.10:
Packets: Sent = 4, Received = 1, Lost = 3 (75% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 0ms, Average = 0ms
PC>ping 40.0.0.10
Pinging 40.0.0.10 with 32 bytes of data:
Reply from 40.0.0.10: bytes=32 time=0ms TTL=125
Reply from 40.0.0.10: bytes=32 time=1ms TTL=125
Reply from 40.0.0.10: bytes=32 time=0ms TTL=125
Reply from 40.0.0.10: bytes=32 time=0ms TTL=125
Ping statistics for 40.0.0.10:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 1ms, Average = 0ms
PC>ping
Time: 21:35:11
Power Cycle Devices Fast Forward Time
Realtime
Connections
Automatically Choose Connection Type
Scenario 0
New
Delete
Toggle PDU List Window
Fire
Last Status
Source
Destination
Type
Color
Periodic
Num
Edit
Delete
Search
10:50:56 AM
10/5/2026

4] How to configure Static Route and Default Route to the Routers

Step 1: Create the topology with two subnetworks. Apply the basic configuration to all hosts and interfaces.

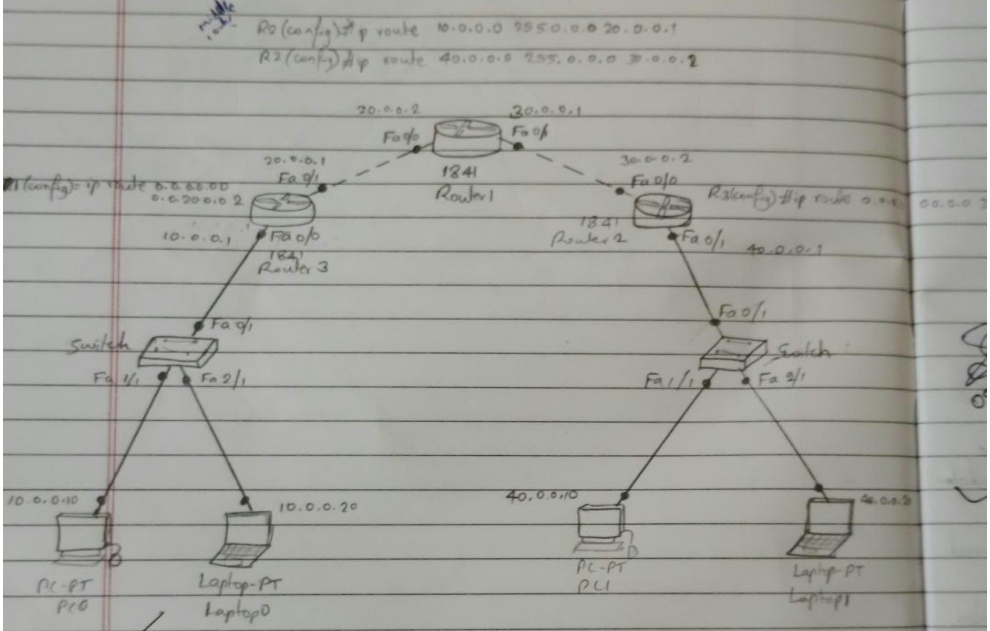

Step 2: Configure static route on R2 to route packets for 10.0.0.0 and 40.0.0.0 networks using the commands in CLI

R2(config)# ip route Destination Network | Destination N/W Subnet Mask | Next Hop Address.

Step 3: Now, we are going to configure default route on R1 & R3 So the routers forward packets to assigned ip address next hop address.

Step 4 : Now check the routing table of R1, R2, R3

Step 5 : Now, Ping from 10.0.0.10 to 40.0.0.10 in cmd and with PDU.

Output :-

Pc > ping 40.0.0.10

Pinging 40.0.0.10 with 32 bytes of data :

Reply from 40.0.0.10 : bytes = 32 time = 0ms TTL = 125
Reply from 40.0.0.10 : bytes = 32 time = 1ms TTL = 125
Reply from 40.0.0.10 : bytes = 32 time = 0ms TTL = 125
Reply from 40.0.0.10 : bytes = 32 time = 0ms TTL = 125

05/10/26

Ping statistics for 40.0.0.10 :
Packets : Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds :
Minimum = 0ms, Maximum = 1ms, Average = 0ms.

Pc >