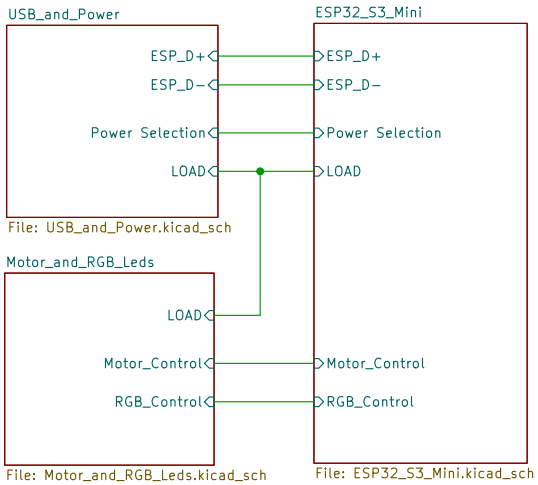


FID1 Fiducial

FID2 Fiducial


FID3 Fiducial

FID4 Fiducial


Sheet: / File: Esp32_Motor_Controller.kicad_sch		
Title:		
Size: A4	Date:	**Rev:**
KiCad E.D.A. 10.0.4		Id: 1/4


ESP32-S3-MINI-1-N8

1.Chip boot mode - GPIO0 and GPIO46
2.VDD_SPI voltage - GPIO45
3.ROM messages printing - GPIO46
4.JTAG signal source - GPIO3




BOOT and RST Button

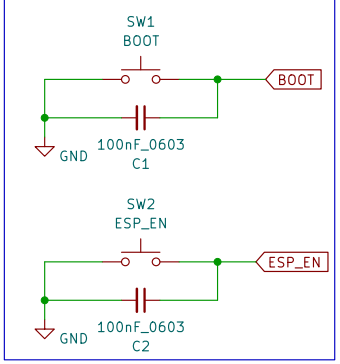


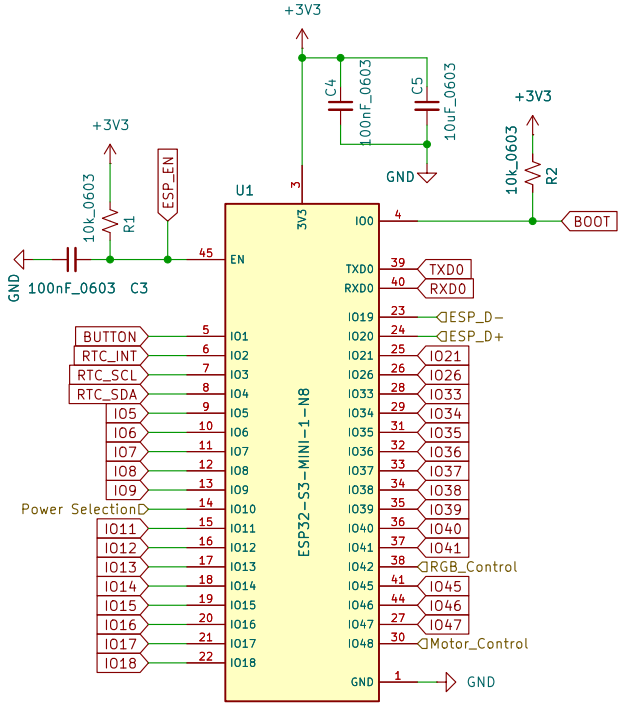

ESP RTC CLOCK

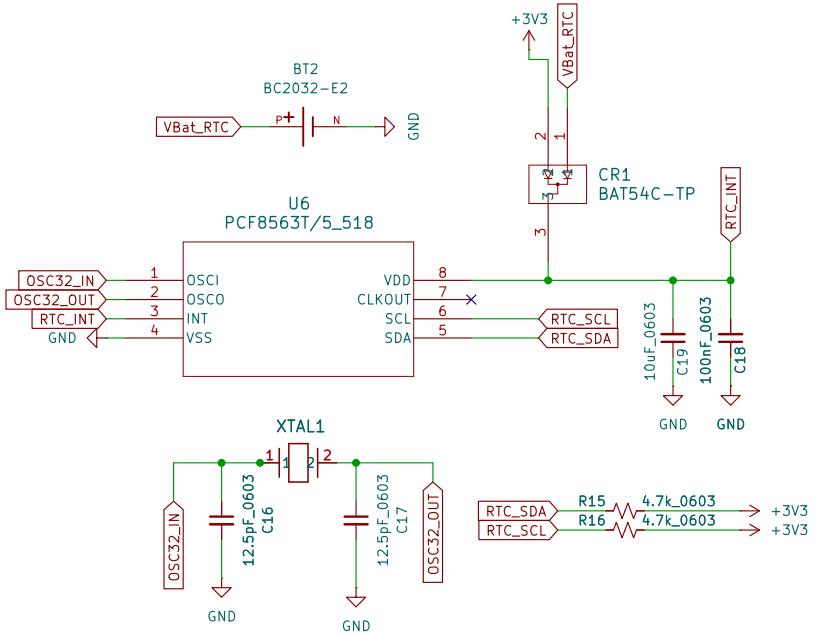

ESP32 unused pins

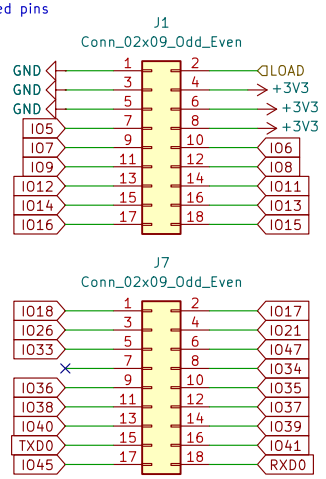

Esp32 S3 Mini1-N8 Notes

Table 4-3. Chip Boot Mode Control

Boot Mode	GPIO0	GPIO46
SPI Boot	1	Any value
Joint Download Boot [2]	0	0

[1] **Bold** marks the default value and configuration.
[2] Joint Download Boot mode supports the following download methods:
- USB Download Boot:
  - USB-Serial-JTAG Download Boot
  - USB-OTG Download Boot
- UART Download Boot


Table 4-1. Default Configuration of Strapping Pins


Strapping Pin	Default Configuration	Bit Value
GPIO0	Weak pull-up	1
GPIO3	Floating	-
GPIO45	Weak pull-down	0
GPIO46	Weak pull-down	0


Sheet: /ESP32_S3_Mini/
File: ESP32_S3_Mini.kicad_sch

Title:

Size: A4	Date:	**Rev:**
KiCad E.D.A. 10.0.4		Id: 2/4

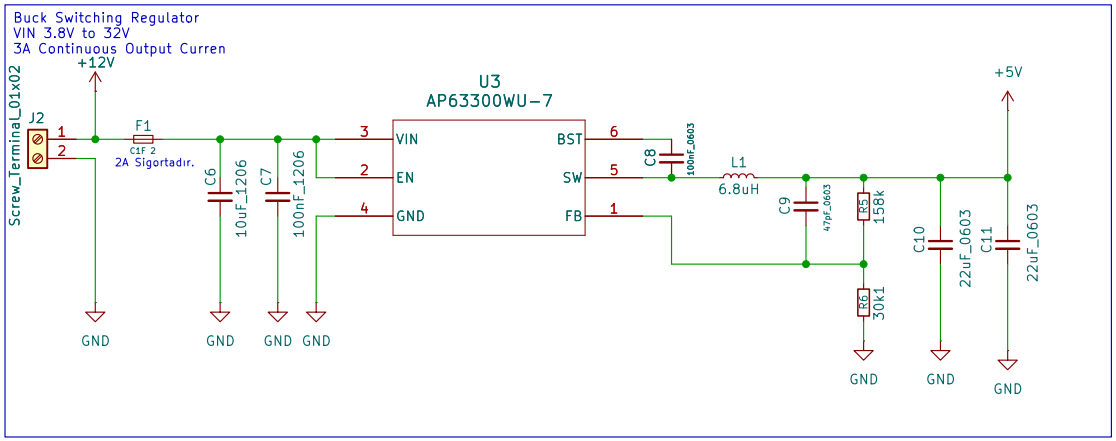


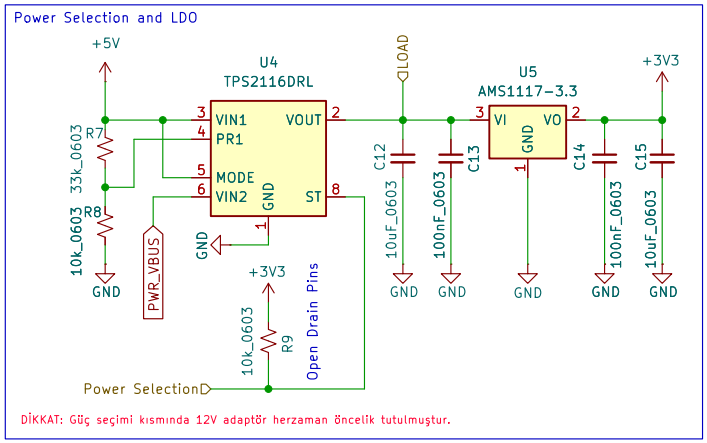

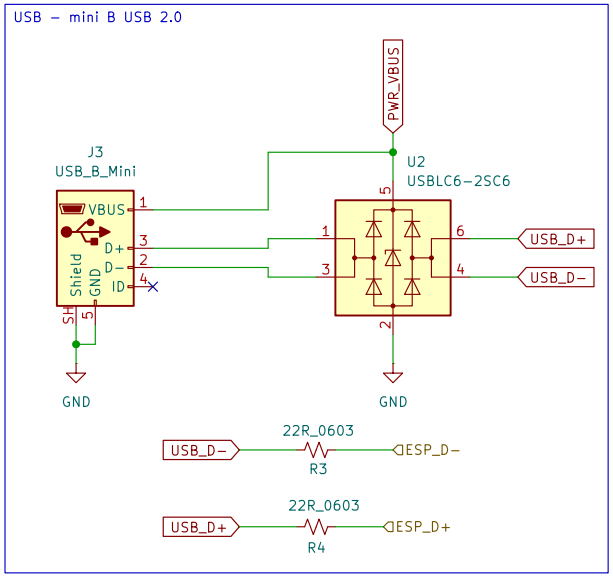


Sheet: /USB_and_Power/		
File: USB_and_Power.kicad_sch		
Title:		
Size: A4	Date:	**Rev:**
KiCad E.D.A. 10.0.4		Id: 3/4

DC motor control with MOSFET.

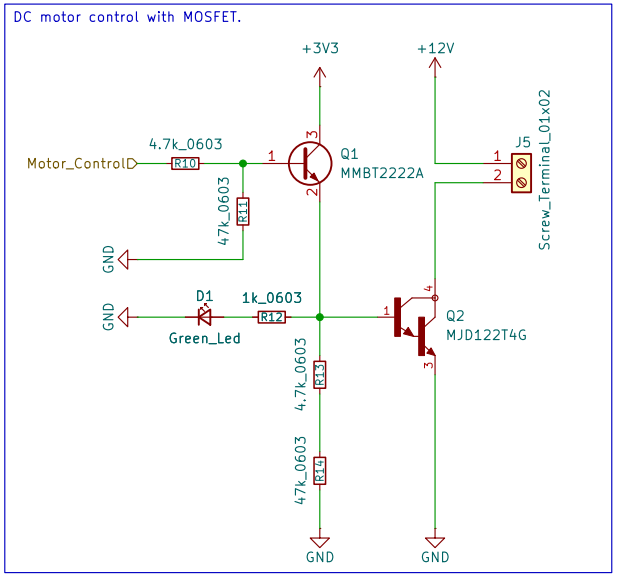

RGB Led Connector



Sheet: /Motor_and_RGB_Leds/ File: Motor_and_RGB_Leds.kicad_sch		
Title:		
Size: A4	Date:	**Rev:**
KiCad E.D.A. 10.0.4		Id: 4/4