


## LAB3: Configure default route, static route to the Router

### Topology:

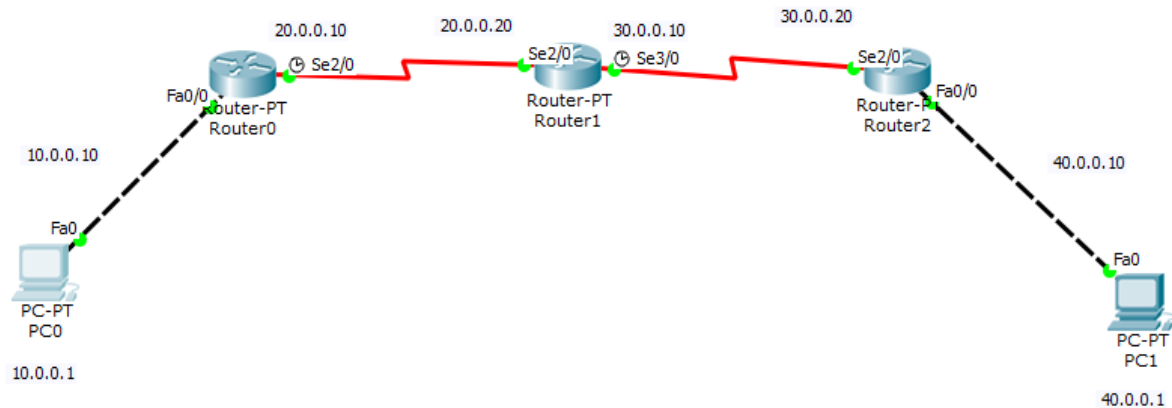

### Router 0 :

```
Router>enable
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface fastethernet 0/0
Router(config-if)#ip address 10.0.0.10 255.0.0.0
Router(config-if)#no shut

Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up
exit
Router(config)#interface serial 2/0
Router(config-if)#ip address 20.0.0.10 255.0.0.0
Router(config-if)#no shut

%LINK-5-CHANGED: Interface Serial2/0, changed state to down
Router(config-if)#exit
Router(config)#exit
_

Router>enable
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#ip route 0.0.0.0 0.0.0.0 20.0.0.20
Router(config)#
```

```

Router>enable
Router#show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route

Gateway of last resort is 20.0.0.20 to network 0.0.0.0

C    10.0.0.0/8 is directly connected, FastEthernet0/0
C    20.0.0.0/8 is directly connected, Serial2/0
S*   0.0.0.0/0 [1/0] via 20.0.0.20
Router#

```

## Roter 1 :

```

Router>enable
Router#config t
Enter configuration commands, one per line.  End with CNTL/Z.
Router(config)#interface serial 2/0
Router(config-if)#ip address 20.0.0.20 255.0.0.0
Router(config-if)#no shut

Router(config-if)#
%LINK-5-CHANGED: Interface Serial2/0, changed state to up
exit
Router(config)#
%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial2/0, changed state to up
interface serail 3/0
      ^
% Invalid input detected at '^' marker.

Router(config)#interface serial 3/0
Router(config-if)#ip address 30.0.0.10 255.0.0.0
Router(config-if)#no shut

%LINK-5-CHANGED: Interface Serial3/0, changed state to down
Router(config-if)#exit
Router(config)#exit

```

```

Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#ip route 10.0.0.0 255.0.0.0 20.0.0.10
Router(config)#ip route 40.0.0.0 255.0.0.0 30.0.0.20
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console
show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route

Gateway of last resort is not set

S    10.0.0.0/8 [1/0] via 20.0.0.10
C    20.0.0.0/8 is directly connected, Serial2/0
C    30.0.0.0/8 is directly connected, Serial3/0
S    40.0.0.0/8 [1/0] via 30.0.0.20

```

## Roter 2 :

```

Router>enable
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface serail 2/0
                        ^
% Invalid input detected at '^' marker.

Router(config)#interface serial 2/0
Router(config-if)#ip address 30.0.0.20 255.0.0.0
Router(config-if)#no shut

Router(config-if)#
%LINK-5-CHANGED: Interface Serial2/0, changed state to up
exi
%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial2/0, changed state to up
t
Router(config)#exit

```

```

Router>enable
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#ip route 0.0.0.0 0.0.0.0 30.0.0.10
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console
show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route

Gateway of last resort is 30.0.0.10 to network 0.0.0.0

C    30.0.0.0/8 is directly connected, Serial2/0
C    40.0.0.0/8 is directly connected, FastEthernet0/0
S*   0.0.0.0/0 [1/0] via 30.0.0.10
Router#

```

## Command Prompt

```

Packet Tracer PC Command Line 1.0
PC>ping 40.0.0.1

Pinging 40.0.0.1 with 32 bytes of data:

Request timed out.
Reply from 40.0.0.1: bytes=32 time=2ms TTL=125
Reply from 40.0.0.1: bytes=32 time=2ms TTL=125
Reply from 40.0.0.1: bytes=32 time=2ms TTL=125

Ping statistics for 40.0.0.1:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 2ms, Maximum = 2ms, Average = 2ms

PC>ping 40.0.0.1

Pinging 40.0.0.1 with 32 bytes of data:

Reply from 40.0.0.1: bytes=32 time=10ms TTL=125
Reply from 40.0.0.1: bytes=32 time=10ms TTL=125
Reply from 40.0.0.1: bytes=32 time=25ms TTL=125
Reply from 40.0.0.1: bytes=32 time=24ms TTL=125

Ping statistics for 40.0.0.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 10ms, Maximum = 25ms, Average = 17ms

PC>

```

13/7/23


classmate

Date \_\_\_\_\_  
Page \_\_\_\_\_

### Lab 3 :

Aim: Configure default route, static route to the Router.

### Topology :

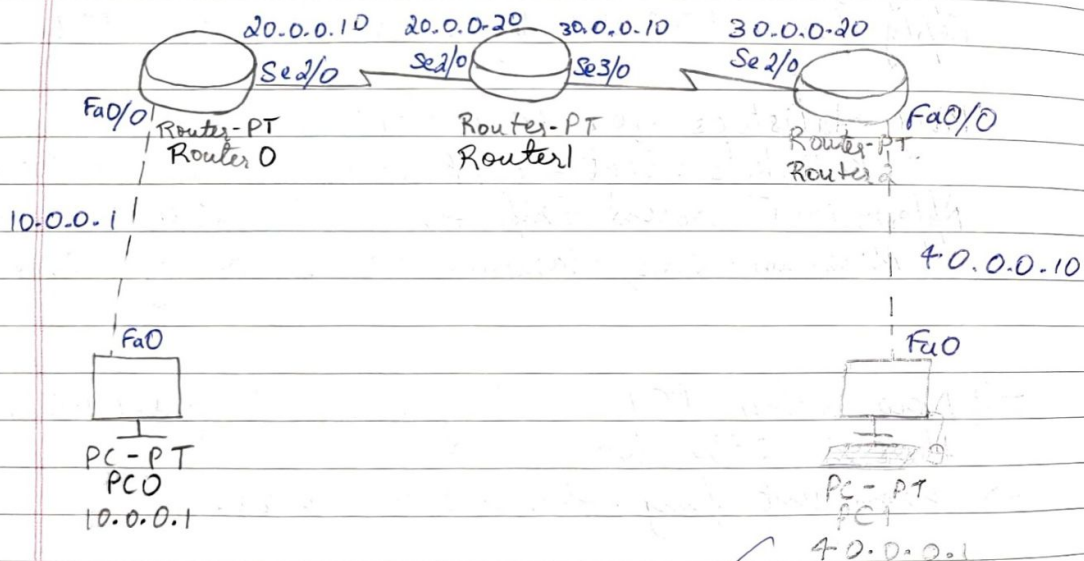

### Procedure

- Create the same topology as 2B experiment.
- Setup IP address of PC0 & PC1  
PC0 → 10.0.0.1  
PC1 → 40.0.0.1  
config → FastEthernet → IP address

- Config IP address of Router 0, Router 1 & Router 2 following steps in 2B experiment.
- Setup Gateway for PC0 & PC1 :  
PC0 : 10.0.0.10  
PC1 : 40.0.0.10
- Setup static routing for Router 1 ~~and~~ Router 2 following steps in 2B experiment.
- For Router 0 and Router 2, we will setup default routing.

Router 0:

```
Router(Config) # ip route 0.0.0.0 0.0.0.0 20.0.0.20
```

```
Router # show ip route
```

```
C 10.0.0.0/8 is directly connected, FastEthernet0/0  
C 20.0.0.0/8 is directly connected,  
S* 0.0.0.0/0 [1/0] via 20.0.0.20
```

Router 2:

```
Router(Config) # ip route 0.0.0.0 0.0.0.0 30.0.0.10
```

```
Router # show ip route
```

```
C 30.0.0.0/8 is directly connected, Serial 2/0  
C 40.0.0.0/8 is directly connected, FastEthernet0/0  
S* 0.0.0.0/0 [1/0] via 30.0.0.10
```