

1. Description


1.1. Project

Project Name	BootLdr
Board Name	BootLdr
Generated with:	STM32CubeMX 4.25.0
Date	03/27/2018

1.2. MCU

MCU Series	STM32L4
MCU Line	STM32L4x6
MCU name	STM32L4A6RGTx
MCU Package	LQFP64
MCU Pin number	64

2. Pinout Configuration

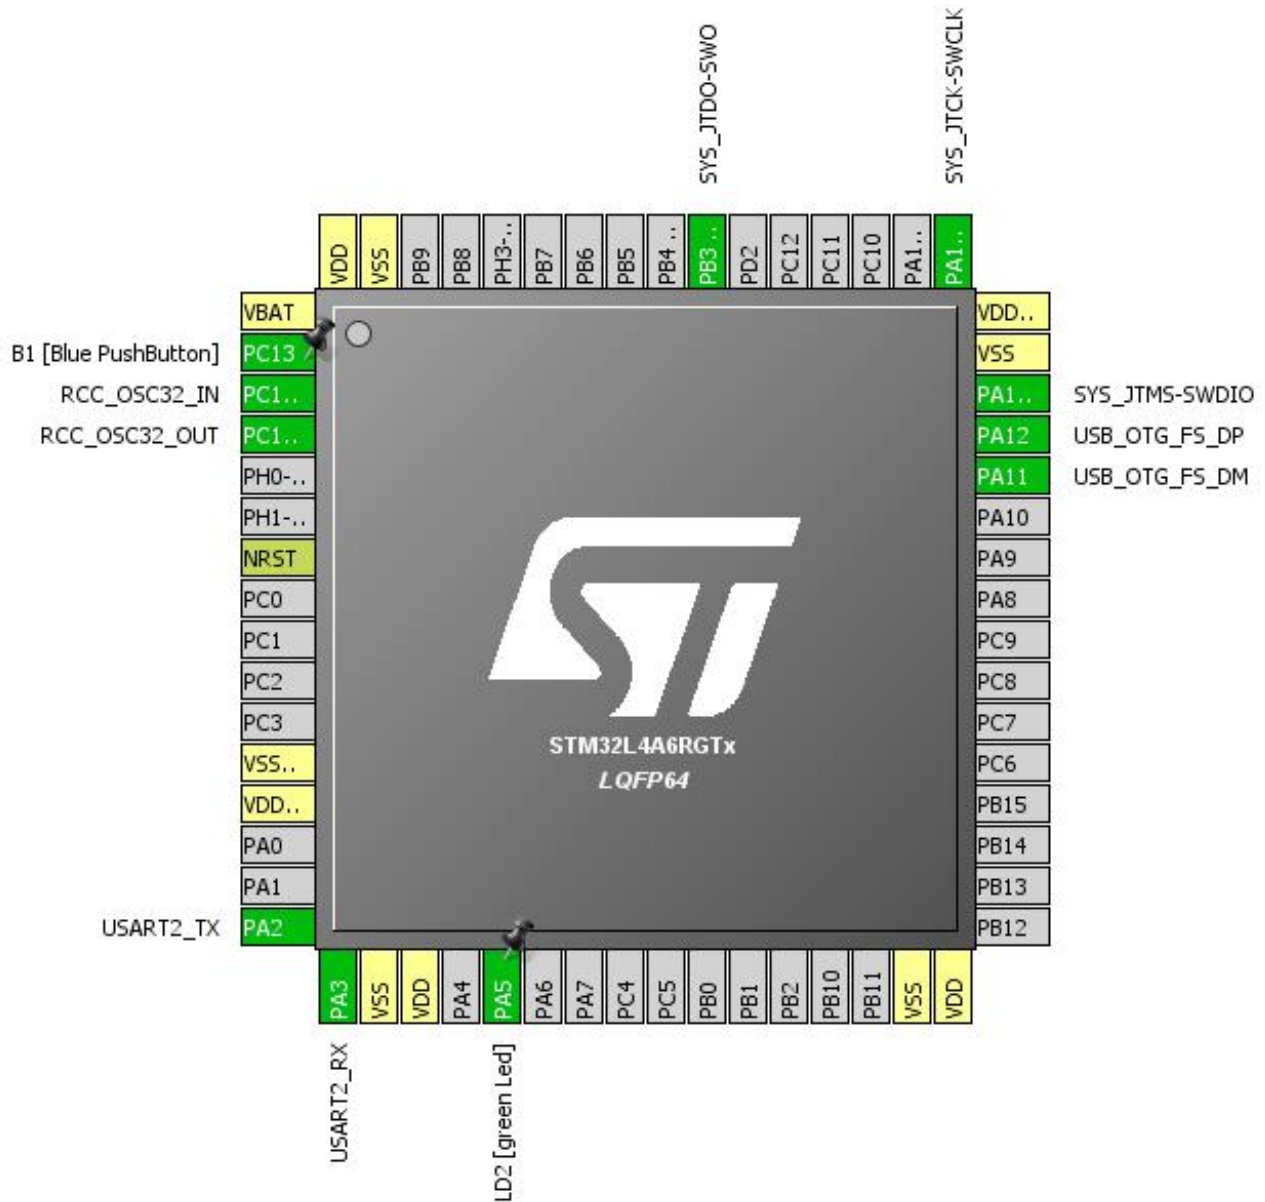


3. Pins Configuration

Pin Number LQFP64	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	VBAT	Power		
2	PC13	I/O	GPIO_EXTI13	B1 [Blue PushButton]
3	PC14-OSC32_IN (PC14)	I/O	RCC_OSC32_IN	
4	PC15-OSC32_OUT (PC15)	I/O	RCC_OSC32_OUT	
7	NRST	Reset		
12	VSSA/VREF-	Power		
13	VDDA/VREF+	Power		
16	PA2	I/O	USART2_TX	
17	PA3	I/O	USART2_RX	
18	VSS	Power		
19	VDD	Power		
21	PA5 *	I/O	GPIO_Output	LD2 [green Led]
31	VSS	Power		
32	VDD	Power		
44	PA11	I/O	USB_OTG_FS_DM	
45	PA12	I/O	USB_OTG_FS_DP	
46	PA13 (JTMS/SWDIO)	I/O	SYS_JTMS-SWDIO	
47	VSS	Power		
48	VDDUSB	Power		
49	PA14 (JTCK/SWCLK)	I/O	SYS_JTCK-SWCLK	
55	PB3 (JTDO/TRACESWO)	I/O	SYS_JTDO-SWO	
63	VSS	Power		
64	VDD	Power		

* The pin is affected with an I/O function

4. Clock Tree Configuration

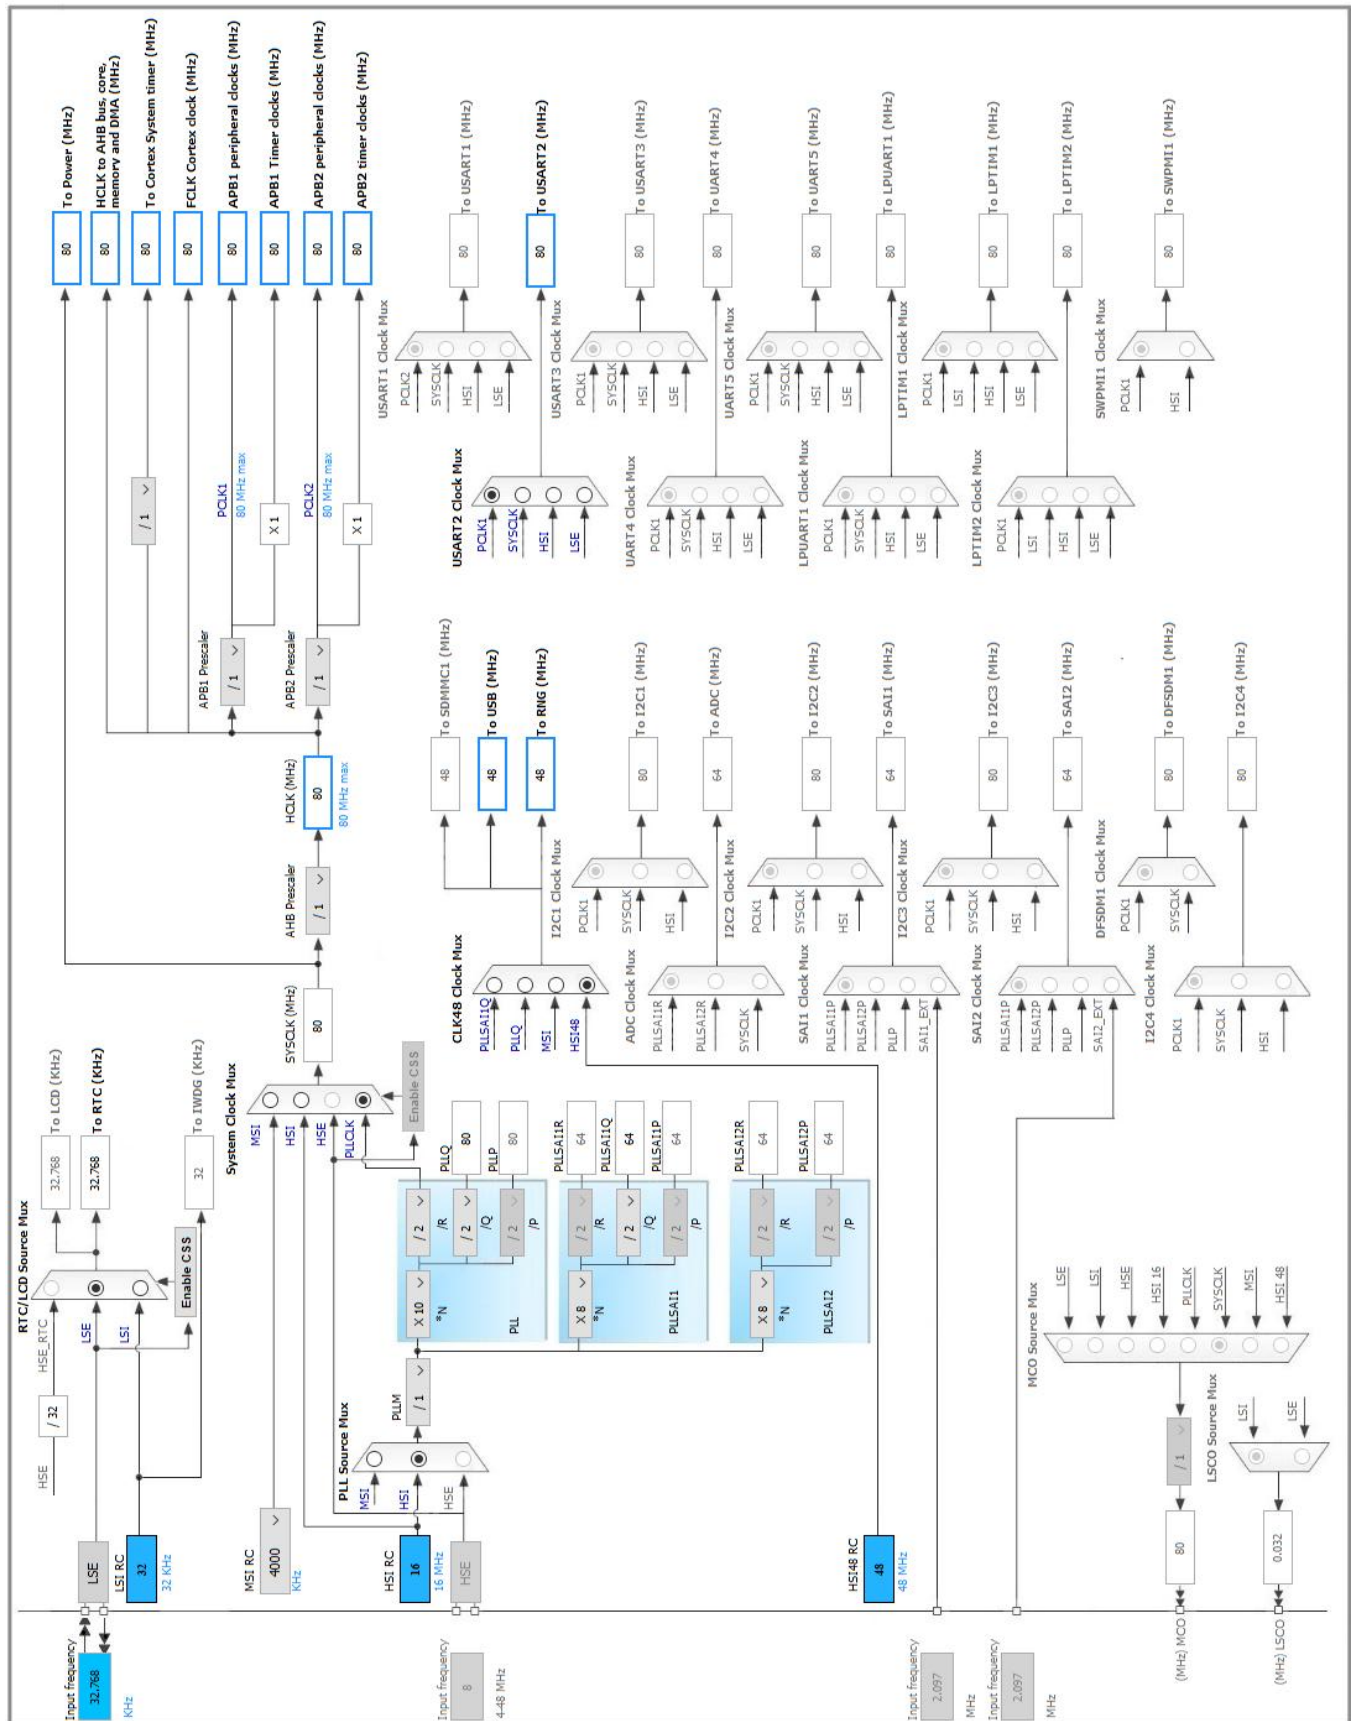

5. IPs and Middleware Configuration

5.1. RCC

Low Speed Clock (LSE) : Crystal/Ceramic Resonator

5.1.1. Parameter Settings:

System Parameters:

VDD voltage (V)	3.3
Instruction Cache	Enabled
Prefetch Buffer	Disabled
Data Cache	Enabled
Flash Latency(WS)	4 WS (5 CPU cycle)

RCC Parameters:

HSI Calibration Value	64
MSI Calibration Value	0
MSI Auto Calibration	Disabled
HSE Startup Timeout Value (ms)	100
LSE Startup Timeout Value (ms)	5000
LSE Drive Capability	LSE oscillator low drive capability

Power Parameters:

Power Regulator Voltage Scale	Power Regulator Voltage Scale 1
-------------------------------	---------------------------------

5.2. RNG

mode: Activated

5.3. RTC

mode: Activate Clock Source

mode: Activate Calendar

5.3.1. Parameter Settings:

General:

Hour Format	Hourformat 24
Asynchronous Predivider value	127
Synchronous Predivider value	255

Calendar Time:

Data Format	Binary data format *
Hours	0
Minutes	0
Seconds	0
Day Light Saving: value of hour adjustment	Daylightsaving None
Store Operation	Storeoperation Reset

Calendar Date:

Week Day	Monday
Month	January
Date	1
Year	0

5.4. SYS

Debug: Trace Asynchronous Sw

Timebase Source: SysTick

5.5. USART2

Mode: Asynchronous

5.5.1. Parameter Settings:

Basic Parameters:

Baud Rate	115200
Word Length	8 Bits (including Parity) *
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Transmit Only *
Over Sampling	16 Samples
Single Sample	Disable

Advanced Features:

Auto Baudrate	Disable
TX Pin Active Level Inversion	Disable
RX Pin Active Level Inversion	Disable
Data Inversion	Disable
TX and RX Pins Swapping	Disable
Overrun	Enable

DMA on RX Error	Enable
MSB First	Disable

5.6. USB_OTG_FS

Mode: Device_Only

5.6.1. Parameter Settings:

Speed	Full Speed 12MBit/s
Endpoint 0 Max Packet size	64 Bytes
Enable internal IP DMA	Disabled
Low power	Disabled
Battery charging	Disabled
Link Power Management	Disabled
Use dedicated end point 1 interrupt	Disabled
VBUS sensing	Disabled
Signal start of frame	Disabled

5.7. USB_DEVICE

Class For FS IP: Download Firmware Update Class (DFU)

5.7.1. Parameter Settings:

Basic Parameters:

USBD_MAX_NUM_INTERFACES (Maximum number of supported interfaces)	1
USBD_MAX_NUM_CONFIGURATION (Maximum number of supported configuration)	1
USBD_MAX_STR_DESC_SIZ (Maximum size for the string descriptors)	512
USBD_SUPPORT_USER_STRING (Enable user string descriptor)	Enabled
USBD_SELF_POWERED (Enabled self power)	Enabled
USBD_DEBUG_LEVEL (USBD Debug Level)	0: No debug message
USBD_LPM_ENABLED (Link Power Management)	1: Link Power Management supported

Class Parameters:

USBD_DFU_MAX_ITF_NUM (DFU maximum interface numbers)	1
USBD_DFU_XFER_SIZE	1024
USBD_DFU_APP_DEFAULT_ADD (Base Address 0x)	0x08000000 *
USBD_DFU_MEDIA Interface	@Internal Flash /0x08000000/03*016Ka,01*016Kg,01*064Kg,07*128Kg,04*016Kg,01*064Kg,07*1

5.7.2. Device Descriptor:

Device Descriptor:

VID (Vendor Identifier)	1155
LANGID_STRING (Language Identifier)	English(United States)
MANUFACTURER_STRING (Manufacturer Identifier)	STMicroelectronics

Device Descriptor FS:

PID (Product Identifier)	57105
PRODUCT_STRING (Product Identifier)	STM32 DownLoad Firmware Update
SERIALNUMBER_STRING (Serial number)	00000000001A
CONFIGURATION_STRING (Configuration Identifier)	DFU Config
INTERFACE_STRING (Interface Identifier)	DFU Interface

* User modified value

6. System Configuration

6.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
RCC	PC14-OSC32_IN (PC14)	RCC_OSC32_IN	n/a	n/a	n/a	
	PC15-OSC32_OUT (PC15)	RCC_OSC32_OUT	n/a	n/a	n/a	
SYS	PA13 (JTMS/SWDIO)	SYS_JTMS-SWDIO	n/a	n/a	n/a	
	PA14 (JTCK/SWCLK)	SYS_JTCK-SWCLK	n/a	n/a	n/a	
	PB3 (JTDO/TRACESWO)	SYS_JTDO-SWO	n/a	n/a	n/a	
USART2	PA2	USART2_TX	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
	PA3	USART2_RX	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
USB_OTG_FS	PA11	USB_OTG_FS_DM	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
	PA12	USB_OTG_FS_DP	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
GPIO	PC13	GPIO_EXTI13	External Interrupt Mode with Rising edge trigger detection	No pull-up and no pull-down	n/a	B1 [Blue PushButton]
	PA5	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LD2 [green Led]

6.2. DMA configuration

nothing configured in DMA service

6.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Prefetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	0	0
USB OTG FS global interrupt	true	0	0
PVD/PVM1/PVM2/PVM3/PVM4 interrupts through EXTI lines 16/35/36/37/38	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
USART2 global interrupt	unused		
EXTI line[15:10] interrupts	unused		
HASH and RNG global interrupts	unused		
FPU global interrupt	unused		

* User modified value

7. Power Consumption Calculator report

7.1. Microcontroller Selection

Series	STM32L4
Line	STM32L4x6
MCU	STM32L4A6RGTx
Datasheet	029172_Rev2

7.2. Parameter Selection

Temperature	25
Vdd	null

8. Software Project

8.1. Project Settings

Name	Value
Project Name	BootLdr
Project Folder	D:\Git\Barnacle\Sample\Barnacle\STM32L4A6RG
Toolchain / IDE	TrueSTUDIO
Firmware Package Name and Version	STM32Cube FW_L4 V1.11.0

8.2. Code Generation Settings

Name	Value
STM32Cube Firmware Library Package	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	No
Backup previously generated files when re-generating	No
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No

9. Software Pack Report