1. Description

1.1. Project

Project Name	RazorClamDICE
Board Name	NUCLEO-L476RG
Generated with:	STM32CubeMX 4.19.0
Date	01/25/2017

1.2. MCU

MCU Series	STM32L4
MCU Line	STM32L4x6
MCU name	STM32L476RGTx
MCU Package	LQFP64
MCU Pin number	64

2. Pinout Configuration

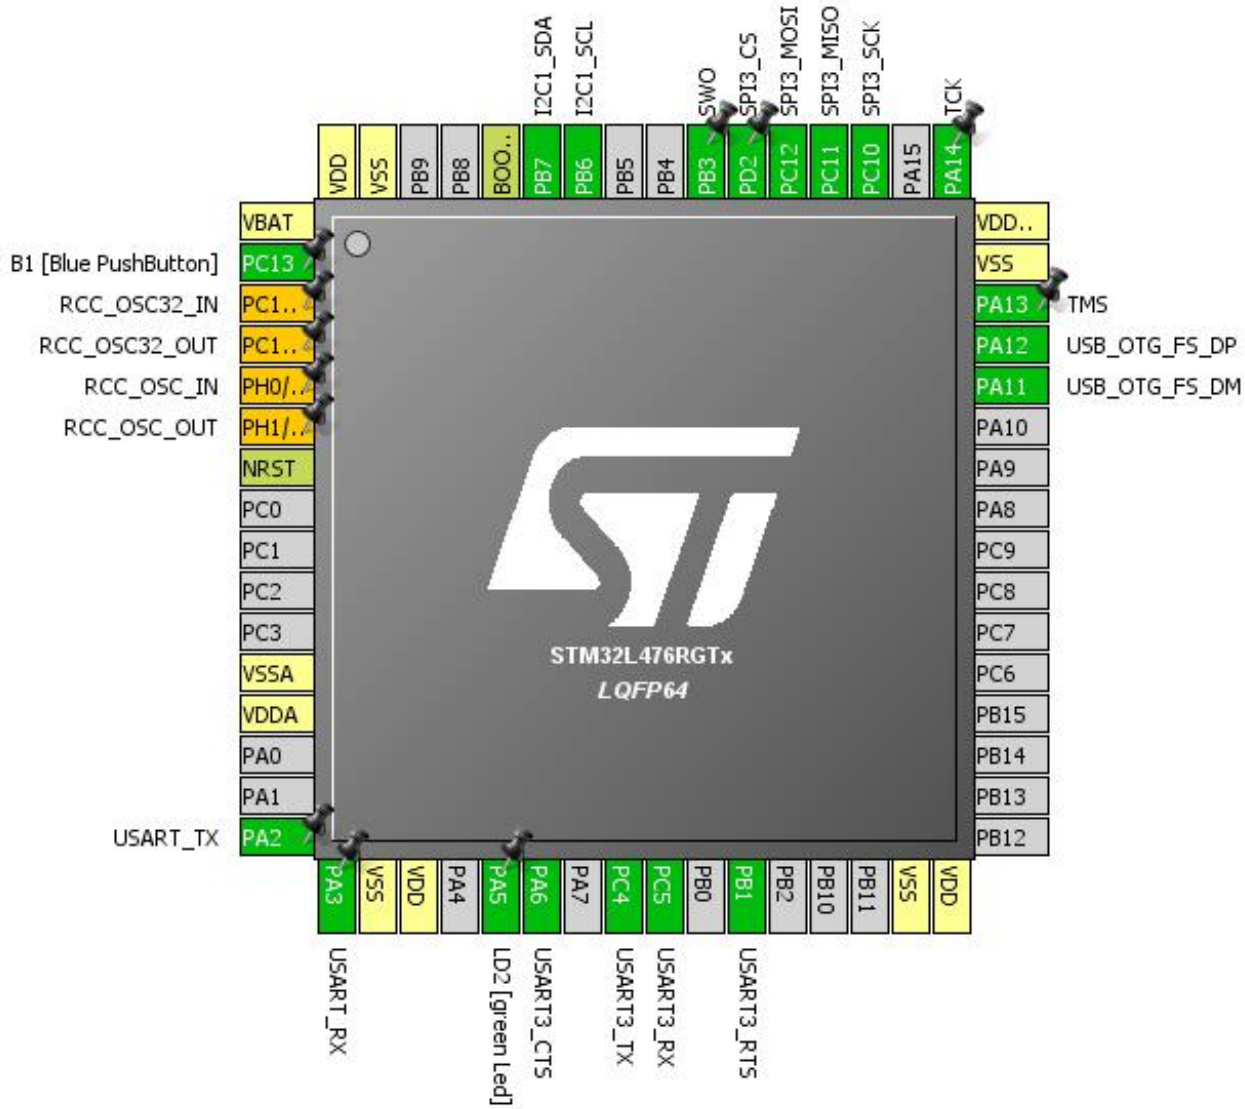

3. Pins Configuration

Pin Number LQFP64	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	VBAT	Power		
2	PC13	I/O	GPIO_EXTI13	B1 [Blue PushButton]
3	PC14/OSC32_IN *	I/O	RCC_OSC32_IN	
4	PC15/OSC32_OUT *	I/O	RCC_OSC32_OUT	
5	PH0/OSC_IN *	I/O	RCC_OSC_IN	
6	PH1/OSC_OUT *	I/O	RCC_OSC_OUT	
7	NRST	Reset		
12	VSSA	Power		
13	VDDA	Power		
16	PA2	I/O	USART2_TX	USART_TX
17	PA3	I/O	USART2_RX	USART_RX
18	VSS	Power		
19	VDD	Power		
21	PA5 **	I/O	GPIO_Output	LD2 [green Led]
22	PA6	I/O	USART3_CTS	
24	PC4	I/O	USART3_TX	
25	PC5	I/O	USART3_RX	
27	PB1	I/O	USART3_RTS	
31	VSS	Power		
32	VDD	Power		
44	PA11	I/O	USB_OTG_FS_DM	
45	PA12	I/O	USB_OTG_FS_DP	
46	PA13	I/O	SYS_JTMS-SWDIO	TMS
47	VSS	Power		
48	VDDUSB	Power		
49	PA14	I/O	SYS_JTCK-SWCLK	TCK
51	PC10	I/O	SPI3_SCK	
52	PC11	I/O	SPI3_MISO	
53	PC12	I/O	SPI3_MOSI	
54	PD2 **	I/O	GPIO_Output	SPI3_CS
55	PB3	I/O	SYS_JTDO-SWO	SWO
58	PB6	I/O	I2C1_SCL	
59	PB7	I/O	I2C1_SDA	
60	BOOT0	Boot		
63	VSS	Power		
64	VDD	Power		

** The pin is affected with an I/O function
 * The pin is affected with a peripheral function but no peripheral mode is activated

4. Clock Tree Configuration

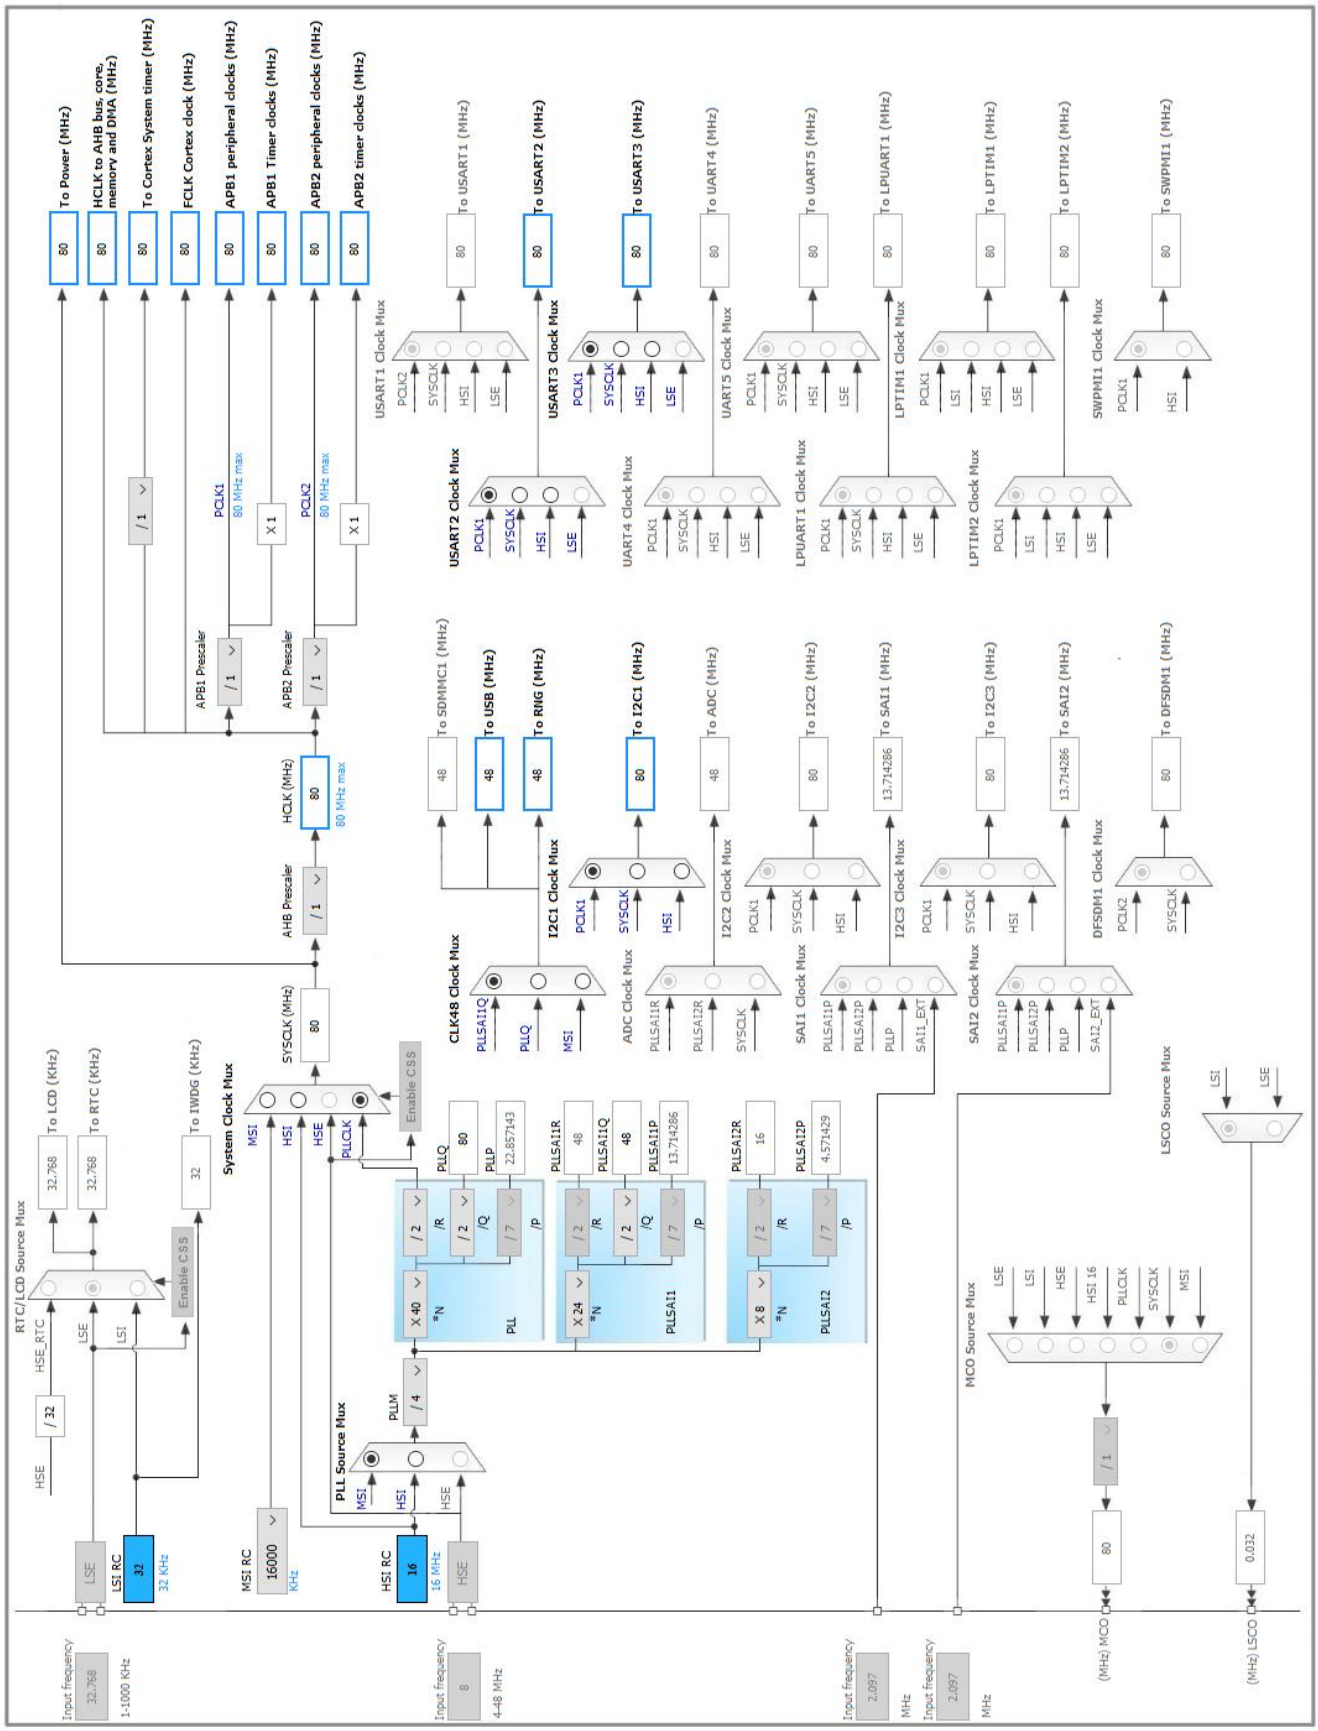

5. IPs and Middleware Configuration

5.1. I2C1

I2C: I2C

5.1.1. Parameter Settings:

Timing configuration:

I2C Speed Mode	**Fast Mode ***
I2C Speed Frequency (KHz)	400
Rise Time (ns)	0
Fall Time (ns)	0
Coefficient of Digital Filter	0
Analog Filter	Enabled
Timing	**0x00702991 ***

Slave Features:

Clock No Stretch Mode	Disabled
General Call Address Detection	Disabled
Primary Address Length selection	7-bit
Dual Address Acknowledged	Disabled
Primary slave address	0

5.2. RNG

mode: Activated

5.3. SPI3

Mode: Full-Duplex Master

5.3.1. Parameter Settings:

Basic Parameters:

Frame Format	Motorola
Data Size	4 Bits
First Bit	MSB First

Clock Parameters:

Prescaler (for Baud Rate)	

	32 *
Baud Rate	**2.5 MBits/s ***
Clock Polarity (CPOL)	Low
Clock Phase (CPHA)	1 Edge

Advanced Parameters:

CRC Calculation	Disabled
NSSP Mode	Enabled
NSS Signal Type	Software

5.4. SYS

Debug: Trace Asynchronous Sw

Timebase Source: TIM1

5.5. USART2

Mode: Asynchronous

5.5.1. Parameter Settings:

Basic Parameters:

Baud Rate	115200
Word Length	**8 Bits (including Parity) ***
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples
Single Sample	Disable

Advanced Features:

Auto Baudrate	Disable
TX Pin Active Level Inversion	Disable
RX Pin Active Level Inversion	Disable
Data Inversion	Disable
TX and RX Pins Swapping	Disable
Overrun	Enable
DMA on RX Error	Enable
MSB First	Disable

5.6. USART3

Mode: Asynchronous

Hardware Flow Control (RS232): CTS/RTS

5.6.1. Parameter Settings:

Basic Parameters:

Baud Rate	115200
Word Length	**8 Bits (including Parity) ***
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples
Single Sample	Disable

Advanced Features:

Auto Baudrate	Disable
TX Pin Active Level Inversion	Disable
RX Pin Active Level Inversion	Disable
Data Inversion	Disable
TX and RX Pins Swapping	Disable
Overrun	Enable
DMA on RX Error	Enable
MSB First	Disable

5.7. USB_OTG_FS

Mode: Device_Only

5.7.1. Parameter Settings:

Speed	Full Speed 12MBit/s
Endpoint 0 Max Packet size	64 Bytes
Enable internal IP DMA	Disabled
Low power	Disabled
Link Power Management	Disabled
VBUS sensing	**Disabled ***
Signal start of frame	Disabled

5.8. USB_DEVICE

Class For FS IP: Download Firmware Update Class (DFU)

5.8.1. Parameter Settings:

Basic Parameters:

VirtualMode	Dfu
USBD_MAX_NUM_INTERFACES (Maximum number of supported interfaces)	1
USBD_MAX_NUM_CONFIGURATION (Maximum number of supported configuration)	1
USBD_MAX_STR_DESC_SIZ (Maximum size for the string descriptors)	512
USBD_SUPPORT_USER_STRING (Enable user string descriptor)	Enabled
USBD_SELF_POWERED (Enabled self power)	Enabled
USBD_DEBUG_LEVEL (USBD Debug Level)	0: No debug message
USBD_LPM_ENABLED (Link Power Management)	1: Link Power Management supported

Class Parameters:

USBD_DFU_MAX_ITF_NUM (DFU maximum interface numbers)	1
USBD_DFU_XFER_SIZE	1024
USBD_DFU_APP_DEFAULT_ADD (Base Address 0x)	**0x08000000 ***
USBD_DFU_MEDIA Interface	@Internal Flash /0x08000000/03*016Ka,01*016Kg,01*064Kg,07*128Kg,04*016Kg,01*064Kg,07*1

5.8.2. Device Descriptor:

Device Descriptor:

VID (Vendor IDentifier)	1155
LANGID_STRING (Language Identifier)	English(United States)
MANUFACTURER_STRING (Manufacturer Identifier)	STMicroelectronics

Device Descriptor FS:

PID (Product IDentifier)	57105
PRODUCT_STRING (Product Identifier)	STM32 DownLoad Firmware Update
SERIALNUMBER_STRING (Serial number)	00000000001A
CONFIGURATION_STRING (Configuration Identifier)	DFU Config
INTERFACE_STRING (Interface Identifier)	DFU Interface

*** User modified value**

6. System Configuration

6.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
I2C1	PB6	I2C1_SCL	Alternate Function Open Drain	Pull-up	**Very High** *	
	PB7	I2C1_SDA	Alternate Function Open Drain	Pull-up	**Very High** *	
SPI3	PC10	SPI3_SCK	Alternate Function Push Pull	No pull-up and no pull-down	**Very High** *	
	PC11	SPI3_MISO	Alternate Function Push Pull	No pull-up and no pull-down	**Very High** *	
	PC12	SPI3_MOSI	Alternate Function Push Pull	No pull-up and no pull-down	**Very High** *	
SYS	PA13	SYS_JTMS-SWDIO	n/a	n/a	n/a	TMS
	PA14	SYS_JTCK-SWCLK	n/a	n/a	n/a	TCK
	PB3	SYS_JTDO-SWO	n/a	n/a	n/a	SWO
USART2	PA2	USART2_TX	Alternate Function Push Pull	*	**Very High** *	USART_TX
	PA3	USART2_RX	Alternate Function Push Pull	*	**Very High** *	USART_RX
USART3	PA6	USART3_CTS	Alternate Function Push Pull	No pull-up and no pull-down	**Very High** *	
	PC4	USART3_TX	Alternate Function Push Pull	Pull-up	**Very High** *	
	PC5	USART3_RX	Alternate Function Push Pull	Pull-up	**Very High** *	
	PB1	USART3_RTS	Alternate Function Push Pull	No pull-up and no pull-down	**Very High** *	
USB_OTG_FS	PA11	USB_OTG_FS_DM	Alternate Function Push Pull	No pull-up and no pull-down	**Very High** *	
	PA12	USB_OTG_FS_DP	Alternate Function Push Pull	No pull-up and no pull-down	**Very High** *	

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
Single Mapped Signals	PC14/OSC32_IN	RCC_OSC32_IN	n/a	n/a	n/a	
	PC15/OSC32_OUT	RCC_OSC32_OUT	n/a	n/a	n/a	
	PH0/OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	
	PH1/OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	
GPIO	PC13	GPIO_EXTI13	**External Interrupt Mode with Falling edge trigger detection**	**Pull-up ***	n/a	B1 [Blue PushButton]
	PA5	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LD2 [green Led]
	PD2	GPIO_Output	Output Push Pull	**Pull-up ***	Low	SPI3_CS

6.2. DMA configuration

nothing configured in DMA service

6.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Prefetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	0	0
TIM1 update interrupt and TIM16 global interrupt	true	0	0
USB OTG FS global interrupt	true	0	0
PVD/PVM1/PVM2/PVM3/PVM4 interrupts through EXTI lines 16/35/36/37/38	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
I2C1 event interrupt	unused		
I2C1 error interrupt	unused		
USART2 global interrupt	unused		
USART3 global interrupt	unused		
EXTI line[15:10] interrupts	unused		
SPI3 global interrupt	unused		
RNG global interrupt	unused		
FPU global interrupt	unused		

*** User modified value**

7. Power Consumption Calculator report

7.1. Microcontroller Selection

Series	STM32L4
Line	STM32L4x6
MCU	STM32L476RGTx
Datasheet	025976_Rev4

7.2. Parameter Selection

Temperature	25
Vdd	3.0

8. Software Project

8.1. Project Settings

Name	Value
Project Name	RazorClamDICE
Project Folder	C:\git\RazorClamDICE
Toolchain / IDE	MDK-ARM V5
Firmware Package Name and Version	STM32Cube FW_L4 V1.6.0

8.2. Code Generation Settings

Name	Value
STM32Cube Firmware Library Package	Copy all used libraries into the project folder
Generate peripheral initialization as a pair of '.c/.h' files	No
Backup previously generated files when re-generating	No
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No