PPe Tool | Smart Demo Box |



With the **PPe Tool Smart Demo Box**, you can quickly get familiar with all the functions of the PPe30 and PPe50.

This demo box supports the NPN/PNP dual logic mode, is compatible with free switching between the dual interfaces of Version A2 and Version A4, and adapts to a variety of usage scenarios.

Built-in with a large-capacity lithium battery, it features a compact and portable body that lets you operate PPe Tool devices anytime and anywhere. Under high-intensity continuous usage, the PPE50 delivers a battery life of up to 3 hours, while the PPE30 boasts an even longer endurance of 5 hours.

General Specifications[1]	
Dimensions	Full-Featured Version: 175×125×75 mm; Standard Version: 150×110×75 mm; Custom Version: 158×90×46 mm
Battery Capacity	2800mAh
Maximum Battery Current	5A
Net Tool Weight	Full-Featured Version: 1kg; Standard Version: 0.84kg; Custom Version: 0.69kg
Power supply	2 A @ 24 V DC
Charger Specification	1A @ 24 V DC
Continuous Operating Time	PPe30: 5 hours PPe50: 3 hours
Connector Type	Male M12 – 5 Pin – A-coded Male M12 – 4 Pin – A-coded Male M12 – 3 Pin – A-coded

Full-Featured Version
(with integrated stepper driver)



Standard Version



Custom Version



Function Introduction


Operation Interface

1. By using the mode switch button on the Smart Demo Box, select your desired operation interface.
2. Identify the corresponding operation interface based on the label on the PPE tool housing.



Function Interface

1. Magnet on/off control and status display
2. Abnormal tool status alert
3. NPN/PNP status is automatically displayed by the Smart Demo Box

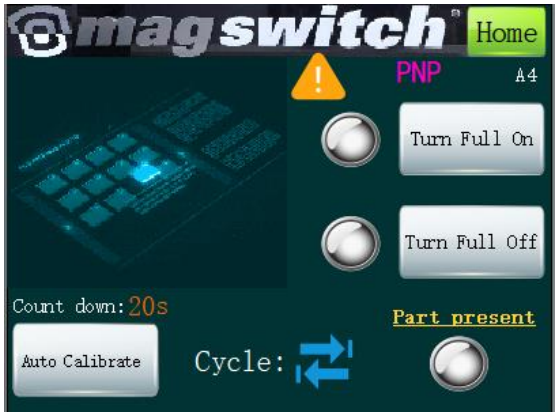

Calibration

1. Manual Calibration: Press the Turn Full On and Turn Full Off buttons simultaneously, then complete the calibration based on the LED display status.
2. Auto Calibration: Press the Auto Calibrate button, and the device will start a 20-second countdown. Calibration will be completed automatically once the countdown ends.



Cycle Function

1. Customize cycle interval duration
2. Real-time display of cycle count
3. Cycle count reset

