

# LSTM-Based Beam Tracking for mmWave Vehicular Networks

Chen Wang, XXX, XXX, XXX

*Beijing Key Laboratory of Network System Architecture and Convergence, Beijing University of Posts and Telecommunications*  
Beijing, China  
wangchen@bupt.edu.cn

**Abstract**—The use of millimeter wave (mmWave) frequency bands for transmission can improve data transmission rate with the help of beamforming technique to overcome the high path and penetration losses. However, utilizing mmWave technology in vehicular networks is challenging, as the high mobility of vehicles results in frequent beam alignment and significant overhead. In this paper, a long short-term memory (LSTM)-based beam tracking scheme is proposed for reducing overhead caused by beam alignment in mmWave Vehicular Networks, by predicting beam angles at next time step through known beam angles at a certain number of consecutive time steps as features. To train this network, a time series channel data is set up by statistical channel model using time series vehicle information generated from road traffic simulation software named “Simulation of Urban MObility (SUMO)”. Simulation results have verified the proposed LSTM-based scheme can reduce a significant overhead with an acceptable loss in spectral efficiency compared with exhaustive search scheme.

**Index Terms**—beam tracking, mmWave vehicular networks, LSTM

## I. INTRODUCTION

MmWave is one of the important technologies for the future development of communications [1], relying on abundant spectrum resources. In order to use mmWave to increase transmission rate effectively, the high path and penetration loss caused by high frequency of mmWave need to be overcome [2]. Fortunately, it is possible to integrate mmWave phased array antennas into small chip with the help of short wavelength of mmWave, and use beamforming technique to deliver signal power in specified direction for high gain [3]. Several beamforming techniques are most commonly used for beamforming, i.e. analog, digital and hybrid beamforming. Considering the digital beamforming is prohibitively complex and costly, it has not been largely adopted by both indoor and outdoor mmWave communications, and most of the researches focused on analog and hybrid beamforming [4].

Unlike conventional omnidirectional antennas, mmWave array antennas are directional [5], which means that if high antenna gain needs to be achieved, it is important to ensure that the beams generated by the receiver and transmitter are aligned well with each other. Otherwise, misalignment of the beam pairs will result in reduction in gain and degrading performance. A hierarchical codebook design was proposed in [6], which essentially exploits binary search algorithm to reduce overhead by using different beam widths at different

stages to perform beam search. This algorithm requires a high quantization level phase shifter and potentially multiple RF chains to implement, which leads to high cost. In [7], Zhang et al. proposed a Kalman filter based scheme for beam tracking using exhaustive search, whose measurements and protocol overhead increase with the number of elements in antenna. Based on prior works, [8] exploits extended Kalman filter and requires only a single measurement, making it more suitable for beam tracking in fast-changing environments.

Providing reliable beam alignment for high speed vehicles is more challenging, due to vehicles move out of the beam coverage area faster. Frequent beam alignment is required to ensure that the vehicles are always covered by high gain beams, and it will further increase system overhead, especially when high resolution codebooks are used. Fortunately, due to the sparsity of mmWave channel [9] and the correlation between the angles of arrival (AoAs) and departure (AoDs) of a mmWave channel and the positions of the receiver and transmitter [10], the beam angles of a vehicle traveling along a road under LOS condition can be well predicted. Wang et al. proposed a situational awareness-aided beam training solution using machine learning in mmWave Vehicle to Infrastructure (V2I) communication, which is dependent on availability of accurate localization of vehicles [11]. In practice, the inaccuracy or incomplete situational awareness may be introduced by localization error, limited location updating frequencies and data transmission rate of vehicles, resulting in beam misalignment.

In this paper, a LSTM-based beam tracking scheme is proposed. By using LSTM network to learn the historical beam angles which were obtained from exhaustive beam search performed by analog beamforming based on quantized phase shifter, AoA and AoD of current channel between vehicle and BS can be predicted simultaneously to reduce measurement overhead. In each round of tracking, the predicted beam angles will be used to select beamforming codeword for transmission and compose new feature, until the signal-to-noise ratio (SNR) of received signal less than or equal to a threshold. In addition, a road traffic simulation software is used to generate time series vehicle information (e.g. position, speed, direction, etc.) to set up time series channel data with a statistical channel model which is modeled by real experimental data for training and evaluating the network.

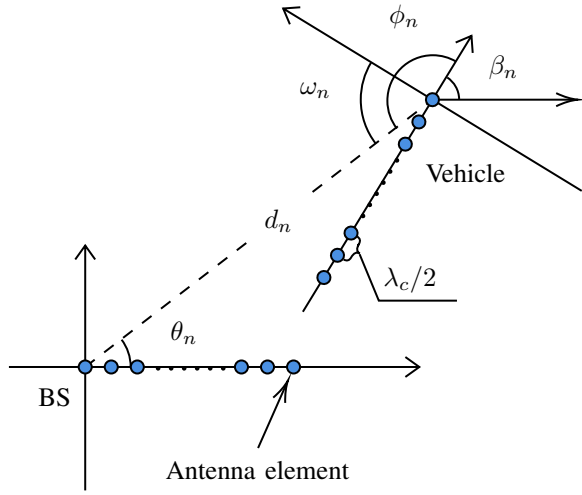


Fig. 1. Channel geometry

The rest of the paper is organized as follows. In Section II, system model is presented. The proposed LSTM-based beam tracking scheme is introduced in Section III. In Section IV, the procedure of data generation is discussed. Section V provides the simulation results of the proposed scheme, followed by the conclusions in Section VI.

The following notation will be used in this paper. Matrices, vectors and scalars are denoted by bold uppercase letters (e.g.  $\mathbf{A}$ ), bold lowercase letters (e.g.  $\mathbf{a}$ ) and lowercase letters (e.g.  $a$ ), respectively.  $(\cdot)^T$  denote transpose and  $(\cdot)^H$  denote conjugate transpose (Hermitian).  $[\mathbf{A}]_{m,:}$ ,  $[\mathbf{A}]_{:,n}$  and  $[\mathbf{A}]_{m,n}$  denote the  $m$ th row,  $n$ th column and the  $m$ th row  $n$ th column entry of  $\mathbf{A}$ , respectively.  $[\mathbf{a}]_n$  denote the  $n$ th entry of  $\mathbf{a}$ . Besides,  $\|\cdot\|_2$  denote  $\ell_2$ -norm of a vector.  $\mathbb{C}$  denote the set of complex number. Gaussian, complex Gaussian, wrapped Gaussian and exponential distribution are denoted by  $\mathcal{N}$ ,  $\mathcal{CN}$ ,  $\mathcal{WN}$  and  $\mathcal{E}$ , respectively.

## II. SYSTEM MODEL

A mmWave vehicular network scenario including a vehicle with  $M_r$  antenna elements as receiver and a base station (BS) with  $M_t$  antenna elements as transmitter is considered. Both of them equip with uniform linear array (ULA) of half-wave interval antenna as shown in Fig. 1, and adopted analog beamforming based on quantized phase shifter which connect with single analog RF chain. The array response vector of a ULA with  $M$  half-wave interval antenna elements is given by:

$$\mathbf{a}(M, \varphi) = \frac{1}{\sqrt{M}} [1, e^{j\pi \cos(\varphi)}, \dots, e^{j\pi(M-1)\cos(\varphi)}]^T \quad (1)$$

where  $\varphi$  is the arrival angle of the signal. When AoA of the vehicle is  $\phi$  and AoD of the BS is  $\theta$ , the array response vectors of both are  $\mathbf{a}_r(\phi) = \mathbf{a}(M_r, \phi)$  and  $\mathbf{a}_t(\theta) = \mathbf{a}(M_t, \theta)$ , respectively.

A statistical 28 GHz mmWave channel model in [12] is used, which is modeled by real experimental data collected in New York City. The narrowband time-varying  $L$  subpaths

channel matrix between the vehicle and BS at  $n$ th time step is  $\mathbf{H}_n \in \mathbb{C}^{M_r \times M_t}$ , which is given as:

$$\mathbf{H}_n = \frac{1}{\sqrt{L}} \sum_{l=1}^L g_{ln} \mathbf{a}_r(\phi_{ln}) \mathbf{a}_t^H(\theta_{ln}) \quad (2)$$

where  $g_{ln} \in \mathbb{C}$  is complex small-scale fading gain on subpath  $l$  at  $n$ th time step,  $\phi_{ln}$  and  $\theta_{ln}$  are the AoA and AoD of the  $l$ th subpath at  $n$ th time step, respectively.  $\phi_{ln} = \phi_n + \Delta\phi_{ln}$  and  $\theta_{ln} = \theta_n + \Delta\theta_{ln}$ , where  $\phi_n$  and  $\theta_n$  is the AoA and AoD of the cluster center at  $n$ th time step,  $\Delta\phi_{ln} \sim \mathcal{WN}(\delta_{rn}^2)$ ,  $\Delta\theta_{ln} \sim \mathcal{WN}(\delta_{tn}^2)$ ,  $\delta_{tn} \sim \mathcal{E}(\lambda_t)$  and  $\delta_{rn} \sim \mathcal{E}(\lambda_r)$ .  $\lambda_t$  and  $\lambda_r$  are root-mean-square (RMS) angular spread of transmitter and receiver, respectively. The complex small-scale fading gain is given by:

$$g_{ln} = \bar{g}_{ln} e^{j2\pi t_n f_{Dn,max} \cos(\omega_{ln})}, \bar{g}_{ln} \sim \mathcal{CN}(0, 10^{-0.1PL_n}) \quad (3)$$

where  $t_n$  is the signal transmission time at  $n$ th time step,  $f_{Dn,max} = v_n/\lambda_c$  is maximum Doppler shift at  $n$ th time step,  $v_n$  is the speed of vehicle at  $n$ th time step,  $\lambda_c$  is the carrier wavelength,  $\omega_{ln} = \phi_{ln} - \pi/2$  is the AoA of subpath  $l$  relative to the direction of vehicle at  $n$ th time step, and  $PL_n$  is omnidirectional path loss at  $n$ th time step, which is defined as:

$$PL_n = 61.4 + 20 \log(d_n) + \xi \text{ [dB]} \quad (4)$$

where  $d_n$  is distance between the vehicle and the BS at  $n$ th time step, and  $\xi \sim \mathcal{N}(0, \sigma_p^2)$ . Note that only the case of single cluster under line-of-sight (LOS) condition is considered in this paper, and the cluster angle depends on the geometric position of the vehicle and the BS.

For a transmitted signal  $x_n$  from the BS, received signal  $y_n$  in the vehicle at  $n$ th time step is:

$$y_n = \mathbf{w}_n^H \mathbf{H}_n \mathbf{f}_n x_n + \mathbf{w}_n^H \mathbf{v}_n \quad (5)$$

where  $\mathbf{w}_n$  and  $\mathbf{f}_n$  are combining vector and beamforming vector at  $n$ th time step, respectively.  $\mathbf{v}_n$  is Gaussian noise at time step  $n$  and  $\mathbf{v}_n \sim \mathcal{CN}(0, \sigma_v^2 \mathbf{I}_{M_r})$ .

## III. LSTM-BASED BEAM TRACKING SOLUTION

### A. The LSTM Network

The purpose of beam tracking is to obtain beam angles with as few beam measurements as possible for reducing the overhead brought by beam alignment. Since the vehicle must travel in a particular direction on the road and the mmWave beams are correlated with the position of vehicles, the problem of beam tracking can be formulated as a time series regression problem after the historical beam angles of vehicles is collected.

An artificial neural network named LSTM network is used to solve this regression problem. It has been implemented successfully in several fields such as machine translation, image captioning, speech recognition, and even stock prices prediction in economy. As one of the recurrent neural networks (RNNs), LSTM is generally considered to be more robust to long time series than simpler vanilla RNN implementations

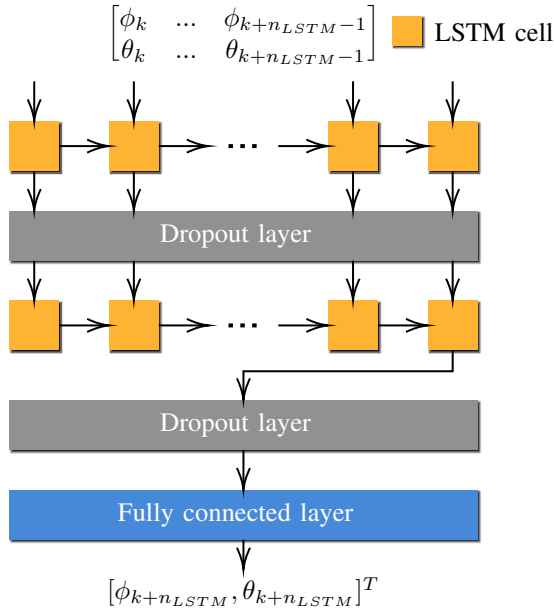


Fig. 2. Structure of network

[13]. It is powerful for handling time series data and learning long-term relations between features, relying on three gates which are forget, input and output gates composed of neural networks (NNs) in LSTM cells.

Fig. 2 shows the structure of the network, which is a sequential model comprises two LSTM layers with 50 hidden units, two dropout layers with 0.2 probability and a fully connected layer with 2 nodes. The output of the first LSTM layer is a sequence of length  $n_{LSTM}$ , which is used as the input of the second LSTM layer. And two dropout layers are set to prevent overfitting.

### B. Loss Function

Mean Square Error (MSE) is the most commonly used regression loss function for quantifying the error of prediction. In [14], considering the problem of angle ambiguity due to the periodicity of the beam angle results in unnecessary loss for large difference of beam angle when used MSE, D. Burghal et al. proposed to use a shifted cosine function as the loss function. However, when using this loss function, the training process may be unstable due to the multiple global minima, and the responses may not converge in a reasonable interval.

In addition, another problem is that the codewords whose beam angle near 0 or  $\pi$  have close gains at two different angles, resulting in unnecessary loss in some cases, as shown in Fig. 3. For instance, in the case of the codeword whose beam angle is  $\pi$ , there are same gains at 0 and  $\pi$ . The loss should be small, even zero, if estimated angle is 0 and predicted angle is  $\pi$ , although the absolute difference of them is  $\pi$ . A straightforward idea is taking  $1 - |\mathbf{a}^H(M, \theta^e) \mathbf{a}(M, \theta^p)|$  as the loss. Calculating this loss, however, requires array response vectors of estimated angle and predicted angle at the corresponding time step, which will increase the computational

cost when training network. On the other hand, considering it is a complex function, it will be difficult to perform backpropagation (BP).

Hence, to avoid the problem of angle ambiguity, the AoAs and AoDs are limited in  $(0, \pi]$  by simple conversion before training. And considering complexity of computation, a modified MSE is used as loss function, which is given as:

$$Loss = \frac{1}{N} \sum_{i=1}^N [(\phi_i^p - \phi_i^e)^2 + (\theta_i^p - \theta_i^e)^2] \quad (6)$$

where  $N$  is the number of training samples,  $\phi_i^e$ ,  $\theta_i^e$ ,  $\phi_i^p$ ,  $\theta_i^p$ , are the estimated AoA, estimated AoD, predicted AoA, and predicted AoD, respectively, for training sample  $i$ .

### C. Procedure of Beam Tracking

Before exploiting the LSTM network for beam tracking, the BS demands to collect historical beam angles, which are estimated by the vehicle using exhaustive beam search, for training the LSTM network. At time step  $k$ , the network takes the AoAs and AoDs from time step  $k - n_{LSTM}$  to  $k - 1$  as features and the AoA and AoD at time step  $k$  as responses. The dataset is consisted of time series AoAs and AoDs of the vehicle from initial access to disconnection.

After the LSTM network has been trained, the vehicle takes exhaustive beam searches in consecutive  $n_{LSTM}$  time steps to obtain initial estimated AoAs and AoDs at the beginning of a round of beam tracking. The network will take the initial estimated AoAs and AoDs to predict AoA and AoD at next time step. Then, the predicted AoA and AoD at  $k$ th time steps and the AoAs and AoDs from  $k - n_{LSTM} + 1$ th to  $k - 1$ th time step of last feature will be used to compose new feature.

Once the predicted AoA and AoD are obtained, the codewords whose steering angle closest to the predicted beam angles will be taken as beamforming and combining vectors. For every time step, SNR under current prediction will be calculated and compared with a threshold  $SNR_T$ . The

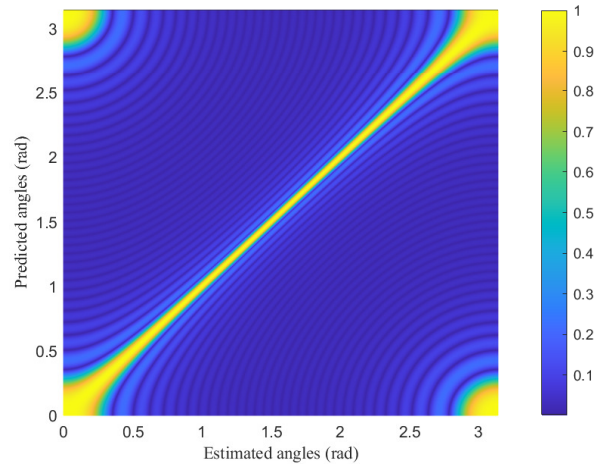


Fig. 3. Heatmap of  $|\mathbf{a}^H(16, \theta^e) \mathbf{a}(16, \theta^p)|$

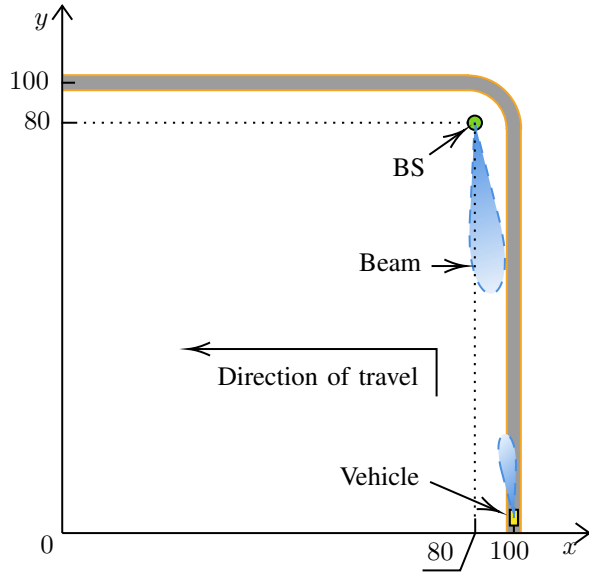


Fig. 4. Scene of mmWave vehicular networks for data generation

network will repeat to use predicted result to compose new features to predict AoA and AoD at next time step, when the calculated SNR is greater than  $SNR_T$ . Otherwise, a new round of estimation and prediction will be executed.

It makes more sense to take the SNR of received signal rather than the absolute difference between predicted and estimated angles as a threshold, because there is no way to obtain a precise beam angle for judgment until it is accurately measured or predicted.

#### IV. DATA GENERATION

##### A. Channel Matrix

A road traffic simulation software named “SUMO” is used to generate time series information of the vehicle in the scenario mentioned in Section II, which including a BS and a vehicle driving on road as shown in Fig. 4. The vehicle departs from (0, 100) at first time step, and arrives (100, 0) at final time step. Note that the speed of vehicle is non-linear and it depends on the road conditions and behavior of the driver which is defined by SUMO.

The generated vehicle time series information is composed of position, speed  $v_n$  and directional angle  $\beta_n$  of the vehicle at each time step. For  $n$ th time step, the position of vehicle is given by  $(x_{rn}, y_{rn})$ ,  $v_n$  is used to determine maximum Doppler shift in (3), and  $\beta_n$  is used to determine  $\phi_{ln}$  and  $\omega_{ln}$ .

Once the position of the vehicle and the BS are obtained,  $\theta_n$  and  $\phi_n$  can be calculated by simple geometric methods as following:

$$\begin{cases} \theta_n = \arg(\Gamma_{xn} + j\Gamma_{yn}) \\ \phi_n = \arg(\Gamma_{xn} + j\Gamma_{yn}) - \beta_n \end{cases} \quad (7)$$

where  $\Gamma_{xn} = x_{rn} - x_t$ ,  $\Gamma_{yn} = y_{rn} - y_t$ , and  $(x_t, y_t)$  are coordinates of the BS. Furthermore, the signal transmission

time  $t_n = d_n/c$  can be calculated, where the distance between the BS and the vehicle is  $d_n = \sqrt{\Gamma_{xn}^2 + \Gamma_{yn}^2}$ , and  $c$  is light speed. Now the channel matrix at each time step can be obtained from (1), (2), (3), (4) and (7).

##### B. Beam Search

In this paper, downlink (DL) configuration scheme is considered for beam management. The beam management procedure is as follows. The reference signals are sent to the vehicle from the BS, the vehicle measures and determines the optimal beam pair for communication, then feeds back to the BS.

The AoAs and AoDs measured from exhaustive beam search scheme is used to train the network, rather than using the generated channel data directly. Although the AoAs and AoDs are in range  $[0, 2\pi]$ , only the angles in range  $(0, \pi)$  are considered, since the cosine function is symmetric around  $\pi$ . To reduce the overhead of beamforming, a discrete resolution  $b$ -bit codebook is adopted to perform beam search, where  $b$  is the number of bits for quantized phase shifters. For a  $b$ -bit codebook, it is consisted of  $2^b$  beam patterns. In this paper,  $b$  is assumed to be  $2\log_2 M$  for a  $M$ -element antenna terminal, and the candidate beam angles vector  $\mathbf{b}_M$  is given by:

$$\mathbf{b}_M = \left[ \frac{1}{2M}\pi, \frac{2}{2M}\pi, \dots, \frac{2M-1}{2M}\pi, \pi \right] \quad (8)$$

So, there are  $2M_r$  beam patterns for the vehicle, and  $2M_t$  beam patterns for the BS. Note that another codebook which achieves uniform maximum gain in all direction is not used for this solution, because its low spatial resolution near 0 and  $\pi$  resulting in network underfitting. The beam codebooks of the vehicle and the BS are:

$$\begin{aligned} \mathbf{W} &= [\mathbf{a}_r([\mathbf{b}_{M_r}]_1), \mathbf{a}_r([\mathbf{b}_{M_r}]_2), \dots, \mathbf{a}_r([\mathbf{b}_{M_r}]_{2M_r})] \\ \mathbf{F} &= [\mathbf{a}_t([\mathbf{b}_{M_t}]_1), \mathbf{a}_t([\mathbf{b}_{M_t}]_2), \dots, \mathbf{a}_t([\mathbf{b}_{M_t}]_{2M_t})] \end{aligned} \quad (9)$$

where  $\mathbf{W} \in \mathbb{C}^{M_r \times 2M_r}$  is the codebook of vehicle, and  $\mathbf{F} \in \mathbb{C}^{M_t \times 2M_t}$  is the codebook of BS. Each column of the codebook represents a beam pattern, each entry in the column is phase rotation for corresponding antenna element to generate directional beam.

Assume  $x_n = 1$  is sent as reference signal, the observation matrix comprises all measurement of exhaustive search now can be given by:

$$\mathbf{Y}_n = \mathbf{W}^H \mathbf{H}_n \mathbf{F} + \mathbf{V}_n \quad (10)$$

where  $\mathbf{V}_n \in \mathbb{C}^{2M_r \times 2M_t}$  is Gaussian noise matrix composed of independent identically distribution (i.i.d.) elements, which are the noise part of (5).  $\mathbf{Y}_n \in \mathbb{C}^{2M_r \times 2M_t}$ ,  $[\mathbf{Y}_n]_{i,j}$  is the received signal of using  $[\mathbf{W}]_{:,i}$  as combining vector and  $[\mathbf{F}]_{:,j}$  as beamforming vector.

For each time step, both of the vehicle and the BS use their codebook to perform exhaustive beam search to find the optimal beam pair. The indexes of optimal beam pair can be obtained by solving an optimization problem as following:

$$\begin{aligned} (i_n^*, j_n^*) &= \underset{i_n, j_n}{\operatorname{argmax}} \|\mathbf{Y}_n\|_{i_n, j_n} \|_2 \\ \text{s.t. } i_n &\in [1, 2M_r], \\ j_n &\in [1, 2M_t] \end{aligned} \quad (11)$$

A simple nested loop algorithm can be exploited to solve this problem. Then, at  $n$ th time step, the optimal combining vector  $\mathbf{w}_n^*$  and the optimal beamforming vector  $\mathbf{f}_n^*$  are  $\mathbf{w}_n^* = [\mathbf{W}]_{:,i_n^*}$  and  $\mathbf{f}_n^* = [\mathbf{F}]_{:,j_n^*}$ , respectively. And the estimated AoA  $\phi_n^e$  and AoD  $\theta_n^e$  used to training network are given by:

$$\begin{cases} \phi_n^e = \frac{i_n^* \pi}{2M_r} \\ \theta_n^e = \frac{j_n^* \pi}{2M_t} \end{cases} \quad (12)$$

The advantage of training with radian instead of the codeword indexes is that it allows the proposed beam tracking solution to be generalized under terminals with different antenna configuration and beamforming techniques, without additional computation and transmitted data.

Note that due to the limited resolution of the beam codebook and the noise received at the vehicle, there will be some errors for the channel estimation, which are reflected in fluctuations in the estimated time series AoAs and AoDs. To reduce the fluctuations, a first order Savitzky-Golay filter [15] with frame length 21 is used to smooth the estimated AoAs and AoDs for training the LSTM network better.

## V. SIMULATION RESULTS


In this section, the performances of proposed LSTM-based beam tracking solution are presented by analyzing the SNR of received signal, number of measurements and outage probability. The outage probability for a simulation is given by:

$$P_o = \frac{\sum_{i=1}^N \mathbf{I}(SNR_i \leq SNR_T)}{N} \quad (13)$$


where  $SNR_i$  is the SNR of received signal for the  $i$ th sample and  $\mathbf{I}$  is an indicator function.

In this paper, the sample rate of series channel data is 20 Hz (50 ms interval) and there are total 613 samples for training and 401 samples for testing. Table I shows the common simulation parameters. For each simulation, parameters default to the values in Table I, except for those mentioned specifically.

Fig. 5 demonstrates the convergence of the LSTM network. The root-mean-square error (RMSE) of the LSTM network is

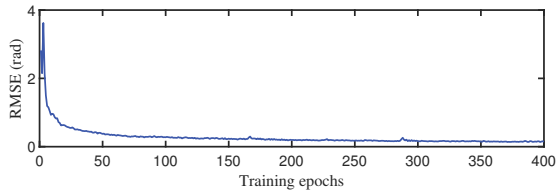

(a) RMSE of the LSTM Network

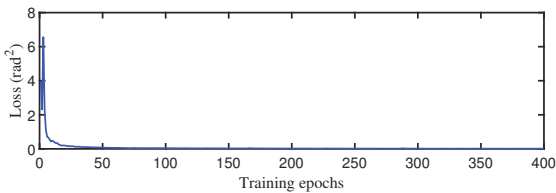

(b) Loss of the LSTM Network

Fig. 5. Convergence of the LSTM network

TABLE I  
SIMULATION PARAMETERS

Parameters	Values
Carrier frequency $f_c$	$28 \times 10^9$ Hz
Coordinates of BS $(x_t, y_t)$	(80, 80)
Number of antenna elements for BS $M_t$	16
Number of antenna elements for Vehicle $M_r$	4
Number of subpaths $L$	20
Expectation of BS RMS angular spread $\lambda_t$	$10.2^\circ$
Expectation of Vehicle RMS angular spread $\lambda_r$	$15.5^\circ$
Path loss standard deviation $\sigma_p$	5.8 dB
Noise variance of received signal $\sigma_v^2$	-140 dBW
Threshold of SNR $SNR_T$	5 dB
Lookback of LSTM $n_{LSTM}$	5
Optimizer of LSTM	Adam
Training Epochs	400
Learning rate	0.05

shown in Fig. 5(a). It is observed that the RMSE rapidly converges to about 0.4 around 50th epoch, and finally converges to about 0.2 after 400 epochs. And the loss of the LSTM network is shown in Fig. 5(b). It shows that the loss decreases sharply around 20 epochs, and converges to a small value about 0.01 after 400 epochs.

Fig. 6 shows the performances of schemes versus noise variance of received signal. The vehicle which adopts exhaustive scheme uses exhaustive search method to find the optimal beam angles at each time step. It illustrates that for both exhaustive and LSTM-based scheme, the average SNR of received signal is decreasing and the probability of outages is increasing with the increasing of  $\sigma_v^2$ . The difference in SNR between LSTM-based scheme and exhaustive scheme is small, up to about 10 dB. When  $\sigma_v^2 = -140$  dBW, there is not any outage in exhaustive scheme, and the average SNR of received signal in exhaustive scheme is 55.62 dB compared to 51.93

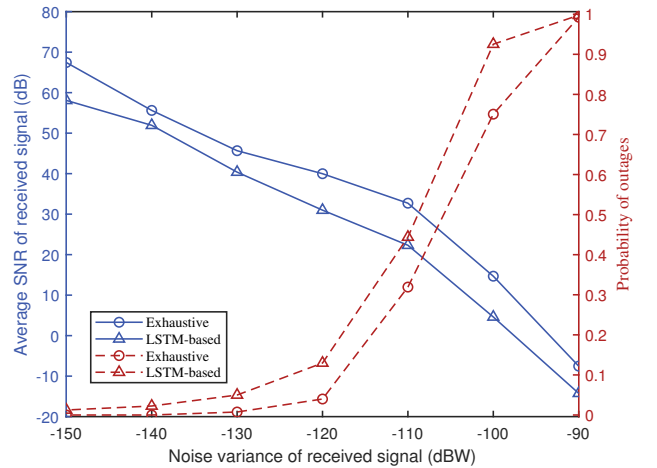


Fig. 6. Average SNR and outages probability versus  $\sigma_v^2$



TABLE II  
COMPARISONS OF THE NUMBER OF MEASUREMENTS

Schemes	Complexity	Number of Measurements
LSTM-based	$N_s + N_f M_t M_r$ <sup>1</sup>	721
Exhaustive	$N M_t M_r$	25984

<sup>1</sup>  $N_s$  is the number of successful prediction and  $N_f = N - N_s$ .

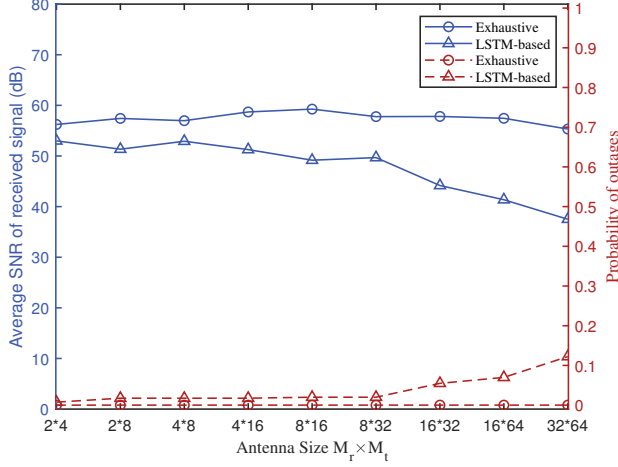


Fig. 7. Average SNR and outages probability versus  $M_t \times M_r$ .

dB in LSTM-based scheme, with a loss of only 3.69 dB in SNR, implying a loss of about 6.7% in spectral efficiency.

Table II shows the comparison of the number of measurements in different schemes. Compared with the exhaustive scheme, proposed LSTM-based scheme can reduce about 97.2% measurement overhead. Considering the significant reduction in measurement overhead, the 6.7% loss of spectral efficiency in Fig. 6 seems to be acceptable. Note that the proposed LSTM-based scheme obtain initial beam angles for prediction by exhaustive search method in this paper, and it is obvious that the measurement overhead can be further reduced by utilizing a smart beam search method (e.g. hierarchical method).

Fig. 7 shows the performances of schemes versus antenna size  $M_t \times M_r$ . It illustrates that the performances of LSTM-based scheme is decreasing with the increasing of antennas size. The reason is the beamwidths of the vehicle and the BS are so small when antenna size is large that reducing the error tolerance for prediction and making it difficult for LSTM-based scheme to accurately align with each other. It is observed that there are fluctuations in both SNR and outages probability, due to the randomness of the channel which is caused by the statistical characteristics (e.g. angular spread, noise variance, etc.) of the channel and the vehicle movement.

## VI. CONCLUSIONS

This paper studies the beam tracking problem in mmWave vehicular network with ULA. A LSTM-based beam tracking scheme is proposed to reduce the beam alignment overhead in

a common vehicular scenario. In order to train and evaluate the proposed scheme, a time series channel data is set up by statistical channel model using time series vehicle information generated from SUMO. Simulation results have verified the proposed LSTM-based scheme can reduce significant measurement overhead compared with the exhaustive scheme, while ensuring an acceptable loss in spectral efficiency.

## ACKNOWLEDGMENT

This work was supported by ...

## REFERENCES

- [1] Y. Niu, Y. Li, D. Jin, L. Su, and A. V. Vasilakos, "A survey of millimeter wave communications (mmWave) for 5G: opportunities and challenges," *Wireless Networks*, vol. 21, no. 8, pp. 2657–2676, 2015. [Online]. Available: <http://dx.doi.org/10.1007/s11276-015-0942-z>
- [2] H. Zhao, R. Mayzus, S. Sun, M. Samimi, J. K. Schulz, Y. Azar, K. Wang, G. N. Wong, F. Gutierrez, and T. S. Rappaport, "28 GHz millimeter wave cellular communication measurements for reflection and penetration loss in and around buildings in New York city," *IEEE International Conference on Communications*, no. Icc, pp. 5163–5167, 2013.
- [3] R. W. Heath, N. Gonzalez-Prelcic, S. Rangan, W. Roh, and A. M. Sayeed, "An Overview of Signal Processing Techniques for Millimeter Wave MIMO Systems," *IEEE Journal on Selected Topics in Signal Processing*, vol. 10, no. 3, pp. 436–453, 2016.
- [4] J. Mercy Sheeba and S. Deepa, "Beamforming Techniques for Millimeter Wave Communications - A Survey," *Lecture Notes on Data Engineering and Communications Technologies*, vol. 35, no. 2, pp. 1563–1573, 2020.
- [5] M. Giordani, M. Polese, A. Roy, D. Castor, and M. Zorzi, "A tutorial on beam management for 3GPP NR at mmwave frequencies," *IEEE Communications Surveys and Tutorials*, vol. 21, no. 1, pp. 173–196, 2019.
- [6] S. Noh, M. D. Zoltowski, and D. J. Love, "Multi-Resolution Codebook and Adaptive Beamforming Sequence Design for Millimeter Wave Beam Alignment," *IEEE Transactions on Wireless Communications*, vol. 16, no. 9, pp. 5689–5701, 2017.
- [7] C. Zhang, D. Guo, and P. Fan, "Tracking angles of departure and arrival in a mobile millimeter wave channel," *2016 IEEE International Conference on Communications, ICC 2016*, 2016.
- [8] V. Va, H. Vikalo, and R. W. Heath, "Beam tracking for mobile millimeter wave communication systems," *2016 IEEE Global Conference on Signal and Information Processing, GlobalSIP 2016 - Proceedings*, no. 1, pp. 743–747, 2017.
- [9] J. Lee, G. T. Gil, and Y. H. Lee, "Exploiting spatial sparsity for estimating channels of hybrid MIMO systems in millimeter wave communications," *2014 IEEE Global Communications Conference, GLOBECOM 2014*, pp. 3326–3331, 2014.
- [10] J. C. Aviles and A. Kouki, "Position-aided mm-wave beam training under NLOS conditions," *IEEE Access*, vol. 4, pp. 8703–8714, 2016.
- [11] Y. Wang, A. Klautau, M. Ribero, M. Narasimha, and R. W. Heath, "MmWave Vehicular Beam Training with Situational Awareness by Machine Learning," *2018 IEEE Globecom Workshops, GC Wkshps 2018 - Proceedings*, pp. 87479–87493, 2019.
- [12] M. R. Akdeniz, Y. Liu, M. K. Samimi, S. Sun, S. Rangan, T. S. Rappaport, and E. Erkip, "Millimeter wave channel modeling and cellular capacity evaluation," *IEEE Journal on Selected Areas in Communications*, vol. 32, no. 6, pp. 1164–1179, 2014.
- [13] S. Hochreiter and J. Schmidhuber, "Long Short-Term Memory," *Neural Computation*, 1997.
- [14] D. Burghal, N. A. Abbasi, and A. F. Molisch, "A Machine Learning Solution for Beam Tracking in mmWave Systems," *Conference Record - Asilomar Conference on Signals, Systems and Computers*, vol. 2019-Novem, pp. 173–177, 2019.
- [15] A. Savitzky and M. J. Golay, "Smoothing and Differentiation of Data by Simplified Least Squares Procedures," *Analytical Chemistry*, 1964.