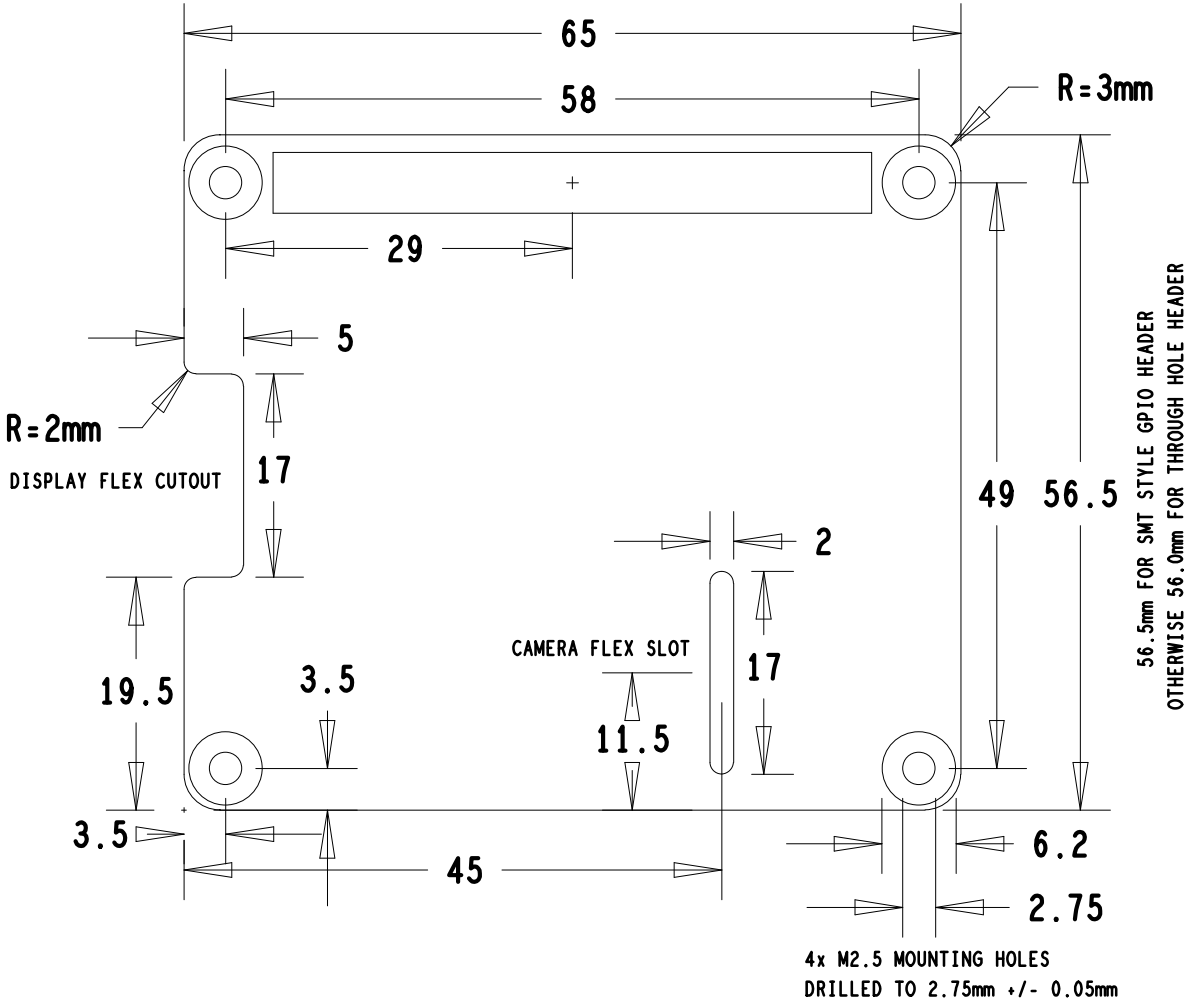# RASPBERRY PI HAT BOARD SPECIFICATION (c) Raspberry Pi 2014

65

58

R=3mm

29

NOTES:
  CAMERA FLEX SLOT AND DISPLAY FLEX CUTOUT
  ARE OPTIONAL (BUT RECOMMENDED)

5

R=2mm

DISPLAY FLEX CUTOUT

17

56.5mm FOR SMT STYLE GPIO HEADER
OTHERWISE 56.0mm FOR THROUGH HOLE HEADER

49   56.5

2

19.5   3.5

CAMERA FLEX SLOT

17

11.5

3.5

6.2

45

2.75

4x M2.5 MOUNTING HOLES
DRILLED TO 2.75mm +/- 0.05mm