




3d bar chart:

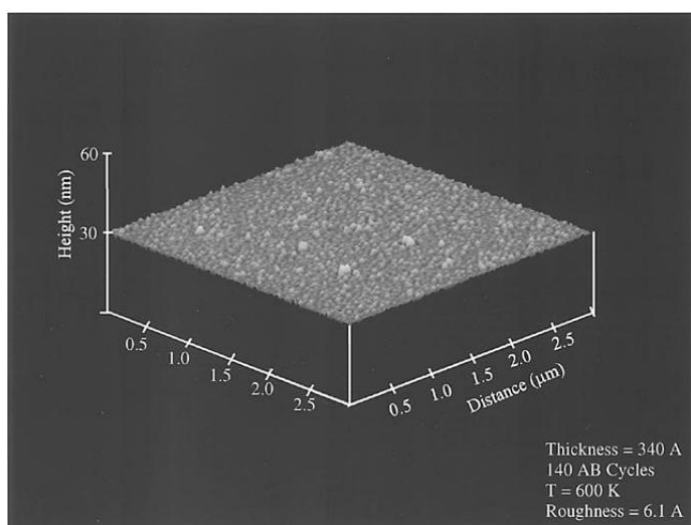


apparatus diagram:

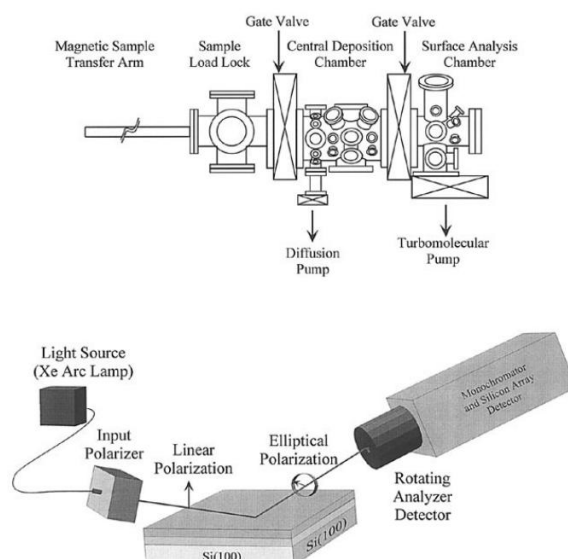


area chart:

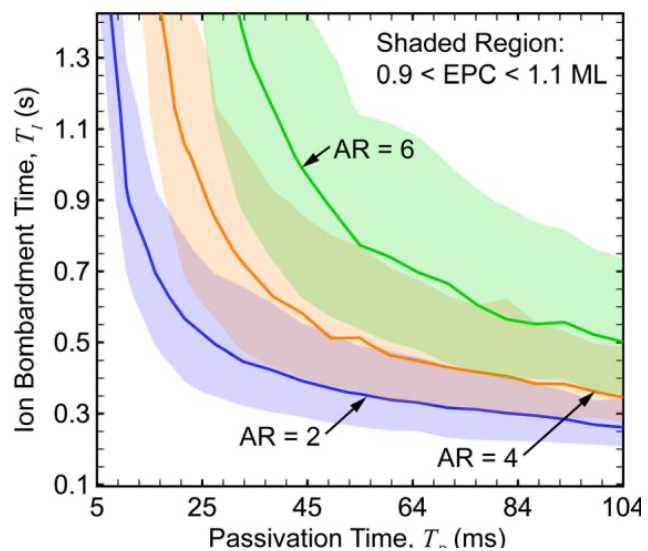


band diagram:

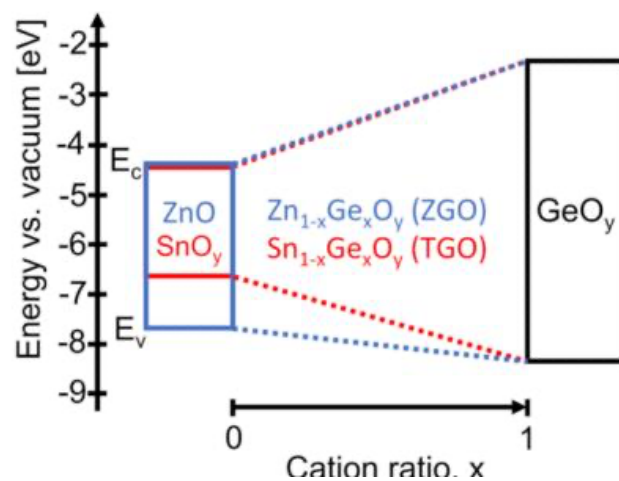


bar chart:

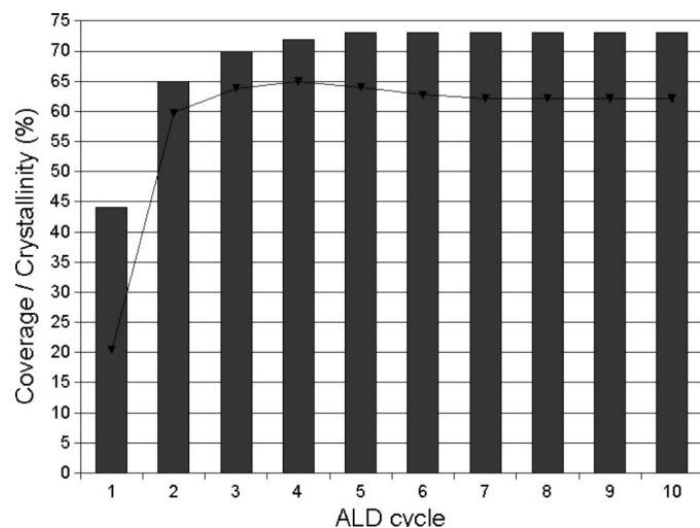


box plot:

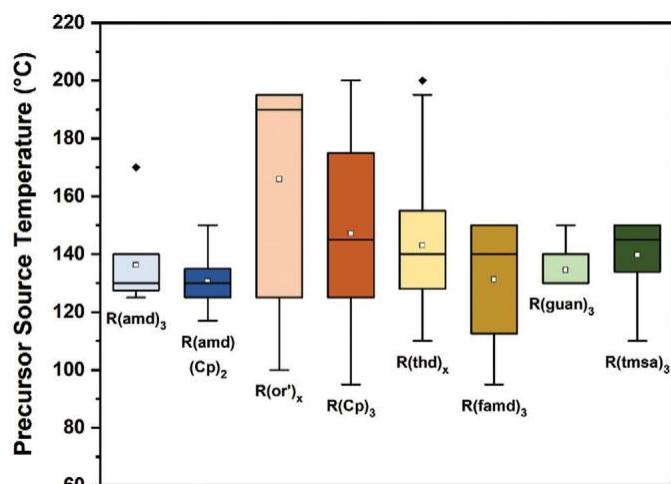


chromaticity diagram:

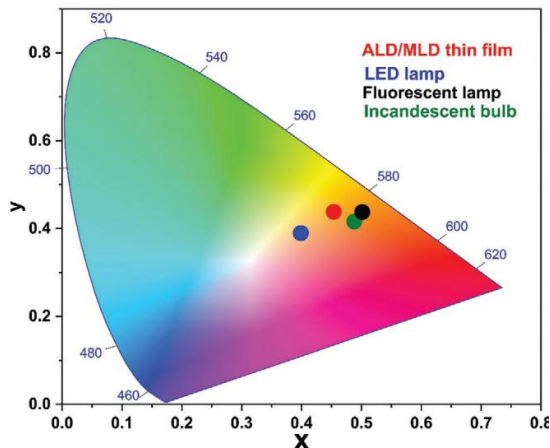


conceptual diagram:

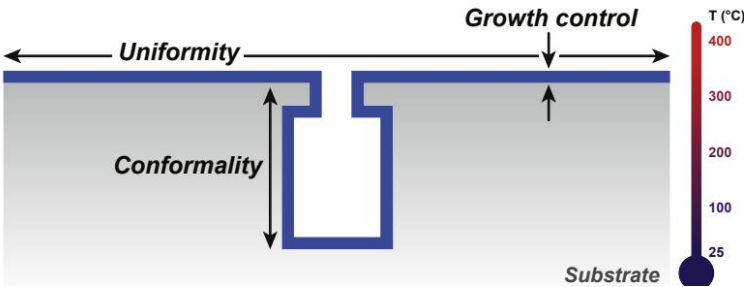

contour heatmap:

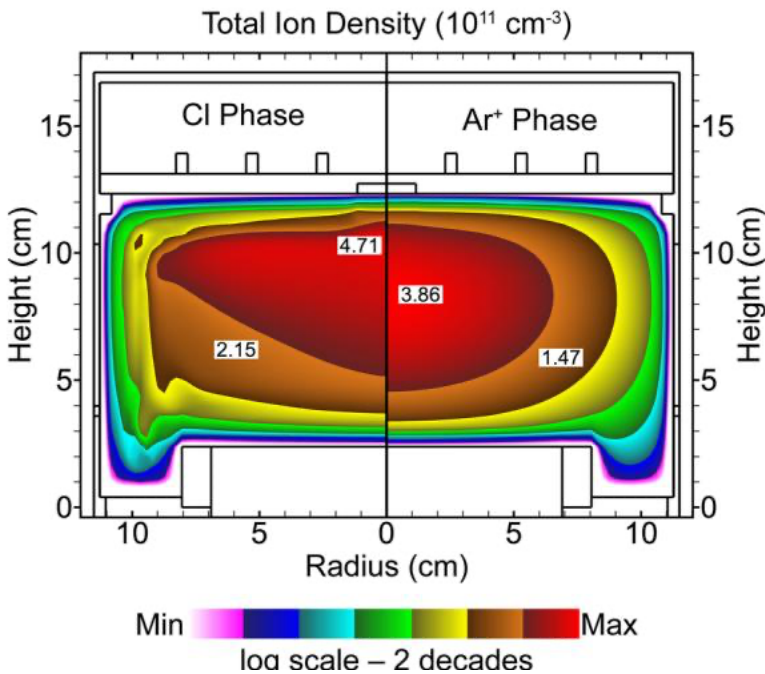


device structure:

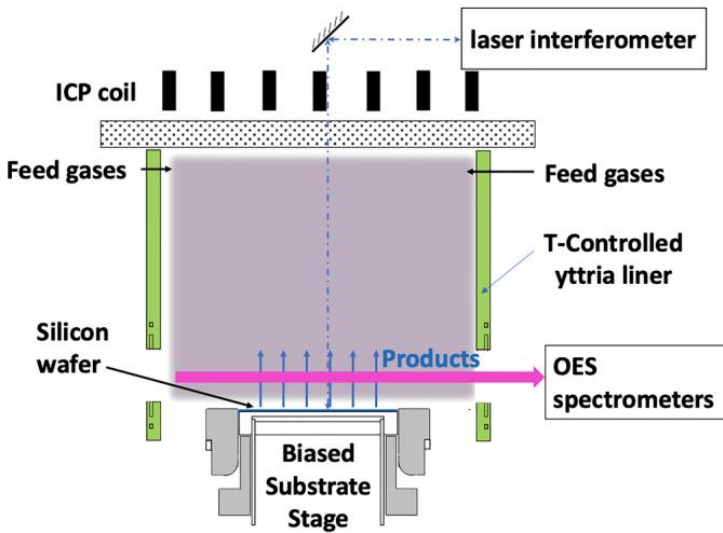

formula:

$$\pi_1 = \frac{1}{1 + \frac{c_2}{c_1}},$$
$$\pi_2 = \frac{\frac{c_2}{c_1}}{1 + \frac{c_2}{c_1}}.$$

grouped bar chart:

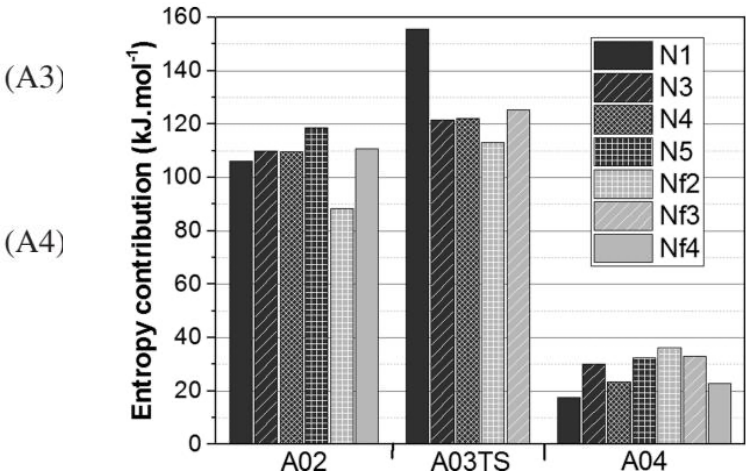

heatmap:



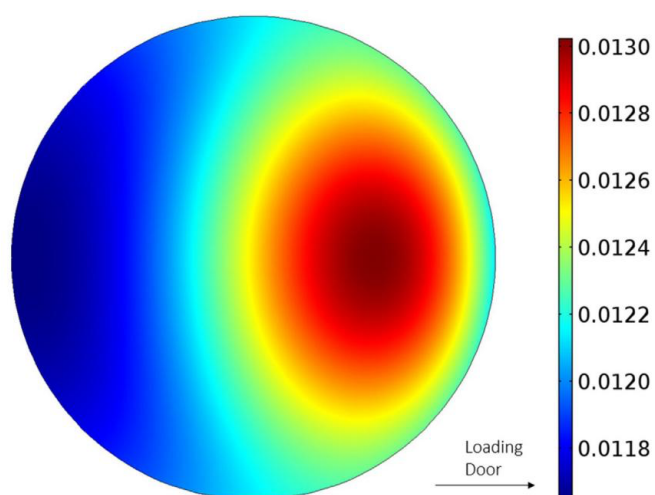



image panel:

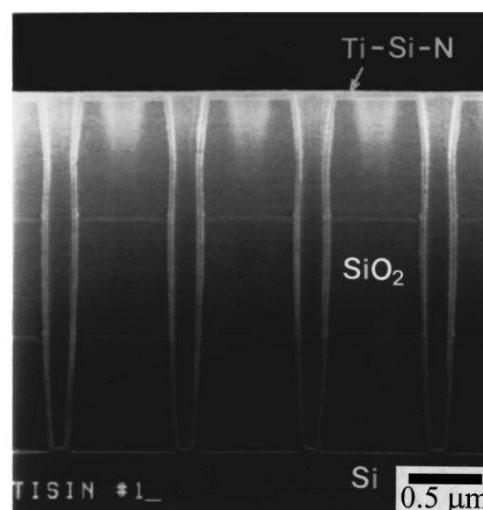


line chart:

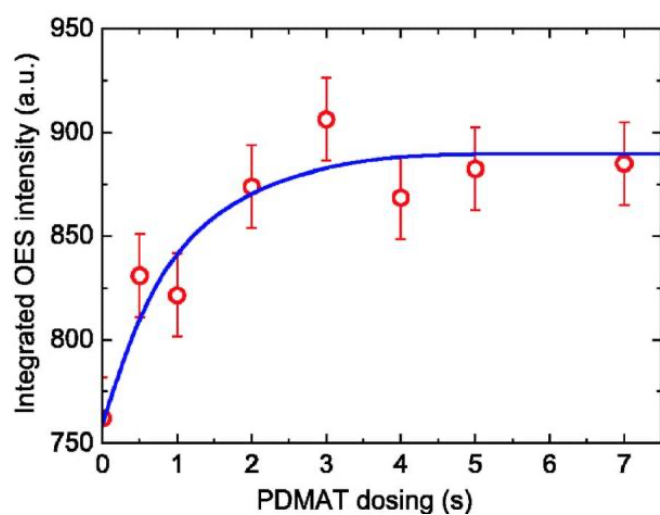


molecular structure diagram:

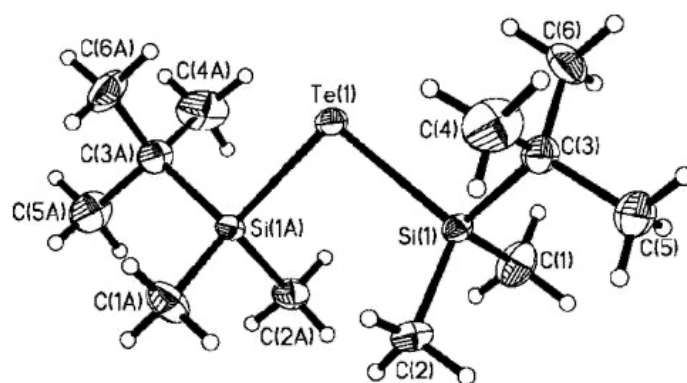


multi spectra chart:

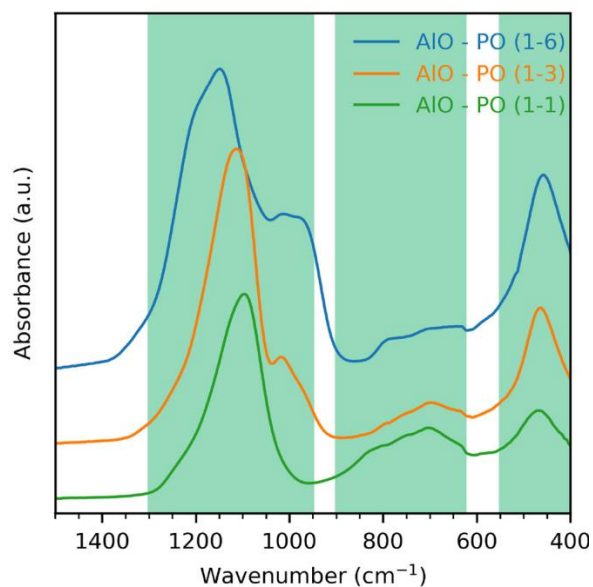


multi-axis chart:

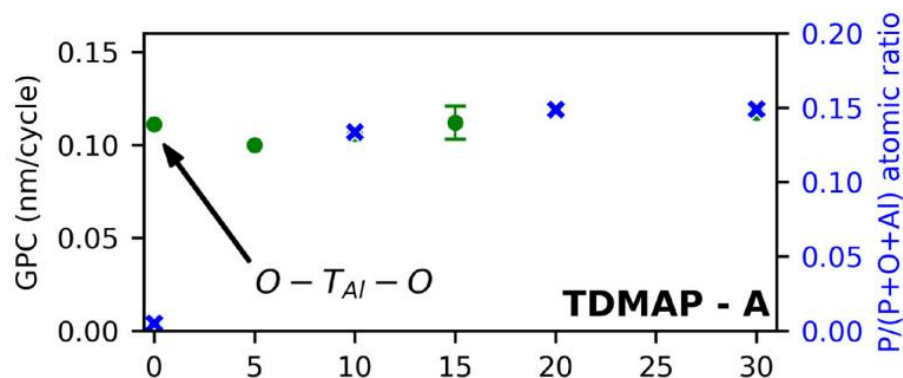


multiple line chart:

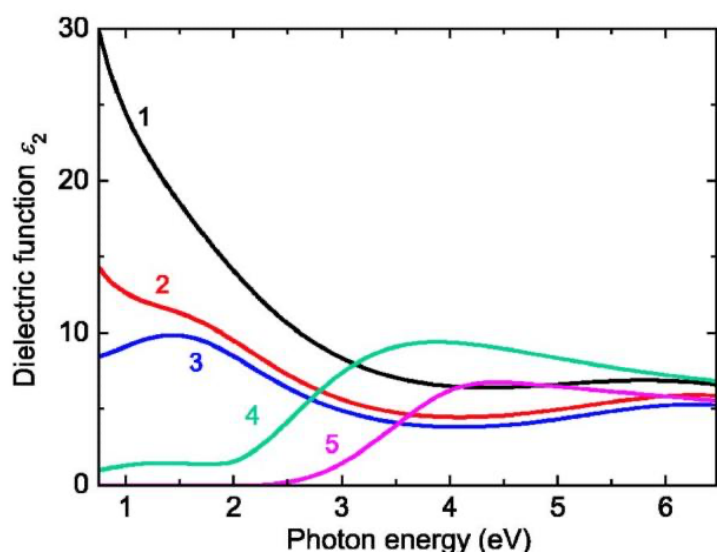


multiple scatter plot:

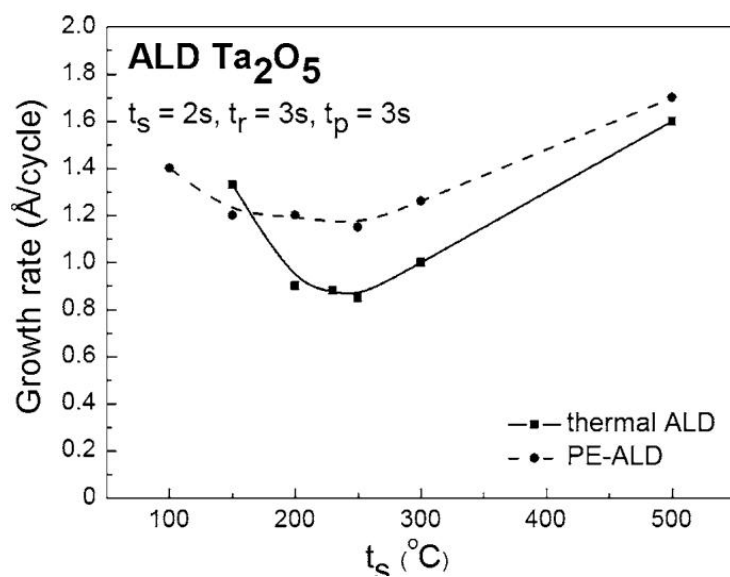


periodic table map:

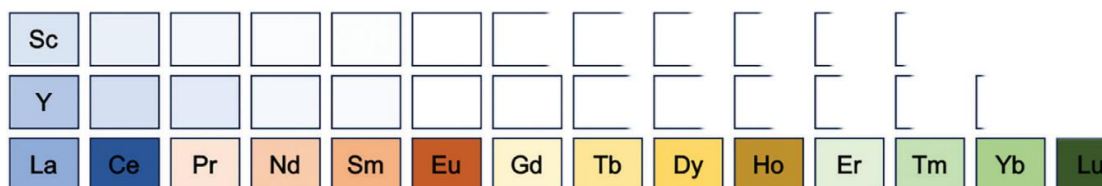


phase diagram:

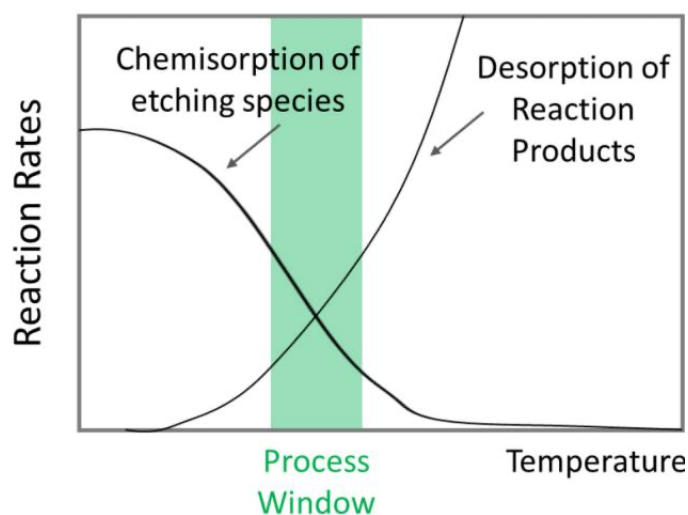


pie chart:

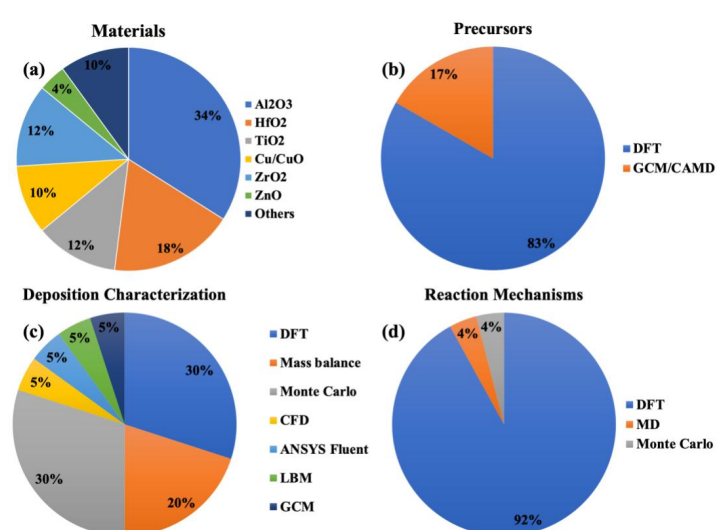


polar chart (rose chart):

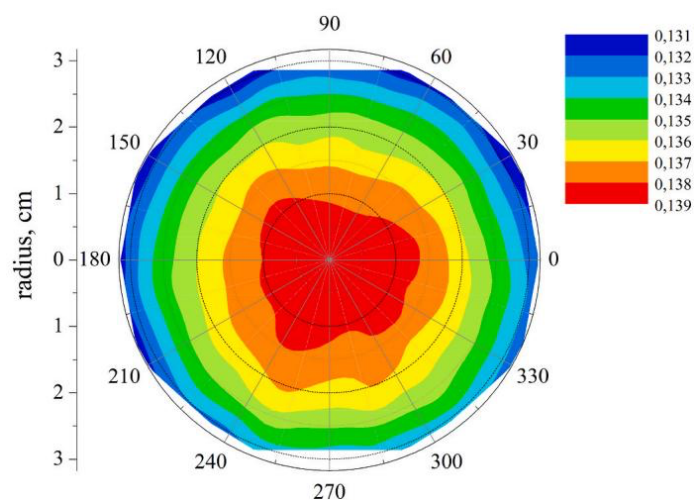


process flow diagram:

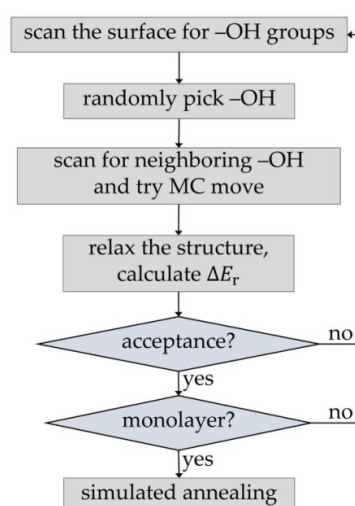


process timing diagram:

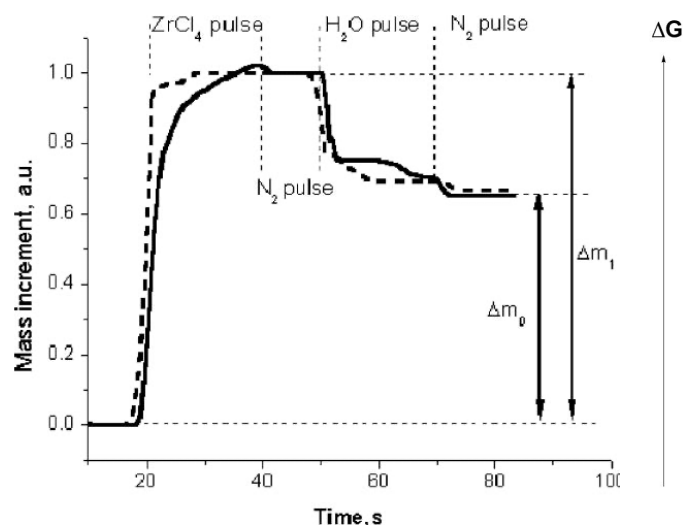


reaction energy profile diagram:

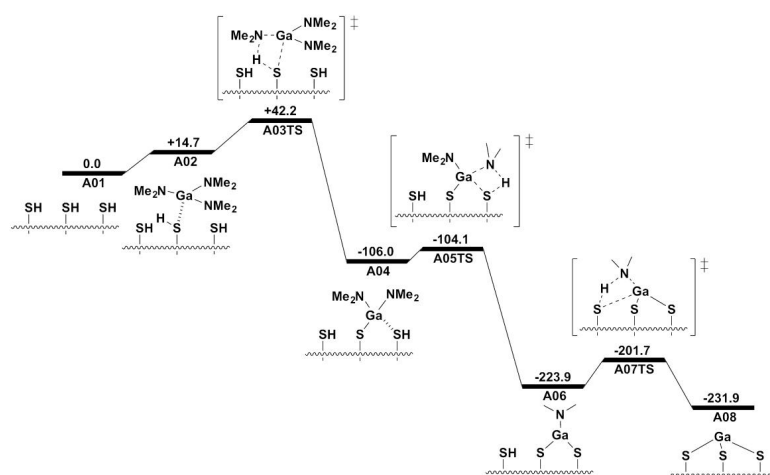


reaction scheme:

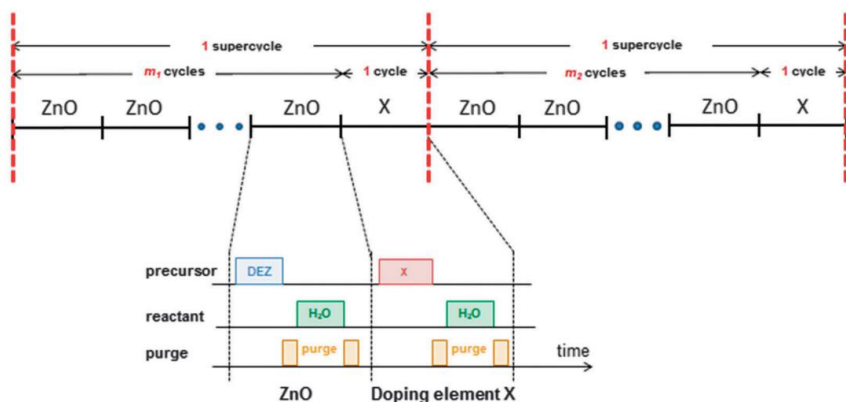


scatter plot:

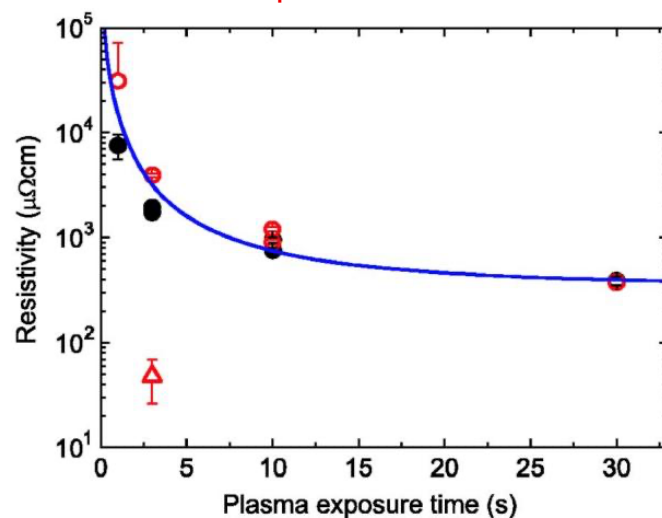

spectra chart:

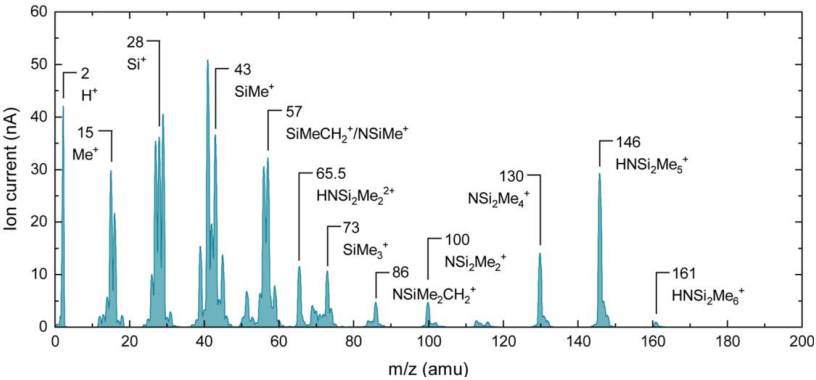

stacked bar chart:

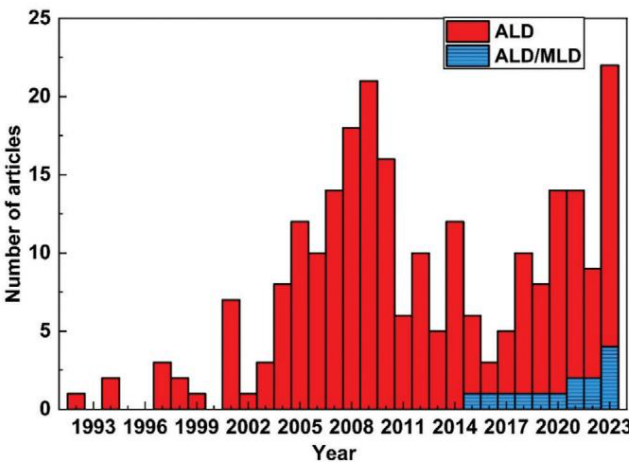

stacked spectra chart:


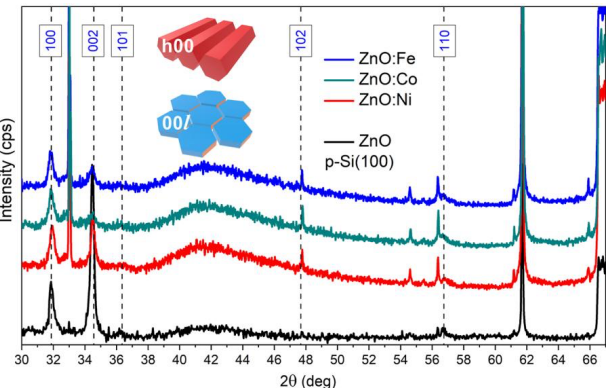


table:


material	metal precursor/evaporation temperature	growth temperature (°C)	growth rate by EDX (Å/cycle)	composition by EDX
ZnTe	ZnCl ₂ /360 °C	400	0.61 ± 0.05	Zn 47%, Te 53%
Bi ₂ Te ₃	BiCl ₃ /140 °C	165	1.21 ± 0.08	Bi 40%, Te 60%
ZnSe	ZnCl ₂ /360 °C	400	0.55 ± 0.04	Zn 48%, Se 50%, Te 2% ^b
Bi ₂ Se ₃	BiCl ₃ /140 °C	165	0.97 ± 0.07	Bi 41%, Se 59%
In ₂ Se ₃	InCl ₃ /285 °C	295	0.55 ± 0.04	In 41%, Se 59%
CuSe	Cu(II) pivalate/155 °C	165	0.63 ± 0.06	Cu 50%, Se 50%
Cu ₂ Se	Cu(II) pivalate/165 °C	200	0.48 ± 0.05	Cu 61%, Se 39%
Cu ₂ Se	Cu(II) pivalate/165 °C	300	0.16 ± 0.03	Cu 69%, Se 31%
Cu ₂ Se	CuCl/350 °C	400		

timeline chart:


(b)

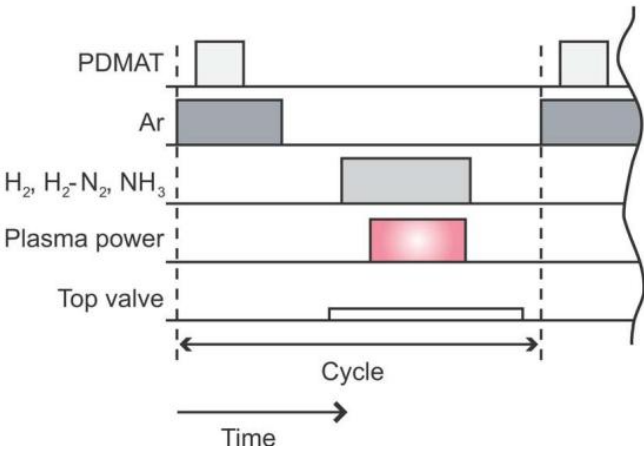


unknown:

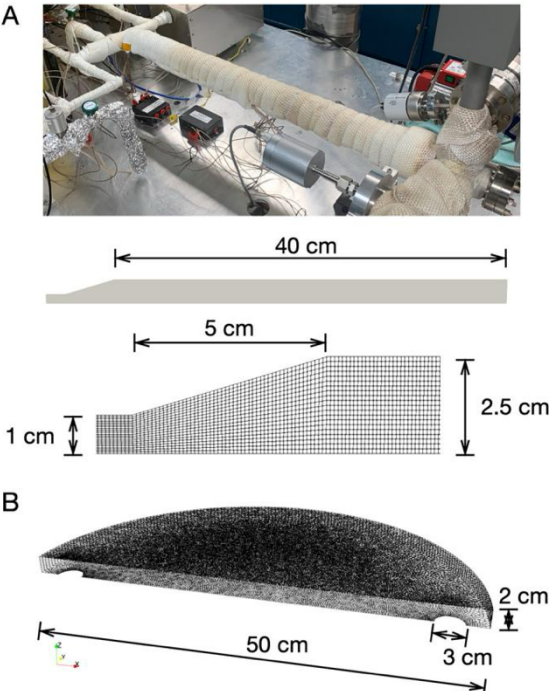


workflow diagram:

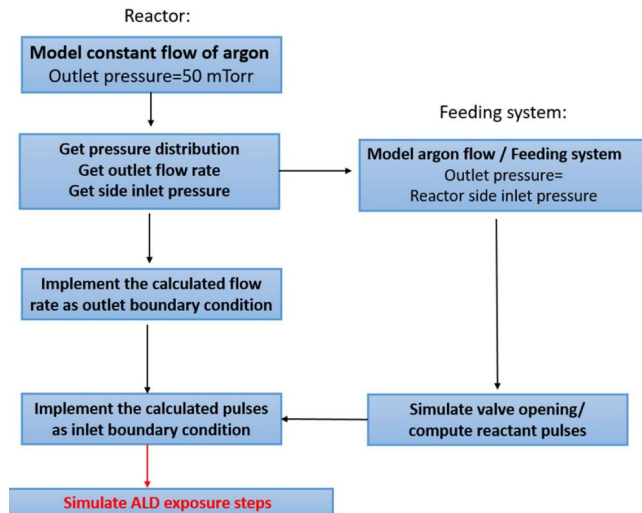


tree diagram:

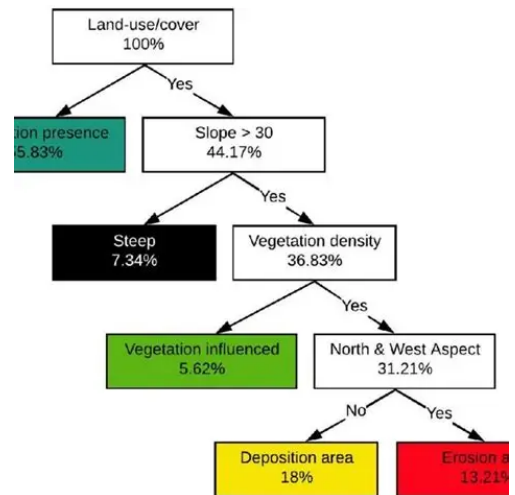

treemap:

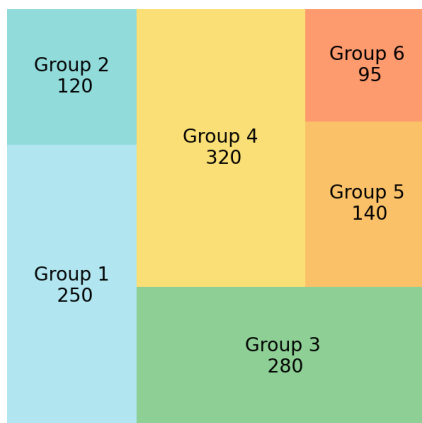


bubble chart:

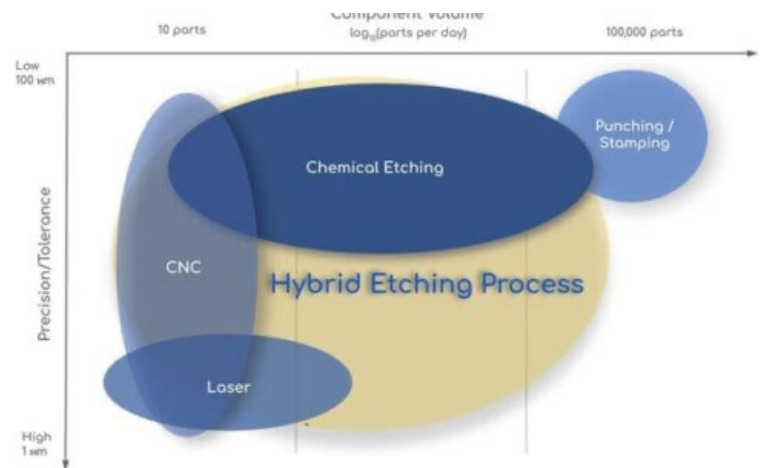


comparison table:

	Sputtering	CVD and MOCVD	Laser ablation	MBE	Sol-gel	FCVA
Epitaxial growth	Possible	Yes	Yes	Highly	Difficult	Possible
Deposition rate	Medium (a few nm/s)	Low (0.2 to a few nm/s)	Low (0.1 to 0.4 nm/s)	Very low	High	High (0.2–15 nm/s)
Compatibility with MEMS processing	Good	Ok	Poor	Poor	Good	Poor
Temperature	25–400 °C	300–900 °C	200–600 °C	300–800 °C	Room temperature	Low
Quality	Good	Good	Good	Excellent	Poor	Good
Cost	Slightly cost	Medium	Medium	High	Cheap	Medium
Deposition size	Large area	Large area	Small size	Medium	Large area	Small size

3d scatter plot:

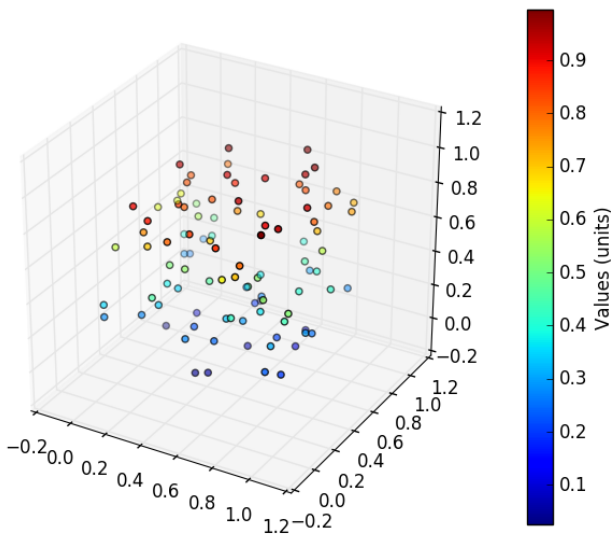


adsorption isotherm:

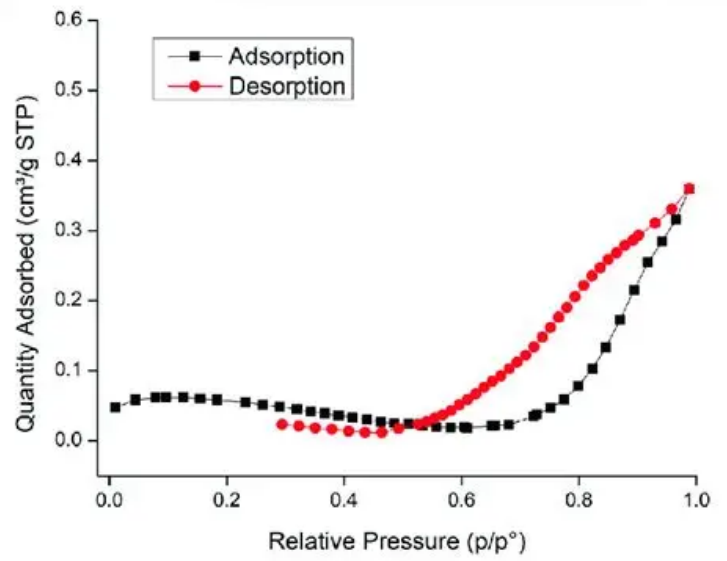


element–property matrix:

Sample (GaAs)	Etching parameters	
	Current density (mA/cm ²)	Etching time (min)
Sample 1	30	5
Sample 2	30	15
Sample 3	60	15


funnel chart:

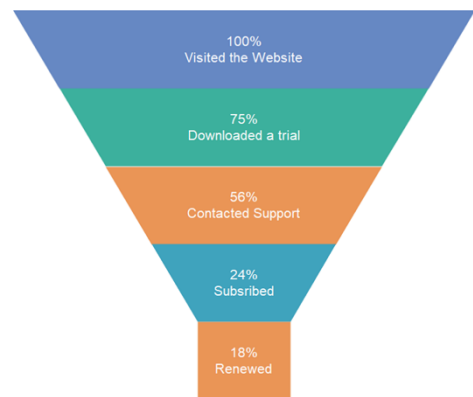


competing reaction rate curve:

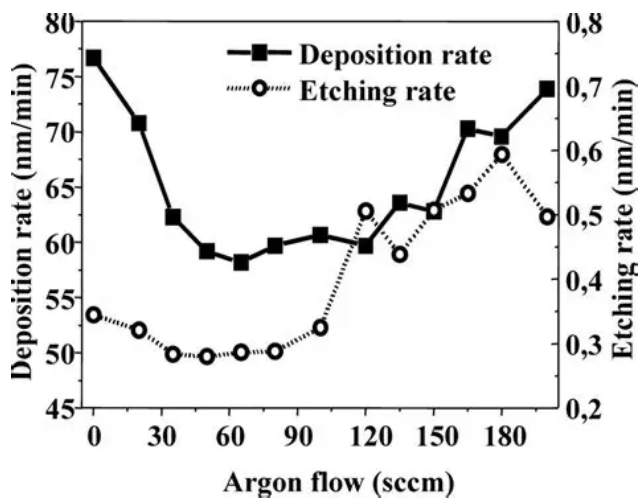


donut chart:

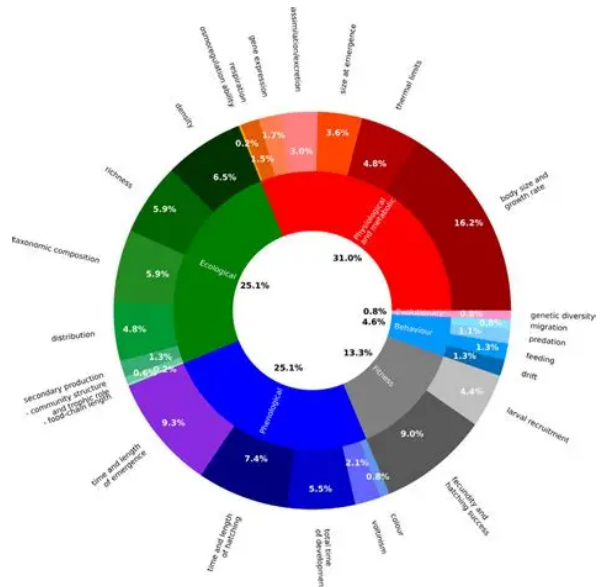

map/geo chart:

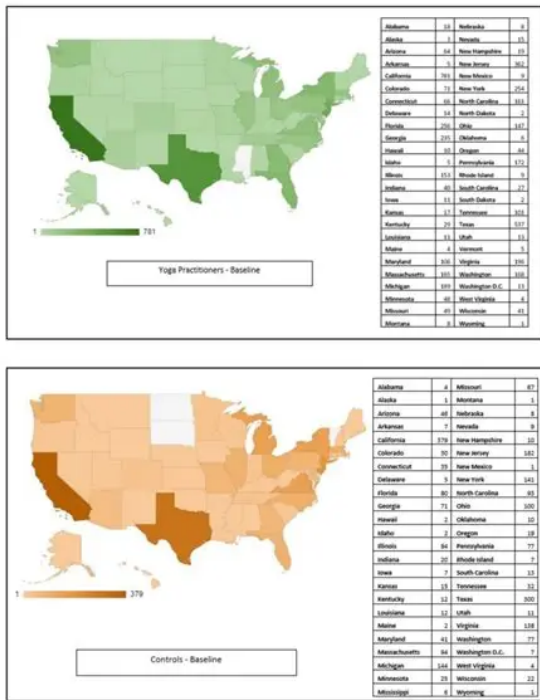

network diagram:

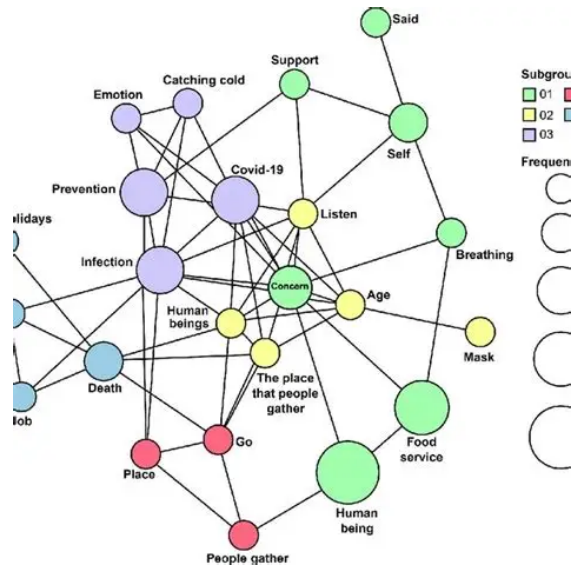

radar chart (spider chart):

