
TAXELSCAN / REV 4

32 x 32 matrix > two sense banks > RP2354A internal 12-bit ADC > RS-485 harness


01 ROW EXCITATION

MCU serial stream > four latched drivers > 32-way row FFC

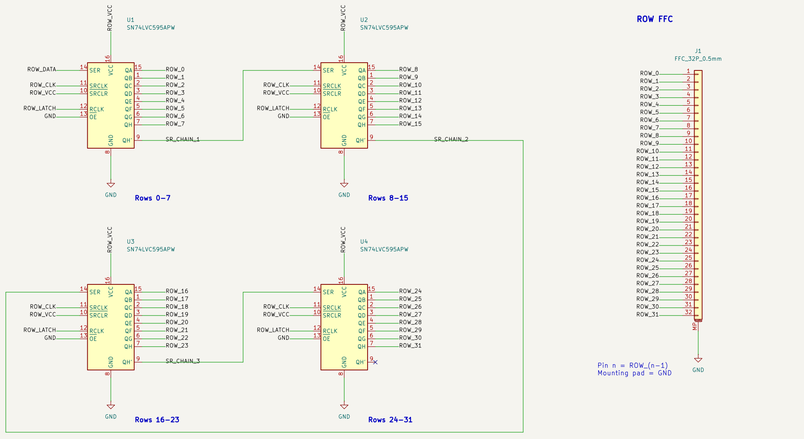

ROW FFC

Serial order: U1 > U2 > U3 > U4
Outputs enabled; unselected rows held LOW.




Clock / latch damping

Excitation rail link




U1–U4 bypass




02 COLUMN SENSING

32 columns > two 16:1 muxes > gain of 6 > filtered inputs to the MCU ADC

COLUMN FFC



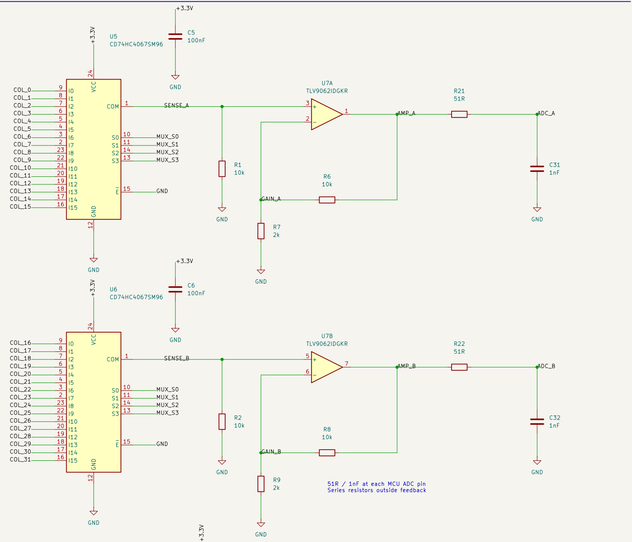

R1/R2: 10k pulldown
Rf/Rg: 10k / 2k (G = 6)


51R / 1nF at each MCU ADC pin
Series resistors outside feedback

ADC_A > U9 GPIO27 / ADC1 (pin 41)
ADC_B > U9 GPIO29 / ADC3 (pin 43)

The converter is the RP2354A (section 03). Its reference is ADC_AVDD, filtered off +3.3V by R26 / C36 (section 04); ROW_VCC is the same rail through R5, so the code stays ratiometric.

03 SCAN CONTROLLER

RP2354A / clock / core supply / local bypass

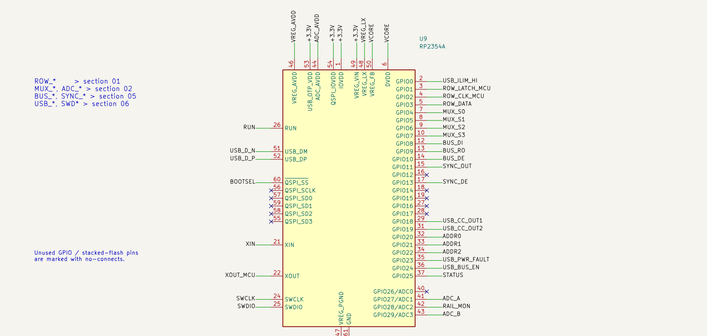


12 MHz / COG load capacitors




R36: 1k XOUT series, limits crystal drive

Core regulator / DVDD bypass

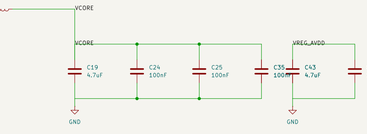


MCU 3.3 V bypass



VREG_AVDD: 33R / 4.7uF filter


04 POWER + RAIL MONITOR

Harness or USB power > diode OR > local 3.3 V buck

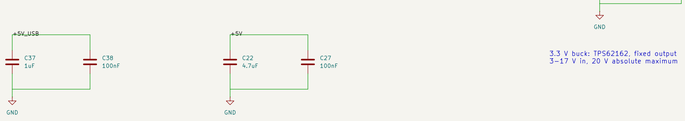

3.3 V buck: TPS62162, fixed output
3–17 V in, 20 V absolute maximum





5 V rail monitor
100k / 47k divider to MCU



MCU ADC supply and reference filter



ROW_VCC link: section 01.
ADC_AVDD is the ADC reference.
All returns use GND.

05 COMMUNICATIONS + BOARD ADDRESS


Half-duplex data pair and dedicated receive-only sync pair



DATA / half duplex


HARNESS IN

HARNESS OUT




1 +5V 2 GND 3/4 DATA P/N 5/6 SYNC P/N

R11 / R12: fit 120R only at the two harness ends.



SYNC / master drives DE (GPIO13)
R37 keeps other boards receive-only

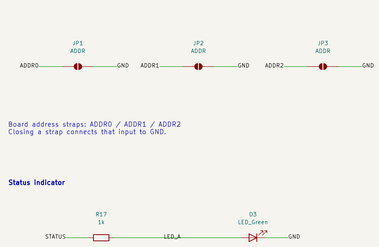

Board address straps: ADDR0 / ADDR1 / ADDR2
Closing a strap connects that input to GND.

Status Indicator

06 USB + PROGRAMMING


USB-C data / configuration straps / SWD / BOOTSEL



CC1 / CC2 terminate inside U13 (section 07).
Do not fit external 5.1k pulldowns.

RUN pull-up

D5: USB ESD, D+/D−/VBUS at the connector




BOOTSEL: series resistor limits the flash-CS stub



USB series resistors at MCU end
USB connector shell and all returns: GND

07 USB-C POWER TO THE HARNESS

Computer port current detection > firmware authorization > current limit > reverse barrier > +5V_BUS










UFP / sink only; ADDR left open selects GPIO mode.
LAI variant required: OUT1/OUT2 track current changes.

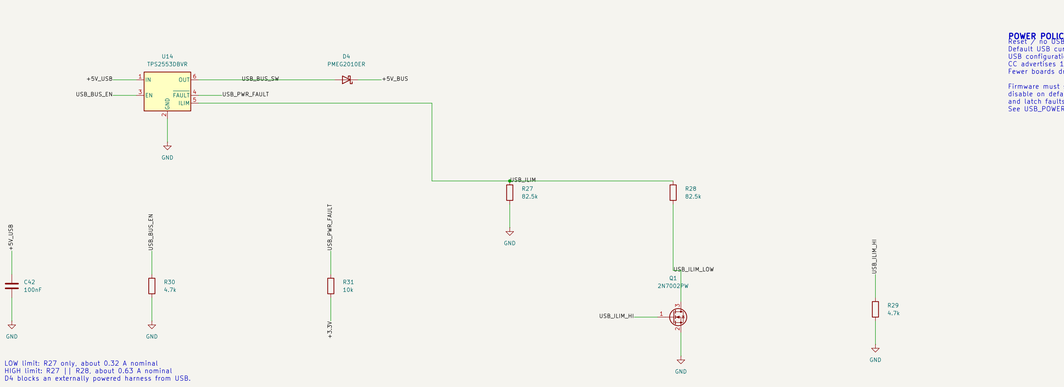

LOW limit: R27 only, about 0.32 A nominal
HIGH limit: R27 || R28, about 0.63 A nominal
D4 blocks an externally powered harness from USB.

POWER POLICY (GPIO 24 / 0 / 18 / 19 / 23)
Reset / no USB / fault: fed dim.
Default USB current: enable LOW only after USB configuration grants 500 mA.
CC advertises 1.5 A or 3 A: HIGH permitted.
Fewer boards draw less; limits do not force current.

Firmware must service CC changes promptly, disable on default-current suspend/reset, and latch faults OFF until an explicit retry.
See USB_POWER.md for budgets and bring-up.

POWER-NET DRIVE DECLARATIONS

+3.3V +5V +5V_BUS +5V_USB GND VCORE ROW_VCC ADC_AVDD VREG_AVDD

Sensor path: ROW_n > mat element > COL_n > SENSE_A/B > AMP_A/B > ADC_A/B

R1/R2 and gain-network values remain fit-on-test values from the existing design.

Reading the sheet

Matching net labels connect between sections. A dot marks a branch; an X marks an unused pin. Bypass capacitors are grouped by supply. USB attach current and the complete eight-board startup / operating budget require measurements; schematic checks cannot establish them.

3.3 V logic | USB-C data and protected chain power | SWD debug
Row drive / dual-bank sensing / RP2354A / RS-485

Sheet: /
File: rev4.kicad_sch

Title: TaxelScan | 32 x 32 sensor interface

Size: User	Date:	Rev: 3
KiCad E.D.A. 10.0.6		Id: 1/1