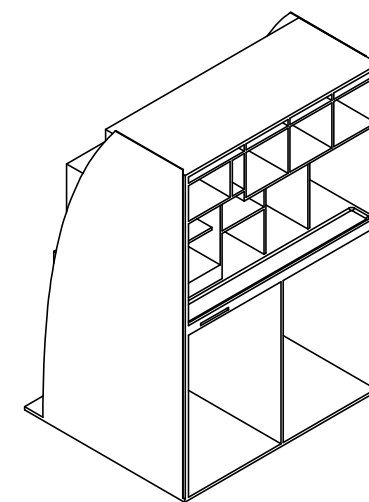


[illegible]

Architectural floor plan showing dimensions for a building layout. The plan includes a central corridor and several rooms. Key dimensions are as follows:

- Overall Dimensions:**
 - Total Width: 1449.30
 - Total Depth: 2098.00
- Room Dimensions (Approximate):**
 - Top Left Room: 313.00 x 231.00
 - Top Right Room: 312.60 x 231.00
 - Bottom Left Room: 693.40 x 1050.30
 - Bottom Right Room: 693.40 x 1050.30
- Corridor and Opening Dimensions:**
 - Central Corridor Width: 16.00
 - Top Corridor Width: 16.00
 - Bottom Corridor Width: 16.00
 - Central Opening Width: 417.00
 - Central Opening Height: 16.00
 - Bottom Opening Width: 208.50
 - Bottom Opening Height: 16.00
- Other Dimensions:**
 - Top Left Offset: 23.25
 - Top Right Offset: 312.60
 - Bottom Left Offset: 114.40
 - Bottom Right Offset: 1050.30

Architectural elevation drawing of a building facade. The drawing includes the following dimensions and annotations:

- Overall Height:** 2087.98
- Overall Width:** 562.06
- Top Right Corner:** 16.00
- Second Level Width:** 581.50
- Third Level Width:** 874.40
- Fourth Level Width:** 969.60
- Vertical Dimensions (from top to bottom):**
 - 8.00
 - 112.00
 - 196.00
 - 292.00
 - 80.00
- Horizontal Dimensions (from left to right):**
 - 100.00
 - 400.00
 - 1022.00
 - 18.69
 - 22.07
- Annotations:**
 - R20.00 (TYP)
 - 24.95
 - 1162.75

RIVET CODE		QUANTITY REQD		PART No.		DESCRIPTION		ZONE		MATERIAL & SPECIFICATION		HEAT TREAT		SURFACE TREAT		PART MARK			
BASIC CODE: DIA DASH NO MFD HEAD LOC. N=NEAR SIDE F=FAIR SIDE D X X X X X X X X SPOT WELD OPT. S=STEEL STAMP (LOC OPT) R=RUBBER STAMP (LOC OPT) C=CONTROLLED-LOCATE WHERE SHOWN THUS		GENERAL LIMITS NO DEC PL ± 0.7 ONE DEC PL ± 0.2 ANGULAR $\pm 0.30^\circ$		UNLESS OTHERWISE SPECIFIED BREAK ALL SHARP CORNERS		SURFACE FINISH WHEN APPLICABLE IS INDICATED THUS $\checkmark$ μ M		SCALE 1:10		TYPE									
DIMPLE NO OF SHEETS TO BE DIMPLED COUNTERSUNK D X C X X X X X X LENGTH NUMBER F DIMPLE CSK IS ON TWO LINES TOP=MFD HD. BOTTOM=DRIVEN HD.		PT NO & INSPECTORS STAMP S=STEEL STAMP (LOC OPT) R=RUBBER STAMP (LOC OPT) C=CONTROLLED-LOCATE WHERE SHOWN THUS		DRAWN B.YUEN						X09652D1-093-00 G2AR				NEXT ASSY		DWG No.		ISS	
				CHKD															
				STRD															
				APPD															
BOEING MASTER CHANGE REQUIRED TICK APPROPRIATE BOX: YES ☐ NO ☐				eRes No.		ATA 100 REF		El No						SHEET		OF			
7				8		9		10		11		12		A1 SHEET					