REF Schematic for RK3568

Main Functions Introduction

1)PMIC: RK809-5+DiscretePower
2)RAM: DDR4 2x16Bit------------------Default
Option:LPDDR4/4x 1X32bit(200ball)
Option:DDR3 4x16bit
Option:DDR3 4x16bit+2x16bit ECC
Option:DDR4 2x16bit+1x16bit ECC
Option:LPDDR3 1x32bit(178ball)
Option:DDR4 4x16bit
3)ROM: eMMC--------------------------Default
Option:Nand Flash
Option:SPI Flash
4)Support:1 x Micro SD Card3.0
5)Support:1 x USB3.0 OTG0 + 1 x USB3.0 HOST1 + 1 x SATA3.0 Port2 ----------Default
Option:1 x USB3.0 OTG0 + 1 x USB3.0 HOST1 + 1 x 1Lane PCIe2.0(RC Mode)
Option:1 x USB3.0 OTG0 + 1 x USB2.0 HOST1 + 1 x SATA3.0 Port1 + 1 x SATA3.0 Port2
Option:1 x USB3.0 OTG0 + 1 x USB2.0 HOST1 + 1 x SATA3.0 Port1 + 1 x 1Lane PCIe2.0(RC Mode)
Option:1 x USB2.0 OTG0 + 1 x SATA3.0 Port0 + 1 x USB3.0 HOST1 + 1 x SATA3.0 Port2
Option:1 x USB2.0 OTG0 + 1 x SATA3.0 Port0 + 1 x USB3.0 HOST1 + 1 x 1Lane PCIe2.0(RC Mode)
Option:1 x USB2.0 OTG0 + 1 x SATA3.0 Port0 + 1 x USB2.0 HOST1 + 1 x SATA3.0 Port1 + 1 x SATA3.0 Port2
Option:1 x USB2.0 OTG0 + 1 x SATA3.0 Port0 + 1 x USB2.0 HOST1 + 1 x SATA3.0 Port1 + 1 x 1Lane PCIe2.0(RC Mode)
6)Support:1 x USB2.0 HOST2+ 1 x USB2.0 HOST3 -- ------Default
7)Support:4G module Via MiniPCIe2.0 Slot With PCIE2.0 and USB2.0 HOST3 functi------Option
8)Support:2 x 1Lane PCIe3.0 Connector (RC Mode) ------Default
Option:1 x 2Lanes PCIe3.0 Connector (RC Mode)
Option:1 x 2Lanes PCIe3.0 Connector (EP Mode)
9)Support:1 x HDMI2.0 TX
10)Support:1 x LCM MIPI DSI TX0 ----------Default
Option:1 x LCM MIPI DSI TX1
Option:1 x LCM LVDS TX
Option:1 x LCM Dual MIPI DSI TX
Option:1 x LCM eDP TX
11)Support:1 x VGA OUT ----------Default
12)Support:1 x 4Lanes Camera MIPI CSI RX ----------Default
Option:2 x 2Lanes Camera MIPI CSI RX
Option:1 x HDMI1.4 RX(HDMI to MIPI CSI)
13)Support:a/b/g/n/ac 2X2 SDIO WIFI5+BT5.0+PCM --------Default
Option:a/b/g/n/ac 1X1 SDIO WIFI+BT+PCM
Option:a/b/g/n/ac/ax 2X2 PCIe WIFI6+BT5.0+PCM
14)Support:1 x 10/100/1000M Ethernet(RGMII1_M1) -------Default
Option:1 x 10/100/1000M Ethernet(RGMII0) or 1 x 10/100M Ethernet(RMII0)
Option:1 x 10/100/1000M PCIe Ethernet Card or 2 x 10/100/1000 Ethernet(QSGMII) or 1 x 10/100/1000 Ethernet(SGMII)
15)Support:1 x Headphone output ----------Default
16)Support:1 x ECM MIC + 1 x Speaker out -------------Default
Option:4 x MEMS MIC + 1 x Speaker out + Loopback or 2 x MEMS MIC + 1 x Speaker out + Loopback
Option:4 x MEMS MIC + 2 x Speaker out + Loopback
17)Support:1 x IR Receiver ----------Default
18)Support:Array Key(MENU,VOL+,VOL-,ESC),Reset,Power on/off Key
19)Support:3 x UART + 1 x RS485 + 1 x CAN FD(Option)
20)Support:Debug UART and ARM JTAG

Rockchip 瑞芯微电子	Rockchip Electronics Co., Ltd				
Project:	RK3568_AIoT_REF_SCH				
File:	00.Cover Page				
Date:	Wednesday, June 16, 2021			Rev:	V1.1
Designed by:	Zhangdz	Reviewed by:	Default	Sheet:	1 of 72

Table of Content

Description

Note

Option

Generate Bill of Materials

Header:

Item\tPart\tDescription\tPCB Footprint\tReference\tQuantity\tOption

Combined property string:

{Item}\t{Value}\t{Description}\t{PCB Footprint}\t{Reference}\t{Quantity}\t{Option}

Notes

NOTE 1:
Component parameter description
1. DNP stands for component not mounted temporarily
2. If Value or option is DNP, which means the area is reserved without being mounted

NOTE 2:
Please use our recommended components to avoid too many changes.
For more informations about the second source,please refer to our AVL.

Revision History

Version	Date	By	Change Dsecription	Approved
V1.0	2021-02-04	Zhangdz	1:Revision preliminary version	
V1.1	2021-06-11	Zhangdz	1:Change content Please Refer to: RK3568_AIoT_REF_SCH_V11_20210611_Modify_Notes	

RK3568 Ref Block Diagram(Default configuration)

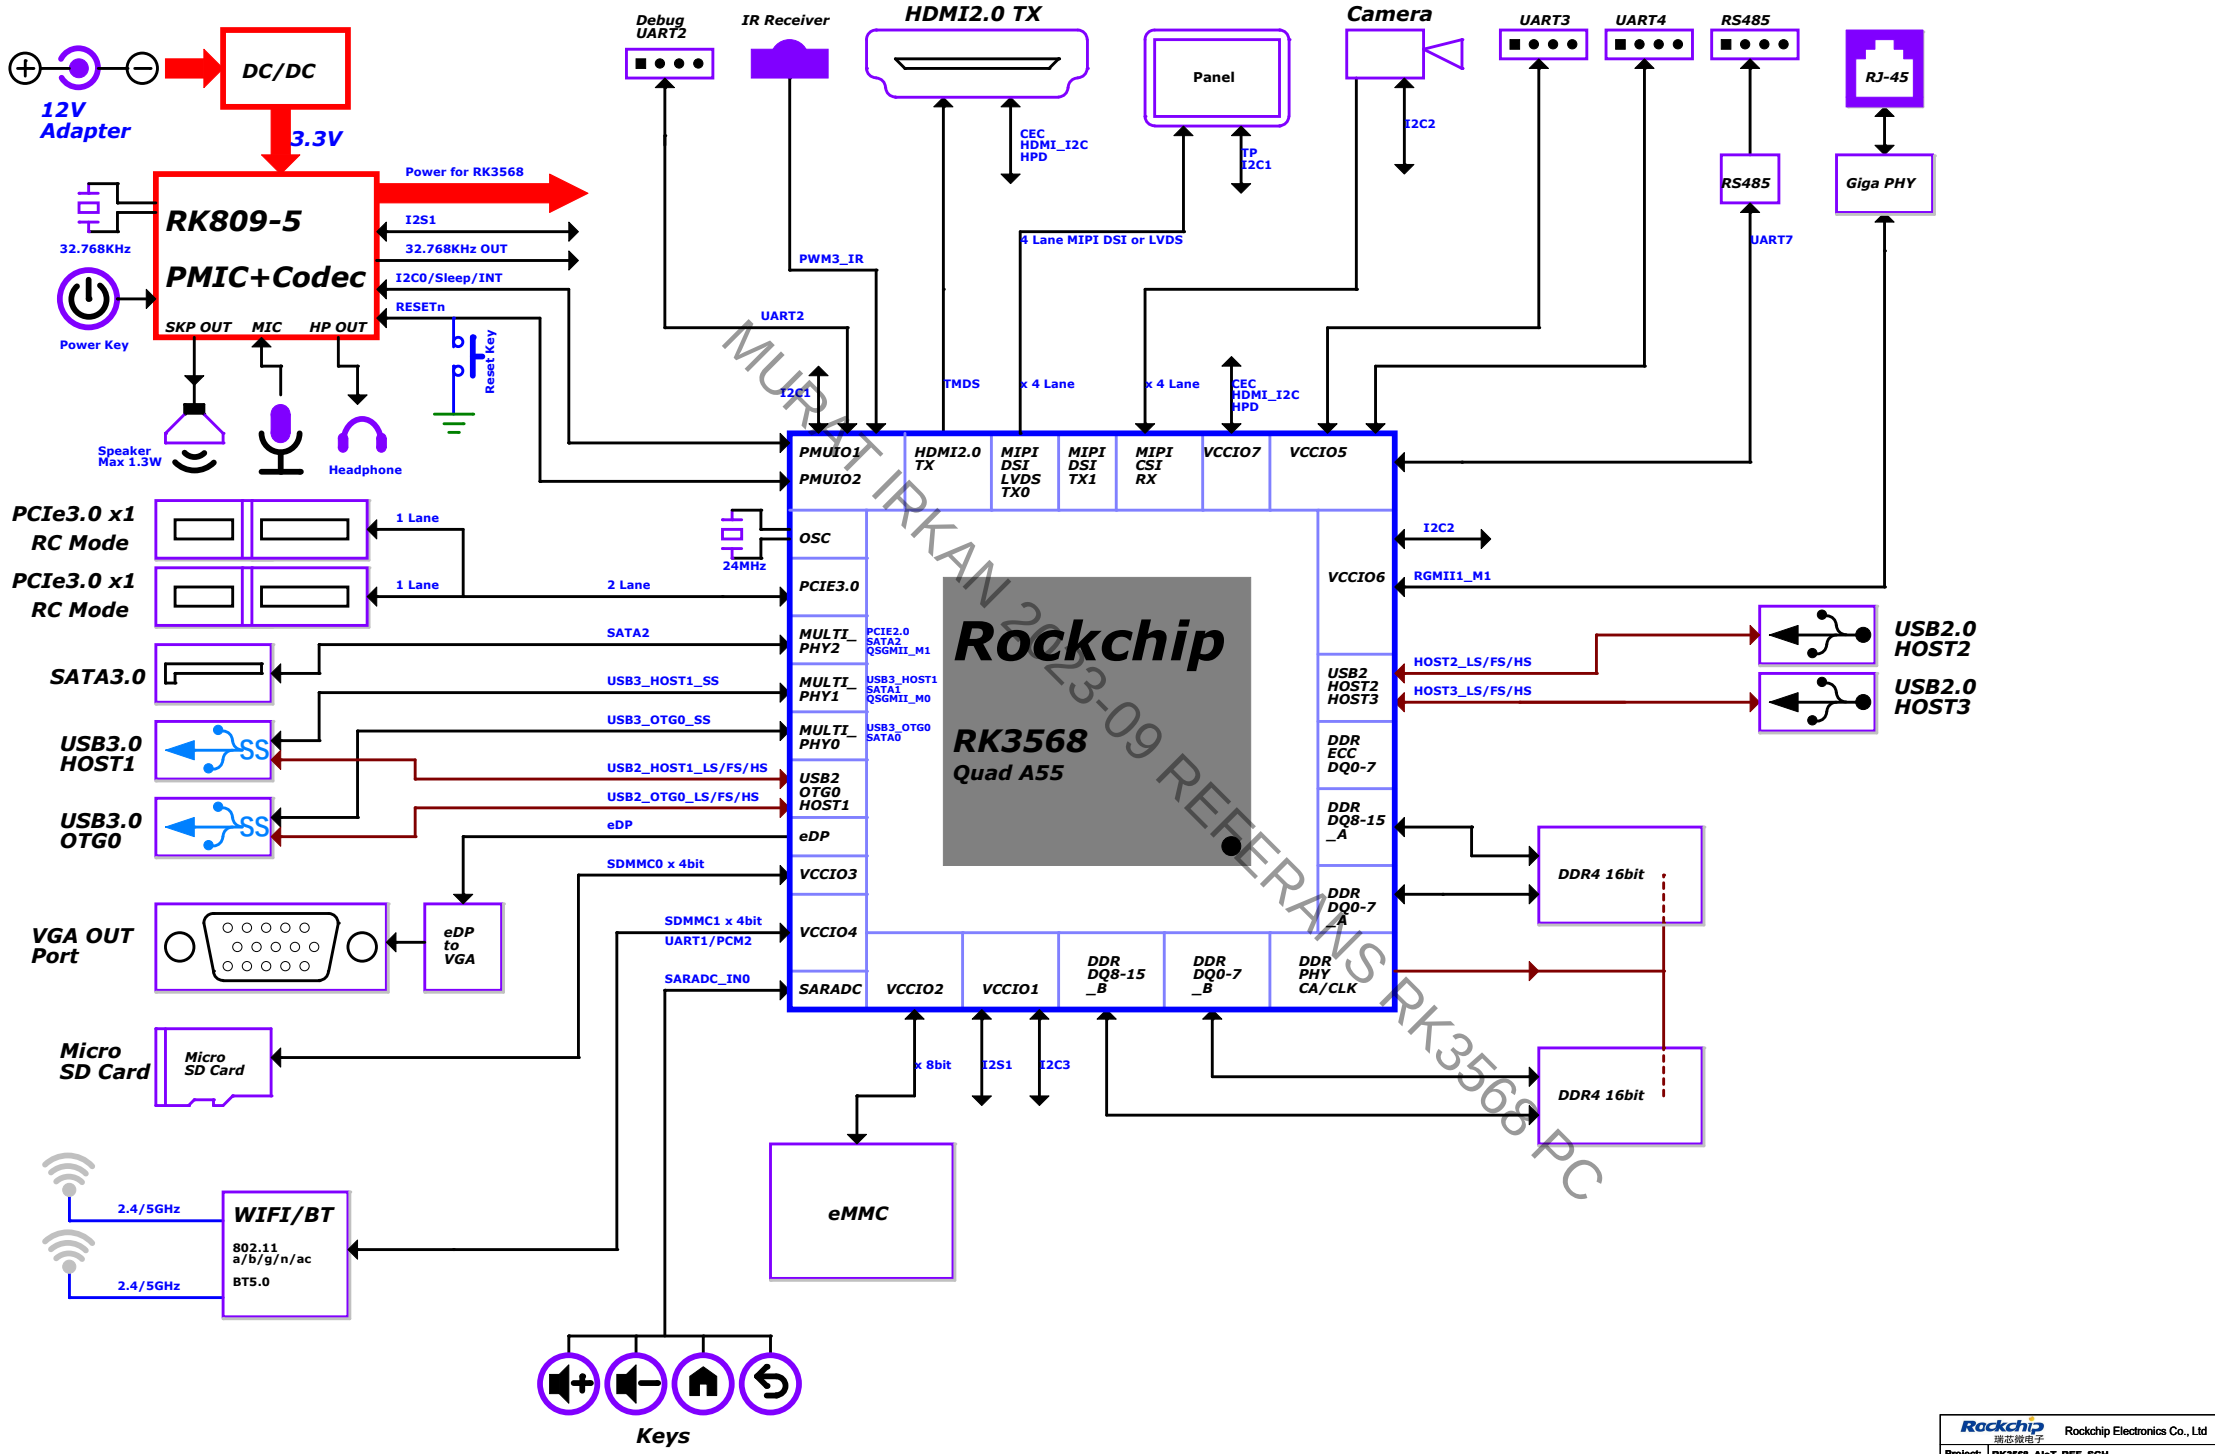

Rockchip 瑞芯微电子	Rockchip Electronics Co., Ltd
Project:	RK3568_AIoT_REF_SCH
File:	03.Block Diagram
Date:	Wednesday, June 16, 2021
Rev:	V1.1
Designed by:	Zhangtz
Reviewed by:	Default
Sheet:	4 of 72

Default Power Diagram

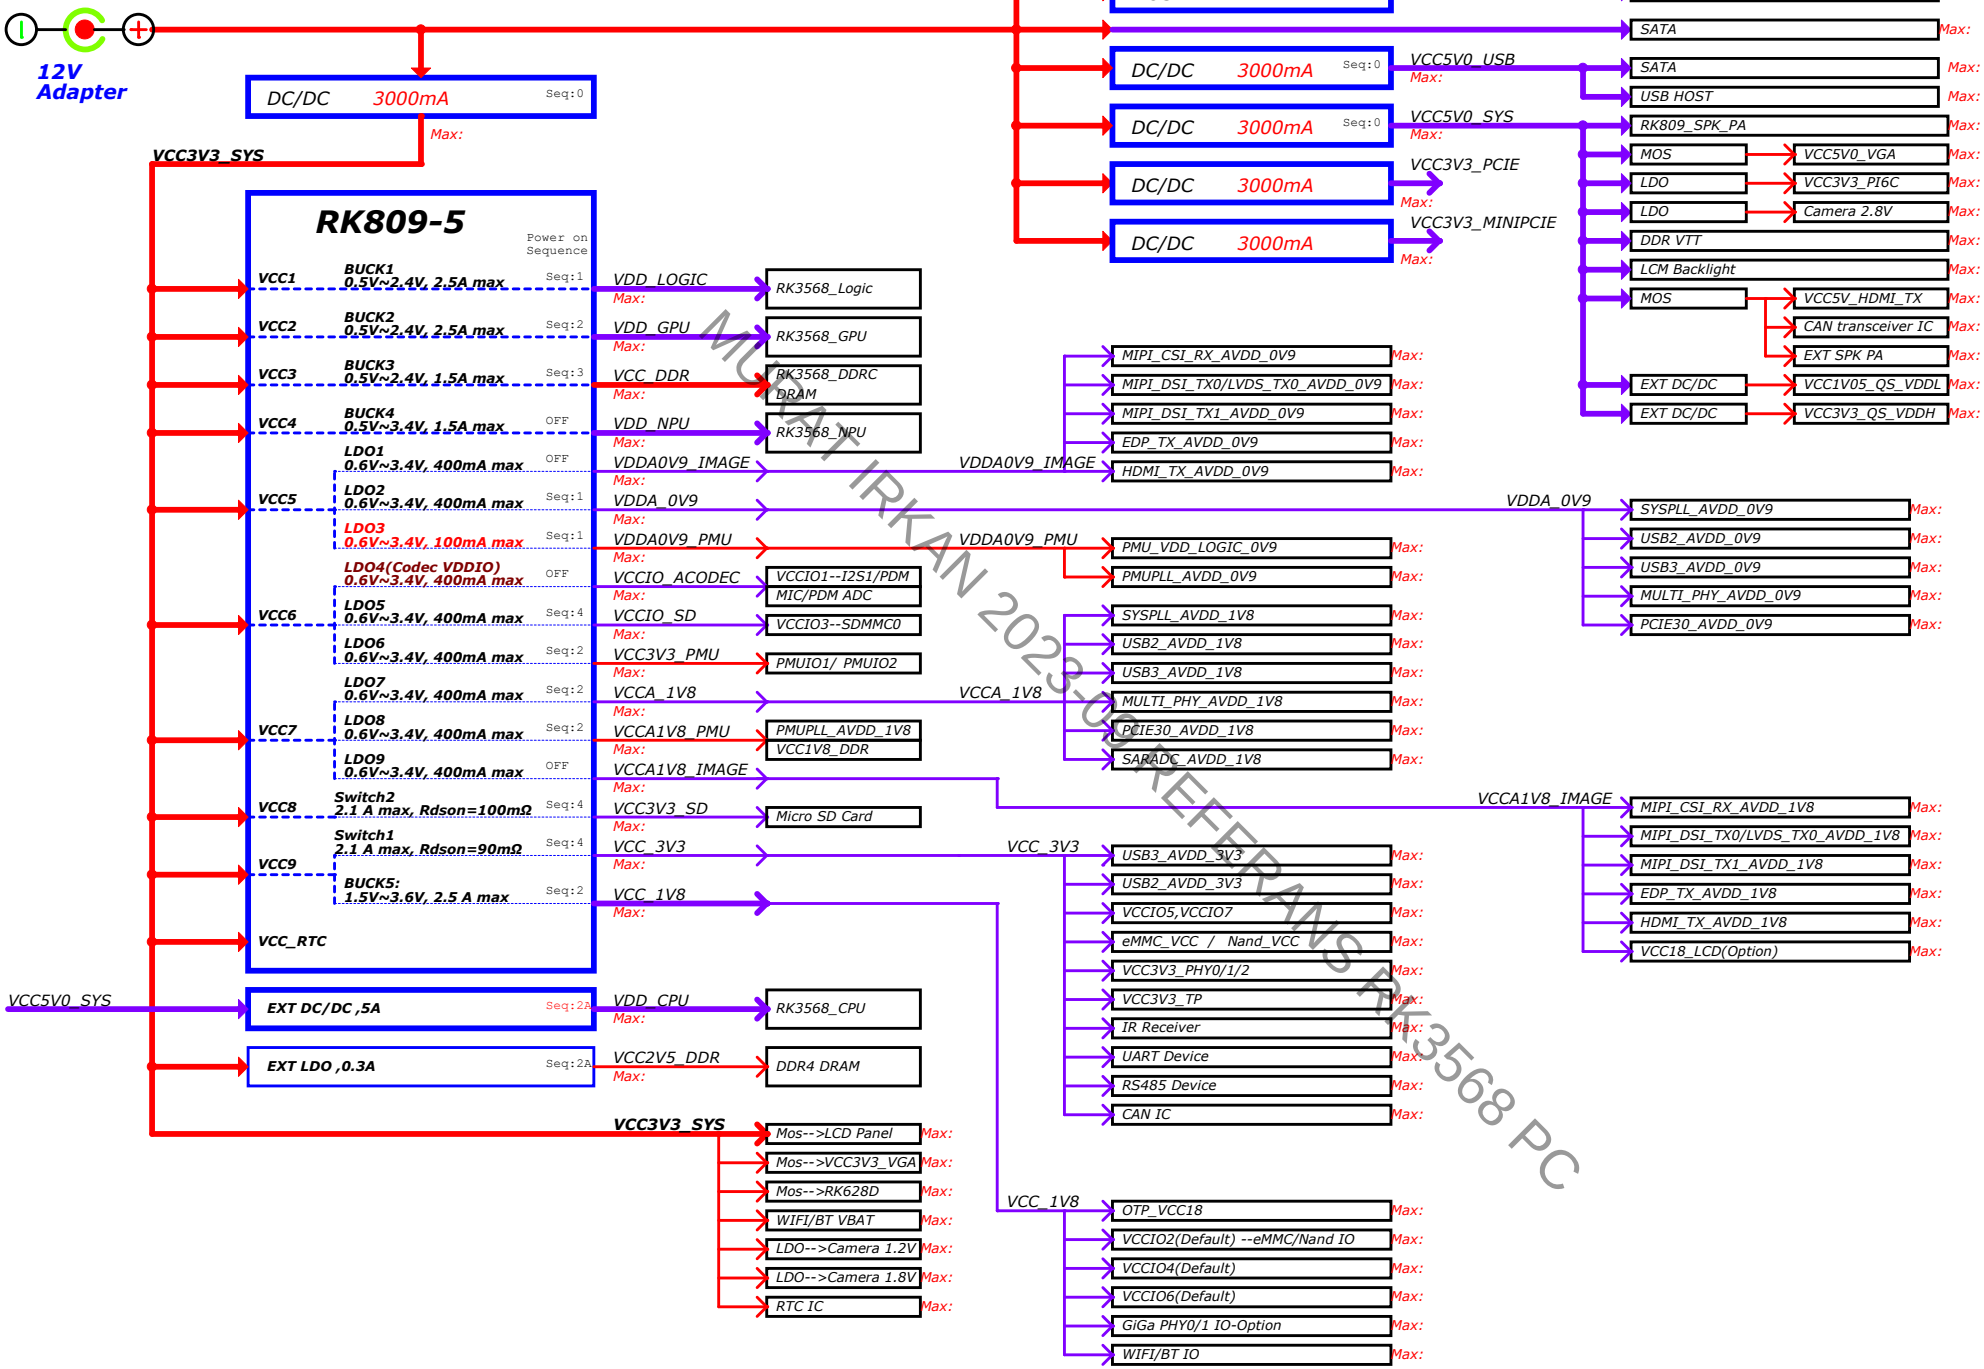

Rockchip 瑞芯微电子	Rockchip Electronics Co., Ltd
Project:	RK3568_AIoT_REF_SCH
File:	04.Power Diagram
Date:	Wednesday, June 16, 2021
Rev:	V1.1
Designed by:	Zhangtz
Reviewed by:	Default
Sheet:	5 of 72

Power Sequence

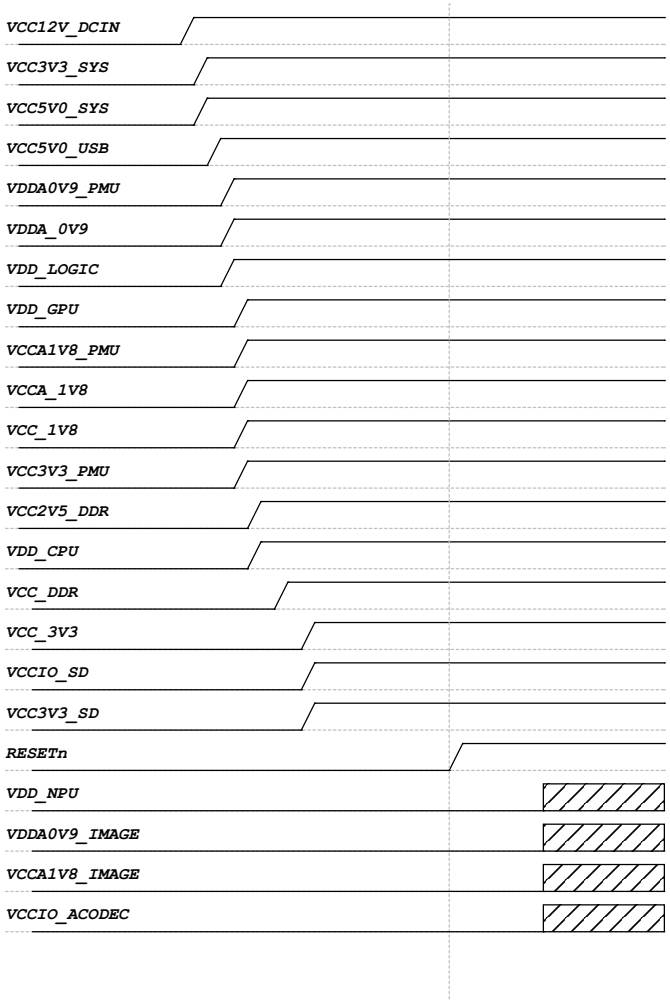

Power description

Power Supply	PMIC Channel	Supply Limit	Power Name	Time Slot	Default Voltage	Default ON/OFF	Work Voltage	Peak Current	Sleep Current
VCC3V3_SYS	RK809_BUCK1	2.5A	VDD_LOGIC	Slot:1	0.9V	ON	0.9V	TBD	TBD
VCC3V3_SYS	RK809_BUCK2	2.5A	VDD_GPU	Slot:2	0.9V	ON	DVFS	TBD	TBD
VCC3V3_SYS	RK809_BUCK3	1.5A	VCC_DDR	Slot:3	ADJ FB=0.8V	ON	1.2V (DDR4)	TBD	TBD
VCC3V3_SYS	RK809_BUCK4	1.5A	VDD_NPU	N/A	0V	OFF	DVFS	TBD	TBD
VCC3V3_SYS	RK809_LDO1	0.4A	VDDA0V9_IMAGE	N/A	0V	OFF	0.9V	TBD	TBD
	RK809_LDO2	0.4A	VDDA_0V9	Slot:1	0.9V	ON	0.9V	TBD	TBD
	RK809_LDO3	0.1A	VDDA0V9_PMU	Slot:1	0.9V	ON	0.9V	TBD	TBD
VCC3V3_SYS	RK809_LDO4	0.4A	VCCIO_ACODEC	N/A	0V	OFF	3.3V	TBD	TBD
	RK809_LDO5	0.4A	VCCIO_SD	Slot:4	3.3V	ON	3.3V or 1.8V (SD2.0=3.3V,SD3.0=1.8V)	TBD	TBD
	RK809_LDO6	0.4A	VCC3V3_PMU	Slot:2	3.3V	ON	3.3V	TBD	TBD
VCC3V3_SYS	RK809_LDO7	0.4A	VCCA_1V8	Slot:2	1.8V	ON	1.8V	TBD	TBD
	RK809_LDO8	0.4A	VCCA1V8_PMU	Slot:2	1.8V	ON	1.8V	TBD	TBD
	RK809_LDO9	0.4A	VCCA1V8_IMAGE	N/A	0V	OFF	1.8V	TBD	TBD
VCC3V3_SYS	RK809_SW2 100mohm	2.1A	VCC3V3_SD	Slot:4	3.3V	ON	3.3V	TBD	TBD
VCC3V3_SYS	RK809_SW1 90mohm	2.1A	VCC_3V3	Slot:4	3.3V	ON	3.3V	TBD	TBD
	RK809_BUCK5	2.5A	VCC_1V8	Slot:2	1.8V	ON	1.8V	TBD	TBD
	RK809_RESETn			Slot:4+5					
VCC12V_DCIN	EXT BUCK	3.0A	VCC3V3_SYS	Slot:0	3.3V	ON	3.3V	TBD	TBD
VCC12V_DCIN	EXT BUCK	3.0A	VCC5V0_SYS	Slot:0	5.0V	ON	5.0V	TBD	TBD
VCC5V0_SYS	EXT BUCK	6.0A	VDD_CPU	Slot:2A	1.025V	ON	DVFS	TBD	TBD
VCC3V3_SYS	EXT LDO	0.3A	VCC2V5_DDR	Slot:2A	2.5V	ON	2.5V	TBD	TBD

Rockchip 瑞芯微电子	Rockchip Electronics Co., Ltd				
Project:	RK3568_AIoT_REF_SCH				
File:	05.Power Sequence				
Date:	Wednesday, June 16, 2021			Rev:	V1.1
Designed by:	Zhangdz	Reviewed by:	Default	Sheet:	6 of 72

IO Power Domain Map

If IO domain power voltage is adjusted, the software DTS configuration must be updated synchronously, otherwise the IO may be damaged!

IO Domain	Pin Num	Support IO Voltage		Notes	Default IO Domain Voltage		
		3.3V	1.8V		Supply Power Net Name	Power Source	Voltage
PMUIO0 (PMUPLL_AVDD_1V8)	Pin Y21	✗	✓	PMUIO0 are fixed 1.8V level mode, which cannot be configured.	VCCA1V8_PMU	VCCA1V8_PMU	1.8V
PMUIO1	Pin Y20	✓	✗	PMUIO1 are fixed 3.3V level mode, which cannot be configured.	VCC3V3_PMU	VCC3V3_PMU	3.3V
PMUIO2	Pin W19	✓	✓	PMUIO2 supports 1.8V or 3.3V level mode Support configurable but require that their hardware power supply voltages must be consistent with the software configuration correspondingly.[2]	VCC3V3_PMU	VCC3V3_PMU	3.3V
VCCIO1	Pin H17	✓	✓	VCCIO1 supports 1.8V or 3.3V level mode Support configurable but require that their hardware power supply voltages must be consistent with the software configuration correspondingly.[2]	VCCIO_ACODEC	VCCIO_ACODEC	3.3V
VCCIO2	Pin H18	✓	✓	VCCIO2 supports 1.8V or 3.3V level mode Default is configured by hardware,namely PIN "FLASH_VOL_SEL" state determines which mode to work in.[1][2]	VCCIO_FLASH	VCC_1V8	1.8V
VCCIO3	Pin L22	✓	✓	VCCIO3 supports 1.8V or 3.3V level mode Support configurable but require that their hardware power supply voltages must be consistent with the software configuration correspondingly.[2][3]	VCCIO_SD	VCCIO_SD	3.3V
VCCIO4	Pin J21	✓	✓	VCCIO4 supports 1.8V or 3.3V level mode Support configurable but require that their hardware power supply voltages must be consistent with the software configuration correspondingly.[2]	VCCIO4	VCC_1V8	1.8V
VCCIO5	Pin V10 Pin V11	✓	✓	VCCIO5 supports 1.8V or 3.3V level mode Support configurable but require that their hardware power supply voltages must be consistent with the software configuration correspondingly.[2]	VCC_3V3	VCC_3V3	3.3V
VCCIO6	Pin R9 Pin U9	✓	✓	VCCIO6 supports 1.8V or 3.3V level mode Support configurable but require that their hardware power supply voltages must be consistent with the software configuration correspondingly.[2]	VCCIO6	VCC_1V8	1.8V
VCCIO7	Pin V12	✓	✓	VCCIO7 supports 1.8V or 3.3V level mode Support configurable but require that their hardware power supply voltages must be consistent with the software configuration correspondingly.[2]	VCC_3V3	VCC_3V3	3.3V

For example, the VCCIO4 hardware has been modified to 3.3V power supply, and the corresponding DTS must be modified to 3.3V configuration, otherwise the IO of VCCIO4 will be damaged.

If a board needs to be compatible with two voltage choices, recommended to enable BOM ID

Notes

[1]:When VCCIO2 voltage is connected to 1.8V, FLASH_VOL_SEL must be high
When VCCIO2 voltage is connected to 3.3V, FLASH_VOL_SEL must be low
If VCCIO2 power supply voltage and FLASH_VOL_SEL fails to meet the above relationship, its function will be abnormally(for example, it cannot be started normally) or IO will be damaged.

[2]:When the IO domain power supply voltage is 1.8V, the IO domain voltage configuration in DTS must be set to 1.8V mode.
If it is misconfigured to 3.3V mode, the IO function of this power domain will be abnormally;
When the IO domain power supply voltage is 3.3V, the IO domain voltage configuration in DTS must be set to 3.3V mode.
If it is misconfigured to 1.8V mode, the IO in this power domain will be in overvoltage state, and the IO will be damaged after long-term operation.

[3]:When VCCIO3 IO domain is assigned as SD card function,:
If SD3.0 mode is to be supported, VCCIO3 power supply voltage must be support configurable, 3.3V in SD2.0 mode and 1.8V in SD3.0 mode.
If only SD2.0 mode is supported (SD3.0 card only works in SD2.0 mode), VCCIO3 only needs fixed power supply of 3.3V.
When VCCIO3 IO domain is assigned as other function,:
Such as uart5 and uart6, then note [2] should be followed

Rockchip 瑞芯微电子	Rockchip Electronics Co., Ltd			
Project:	RK3568_AIoT_REF_SCH			
File:	06.IO Power Domain Map			
Date:	Wednesday, June 16, 2021		Rev:	V1.1
Designed by:	Zhangdz	Reviewed by: Default	Sheet:	7 of 72

Default UART Map

RK3568

UART0

UART1 — Mux (M0, M1) — UART1_M0 → BT

UART2 — Mux (M0, M1) — UART2_M0 → Debug UART2 Port

UART3 — Mux (M0, M1) — UART3_M1 → ●●●■

UART4 — Mux (M0, M1) — UART4_M1 → ●●●■

UART5 — Mux (M0, M1)

UART6 — Mux (M0, M1) — UART6_M1 → ●●●■

If no MicroSD Card function

UART7 — Mux (M0, M1, M2) — UART7_M1 → RS485 → RS485 → ●●●■

UART8 — Mux (M0, M1)

UART9 — Mux (M0, M1, M2) — UART9_M1 → ●●●■

GMAC0/1 Path Map

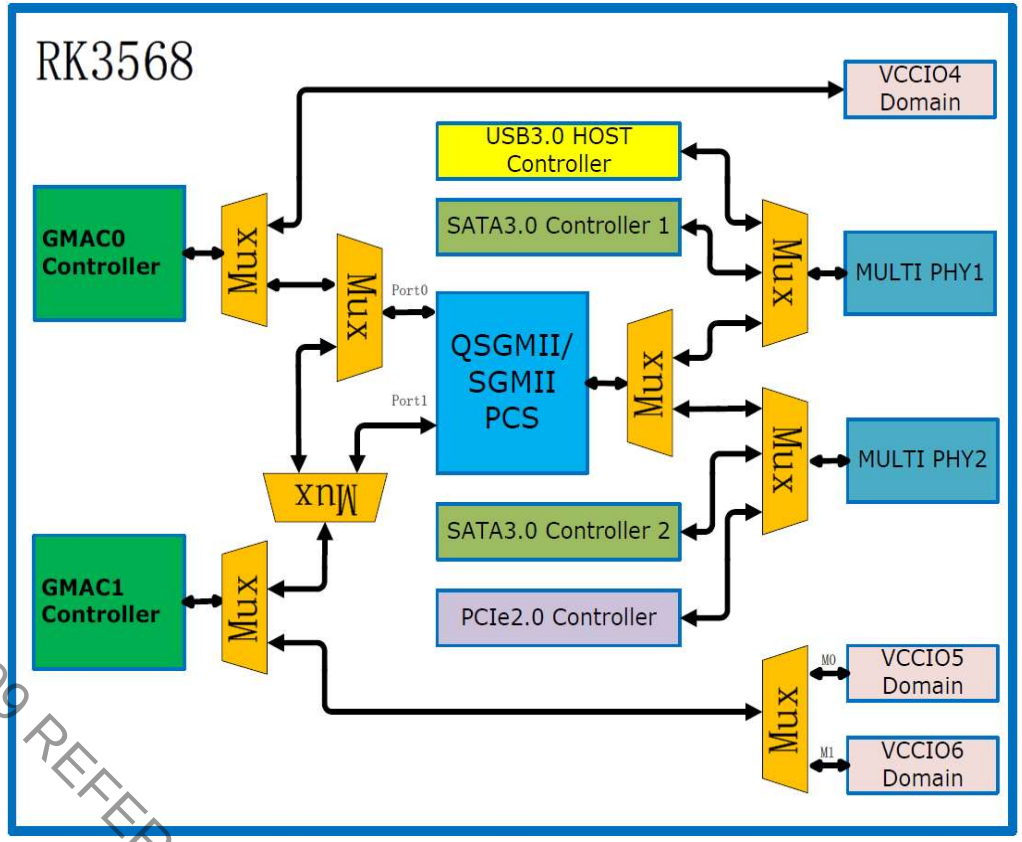

Note:

M0 M1 M2 indicates that the same function is multiplexed to different IO
When selecting, only M0 or M1 or M2 can be selected
eg:Not supported UART1_TX_M0 and UART1_RX_M1 combination

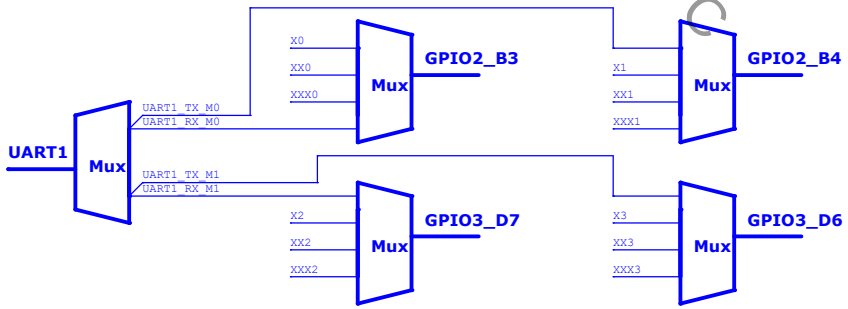

It is suitable for other interfaces

Rockchip 瑞芯微电子	Rockchip Electronics Co., Ltd				
Project:	RK3568_AIoT_REF_SCH				
File:	07.UART Map/GMAC0/1 Path Map				
Date:	Wednesday, June 16, 2021			Rev:	V1.1
Designed by:	Zhangdz	Reviewed by:	Default	Sheet:	8 of 72

Default I2C Map

Note:
M0 M1 M2 indicates that the same function is multiplexed to different IO. When selecting, only M0 or M1 or M2 can be selected
eg:
Not supported I2C1_SCL_M0 and I2C1_SDA_M1 combination

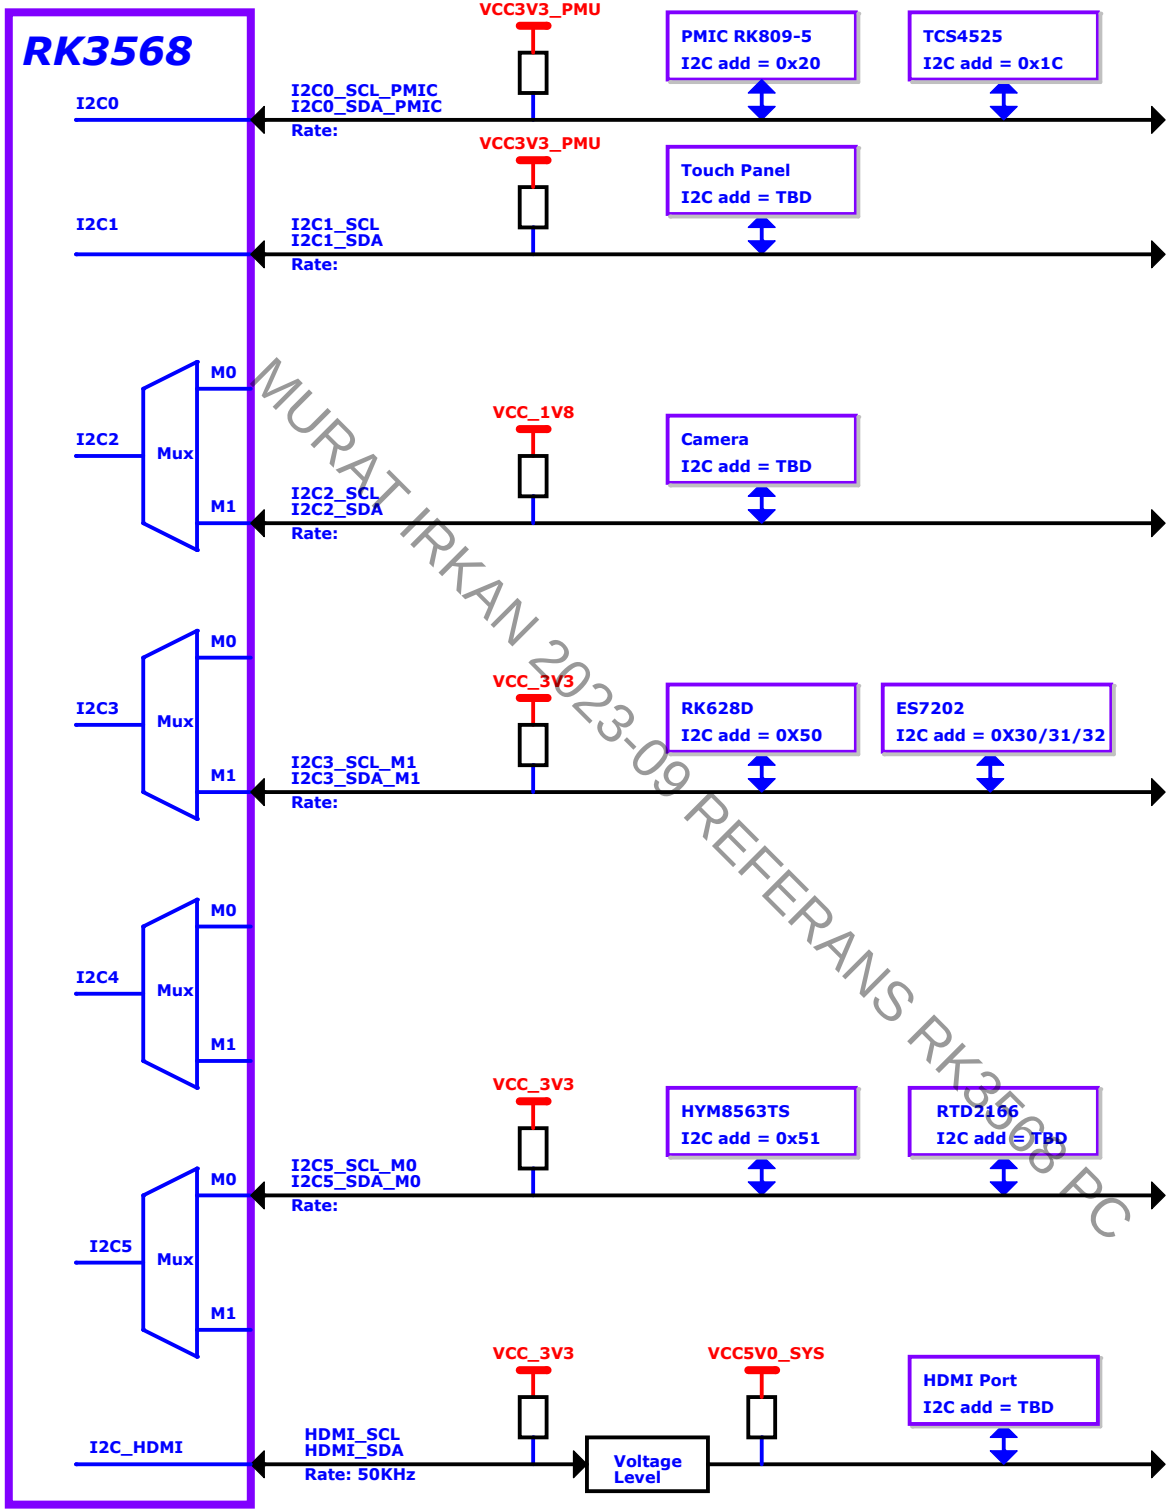

Rockchip 瑞芯微电子	Rockchip Electronics Co., Ltd				
Project:	RK3568_AIoT_REF_SCH				
File:	08.I2C Bus Map				
Date:	Wednesday, June 16, 2021			Rev:	V1.1
Designed by:	Zhangdz	Reviewed by:	Default	Sheet:	9 of 72

MULTI_PHY0/1/2 Path Map

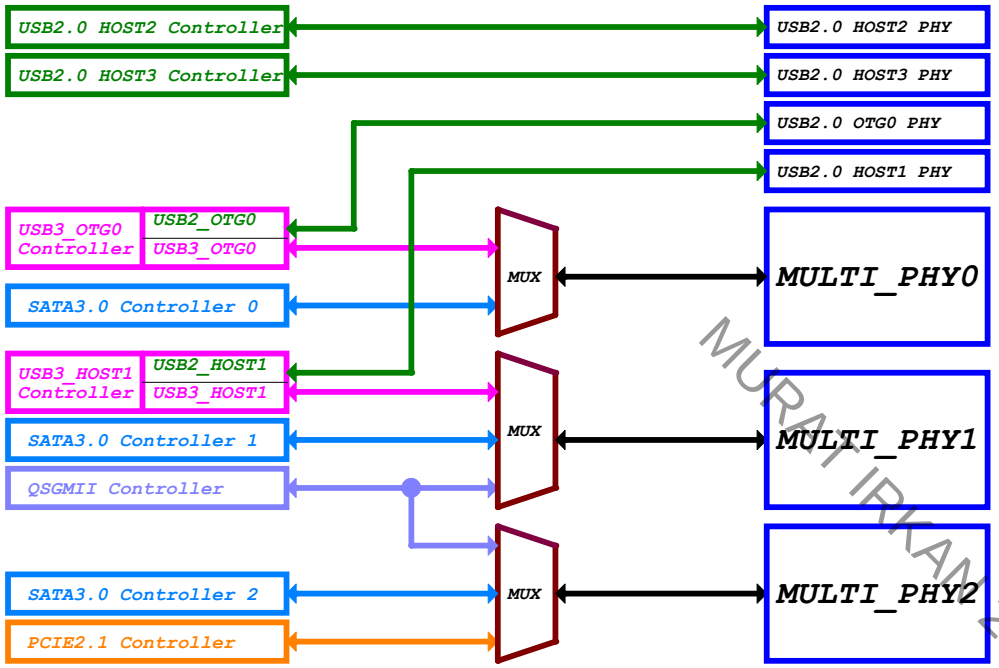

VOP Path Map

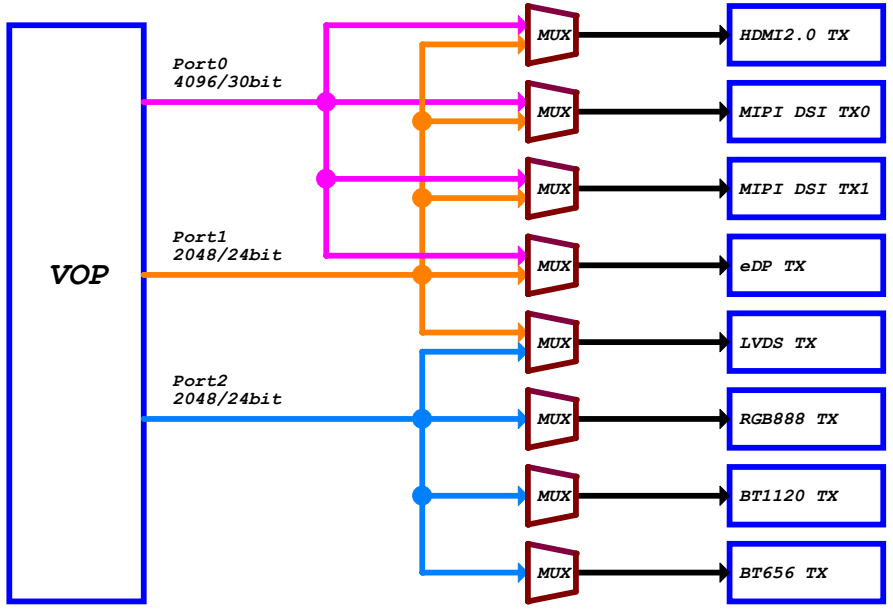

USB3.0 OTG0

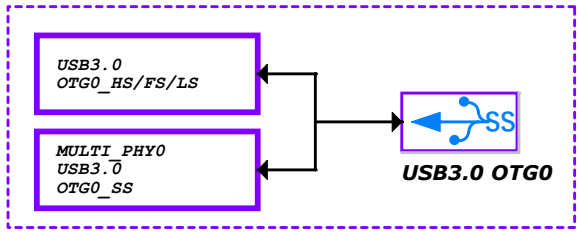

USB3.0 HOST1

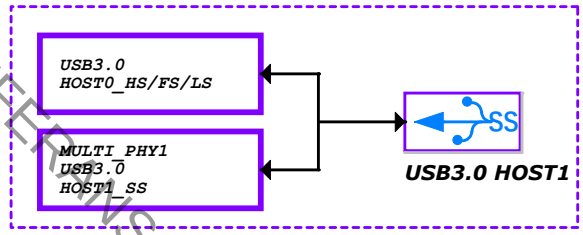

PCIe3.0 PHY

Option1	PCIe3.0 x2Lane	PCIE30_REFCLK (RC/EP:input)	PCIE30_TX0 PCIE30_RX0 PCIE30_TX1 PCIE30_RX1	PCIE30X2_CLKREQn PCIE30X2_WAKEn PCIE30X2_PERSTn PCIE30X2_BUTTONRSTn	RC or EP
Option2	PCIe3.0 x1Lane + PCIe3.0 x1Lane	PCIE30_REFCLK (RC:input)	PCIE30_TX0 PCIE30_RX0	PCIE30X2_CLKREQn PCIE30X2_WAKEn PCIE30X2_PERSTn PCIE30X2_BUTTONRSTn	Only RC
			PCIE30_TX1 PCIE30_RX1	PCIE30X1_CLKREQn PCIE30X1_WAKEn PCIE30X1_PERSTn PCIE30X1_BUTTONRSTn	Only RC

PCIe3.0 REFCLK-RC Mode

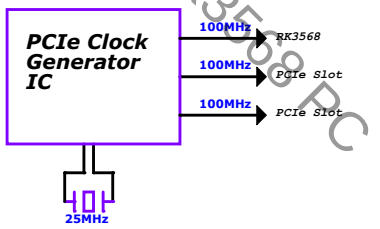

PCIe3.0 REFCLK-EP Mode



PCIe2.1 PHY

MULTI_PHY2	PCIe2.1 x1Lane	PCIE20_REFCLK (RC:output)	PCIE20_TX PCIE20_RX	PCIE20_CLKREQn PCIE20_WAKEn PCIE20_PERSTn PCIE20_BUTTONRSTn	Only RC

PCIe2.1 REFCLK-RC Mode



Rockchip 瑞芯微电子	Rockchip Electronics Co., Ltd
Project:	RK3568_AIoT_REF_SCH
File:	09.PCIE30/MULTI_PHY/VOP Fun Map
Date:	Wednesday, June 16, 2021
Rev:	V1.1
Designed by: Zhangtz	Reviewed by: Default
Sheet:	10 of 72

RK3568 ABCDE (Power&Gnd)

ANDROID 12

GÜÇ-NEGATİF BAĞLANTILAR

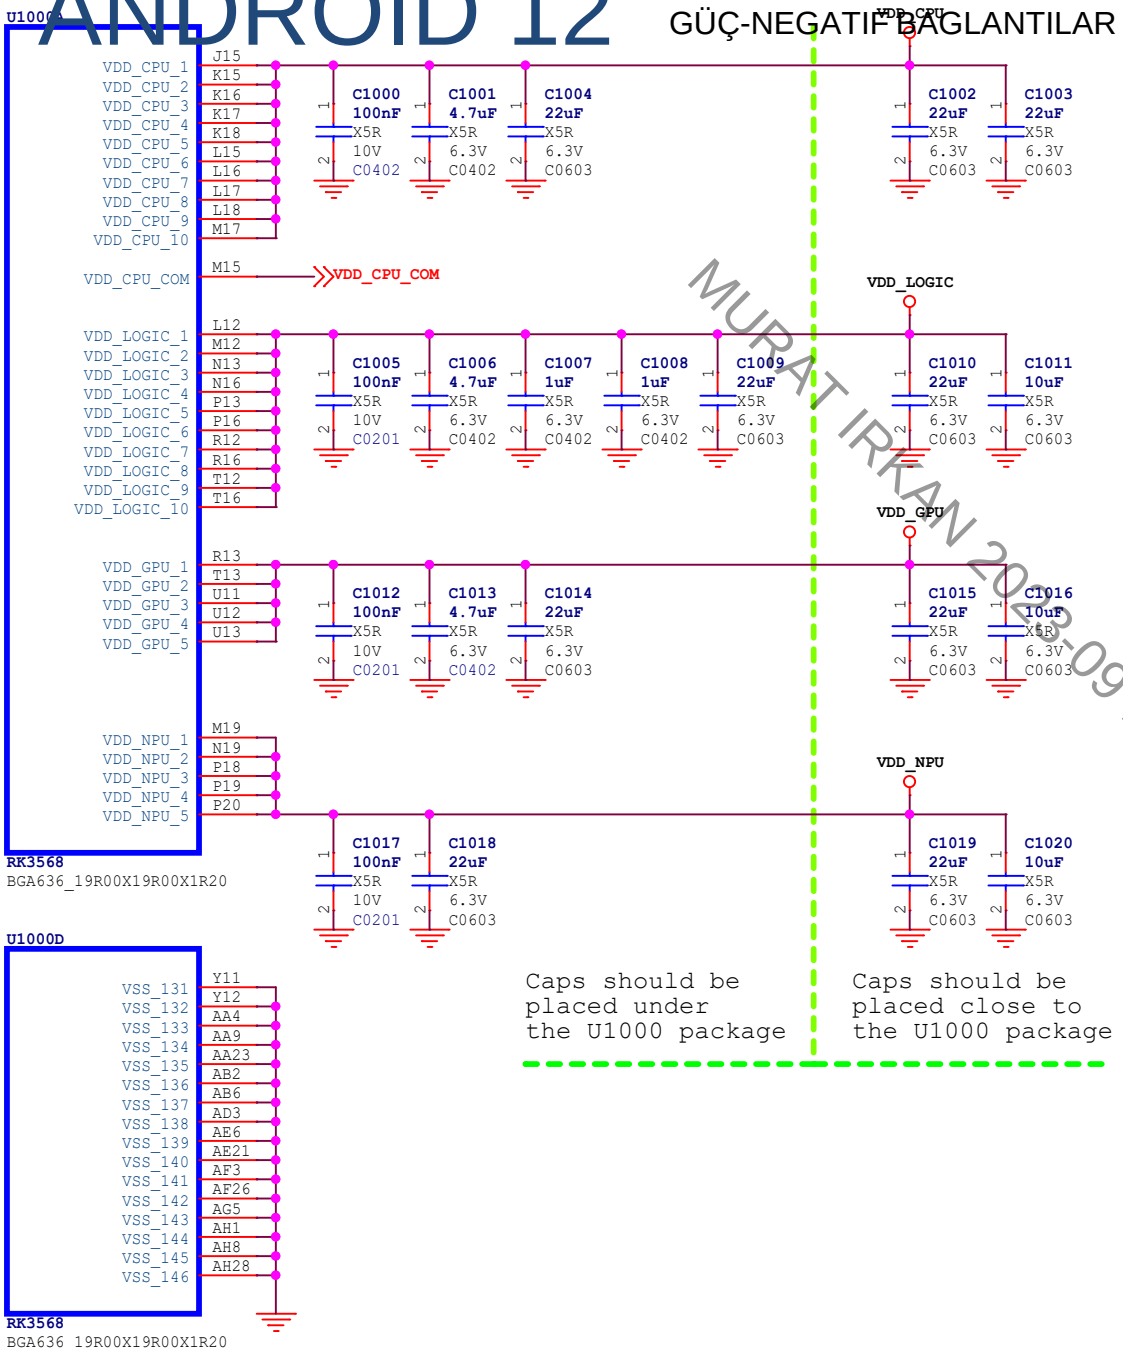

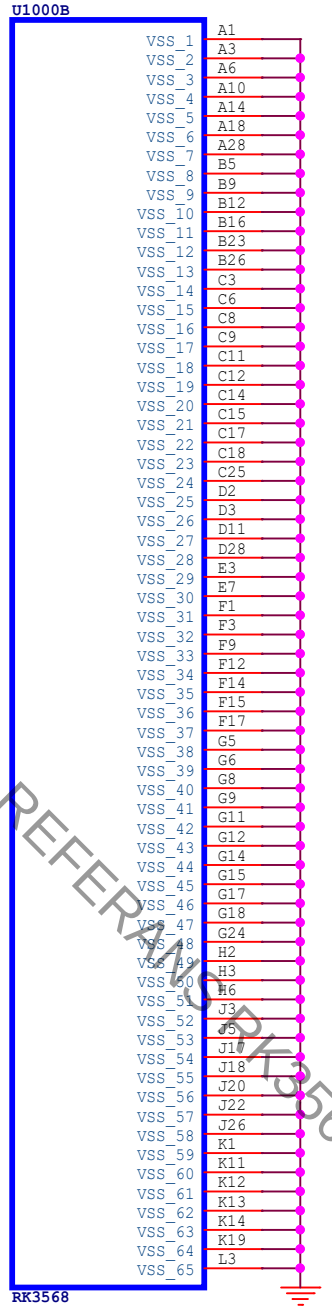

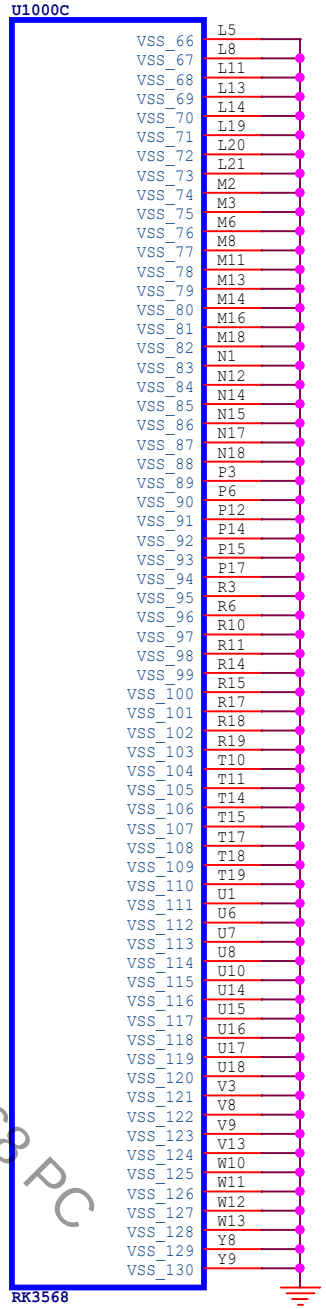

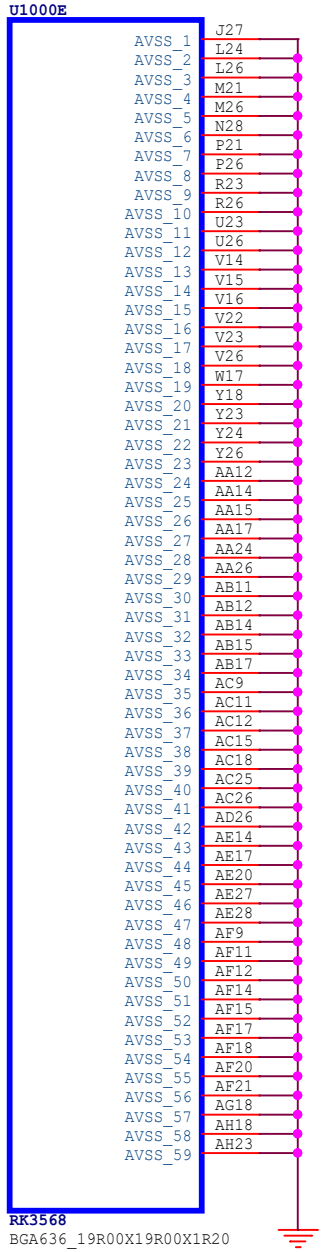

Rockchip 瑞芯微电子	Rockchip Electronics Co., Ltd				
Project:	RK3568_AIoT_REF_SCH				
File:	10.RK3568_Power/GND				
Date:	Wednesday, June 16, 2021			Rev:	V1.1
Designed by:	Zhangdz	Reviewed by:	Default	Sheet:	11 of 72

RK3568_F (DDR PHY)

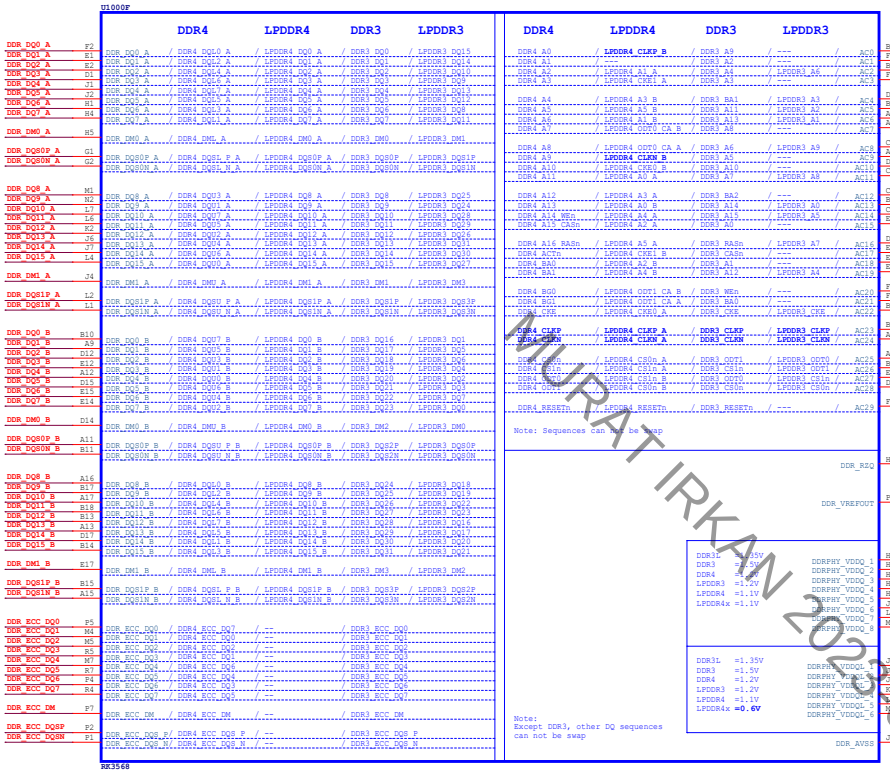

Default DDR4 AC

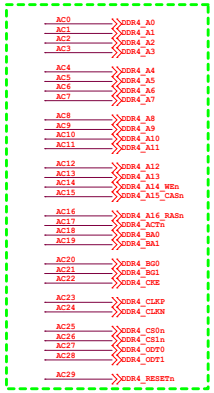

LPDDR4/4x AC

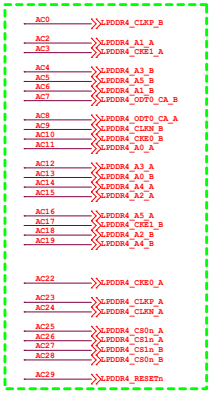

DDR3 AC

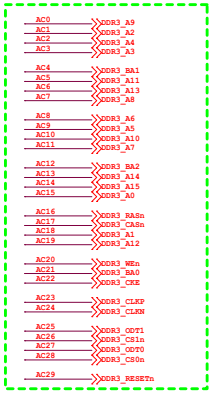

LPDDR3 AC

R1100 1 2 120R 1% R0201 — For DDR4/DDR3/LPDDR3 mode, a 120 ohm +/-1% tolerance external resistor must be connected between the DDR_RZQ pin and VSS pin

R1101 1 2 120R 1% R0201 VCC_DDR — For LPDDR4/LPDDR4x mode, a 120 ohm +/-1% tolerance external resistor must be connected between the DDR_RZQ pin and DDRPHY_VDDQ pin

DDR_RZQ

DDRPHY_VREFOUT



Default DDR4

Note:
Caps should be placed under the U1000 package

Note:
LPDDR4x mode:
Pin J11,J12,J14,K10,L10,M10 connected to VCC0V6_DDR power supply
For example

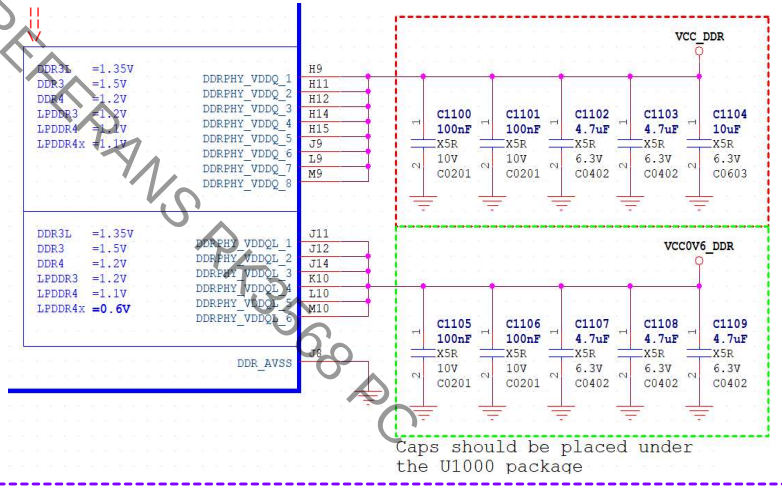

Caps should be placed under the U1000 package

Default DDR4 DQ

LPDDR4/4x DQ

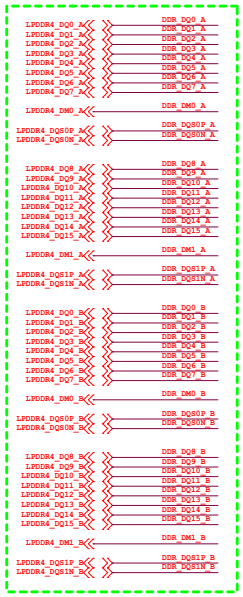

DDR3 DQ

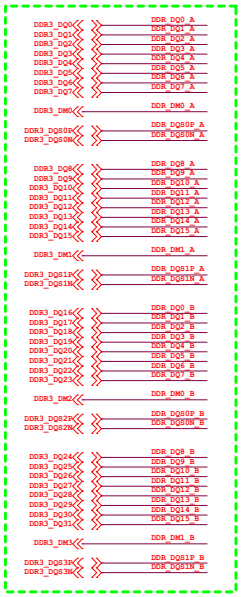

LPDDR3 DQ

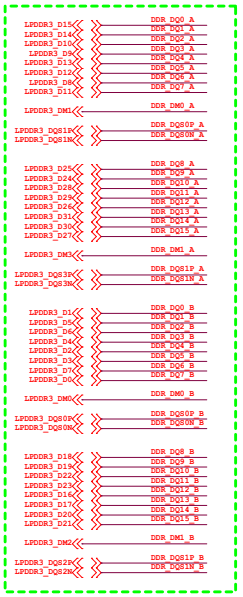

DDR4 ECC DQ



DDR3 ECC DQ



Rockchip 瑞芯微电子	Rockchip Electronics Co., Ltd		
Project:	RK3568_AIoT_REF_SCH		
File:	11.RK3568_DDR PHY		
Date:	Wednesday, June 16, 2021	Rev:	V1.1
Designed by:	Zhangtz	Reviewed by: Default	Sheet: 12 of 72

RK3568_G(OSC/PLL/PMUIO1/2)

Note:
Adjusted the load capacitance according to the crystal specification.

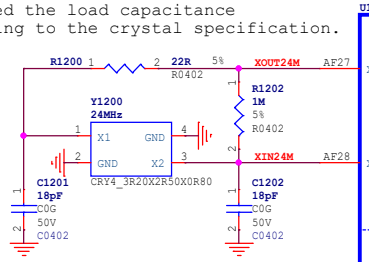

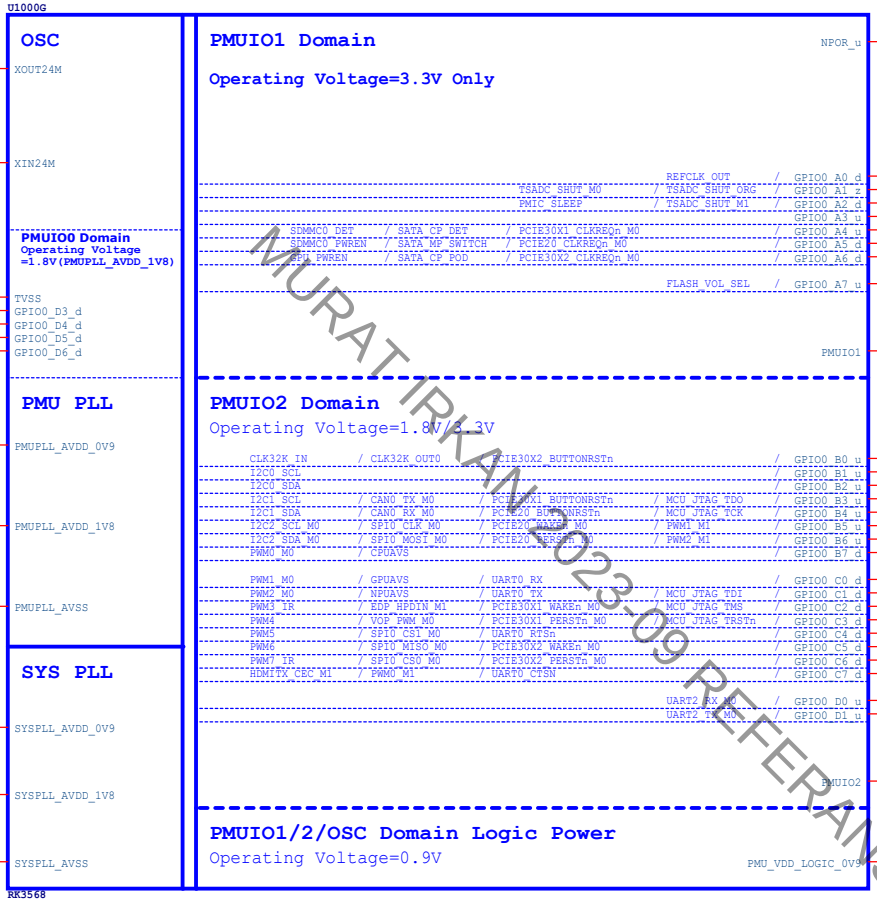

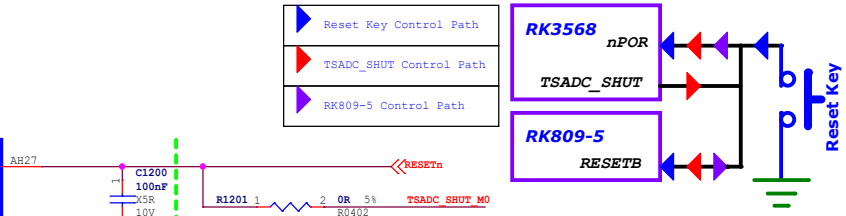

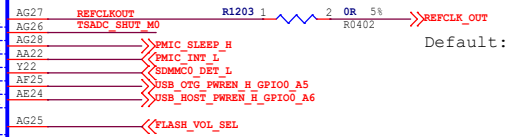

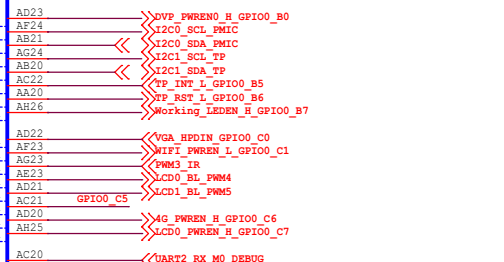

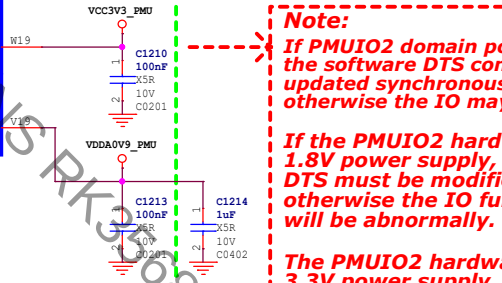





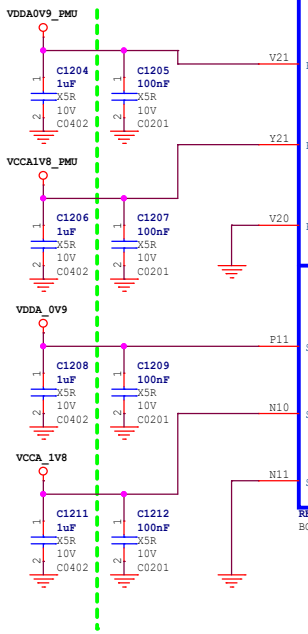

Note:
If PMUIO2 domain power voltage is adjusted, the software DTS configuration must be updated synchronously, otherwise the IO may be damaged!

If the PMUIO2 hardware has been modified to 1.8V power supply, and the corresponding DTS must be modified to 1.8V configuration, otherwise the IO function of PMUIO2 will be abnormally.

The PMUIO2 hardware has been modified to 3.3V power supply, if the software DTS configuration is still 1.8V configuration, the IO of PMUIO2 will be damaged!

If a board needs to be compatible with two voltage choices, recommended to enable BOM_ID

Note:
Caps of between dashed green lines and U1000 should be placed under the U1000 package.
Other caps should be placed close to the U1000 package

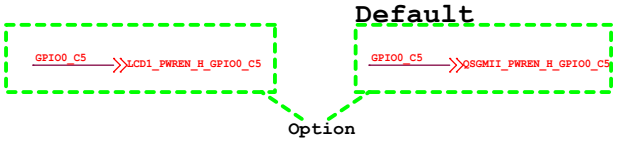

Rockchip Confidential

Rockchip 瑞芯微电子	Rockchip Electronics Co., Ltd				
Project:	RK3568_AIoT_REF_SCH				
File:	12.RK3568_OSC/PLL/PMUIO				
Date:	Wednesday, June 16, 2021			Rev:	V1.1
Designed by:	Zhangdz	Reviewed by:	Default	Sheet:	13 of 72

RK3568_I(VCCIO2 Domain)

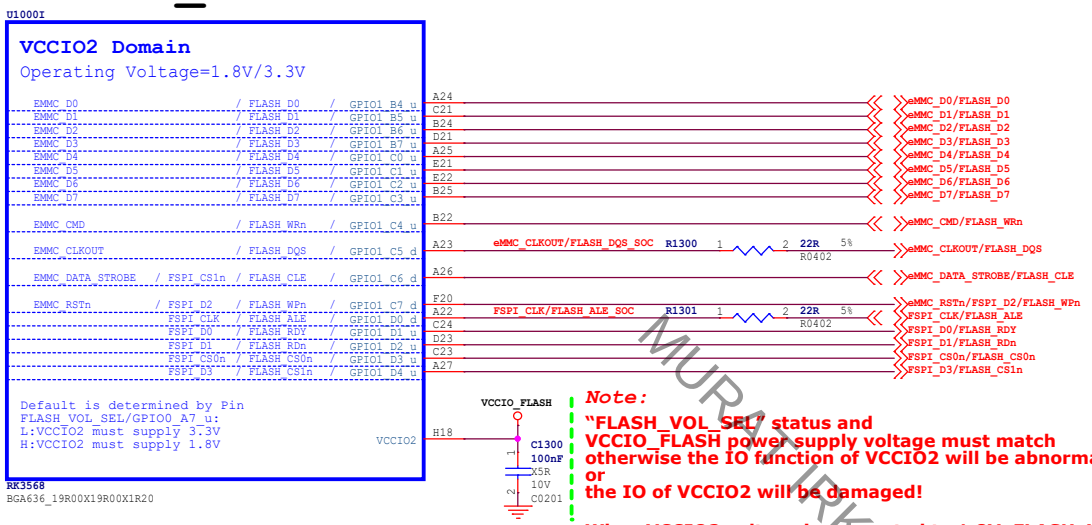

Note:

"FLASH_VOL_SEL" status and
VCCIO_FLASH power supply voltage must match
otherwise the IO function of VCCIO2 will be abnormally
or
the IO of VCCIO2 will be damaged!

When VCCIO2 voltage is connected to 1.8V, FLASH_VOL_SEL must be high
When VCCIO2 voltage is connected to 3.3V, FLASH_VOL_SEL must be low
If VCCIO2 power supply voltage and FLASH_VOL_SEL fails to meet the above relationship,
its function will be abnormally(for example, it cannot be started normally) or IO will be damaged.



Note:

For eMMC or Nand Flash:
If eMMC_D0/FLASH_D0=0V at after power on and reset,
then system will enter into Maskrom mode.

Layout note:

Test point must be placed on the line, and no branch can be added



Note:

For SPI Flash:
If FSPI_CLK=0V at after power on and reset,
then system will enter into Maskrom mode.

Note:

Reserve TestPoint for put the system into Maskrom mode to update the firmware
When writing mismatched firmware or other conditions result in boot failure,
use this test point

Except in this case, please use Recovery Key
Put the system into loader mode to update the firmware

RK3568_J(VCCIO3 Domain)

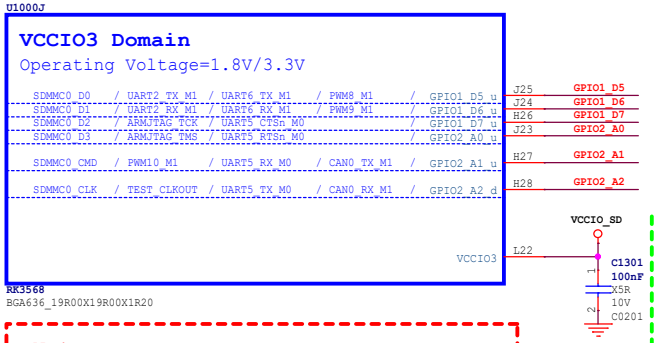

Note:

Caps of between dashed green lines and U1000 should be placed under the U1000 package

Default

SDMMC0&JTAG

UART&CAN&JTAG

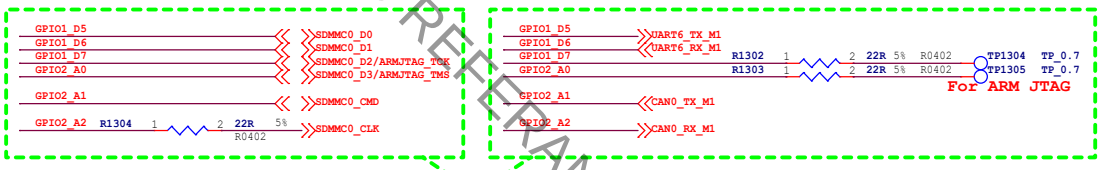

Option

Note:

If VCCIO3 domain power voltage is adjusted,
the software DTS configuration must be
updated synchronously,
otherwise the IO may be damaged!

If the VCCIO3 hardware has been modified to
1.8V power supply, and the corresponding
DTS must be modified to 1.8V configuration,
otherwise the IO function of VCCIO3
will be abnormally.

The VCCIO3 hardware has been modified to
3.3V power supply, if the software DTS
configuration is still 1.8V configuration,
the IO of VCCIO3 will be damaged!

If a board needs to be compatible
with two voltage choices,
recommended to enable BOM_ID

Rockchip 瑞芯微电子	Rockchip Electronics Co., Ltd				
Project:	RK3568_AIoT_REF_SCH				
File:	13.RK3568_Flash/SD Controller				
Date:	Wednesday, June 16, 2021			Rev:	V1.1
Designed by:	Zhangdz	Reviewed by:	Default	Sheet:	14 of 72

RK3568_U(USB3.0/SATA/QSGMII/PCIe2.0 x1)

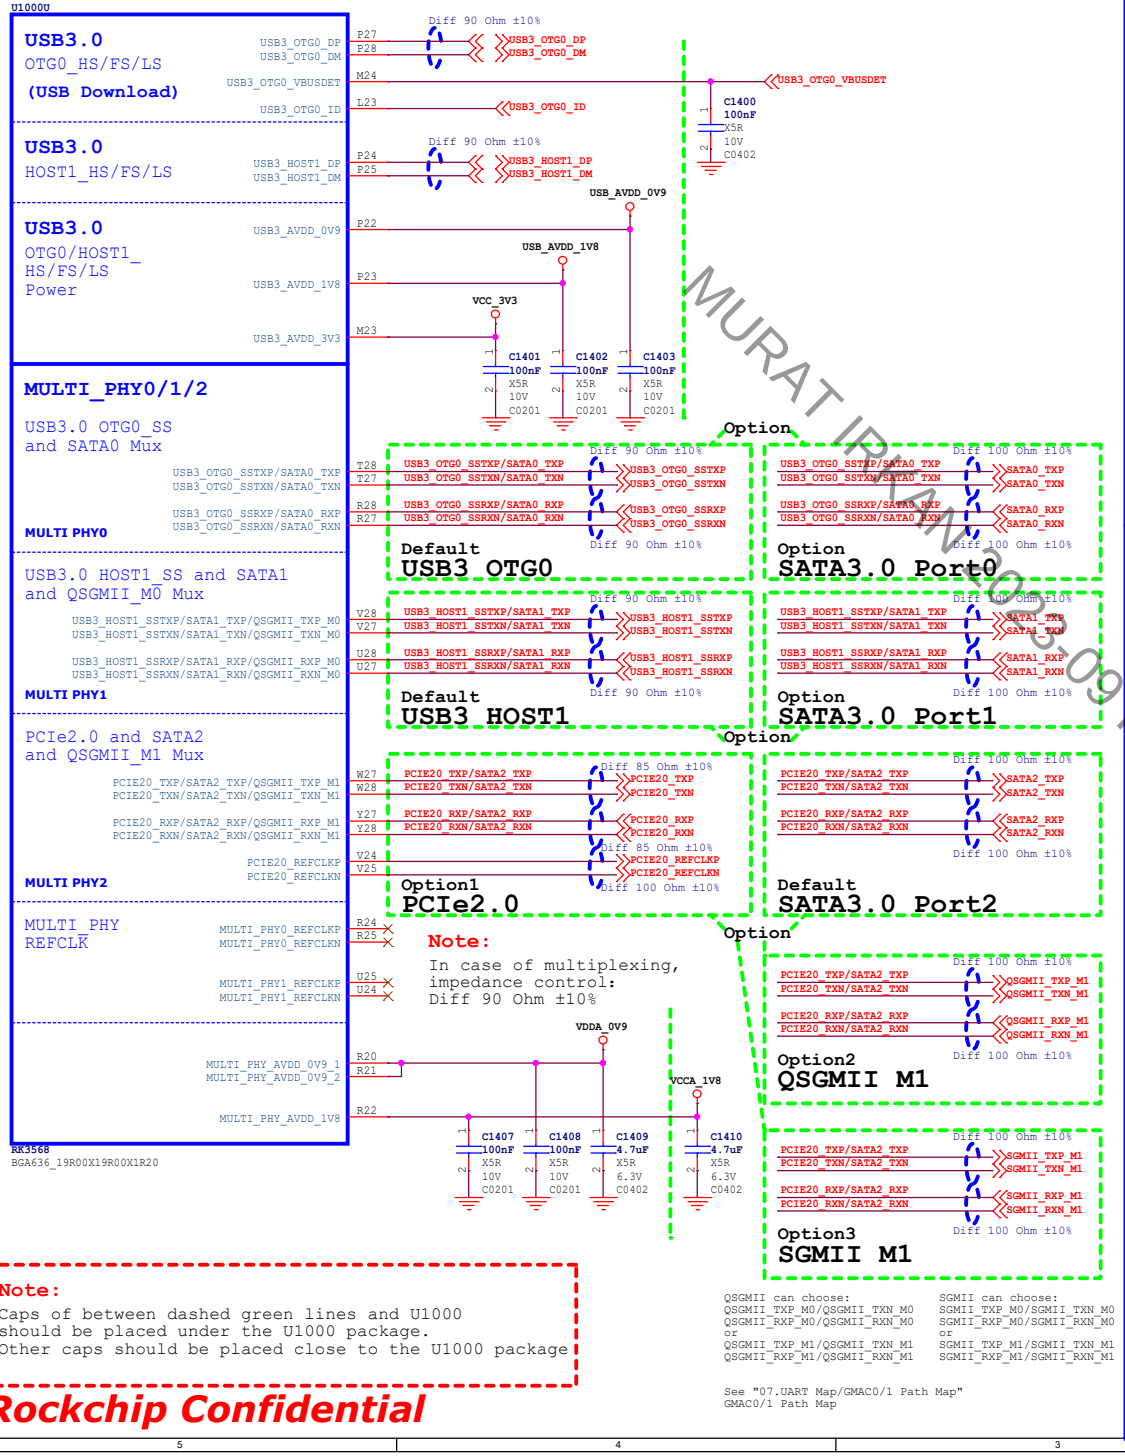

Note:
Caps of between dashed green lines and U1000
should be placed under the U1000 package.
Other caps should be placed close to the U1000 package

Rockchip Confidential

RK3568_V(USB2.0 HOST)

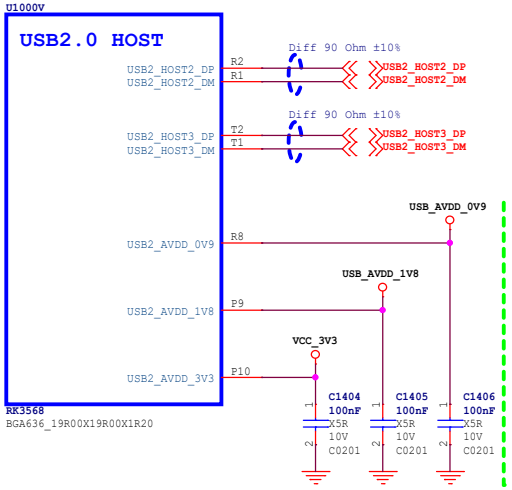

RK3568_W(PCIe3.0 x2)

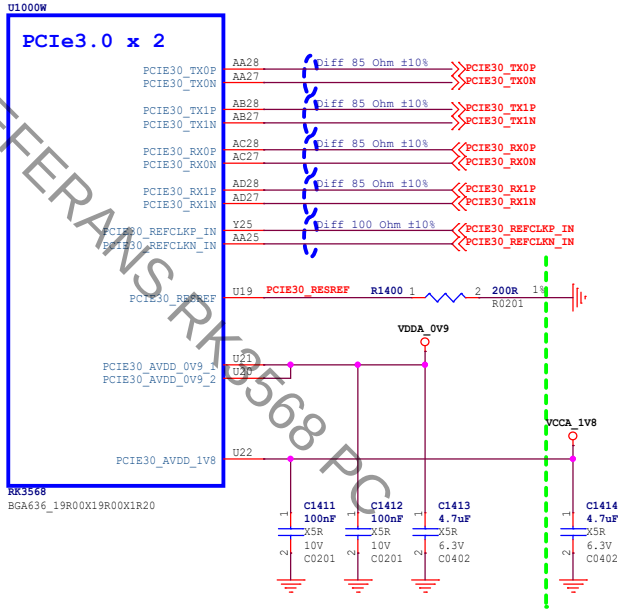

Rockchip 瑞芯微电子	Rockchip Electronics Co., Ltd				
Project:	RK3568_AIoT_REF_SCH				
File:	14.RK3568_USB/PCIe/SATA PHY				
Date:	Wednesday, June 16, 2021			Rev:	V1.1
Designed by:	Zhangdz	Reviewed by:	Default	Sheet:	15 of 72

RK3568_K(VCCIO4 Domain)

Note: *If VCCIO4 domain power voltage is adjusted, the software DTS configuration must be updated synchronously, otherwise the IO may be damaged!*
If the VCCIO4 hardware has been modified to 1.8V power supply, and the corresponding DTS must be modified to 1.8V configuration, otherwise the IO function of VCCIO4 will be abnormally.
The VCCIO4 hardware has been modified to 3.3V power supply, if the software DTS configuration is still 1.8V configuration, the IO of VCCIO4 will be damaged!

U1000K

VCCIO4 Domain
Operating Voltage=1.8V/3.3V

SDMMC1_D0	GMAC0_RXD2	UART6_RX_M0			GPIO2_A3_u
SDMMC1_D1	GMAC0_RXD3	UART6_TX_M0			GPIO2_A4_u
SDMMC1_D2	GMAC0_RXCLK	UART7_RX_M0			GPIO2_A5_u
SDMMC1_D3	GMAC0_TXD2	UART7_TX_M0			GPIO2_A6_u
SDMMC1_CMD	GMAC0_TXD3	UART9_RX_M0			GPIO2_A7_u
SDMMC1_CLK	GMAC0_TXCLK	UART9_TX_M0			GPIO2_B0_d
SDMMC1_PWREN	I2C4_SDA_M1	UART8_RTSn_M0	CAN2_RX_M1		GPIO2_B1_d
SDMMC1_DET	I2C4_SCL_M1	UART8_CTSn_M0	CAN2_TX_M1		GPIO2_B2_u
	GMAC0_TXD0	UART1_RX_M0			GPIO2_B3_u
	GMAC0_TXD1	UART1_TX_M0			GPIO2_B4_u
	GMAC0_TXEN	UART1_RTSn_M0	SPI1_CLK_M0		GPIO2_B5_u
	GMAC0_RXD0	UART1_CTSn_M0	SPI1_MISO_M0		GPIO2_B6_u
I2S2_SCLK_RX_M0	GMAC0_RXD1	UART6_RTSn_M0	SPI1_MOSI_M0		GPIO2_B7_d
I2S2_LRCK_RX_M0	GMAC0_RXDV_CRS	UART6_CTSn_M0	SPI1_CS0_M0		GPIO2_C0_d
I2S2_MCLK_M0	ETH0_REFCLKO_25M	UART7_RTSn_M0	SPI2_CLK_M0		GPIO2_C1_d
I2S2_SCLK_TX_M0	GMAC0_MCLKINOUT	UART7_CTSn_M0	SPI2_MISO_M0		GPIO2_C2_d
I2S2_LRCK_TX_M0	GMAC0_MDC	UART9_RTSn_M0	SPI2_MOSI_M0		GPIO2_C3_d
I2S2_SDO_M0	GMAC0_MDIO	UART9_CTSn_M0	SPI2_CS0_M0		GPIO2_C4_d
I2S2_SDI_M0	GMAC0_RXER	UART8_TX_M0	SPI2_CS1_M0		GPIO2_C5_d
CLK32K_OUT1		UART8_RX_M0	SPI1_CS1_M0		GPIO2_C6_d

RK3568
BGA636_19R00X19R00X1R20

E27 GPIO2_A3
E28 GPIO2_A4
B28 GPIO2_A5
C27 GPIO2_A6
C28 GPIO2_A7
D27 GPIO2_B0
D26 GPIO2_B1
E25 GPIO2_B2
F28 GPIO2_B3
G27 GPIO2_B4
G28 GPIO2_B5
F27 GPIO2_B6
H25 GPIO2_B7
F24 GPIO2_C0
G23 GPIO2_C1
F25 GPIO2_C2
H24 GPIO2_C3
H23 GPIO2_C4
F26 GPIO2_C5
E26 GPIO2_C6

J21 VCCIO4
VCCIO4 — C1500 100nF X5R 10V C0201

Default

WIFI+BT+PCM

GPIO2_A3 SDMMC1_D0
GPIO2_A4 SDMMC1_D1
GPIO2_A5 SDMMC1_D2
GPIO2_A6 SDMMC1_D3
GPIO2_A7 SDMMC1_CMD
GPIO2_B0 R1502 1 2 22R 5% R0402 SDMMC1_CLK
GPIO2_B1 WIFI_REG_ON_H_GPIO2_B1
GPIO2_B2 WIFI_WAKE_HOST_H_GPIO2_B2
GPIO2_B3 UART1_RX_M0
GPIO2_B4 UART1_TX_M0
GPIO2_B5 UART1_RTSn_M0
GPIO2_B6 UART1_CTSn_M0
GPIO2_B7 BT_REG_ON_H_GPIO2_B7
GPIO2_C0 BT_WAKE_HOST_H_GPIO2_C0
GPIO2_C1 HOST_WAKE_BT_H_GPIO2_C1
GPIO2_C2 SOC_PCM_CLK
GPIO2_C3 SOC_PCM_SYNC
GPIO2_C4 SOC_PCM_OUT
GPIO2_C5 SOC_PCM_IN
GPIO2_C6 R1508 1 2 0R 5% R0402 CLK32K_OUT1_WIFI

VCCIO4 — R1510 1 2 0R 5% R0402 VCCIO_WL

If a board needs to be compatible with two voltage choices, recommended to enable BOM_ID

Option

RGMII0

GPIO2_A3 GMAC0_RXD2
GPIO2_A4 GMAC0_RXD3
GPIO2_A5 GMAC0_RXCLK
GPIO2_A6 R1500 1 2 22R 5% R0402 GMAC0_TXD2
GPIO2_A7 R1501 1 2 22R 5% R0402 GMAC0_TXD3
GPIO2_B0 R1503 1 2 22R 5% R0402 GMAC0_TXCLK
GPIO2_B3 R1504 1 2 22R 5% R0402 GMAC0_TXD0
GPIO2_B4 R1505 1 2 22R 5% R0402 GMAC0_TXD1
GPIO2_B5 R1506 1 2 22R 5% R0402 GMAC0_TXEN
GPIO2_B6 GMAC0_RXD0
GPIO2_B7 GMAC0_RXD1
GPIO2_C0 GMAC0_RXDV_CRS
GPIO2_C1 R1507 1 2 22R 5% R0402 ETH0_REFCLKO_25M
GPIO2_C2 GMAC0_MCLKINOUT
GPIO2_C3 R1513 1 2 0R 5% R0402 GMAC0_MDC
GPIO2_C4 GMAC0_MDIO
GPIO2_C5 GMAC0_RXER

V1.1

VCCIO4
R1509 1 2 0R 5% R0402 VCC_1V8
R1511 1 DNP 2 0R 5% R0402 VCC_3V3

If a board needs to be compatible with two voltage choices, recommended to enable BOM_ID

Note:
If Ethernet PHY uses other models, please note whether the default pull-up and pull-down of GPIO affect Ethernet PHY function

At present, TXEN will be affected if it defaults to high level need to add a 4.7K resistance to ground

GMAC0_TXEN — R1515 4.7K 5% R0402 DNP

Note:
According to the actual choice of mounted Cannot be mounted at the same time
Default:1.8V
Select the voltage according to the application

RTL8201F/YT8512C only support 3.3V IO
VCCIO4 must be changed to 3.3V power supply

RK3568_N(VCCIO7 Domain)

Note:
When use HDMI, HDMITX_SCL/SDA cannot be shared with other devices

U1000N

VCCIO7 Domain
Operating Voltage=1.8V/3.3V

PWM14_M1	SPI3_CLK_M1	CAN1_RX_M1	PCIE30X2_CLKREQn_M2	I2S3_MCLK_M1	GPIO4_C2_d
PWM15_IR_M1	SPI3_MOSI_M1	CAN1_TX_M1	PCIE30X2_WAKEn_M2	I2S3_SCLK_M1	GPIO4_C3_d
EDP_HPDIN_M0	SPDIF_TX_M2	SATA2_ACT_LED	PCIE30X2_PERSTn_M2	I2S3_LRCK_M1	GPIO4_C4_d
PWM12_M1	SPI3_MISO_M1	SATA1_ACT_LED	UART9_TX_M1	I2S3_SDO_M1	GPIO4_C5_d
PWM13_M1	SPI3_CS0_M1	SATA0_ACT_LED	UART9_RX_M1	I2S3_SDI_M1	GPIO4_C6_d
HDMITX_SCL	I2C5_SCL_M1				GPIO4_C7_u
HDMITX_SDA	I2C5_SDA_M1				GPIO4_D0_u
HDMITX_CEC_M0	SPI3_CS1_M1				GPIO4_D1_u
					GPIO4_D2_d

RK3568
BGA636_19R00X19R00X1R20

AF8 4G_DISABLE_GPIO4_C2
AA11 HDMIRX_INT_L_GPIO4_C3
AH7 SATA2_ACT_LED
AD8 GPIO4_C5
AE8 GPIO4_C6
AG8 HDMITX_SCL
AG7 HDMITX_SDA
AH6 HDMITX_CEC_M0
AB9 HDMIRX_RST_L_GPIO4_D2

V12 VCCIO7
VCC_3V3 — C1509 100nF X5R 10V C0201

If a board needs to be compatible with two voltage choices, recommended to enable BOM_ID

Note:
If VCCIO7 domain power voltage is adjusted, the software DTS configuration must be updated synchronously, otherwise the IO may be damaged!

If the VCCIO7 hardware has been modified to 1.8V power supply, and the corresponding DTS must be modified to 1.8V configuration, otherwise the IO function of VCCIO7 will be abnormally.

The VCCIO7 hardware has been modified to 3.3V power supply, if the software DTS configuration is still 1.8V configuration, the IO of VCCIO7 will be damaged!

Default

GPIO4_C5 UART9_TX_M1
GPIO4_C6 UART9_RX_M1

GPIO4_C5 SATA1_ACT_LED
GPIO4_C6 SATA0_ACT_LED

Option

RK3568_O(SARADC/OTP)

U1000O

SARADC

Recovery/ SARADC_VIN0	B27	SARADC_VIN0_KEY/RECOVERY	C1501 1 2 1nF X5R 50V C0402
SARADC_VIN1	C26	SARADC_VIN1_HW_ID	C1502 1 2 1nF X5R 50V C0402
SARADC_VIN2	D24	SARADC_VIN2_HP_HOOK	C1503 1 2 1nF X5R 50V C0402
SARADC_VIN3	E23	SARADC_VIN3_BOM_ID	C1504 1 2 1nF X5R 50V C0402
SARADC_VIN4	G21	SARADC_VIN4	C1505 1 2 1nF X5R 50V C0402
SARADC_VIN5	G22	SARADC_VIN5	C1506 1 2 1nF X5R 50V C0402
SARADC_VIN6	G20	SARADC_VIN6	C1507 1 2 1nF X5R 50V C0402
SARADC_VIN7	F21	SARADC_VIN7	C1508 1 2 1nF X5R 50V C0402
SARADC_AVDD_1V8	H22		VCCA_1V8 — C1510 100nF X5R 10V C0201
OTP OTP_VCC18	H20		VCC_1V8 — C1511 100nF X5R 10V C0201

RK3568
BGA636_19R00X19R00X1R20

Note:
Caps of between dashed green lines and U1000 should be placed under the U1000 package

Note:
Must be mounted

VCCA_1V8 — R1512 10K 1% R0402 SARADC_VIN0_KEY/RECOVERY

SARADC_VIN0_KEY/RECOVERY — TP1501 TP_0.7
TP1502 TP_0.7

Note:
If there is no Key requirement, two test points must be reserved to facilitate firmware update

It is suggested to reserve a Key to facilitate the development debug

If SARADC_VIN0=0V at after power on and reset, then system will enter into loader mode.

SARADC_VIN0_KEY/RECOVERY
SARADC_VIN1_HW_ID
SARADC_VIN2_HP_HOOK
SARADC_VIN3_BOM_ID
SARADC_VIN4
SARADC_VIN5
SARADC_VIN6
SARADC_VIN7

Rockchip 瑞芯微电子	Rockchip Electronics Co., Ltd
Project:	RK3568_AIoT_REF_SCH
File:	15.RK3568_SARADC/GPIO
Date:	Wednesday, June 16, 2021
Rev:	V1.1
Designed by:	Zhangdz
Reviewed by:	Default
Sheet:	16 of 72

RK3568_P(MIPI_CSI_RX)

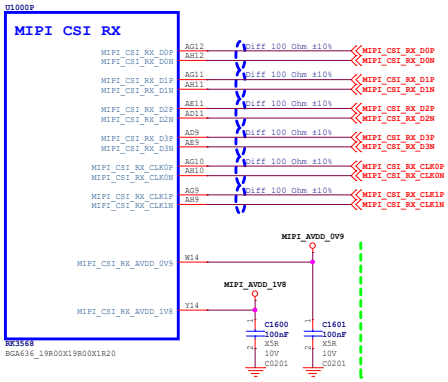

Option1	Sensor1 x4Lane	MIPI_CSI_RX_D0-3 MIPI_CSI_RX_CLK0
Option2	Sensor1 x2Lane + Sensor2 x2Lane	MIPI_CSI_RX_D0-1 MIPI_CSI_RX_CLK0
		MIPI_CSI_RX_D2-3 MIPI_CSI_RX_CLK1

RK3568_M(VCCIO6 Domain)

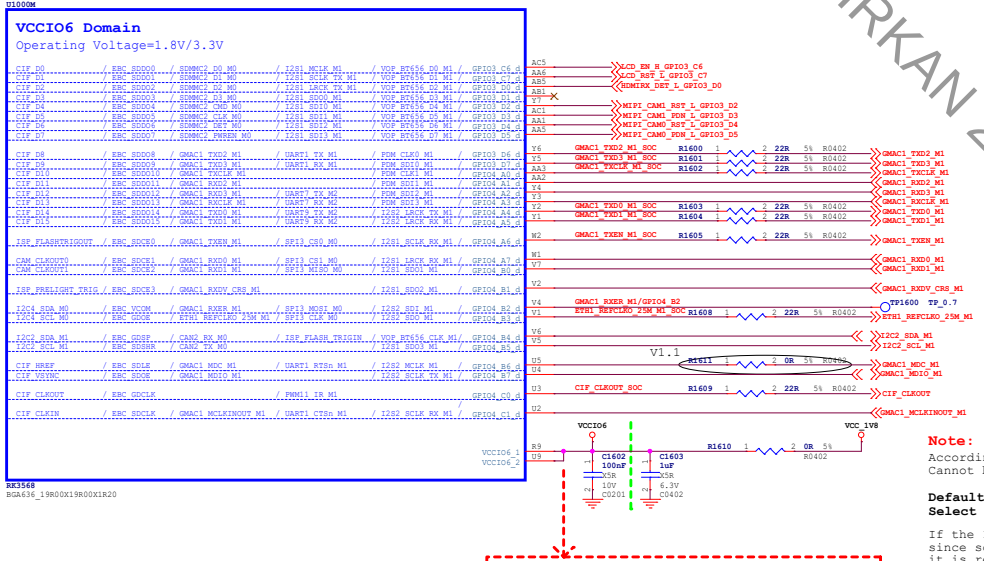



Mode	16bit	12bit	10bit	8bit
CIF_D0	D0	--	--	--
CIF_D1	D1	--	--	--
CIF_D2	D2	--	--	--
CIF_D3	D3	--	--	--
CIF_D4	D4	D0	--	--
CIF_D5	D5	D1	--	--
CIF_D6	D6	D2	D0	--
CIF_D7	D7	D3	D1	--
CIF_D8	D8	D4	D2	D0
CIF_D9	D9	D5	D3	D1
CIF_D10	D10	D6	D4	D2
CIF_D11	D11	D7	D5	D3
CIF_D12	D12	D8	D6	D4
CIF_D13	D13	D9	D7	D5
CIF_D14	D14	D10	D8	D6
CIF_D15	D15	D11	D9	D7

Support BT601 YCbCr 422 8bit input
Support BT656 YCbCr 422 8bit input
Support RAW 8/10/12bit input
Support BT1120 YCbCr 422 8/10/12/16bit input, single/dual-edge sampling
Support 2/4 mixed BT656/BT1120 YCbCr 422 8bit input

BT1120 16bit Mode:
Default: D0-D7 <--> Y0-Y7 , D8-D15 <--> C0-C7
Swap ON: D0-D7 <--> C0-C7 , D8-D15 <--> Y0-Y7

Note:
Caps of between dashed green lines and U1000
should be placed under the U1000 package.
Other caps should be placed close to the U1000 package

Note:
If VCCIO6 domain power voltage is adjusted, the software DTS configuration must be updated synchronously, otherwise the IO may be damaged!

If the VCCIO6 hardware has been modified to 1.8V power supply, and the corresponding DTS must be modified to 1.8V configuration, otherwise the IO function of VCCIO6 will be abnormally.

The VCCIO6 hardware has been modified to 3.3V power supply, if the software DTS configuration is still 1.8V configuration, the IO of VCCIO6 will be damaged!

Note:
According to the actual choice of mounted
Cannot be mounted at the same time

Default:1.8V
Select the voltage according to the application

If the IO domain is to be used as FEPHY,
since some FEPHY only support 3.3V IO,
it is recommended to reallocate GPIO
to reduce the cost of level conversion

If a board needs to be compatible with two voltage choices, recommended to enable BOM_ID

Note:
Camera MCLK can select the following clock:
1:CAM_CLKOUT0
2:CAM_CLKOUT1
3:CIF_CLKOUT
4:REFCLK_OUT(24MHz)

Attention to the voltage matching

GMAC	Direction	GEPHY	GMAC	Direction	FEPHY
GMACx_TXD0	------->	PHYx_TXD0	GMACx_TXD0	------->	PHYx_TXD0
GMACx_TXD1	------->	PHYx_TXD1	GMACx_TXD1	------->	PHYx_TXD1
GMACx_TXD2	------->	PHYx_TXD2			
GMACx_TXD3	------->	PHYx_TXD3			
GMACx_TXEN	------->	PHYx_TXEN	GMACx_TXEN	------->	PHYx_TXEN
GMACx_TXCLK	------->	PHYx_TXCLK			
GMACx_RXD0	<-------	PHYx_RXD0	GMACx_RXD0	<-------	PHYx_RXD0
GMACx_RXD1	<-------	PHYx_RXD1	GMACx_RXD1	<-------	PHYx_RXD1
GMACx_RXD2	<-------	PHYx_RXD2			
GMACx_RXD3	<-------	PHYx_RXD3			
GMACx_RXDV	<-------	PHYx_RXDV	GMACx_RXDV	<-------	PHYx_CRS_DV
GMACx_RXCLK	<-------	PHYx_RXCLK			
GMACx_RXER			GMACx_RXER	<-------	PHYx_RXER
GMACx_MDC	------->	PHYx_MDC	GMACx_MDC	------->	PHYx_MDC
GMACx_MDIO	<------->	PHYx_MDIO	GMACx_MDIO	<------->	PHYx_MDIO
ETHx_REFCLKO_25M	------->	PHYx OSC	ETHx_REFCLKO_25M	------->	PHYx OSC
GMACx_MCLKINOUT	<-------	PHYx_CLKOUT125(Option)	GMACx_MCLKINOUT	<------->	PHYx_TXC
GPIO	------->	PHYx_RSTn	GPIO	------->	PHYx_RSTn
GPIO	<-------	PHYx_INT/PMEB	GPIO	<-------	PHYx_INT/PMEB

Rockchip 瑞芯微电子	Rockchip Electronics Co., Ltd
Project:	RK3568_AIoT_REF_SCH
File:	16.RK3568_VI Interface
Date:	Wednesday, June 16, 2021
Rev:	V1.1
Designed by:	Zhangtz
Reviewed by:	Default
Sheet:	17 of 72

RK3568_R(MIPI_DSI_TX0/LVDS_TX0)

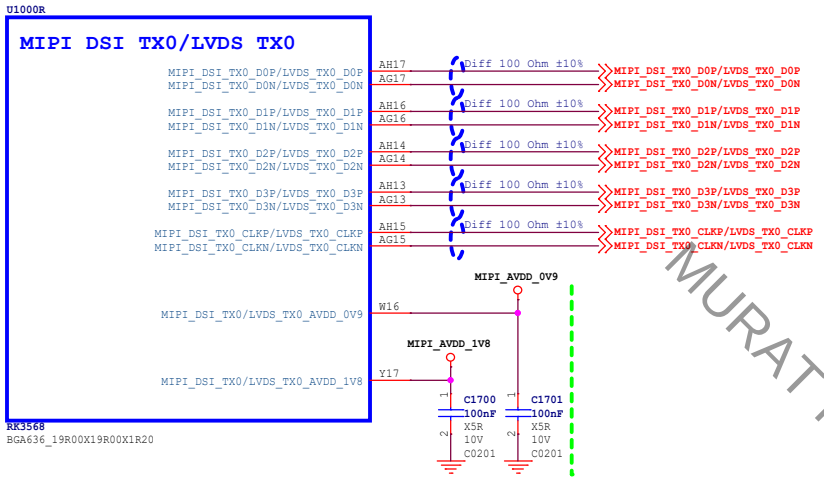

RK3568_S(MIPI_DSI_TX1)

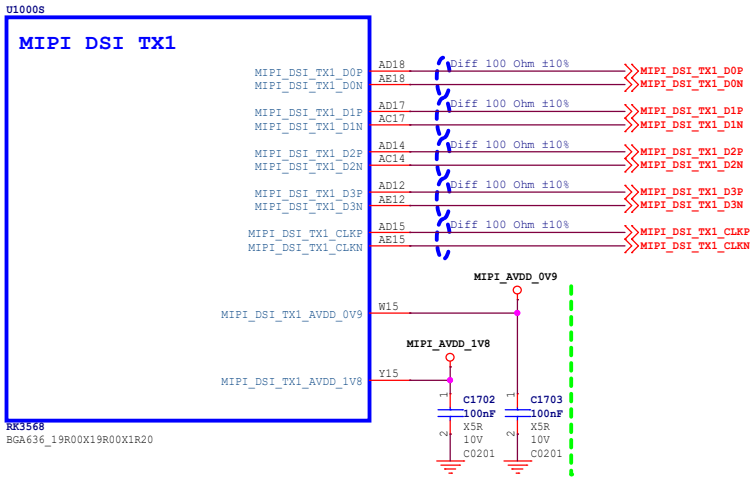

RK3568_T(eDP TX)

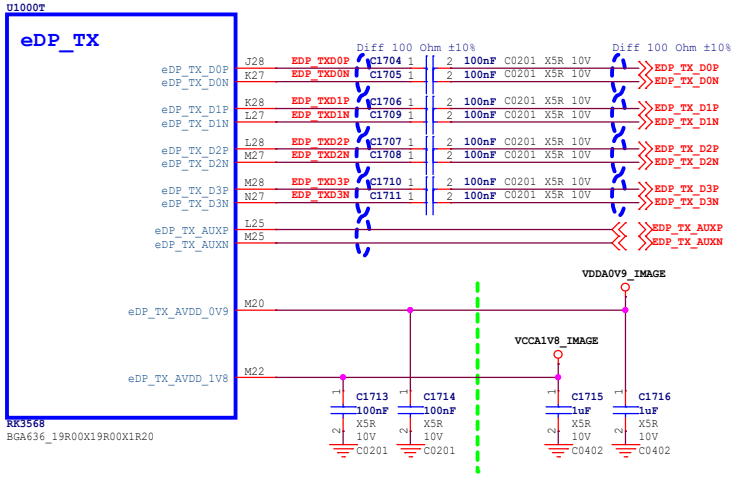

Note:
Caps of between dashed green lines and U1000
should be placed under the U1000 package.
Other caps should be placed close to the U1000 package

Rockchip Confidential

RK3568_Q(HDMI2.0 TX)

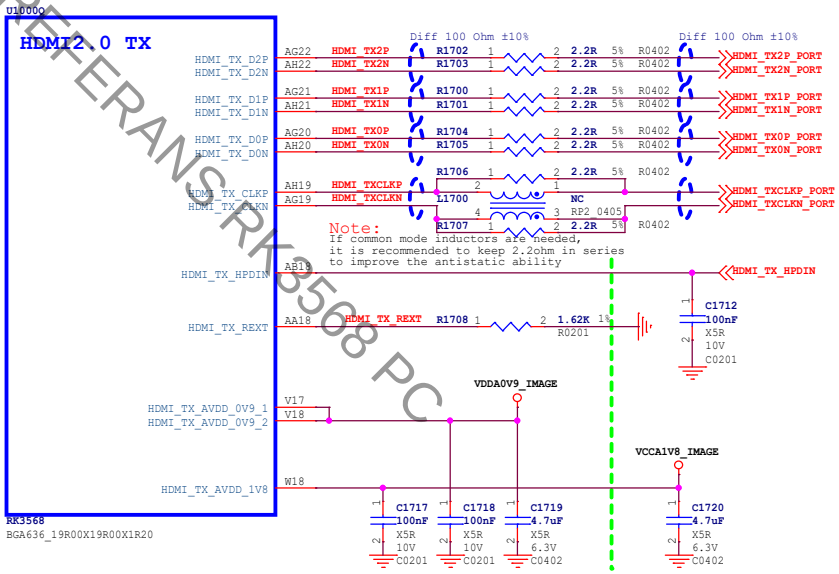

Rockchip 瑞芯微电子	Rockchip Electronics Co., Ltd				
Project:	RK3568_AIoT_REF_SCH				
File:	17.RK3568_VO Interface_1				
Date:	Wednesday, June 16, 2021			Rev:	V1.1
Designed by:	Zhangdz	Reviewed by:	Default	Sheet:	18 of 72

RK3568_L(VCCIO5 Domain)

U1000L

VCCIO5 Domain

Operating Voltage=1.8V/3.3V

LCDC_D0	VOP_BT656_D0_M0	SPI0_MISO_M1	PCIE20_CLKREQn_M1	I2S1_MCLK_M2	GPIO2_D0_d
LCDC_D1	VOP_BT656_D1_M0	SPI0_MOSI_M1	PCIE20_WAKEn_M1	I2S1_SCLK_TX_M2	GPIO2_D1_d
LCDC_D2	VOP_BT656_D2_M0	SPI0_CS0_M1	PCIE30X1_CLKREQn_M1	I2S1_LRCK_TX_M2	GPIO2_D2_d
LCDC_D3	VOP_BT656_D3_M0	SPI0_CLK_M1	PCIE30X1_WAKEn_M1	I2S1_SDI0_M2	GPIO2_D3_d
LCDC_D4	VOP_BT656_D4_M0	SPI2_CS1_M1	PCIE30X2_CLKREQn_M1	I2S1_SDI1_M2	GPIO2_D4_d
LCDC_D5	VOP_BT656_D5_M0	SPI2_CS0_M1	PCIE30X2_WAKEn_M1	I2S1_SDI2_M2	GPIO2_D5_d
LCDC_D6	VOP_BT656_D6_M0	SPI2_MOSI_M1	PCIE30X2_PERSTn_M1	I2S1_SDI3_M2	GPIO2_D6_d
LCDC_D7	VOP_BT656_D7_M0	SPI2_MISO_M1	UART8_TX_M1	I2S1_SDO0_M2	GPIO2_D7_d
LCDC_CLK	VOP_BT656_CLK_M0	SPI2_CLK_M1	UART8_RX_M1	I2S1_SDO1_M2	GPIO3_A0_d
LCDC_D8	VOP_BT1120_D0	SPI1_CS0_M1	PCIE30X1_PERSTn_M1	SDMMC2_D0_M1	GPIO3_A1_d
LCDC_D9	VOP_BT1120_D1	GMAC1_TXD2_M0	I2S3_MCLK_M0	SDMMC2_D1_M1	GPIO3_A2_d
LCDC_D10	VOP_BT1120_D2	GMAC1_TXD3_M0	I2S3_SCLK_M0	SDMMC2_D2_M1	GPIO3_A3_d
LCDC_D11	VOP_BT1120_D3	GMAC1_RXD2_M0	I2S3_LRCK_M0	SDMMC2_D3_M1	GPIO3_A4_d
LCDC_D12	VOP_BT1120_D4	GMAC1_RXD3_M0	I2S3_SDO_M0	SDMMC2_CMD_M1	GPIO3_A5_d
LCDC_D13	VOP_BT1120_CLK	GMAC1_TXCLK_M0	I2S3_SDI_M0	SDMMC2_CLK_M1	GPIO3_A6_d
LCDC_D14	VOP_BT1120_D5	GMAC1_RXCLK_M0		SDMMC2_DET_M1	GPIO3_A7_d
LCDC_D15	VOP_BT1120_D6	ETH1_REFCLKO_25M_M0		SDMMC2_PWREN_M1	GPIO3_B0_d
LCDC_D16	VOP_BT1120_D7	GMAC1_RXD0_M0	UART4_RX_M1	PWM8_M0	GPIO3_B1_d
LCDC_D17	VOP_BT1120_D8	GMAC1_RXD1_M0	UART4_TX_M1	PWM9_M0	GPIO3_B2_d
LCDC_D18	VOP_BT1120_D9	GMAC1_RXDV_CRS_M0	I2C5_SCL_M0	PDM_SDI0_M2	GPIO3_B3_d
LCDC_D19	VOP_BT1120_D10	GMAC1_RXER_M0	I2C5_SDA_M0	PDM_SDI1_M2	GPIO3_B4_d
LCDC_D20	VOP_BT1120_D11	GMAC1_TXD0_M0	I2C3_SCL_M1	PWM10_M0	GPIO3_B5_d
LCDC_D21	VOP_BT1120_D12	GMAC1_TXD1_M0	I2C3_SDA_M1	PWM11_IR_M0	GPIO3_B6_d
LCDC_D22	PWM12_M0	GMAC1_TXEN_M0	UART3_TX_M1	PDM_SDI2_M2	GPIO3_B7_d
LCDC_D23	PWM13_M0	GMAC1_MCLKINOUT_M0	UART3_RX_M1	PDM_SDI3_M2	GPIO3_C0_d
LCDC_HSYNC	VOP_BT1120_D13	SPI1_MOSI_M1	PCIE20_PERSTn_M1	I2S1_SDO2_M2	GPIO3_C1_d
LCDC_VSYNC	VOP_BT1120_D14	SPI1_MISO_M1	UART5_TX_M1	I2S1_SDO3_M2	GPIO3_C2_d
LCDC_DEN	VOP_BT1120_D15	SPI1_CLK_M1	UART5_RX_M1	I2S1_SCLK_RX_M2	GPIO3_C3_d
PWM14_M0	VOP_PWM_M1	GMAC1_MDC_M0	UART7_TX_M1	PDM_CLK1_M2	GPIO3_C4_d
PWM15_IR_M0	SPDIF_TX_M1	GMAC1_MDIO_M0	UART7_RX_M1	I2S1_LRCK_RX_M2	GPIO3_C5_d

RK3568
BGA636_19R00X19R00X1R20

AG6 PCIE20_CLKREQn_M1
AD7 PCIE20_WAKEn_M1
AC8 PCIE30X1_CLKREQn_M1
AC7 PCIE30X1_WAKEn_M1
AF5 PCIE30X2_CLKREQn_M1
AF6 PCIE30X2_WAKEn_M1
AD6 PCIE30X2_PERSTn_M1
AH5 PCIE30X2_PRSNT_L_GPIO2_D7

AH4 PCIE30X1_PRSNT_L_GPIO3_A0

AB8 PCIE30X1_PERSTn_M1

AE5 I2S3_MCLK_M0
AG4 I2S3_SCLK_M0_SOC — R1802 1 2 22R 5% R0402 — TP1800 TP_0.7 — I2S3_SCLK_M0
AF4 I2S3_LRCK_M0_SOC — R1803 1 2 22R 5% R0402 — I2S3_LRCK_M0
AH3 I2S3_SDO_M0 — TP1801 TP_0.7

AG3 I2S3_SDI_M0
AH2 GMAC1_INT/PMEB_GPIO3_A7
AG2 GMAC1_RSTn_GPIO3_B0

AG1 UART4_RX_M1
AF2 UART4_TX_M1
AF1 I2C5_SCL_M0
AE1 I2C5_SDA_M0
AE2 RS485_DIR_GPIO3_B5
AE3 GPIO3_B6
AD4 GPIO3_B7
AD2 GPIO3_C0

AD1 PCIE20_PERSTn_M1
AA1 HP_DET_L_GPIO3_C2
AC4 SPK_CTL_H_GPIO3_C3

AC3 GPIO3_C4
AC2 GPIO3_C5

V10 VCCIO5_1
V11 VCCIO5_2

VCC_3V3
C1800 100nF X5R 10V C0201

VCC_3V3
R1800 10K 5% R0402
R1801 10K 5% R0402
GMAC0_INT/PMEB_GPIO3_C0
GMAC1_INT/PMEB_GPIO3_A7
od

VCC_3V3
R1804 2.2K 5% R0402
R1805 2.2K 5% R0402
I2C5_SCL_M0
I2C5_SDA_M0

If a board needs to be compatible with two voltage choices, recommended to enable BOM_ID

Note:
If VCCIO5 domain power voltage is adjusted, the software DTS configuration must be updated synchronously, otherwise the IO may be damaged!

If the VCCIO5 hardware has been modified to 1.8V power supply, and the corresponding DTS must be modified to 1.8V configuration, otherwise the IO function of VCCIO5 will be abnormally.

The VCCIO5 hardware has been modified to 3.3V power supply, if the software DTS configuration is still 1.8V configuration, the IO of VCCIO5 will be damaged!

Default PCIe slot
GPIO3_B6 PCIE20_PRSNT_L_GPIO3_B6

PCIe Ethernet
GPIO3_B6 PCIE_ETH_ISOLATE_L_GPIO3_B6

QSGMII/SGMII
GPIO3_C4 GMAC1_MDC_M0
GPIO3_C5 GAMC1_MDIO_M0

Default UART7
GPIO3_C4 UART7_TX_M1
GPIO3_C5 UART7_RX_M1

Option

Default
GPIO3_B7 UART3_TX_M1
GPIO3_C0 UART3_RX_M1

GPIO3_B7 GMAC0_RSTn_GPIO3_B7
GPIO3_C0 GMAC0_INT/PMEB_GPIO3_C0

Option

Note:
Caps of between dashed green lines and U1000 should be placed under the U1000 package

Rockchip 瑞芯微电子	Rockchip Electronics Co., Ltd			
Project:	RK3568_AIoT_REF_SCH			
File:	18.RK3568_VO Interface_2			
Date:	Wednesday, June 16, 2021		Rev:	V1.1
Designed by:	Zhangdz	Reviewed by: Default	Sheet:	19 of 72

RK3568_H(VCCIO1 Domain)

U1000H

VCCIO1 Domain

Operating Voltage=1.8V/3.3V

I2C3_SDA_M0	/ UART3_RX_M0	/ CAN1_RX_M0		/ AUDIOPWM_LOUT_P / ACODEC_ADC_DATA	/ GPIO1_A0_u
I2C3_SCL_M0	/ UART3_TX_M0	/ CAN1_TX_M0		/ AUDIOPWM_LOUT_N / ACODEC_ADC_CLK	/ GPIO1_A1_u
I2S1_MCLK_M0	/ UART3_RTSn_M0	/ SCR_CLK	/ PCIE30X1_PERSTn_M2		/ GPIO1_A2_d
I2S1_SCLK_TX_M0	/ UART3_CTSn_M0	/ SCR_IO	/ PCIE30X1_WAKEn_M2	/ ACODEC_DAC_CLK	/ GPIO1_A3_d
I2S1_SCLK_RX_M0	/ UART4_RX_M0	/ PDM_CLK1_M0	/ SPDIF_TX_M0		/ GPIO1_A4_d
I2S1_LRCK_TX_M0	/ UART4_RTSn_M0	/ SCR_RST	/ PCIE30X1_CLKREQn_M2	/ ACODEC_DAC_SYNC	/ GPIO1_A5_d
I2S1_LRCK_RX_M0	/ UART4_TX_M0	/ PDM_CLK0_M0	/ AUDIOPWM_ROUT_P		/ GPIO1_A6_d
I2S1_SDO0_M0	/ UART4_CTSn_M0	/ SCR_DET	/ AUDIOPWM_ROUT_N	/ ACODEC_DAC_DATAL	/ GPIO1_A7_d
I2S1_SDO1_M0	/ I2S1_SDI3_M0	/ PDM_SDI3_M0	/ PCIE20_CLKREQn_M2	/ ACODEC_DAC_DATAR	/ GPIO1_B0_d
I2S1_SDO2_M0	/ I2S1_SDI2_M0	/ PDM_SDI2_M0	/ PCIE20_WAKEn_M2	/ ACODEC_ADC_SYNC	/ GPIO1_B1_d
I2S1_SDO3_M0	/ I2S1_SDI1_M0	/ PDM_SDI1_M0	/ PCIE20_PERSTn_M2		/ GPIO1_B2_d
	I2S1_SDI0_M0	/ PDM_SDI0_M0			/ GPIO1_B3_d

VCCIO1

RK3568

BGA636_19R00X19R00X1R20

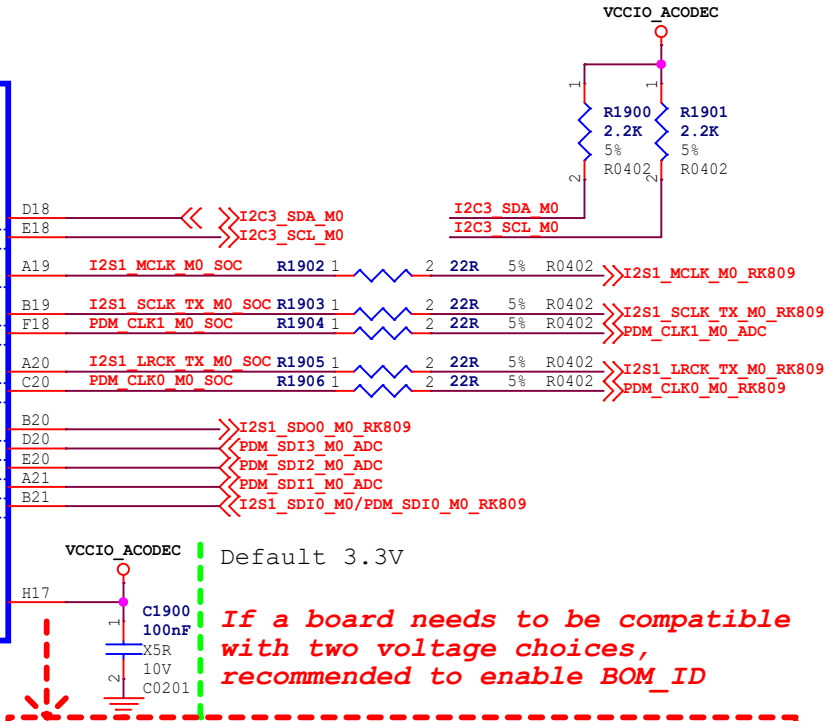

Note:

If VCCIO1 domain power voltage is adjusted, the software DTS configuration must be updated synchronously, otherwise the IO may be damaged!

If the VCCIO1 hardware has been modified to 1.8V power supply, and the corresponding DTS must be modified to 1.8V configuration, otherwise the IO function of VCCIO1 will be abnormally.

The VCCIO1 hardware has been modified to 3.3V power supply, if the software DTS configuration is still 1.8V configuration, the IO of VCCIO1 will be damaged!

Note:

Caps of between dashed green lines and U1000 should be placed under the U1000 package

Rockchip 瑞芯微电子	Rockchip Electronics Co., Ltd			
Project:	RK3568_AIoT_REF_SCH			
File:	19.RK3568_Audio Interface			
Date:	Wednesday, June 16, 2021		Rev:	V1.1
Designed by:	Zhangdz	Reviewed by: Default	Sheet:	20 of 72

12V/3A DCIN

Note:
With SATA,PCIe, the current is estimated according to the actual number of SATA,PCIe

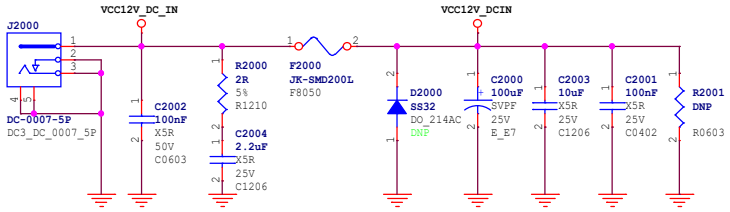

VCC3V3_SYS

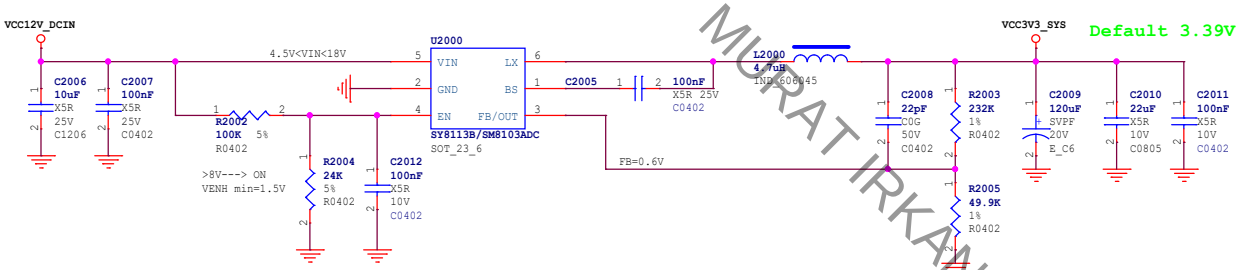

VCC5V0_SYS

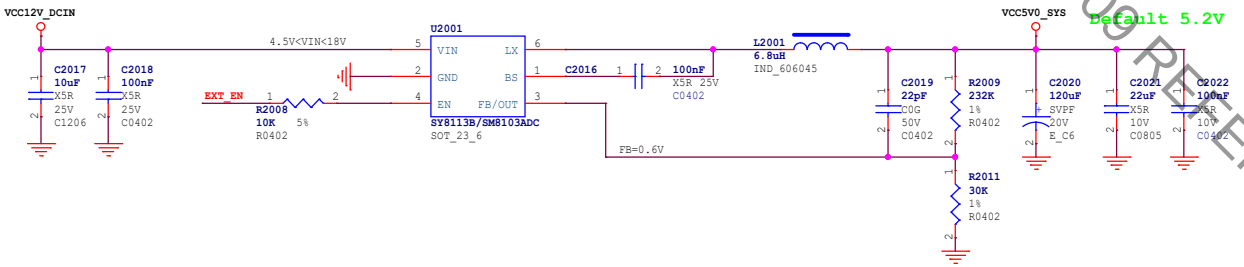

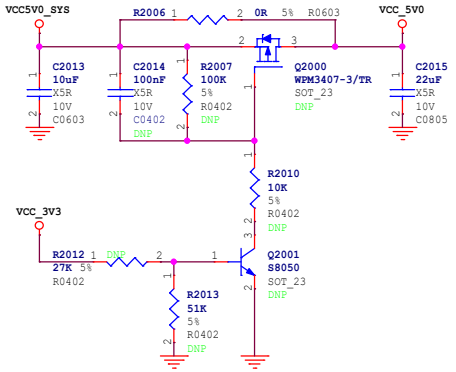

VCC5V0_USB

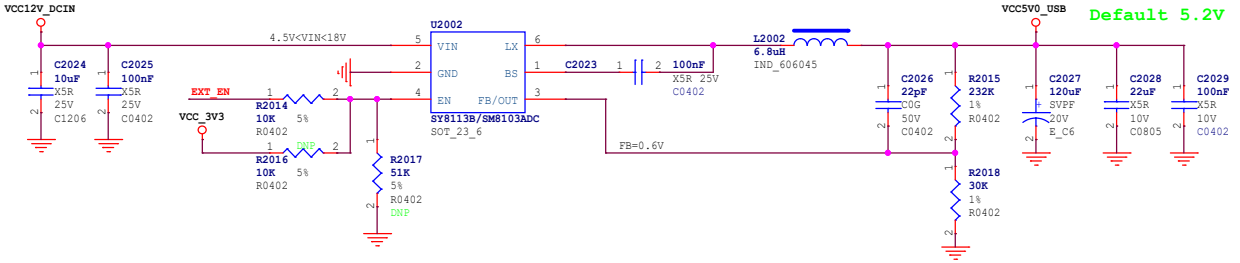

EXT_EN

Rockchip 瑞芯微电子	Rockchip Electronics Co., Ltd				
Project:	RK3568_AIoT_REF_SCH				
File:	20.Power_DC IN				
Date:	Wednesday, June 16, 2021			Rev:	V1.1
Designed by:	Zhangdz	Reviewed by:	Default	Sheet:	21 of 72

I2C0_SCL_PMIC
I2C0_SDA_PMIC
PMIC_INT_L
PMIC_SLEEP_H
RK809_32KOUT_WIFI
RESETn
RK809_PWRON
I2S1_MCLK_M0_RK809
I2S1_SCLK_TX_M0_RK809
I2S1_LRCK_TX_M0_RK809
I2S1_SDO0_M0_RK809
I2S1_SDI0_M0/PDM_SDI0_M0_RK809
PDM_CLK0_M0_RK809
EXT_EN
HPL_OUT
HP_SNS
HPR_OUT
SPKN_OUT
SPKP_OUT
MIC1_INP
MIC1_INN



PMIC RK809 DCDC

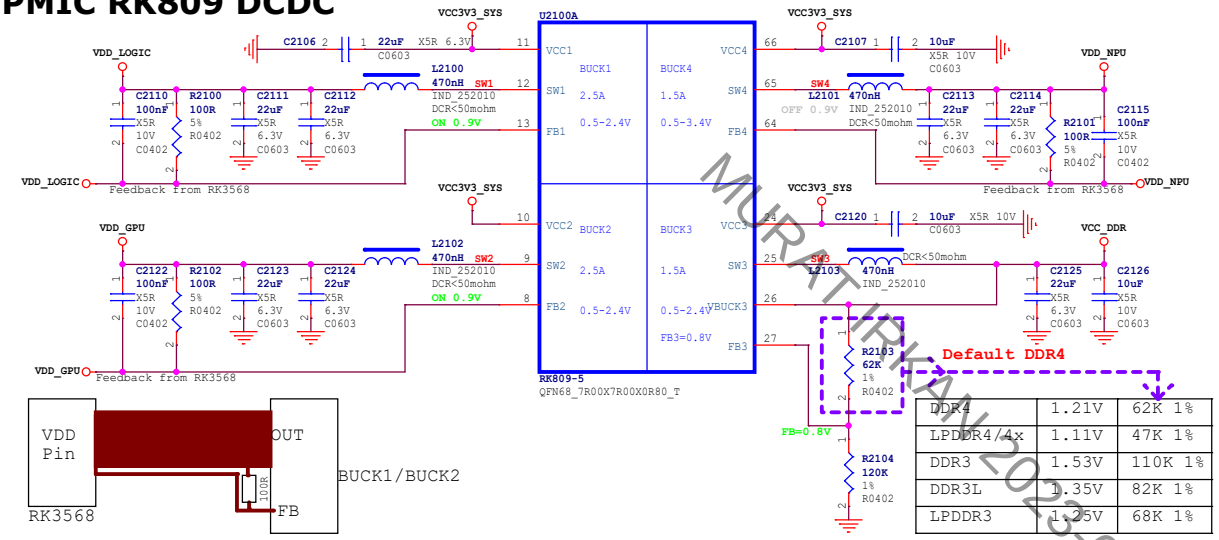

DDR4	1.21V	62K 1%
LPDDR4/4x	1.11V	47K 1%
DDR3	1.53V	110K 1%
DDR3L	1.35V	82K 1%
LPDDR3	1.25V	68K 1%

PMIC RK809 LDO

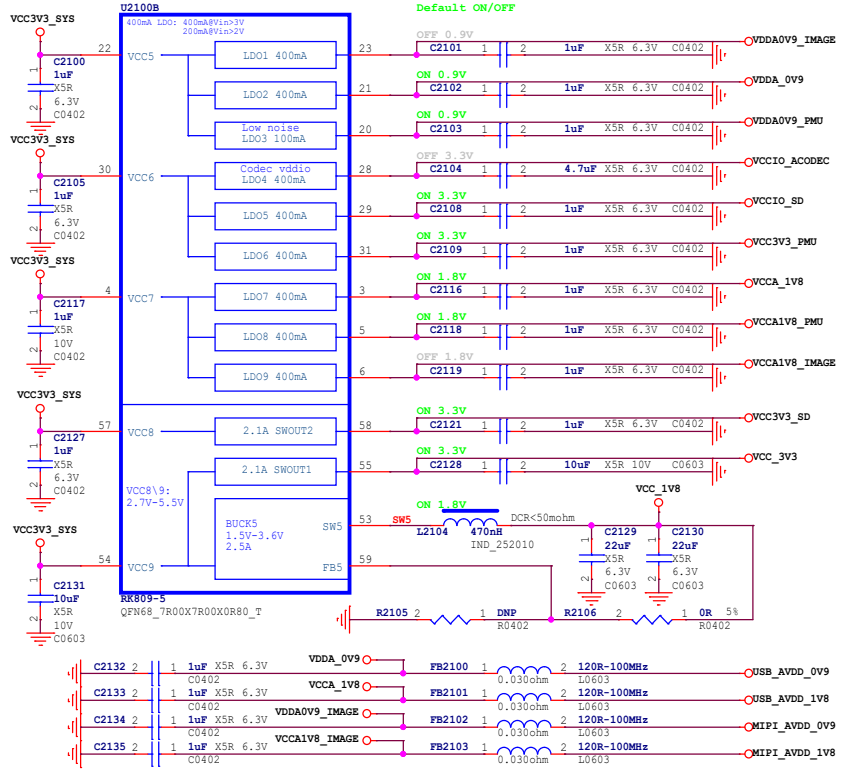

PMIC RK809 Management

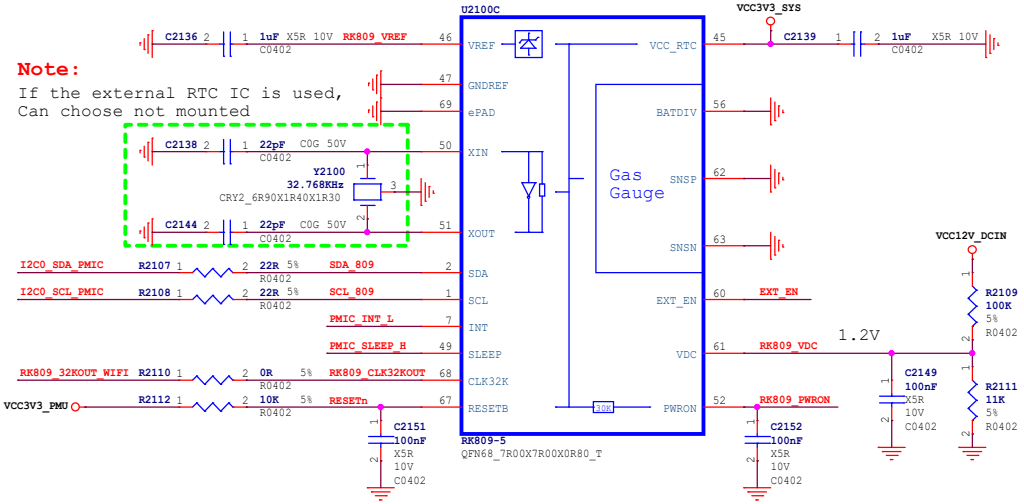

PMIC RK809 CODEC

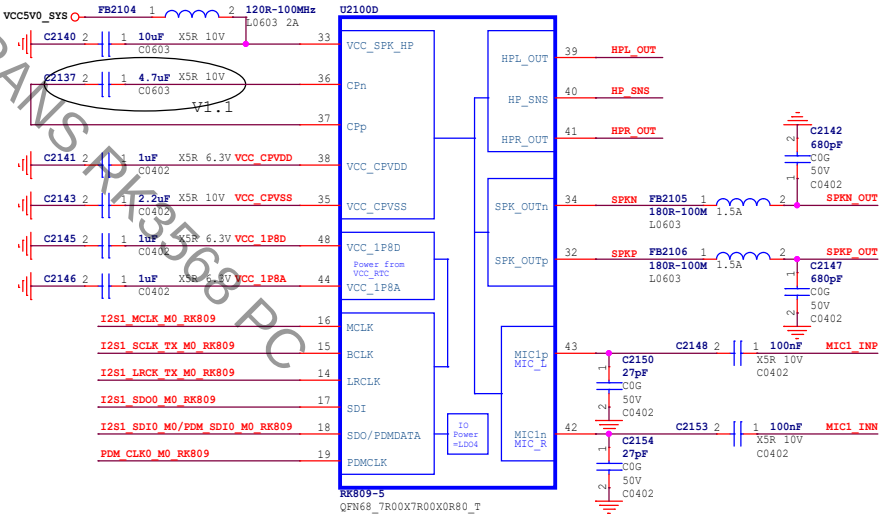

Note:
If RK809-5 codec is not used,
then Pin 14,15,16,17,19,40 Tie VSS
Pin 18,36,37,38,35,39,41,34,32,43,42
Leave floating

Rockchip 瑞芯微电子	Rockchip Electronics Co., Ltd				
Project:	RK3568_AIoT_REF_SCH				
File:	21.Power_PMIC				
Date:	Wednesday, June 16, 2021			Rev:	V1.1
Designed by:	Zhangdz	Reviewed by:	Default	Sheet:	22 of 72

I2C0_SCL_PMIC
I2C0_SDA_PMIC
PMIC_SLEEP_H
VDD_CPU_COM
RTCIC_INT_L_GPIO0_D3
RTCIC_32KOUT
I2C5_SCL_M0
I2C5_SDA_M0
LCD0_PWREN_H_GPIO0_C7
LCD1_PWREN_H_GPIO0_C5

VDD_CPU

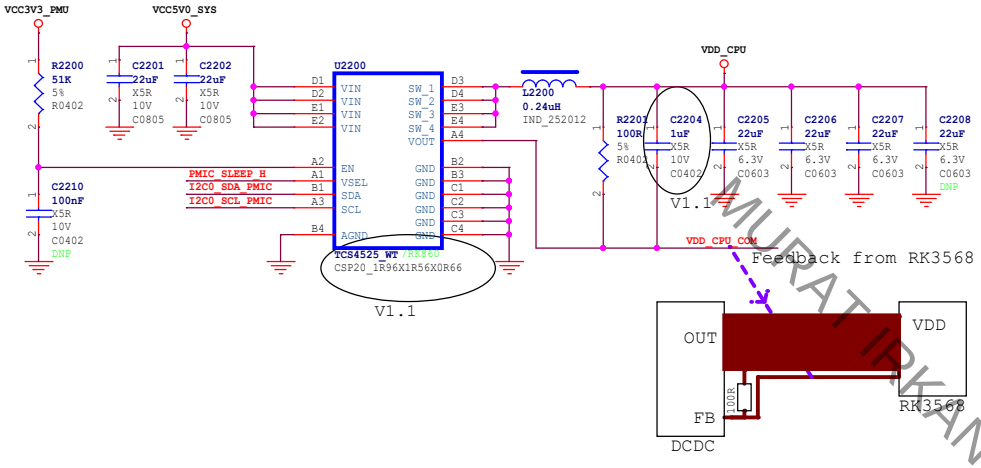

RTC IC --Option

Note:

The power off hold time scheme is required,
It is recommended to use external RTC IC

But, it will not support the timing poweron function

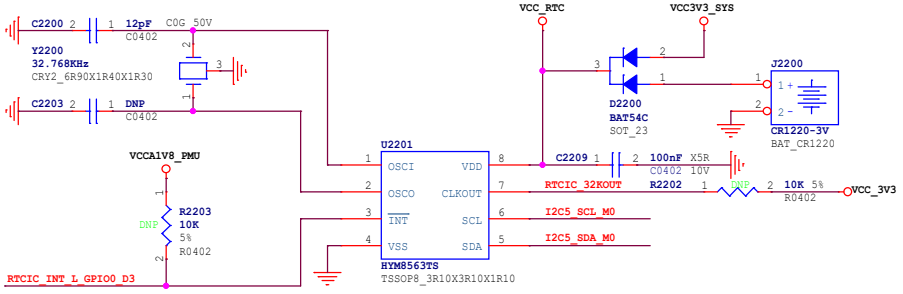

Address:Read A3H,Write A2H

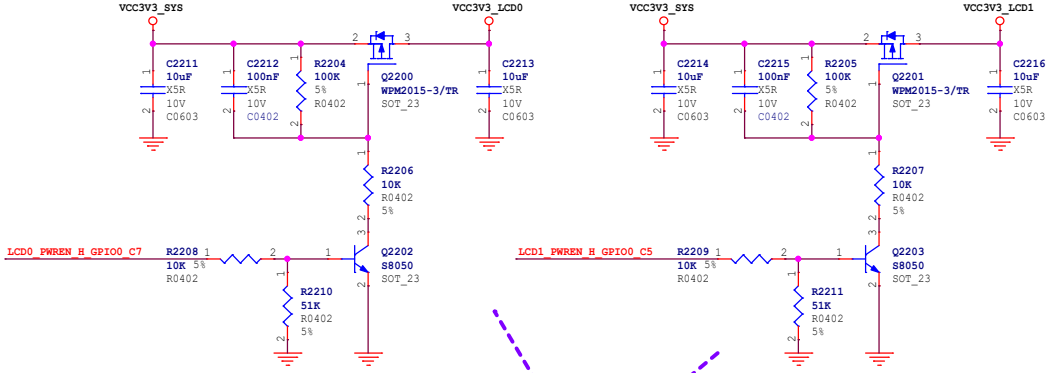

According to the actual product assigned to the LCM

Rockchip 瑞芯微电子	Rockchip Electronics Co., Ltd				
Project:	RK3568_AIoT_REF_SCH				
File:	22.Power_Ext Discrete/RTC IC				
Date:	Wednesday, June 16, 2021			Rev:	V1.1
Designed by:	Zhangdz	Reviewed by:	Default	Sheet:	23 of 72

FLASH_VOL_SEL

Flash Power Manage

	VCCIO2 domain voltage: Recommend voltage value (VCCIO_FLASH)	FLASH_VOL_SEL state decided to VCCIO2 domain IO driven by default
eMMC	1.8V	FLASH_VOL_SEL --> Logic=H
Nand flash	Default 3.3V, Optional 1.8V	FLASH_VOL_SEL --> Logic=L(Default)
SPI flash	Default 1.8V, Optional 3.3V	FLASH_VOL_SEL --> Logic=H(Default)

Note:
According to the actual choice of mounted
Cannot be mounted at the same time

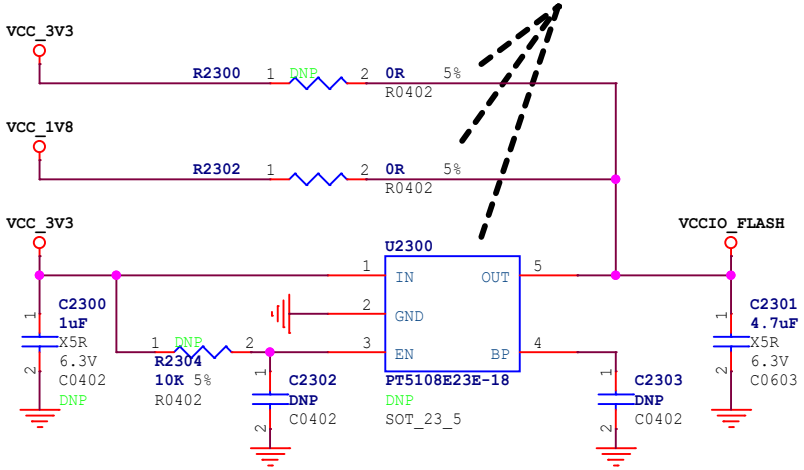

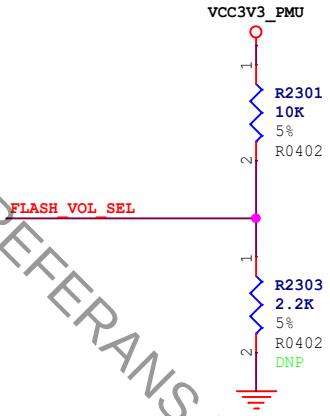

Note:
FLASH_VOL_SEL state decided
to VCCIO2 domain IO driven by default
Logic=L: 3.3V IO driven
Logic=H: 1.8V IO driven

When VCCIO2 voltage is connected to 1.8V, FLASH_VOL_SEL must be high
When VCCIO2 voltage is connected to 3.3V, FLASH_VOL_SEL must be low
If VCCIO2 power supply voltage and FLASH_VOL_SEL fails to meet the above relationship,
its function will be abnormally(for example, it cannot be started normally) or IO will be damaged.

Rockchip 瑞芯微电子	Rockchip Electronics Co., Ltd				
Project:	RK3568_AIoT_REF_SCH				
File:	23.Power_Flash Power Manage				
Date:	Wednesday, June 16, 2021			Rev:	V1.1
Designed by:	Zhangdz	Reviewed by:	Default	Sheet:	24 of 72

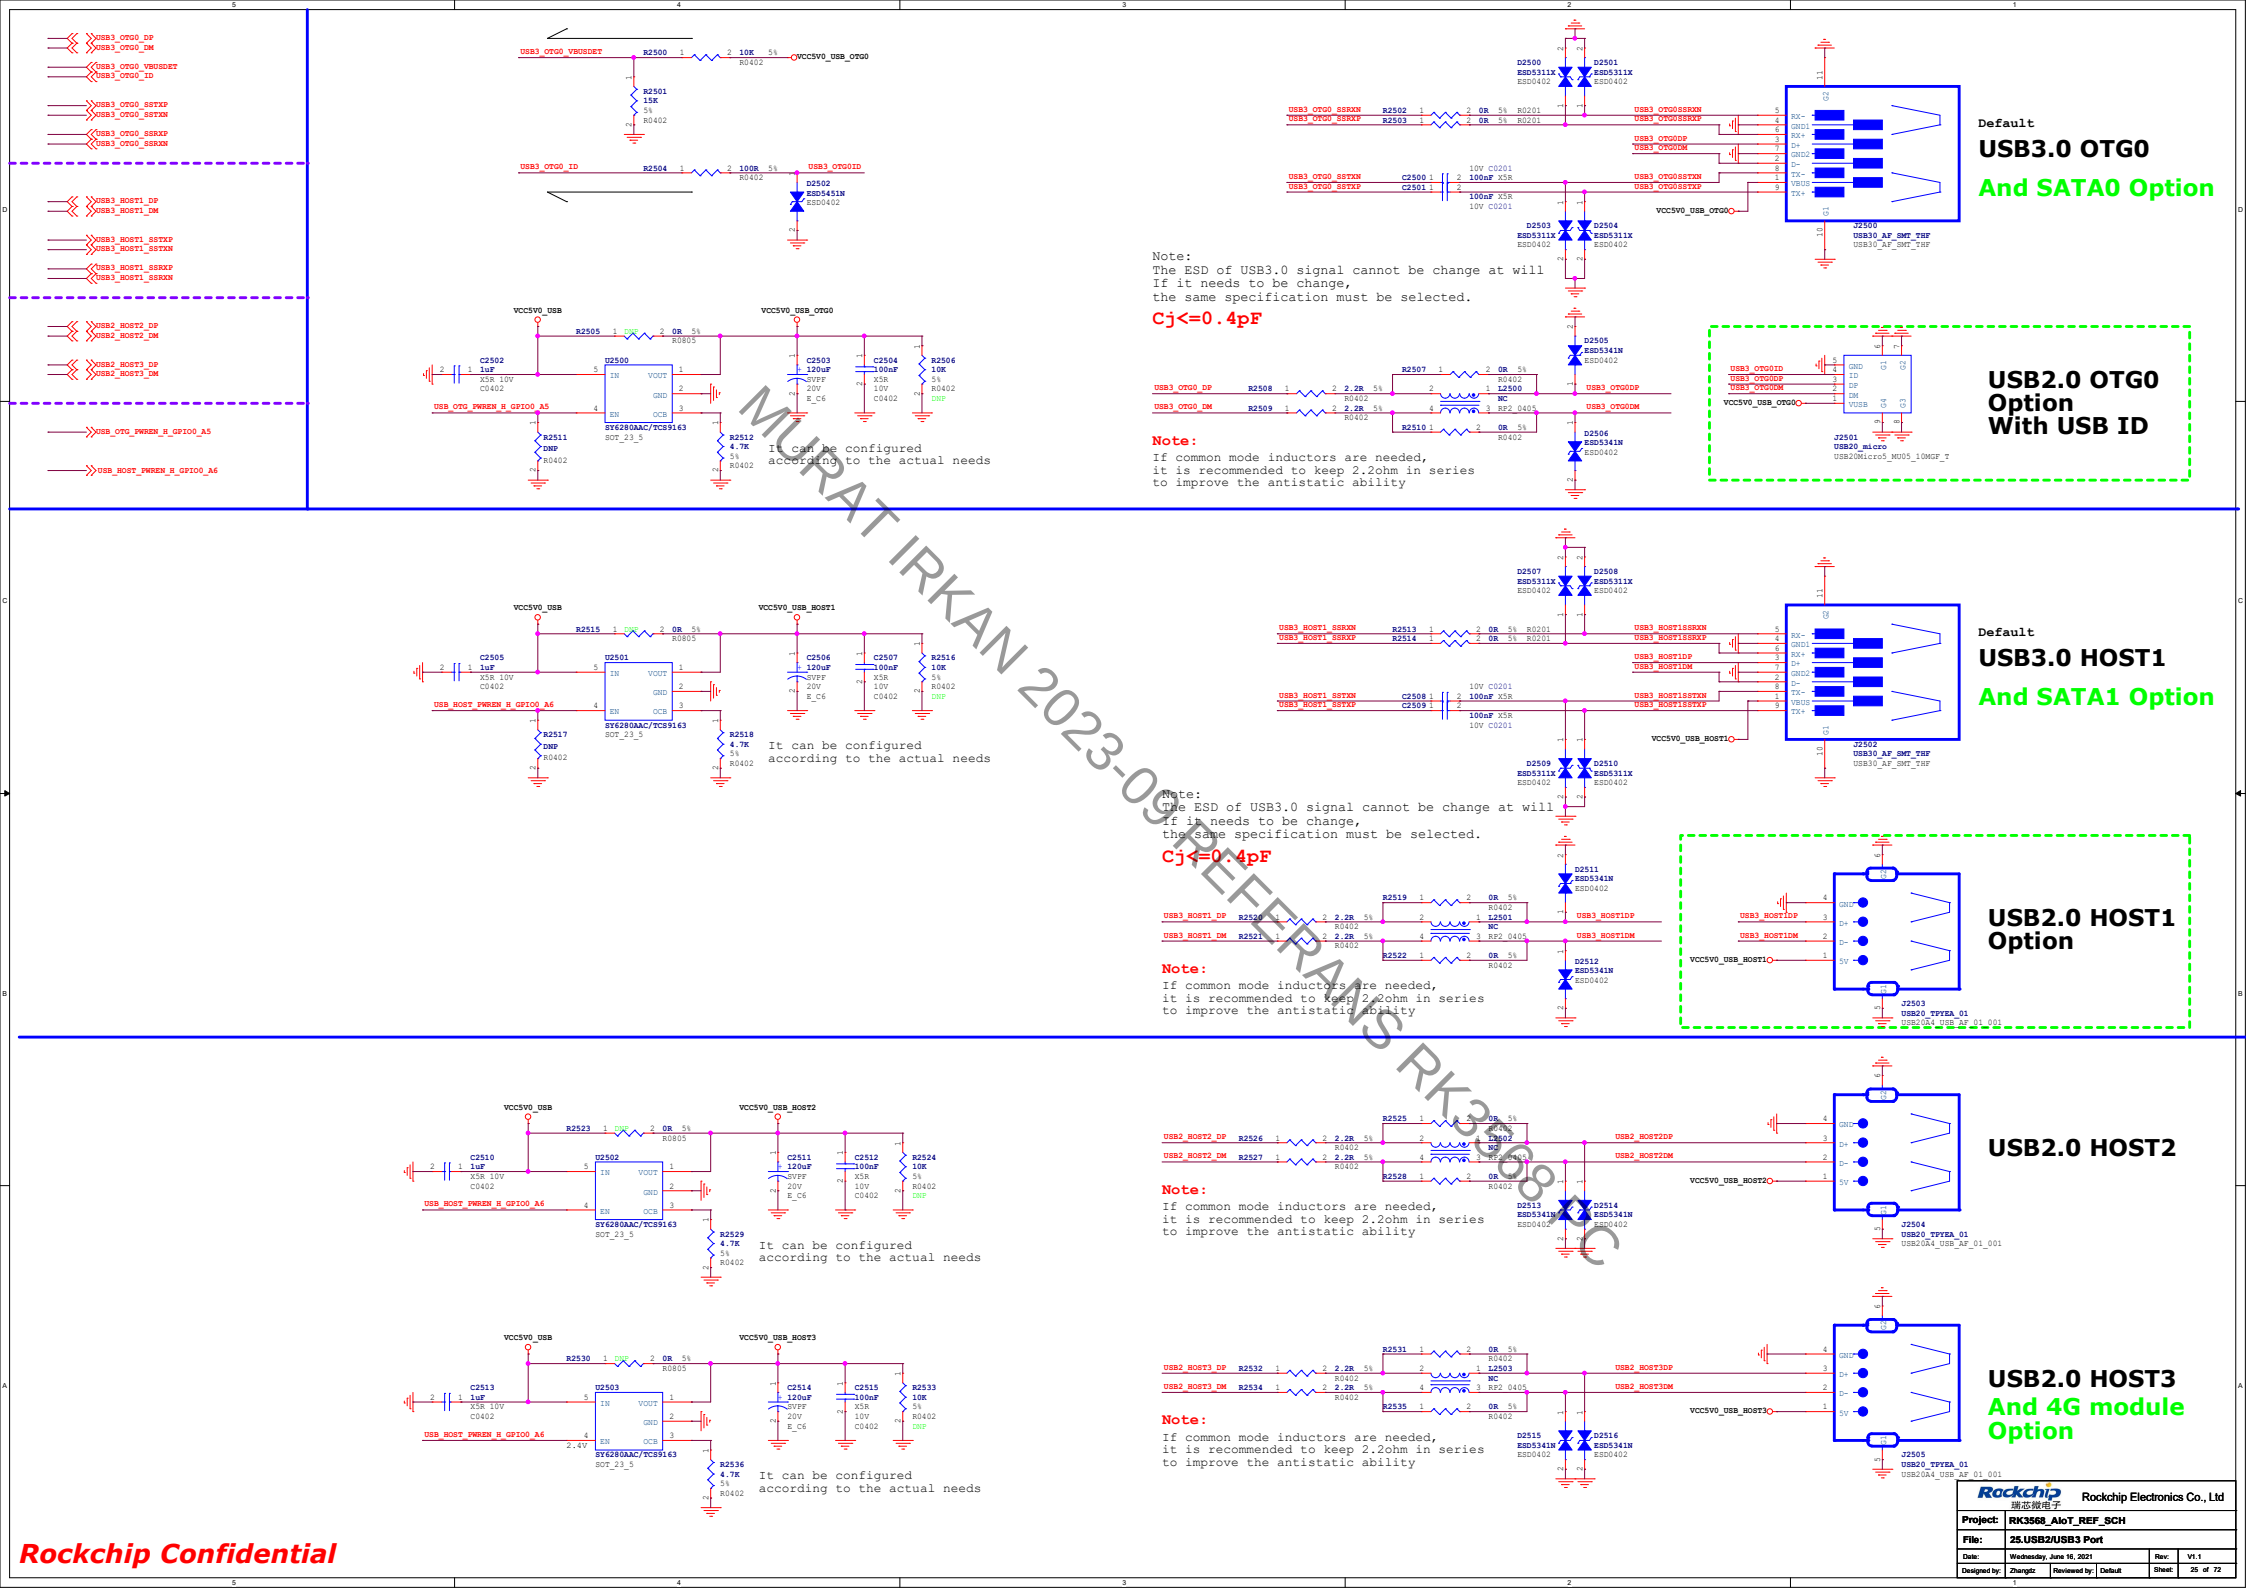

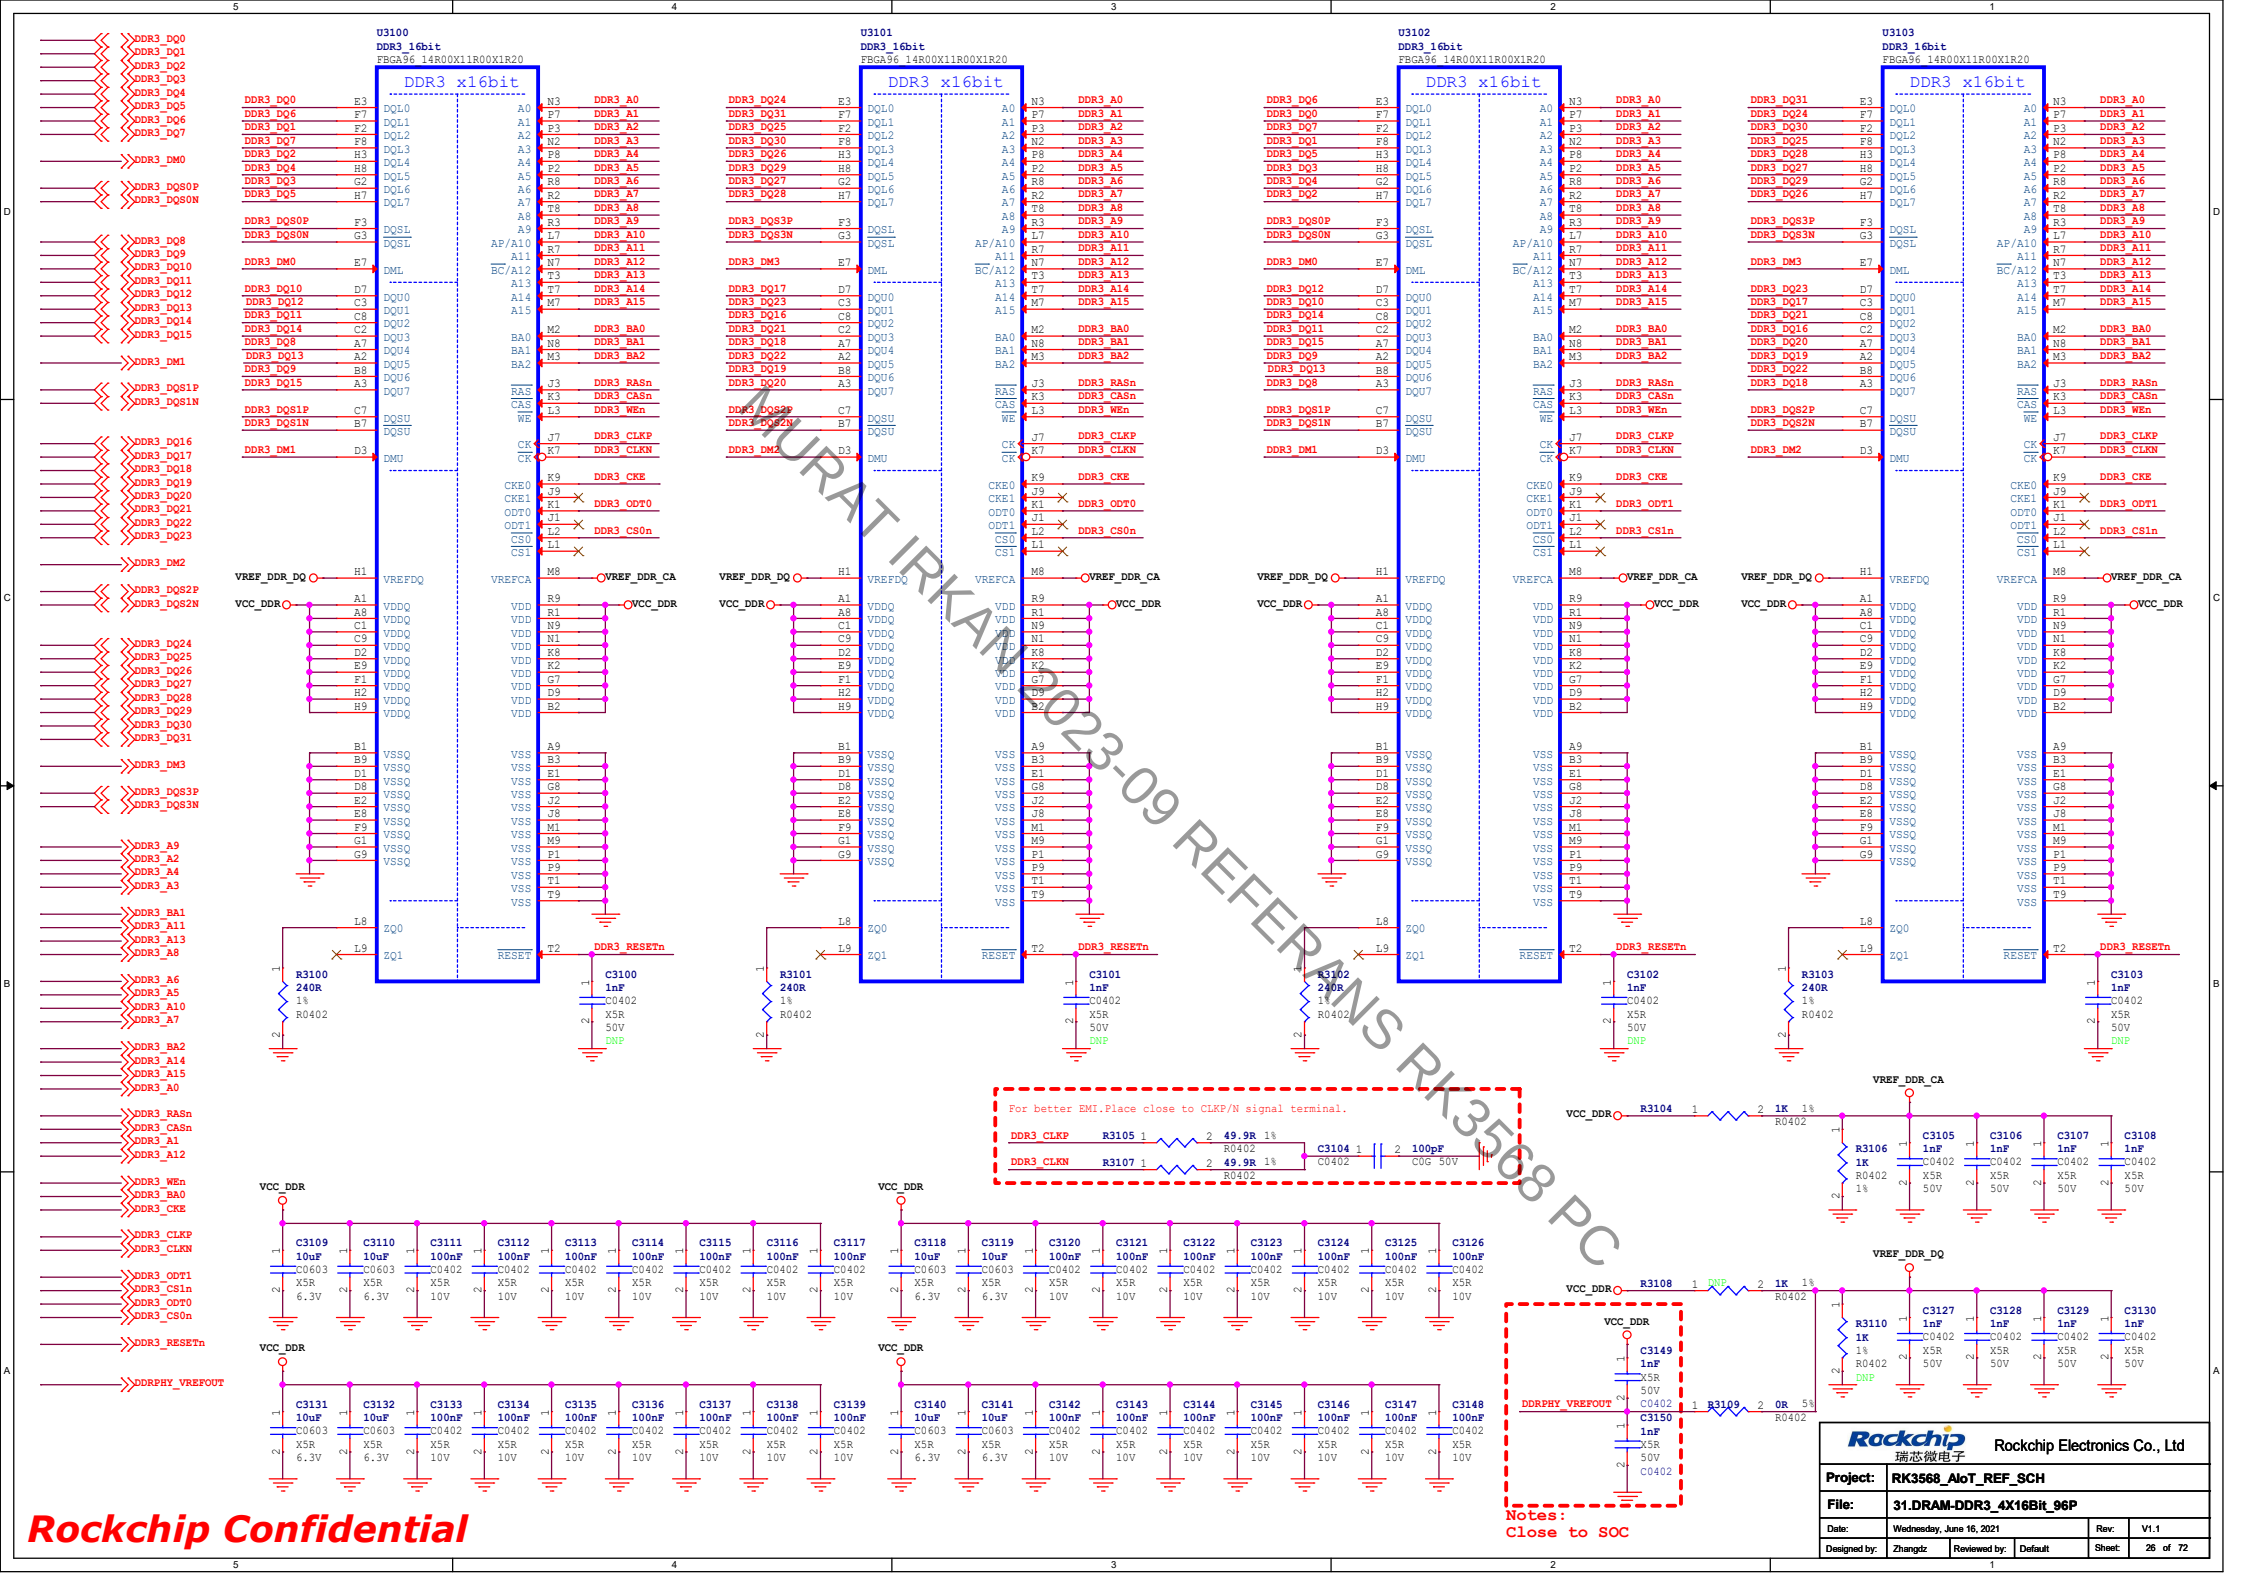

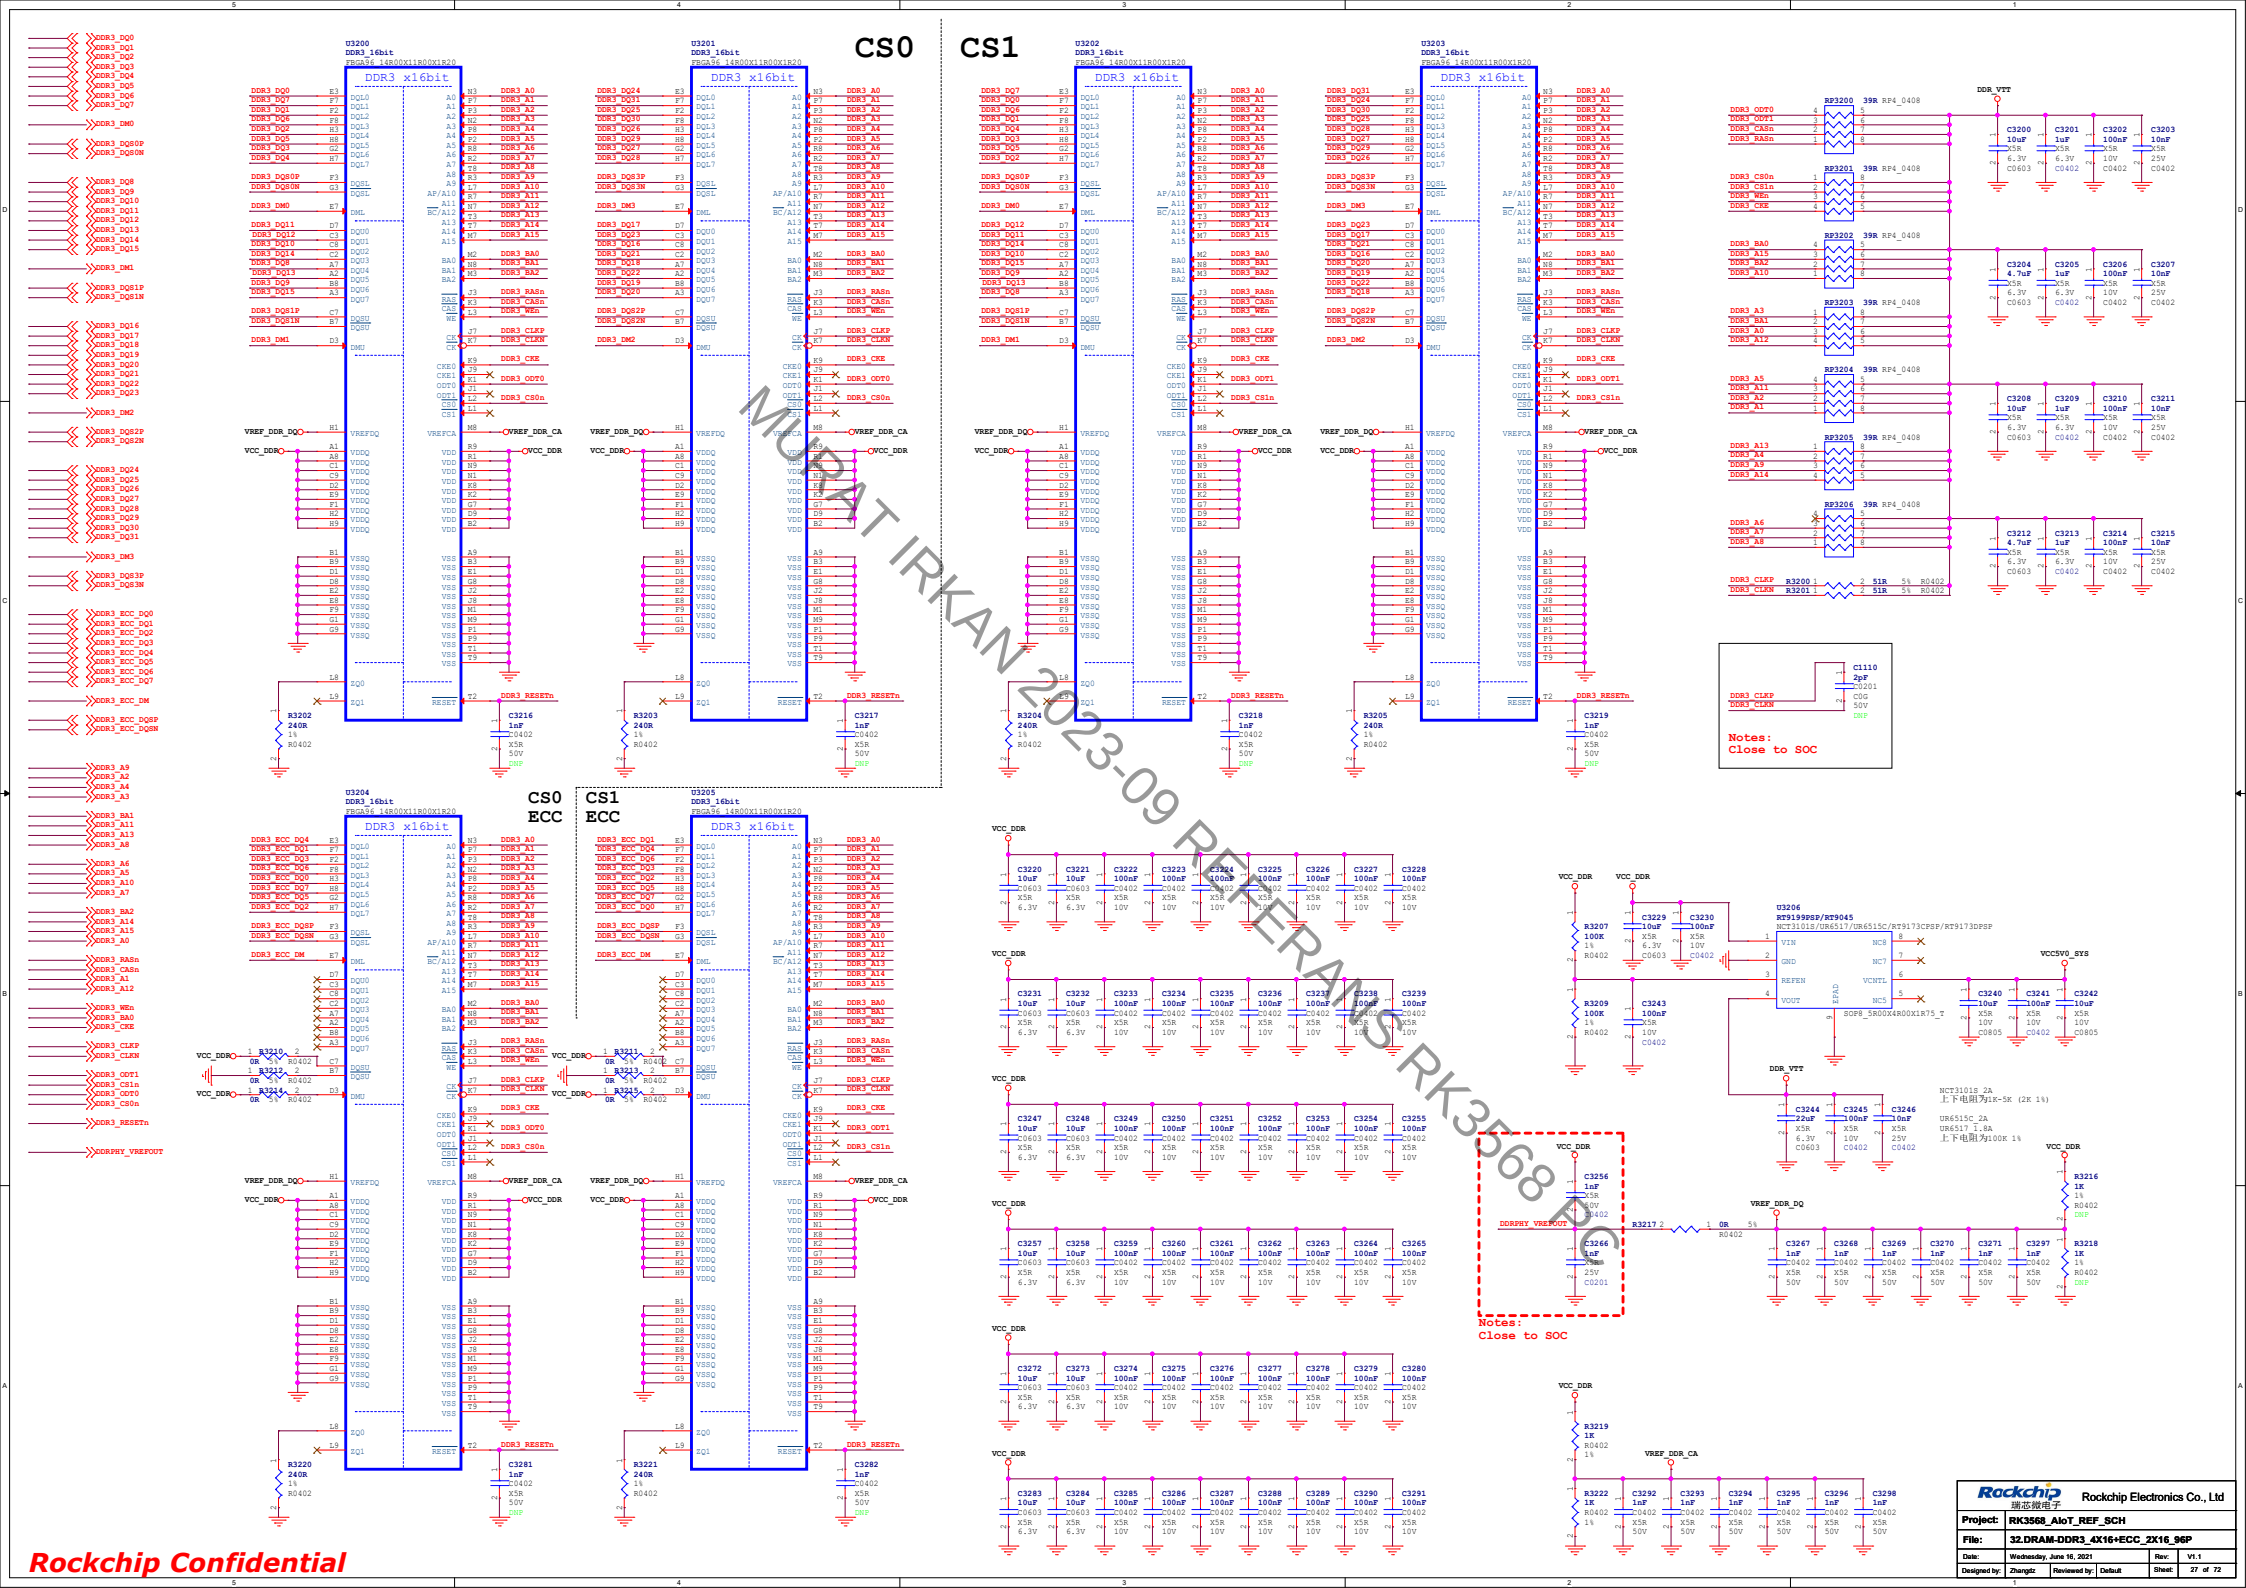

DDR4P216SD6

DDR4 3133MG/z

04/19/2024 10:48 AM

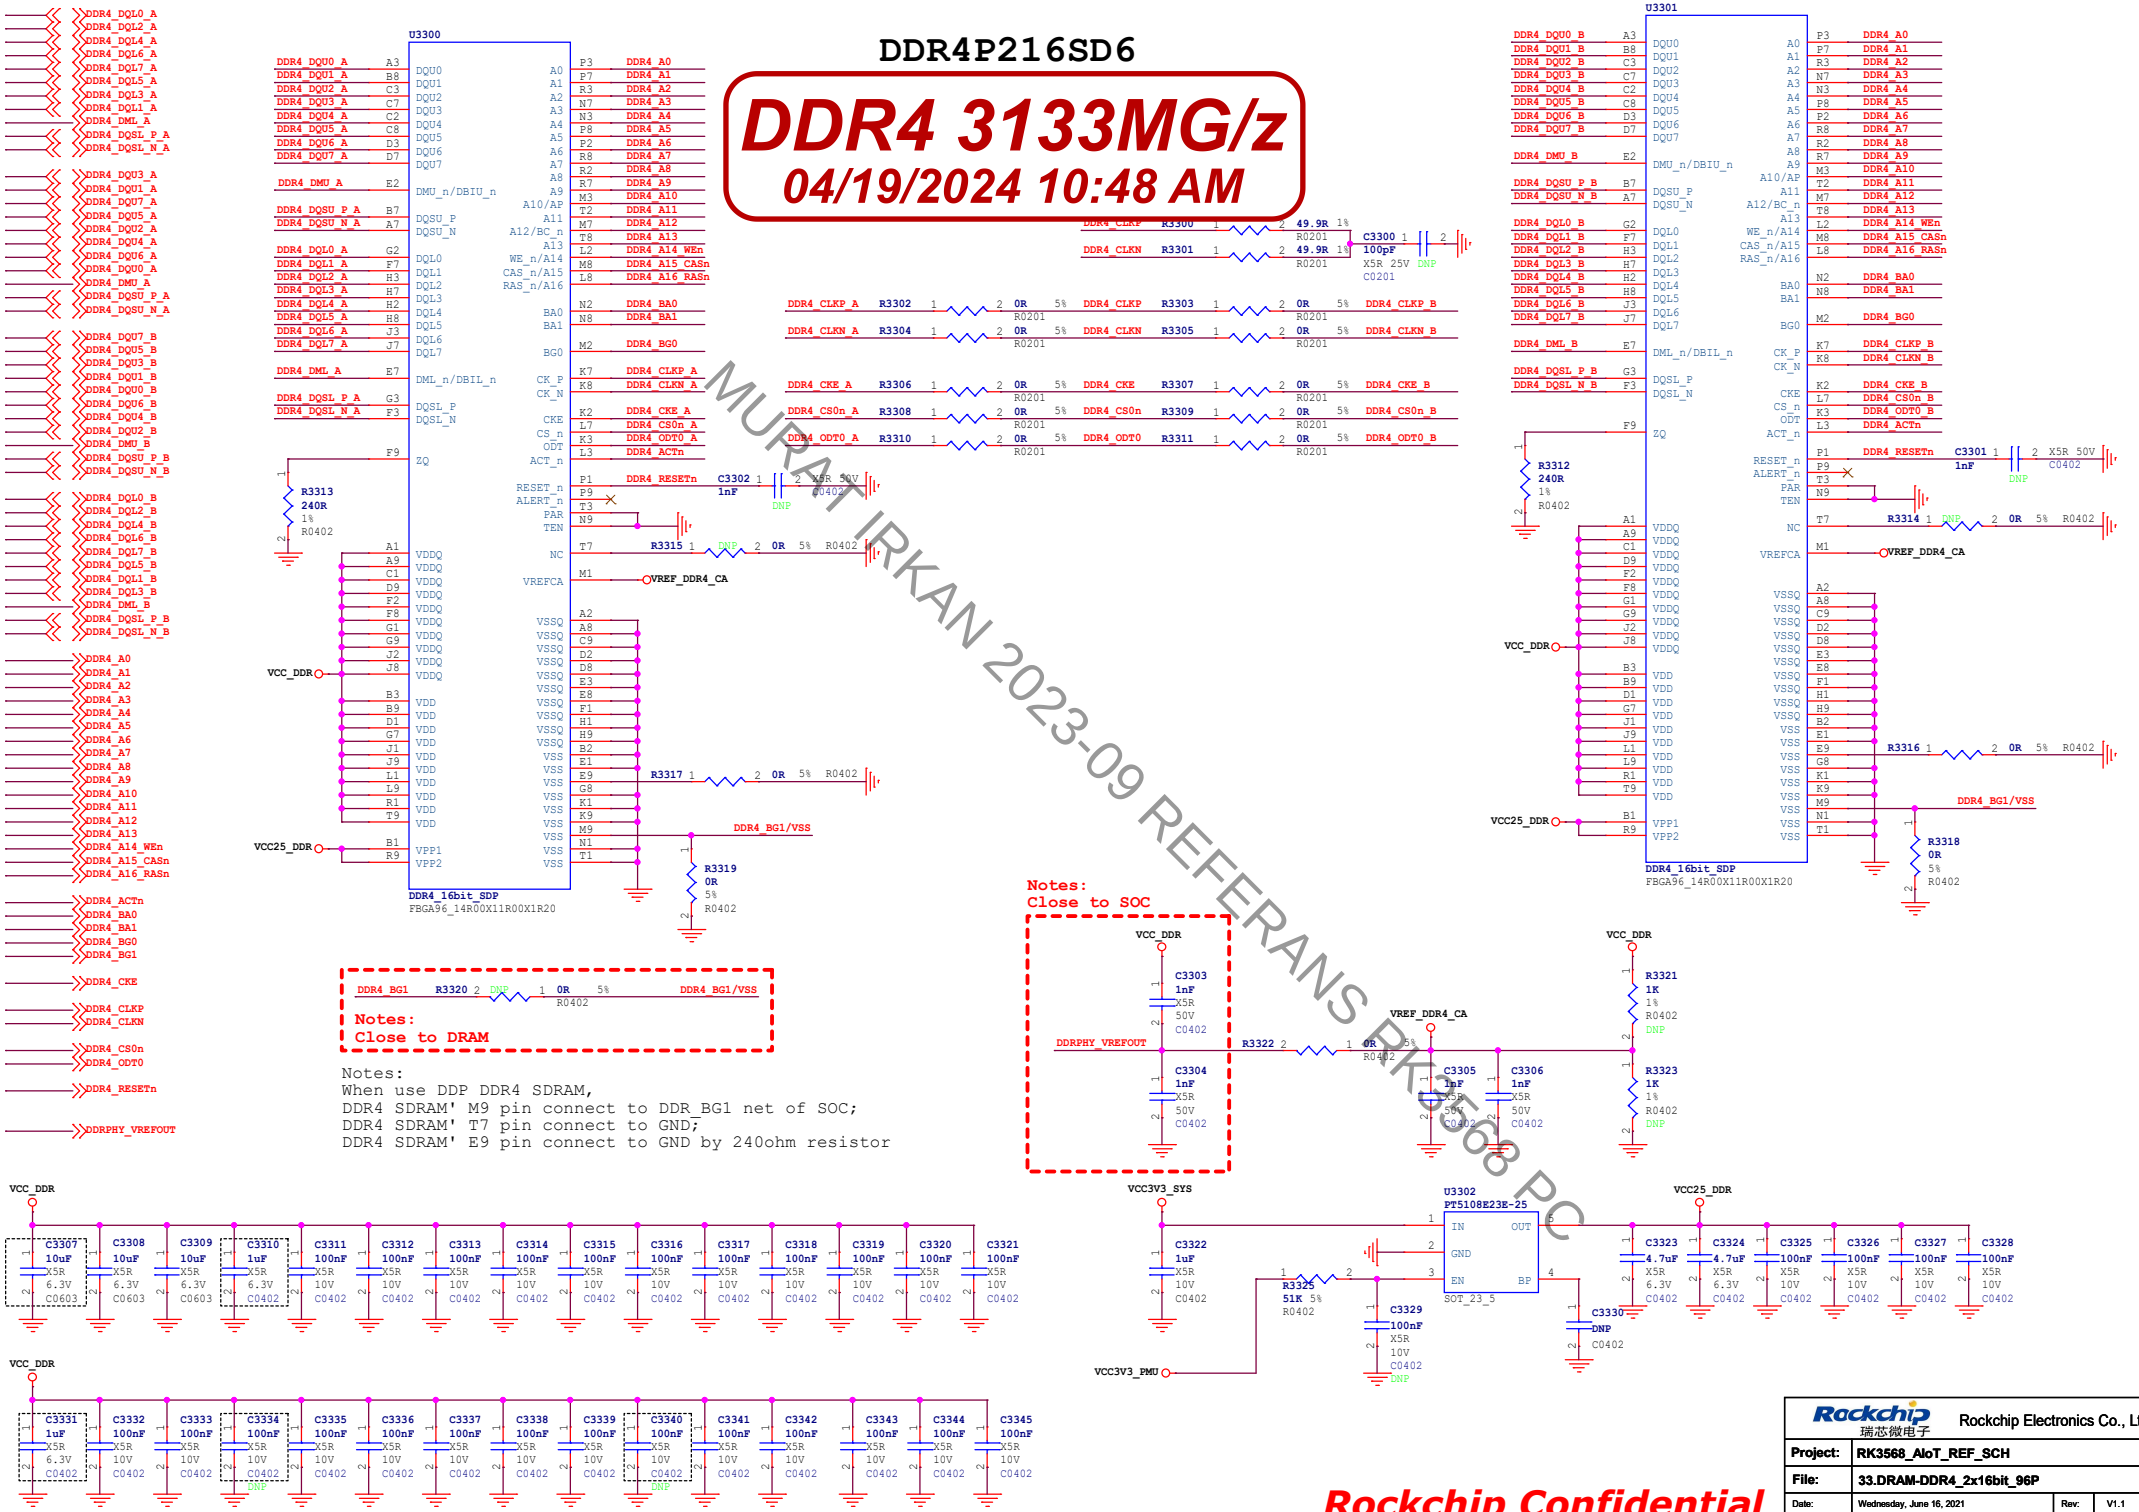

Rockchip 瑞芯微电子	Rockchip Electronics Co., Ltd				
Project:	RK3568_AIoT_REF_SCH				
File:	33.DRAM-DDR4_2x16bit_96P				
Date:	Wednesday, June 16, 2021		Rev:	V1.1	
Designed by:	Zhangdz	Reviewed by:	Default	Sheet:	28 of 72

Rockchip Confidential

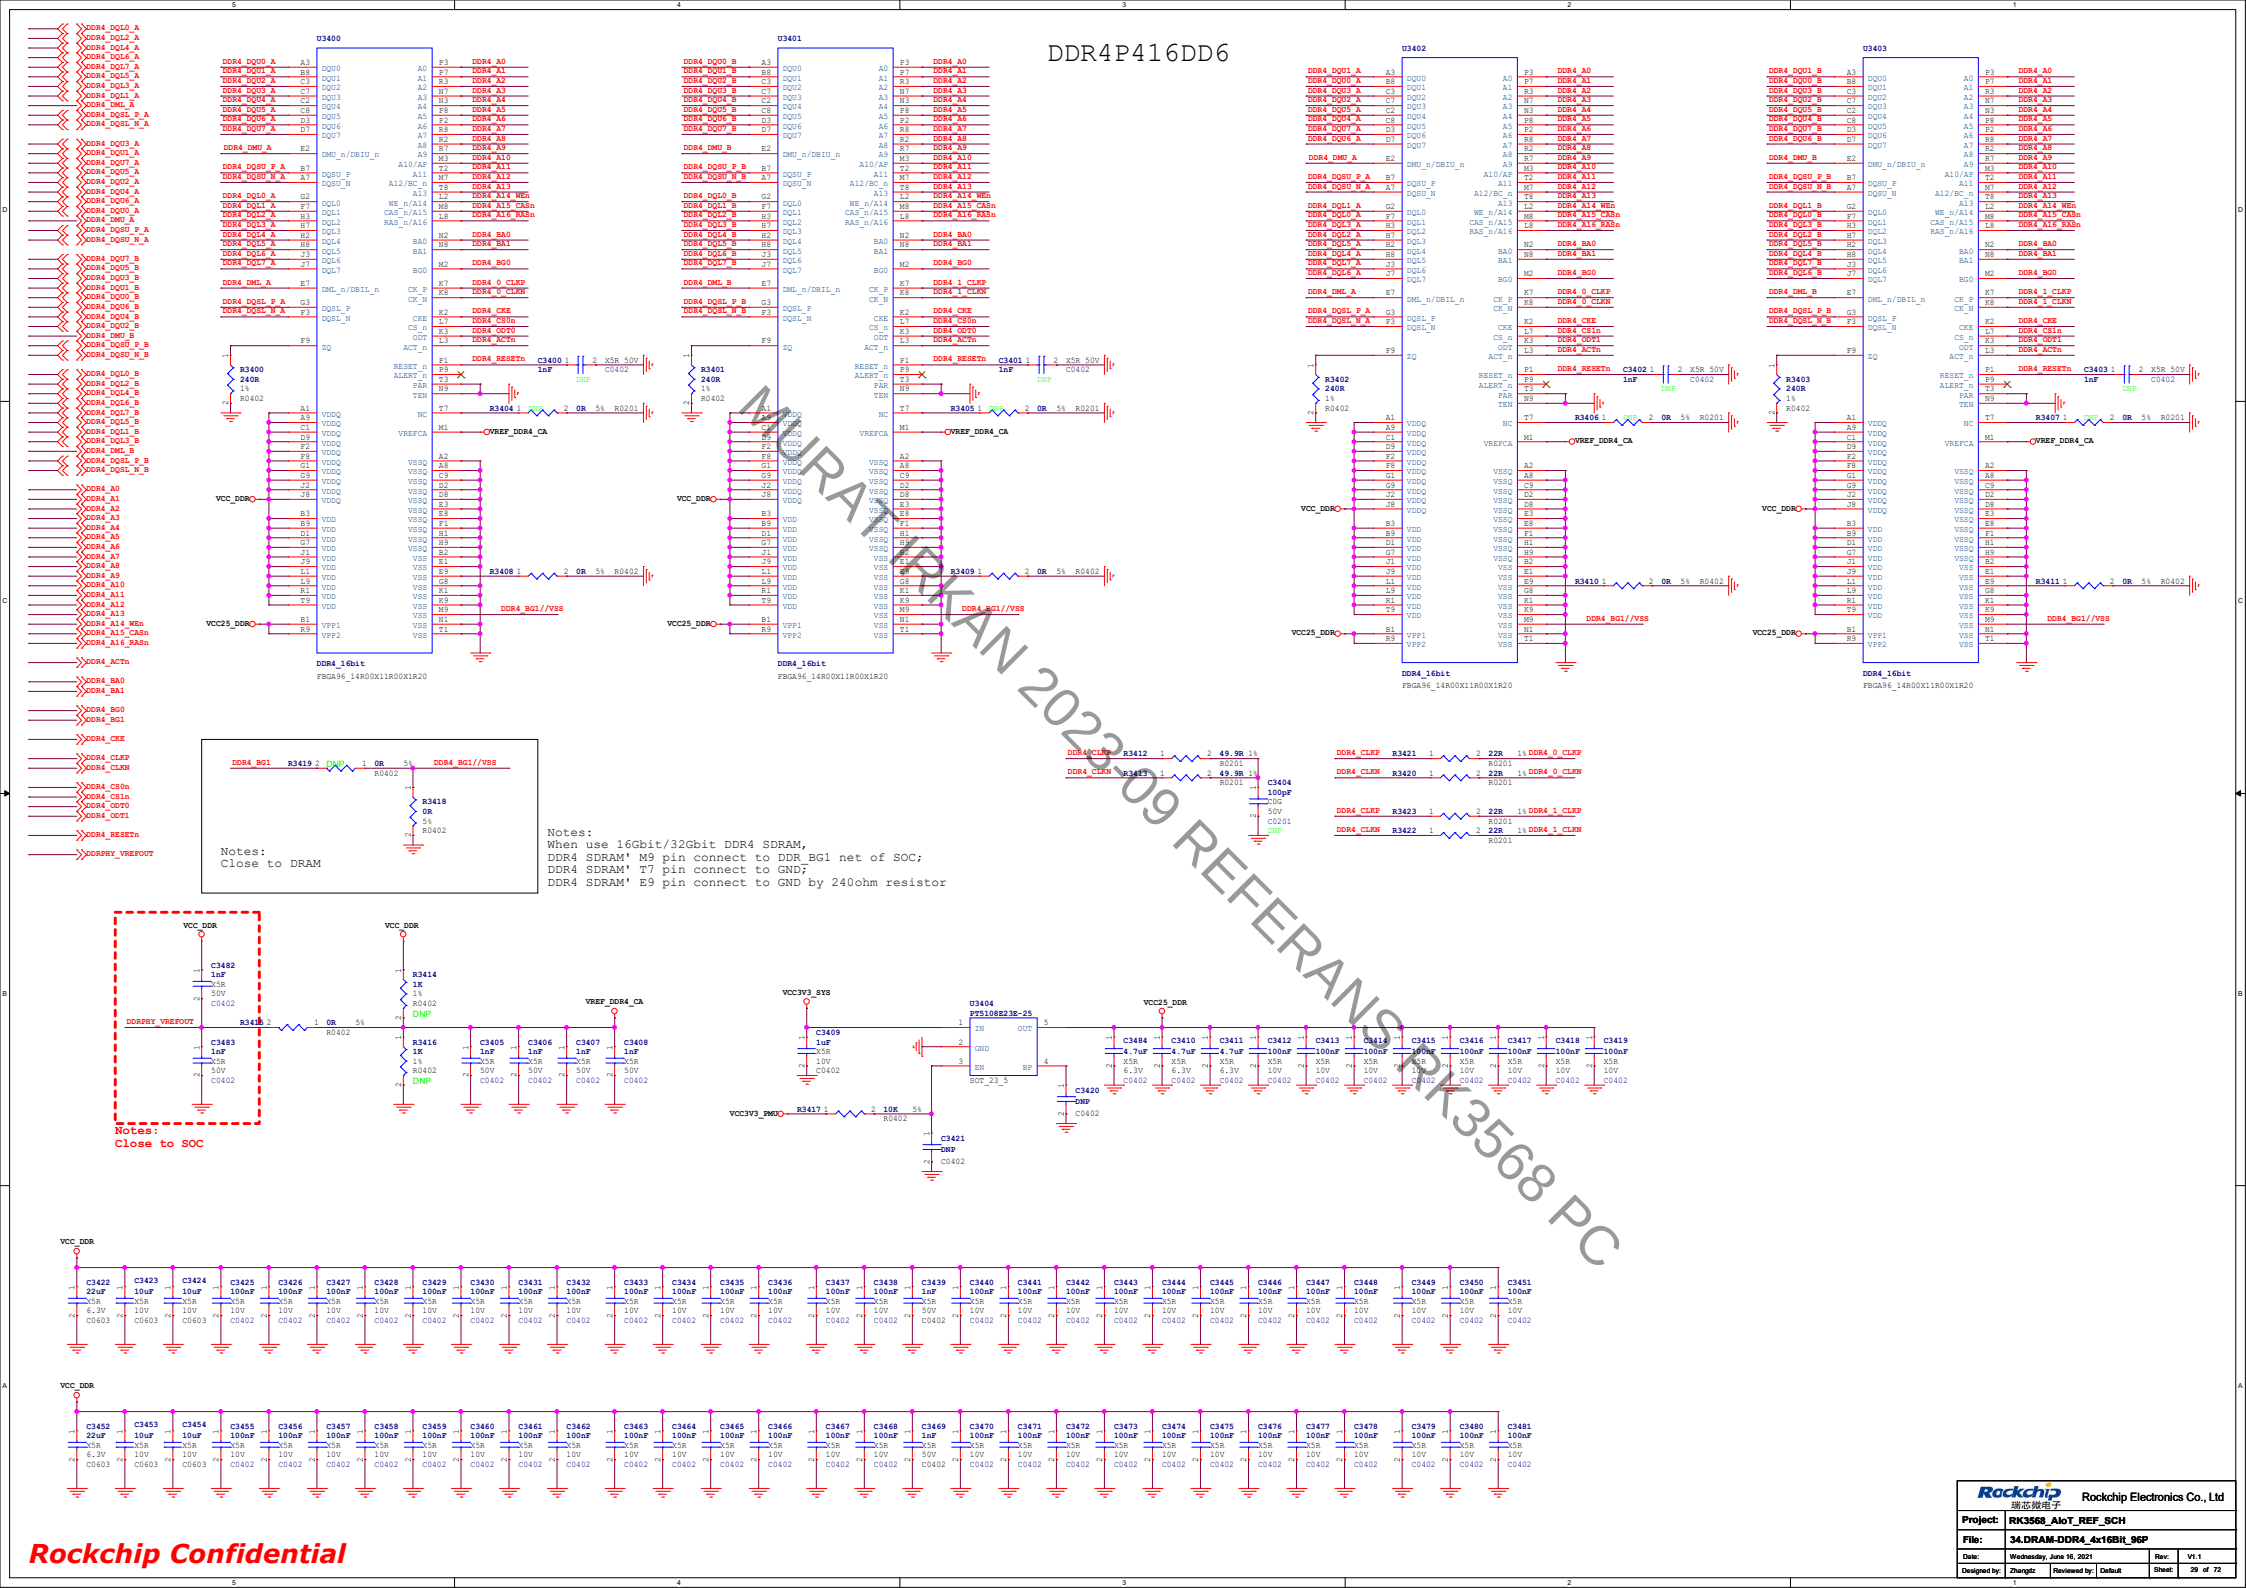

Rockchip Confidential

Rockchip 瑞芯微电子	Rockchip Electronics Co., Ltd
Project:	RK3568_AIoT_REF_SCH
File:	34.DRAM-DDR4_4x16Bit_96P
Date:	Wednesday, June 16, 2021
Rev:	V1.1
Designed by:	Zhangtz
Reviewed by:	Default
Sheet:	29 of 72

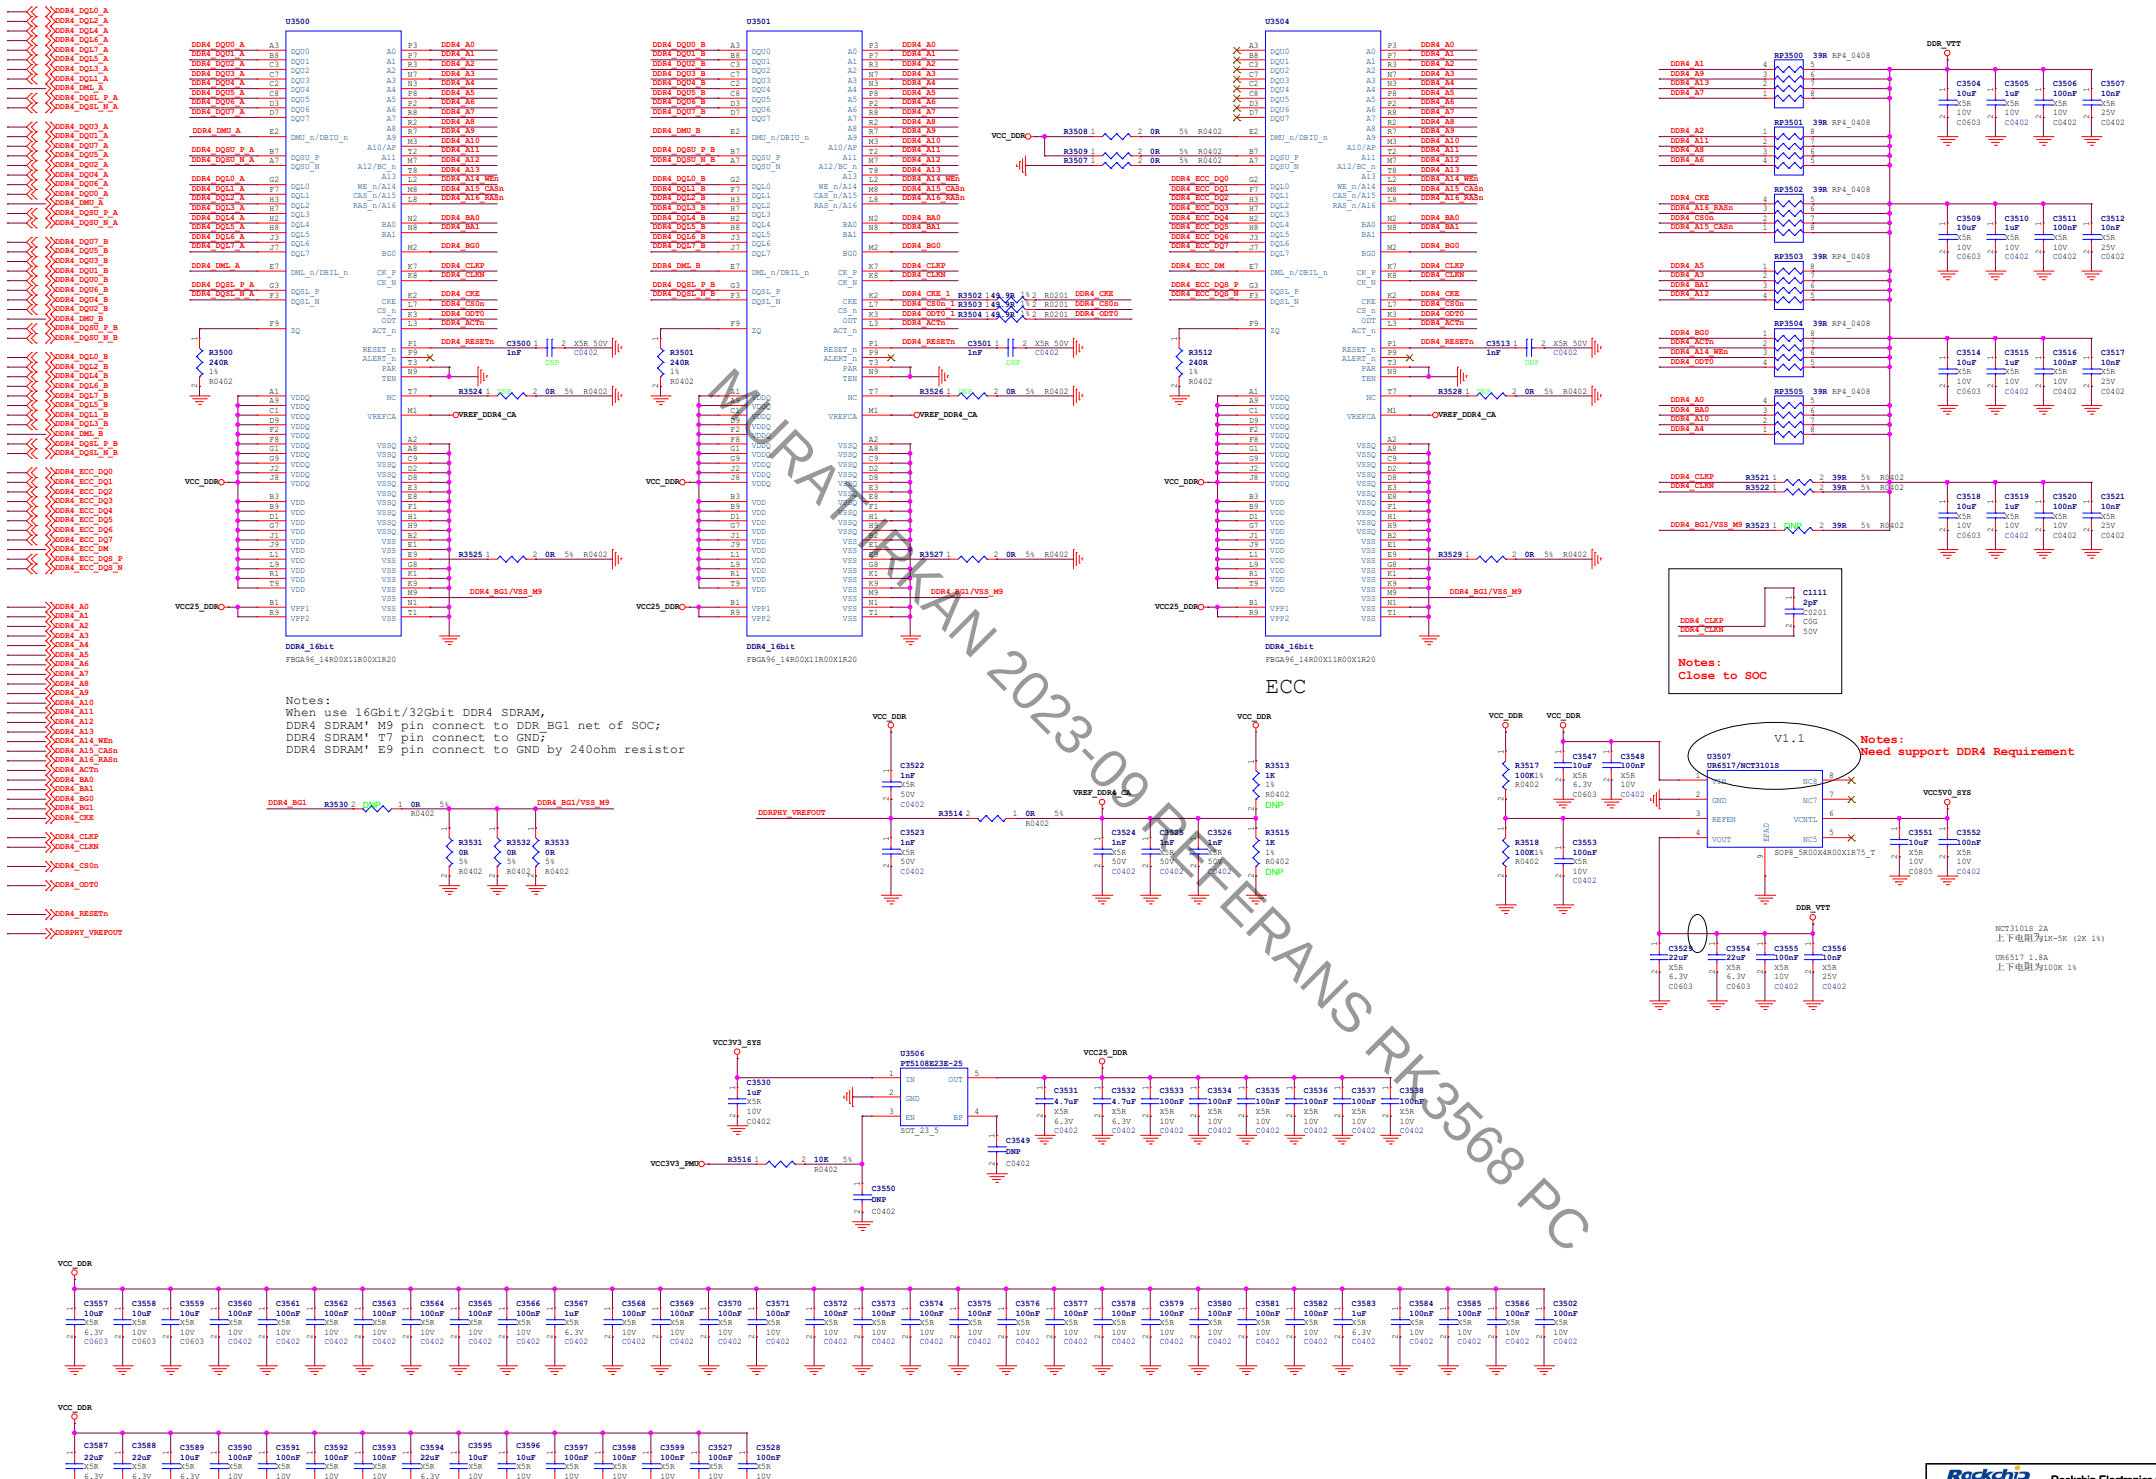

Rockchip Confidential

Rockchip 瑞芯微电子	Rockchip Electronics Co., Ltd		
Project:	RK3568_AIoT_REF_SCH		
File:	35.DRAM-DDR4_96P_2X16+ECC_1X16		
Date:	Wednesday, June 16, 2021	Rev:	V1.1
Designed by:	Zhangtz	Reviewed by:	Default
Sheet:	30 of 72		

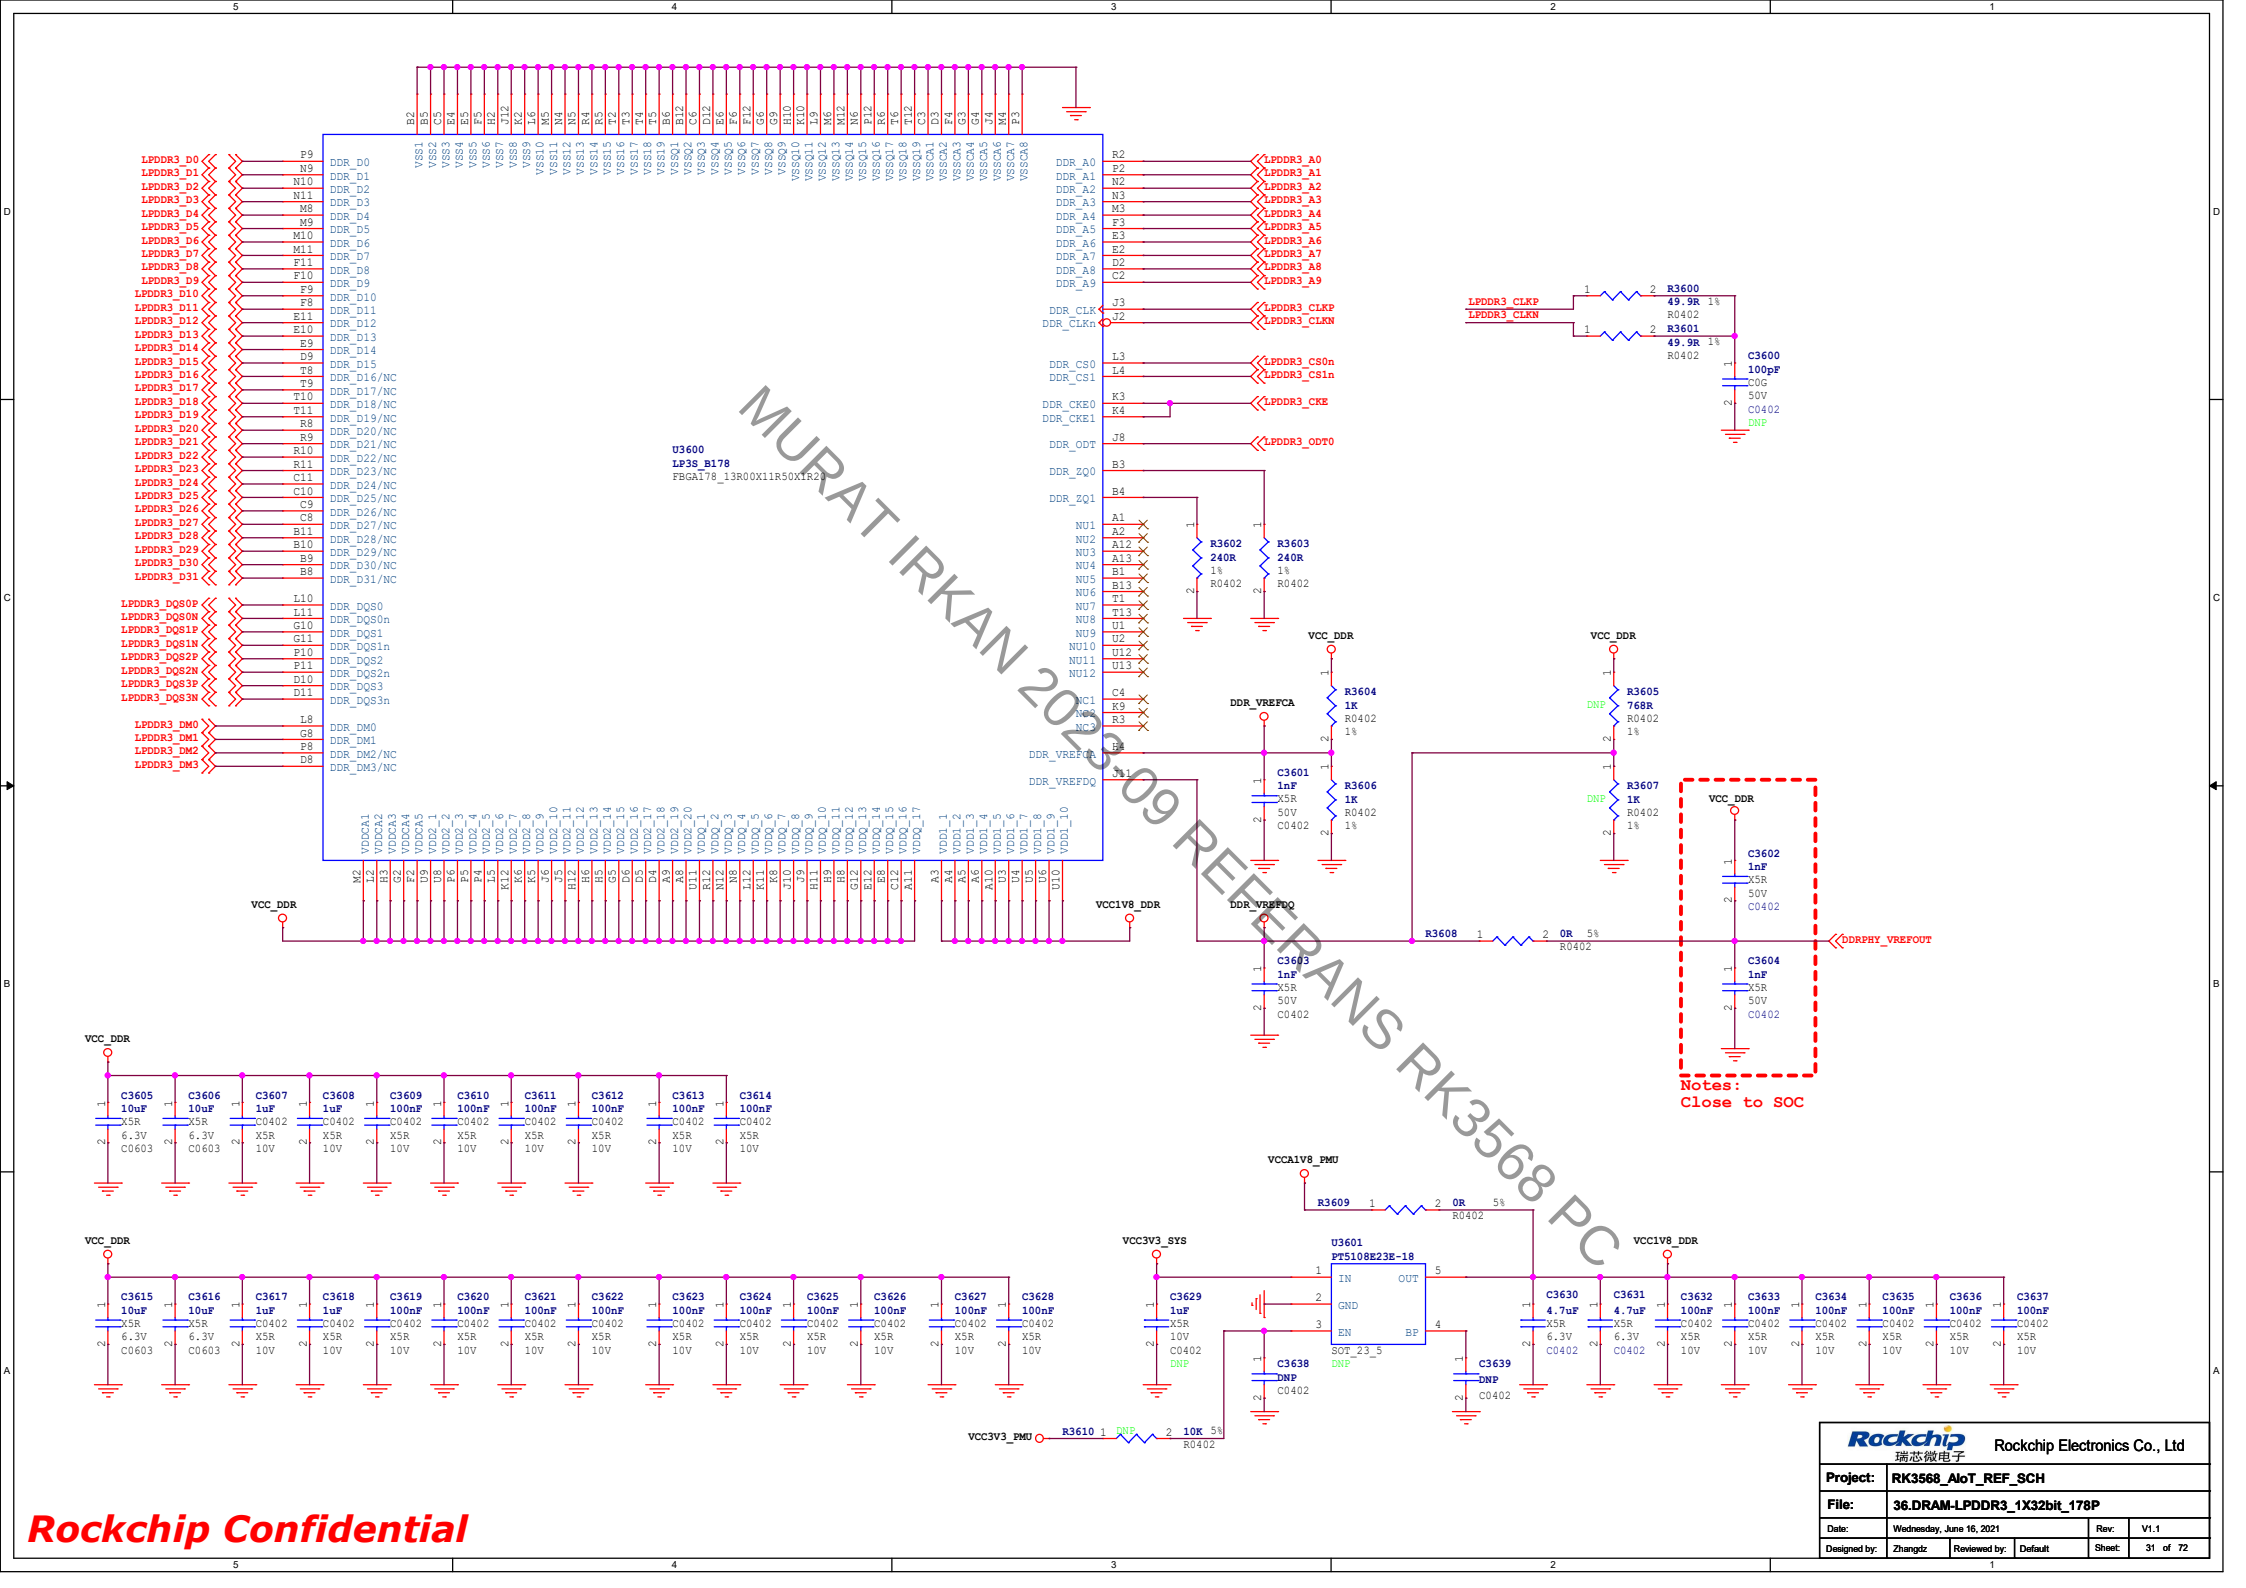

Rockchip 瑞芯微电子	Rockchip Electronics Co., Ltd				
Project:	RK3568_AIoT_REF_SCH				
File:	36.DRAM-LPDDR3_1X32bit_178P				
Date:	Wednesday, June 16, 2021			Rev:	V1.1
Designed by:	Zhangdz	Reviewed by:	Default	Sheet:	31 of 72

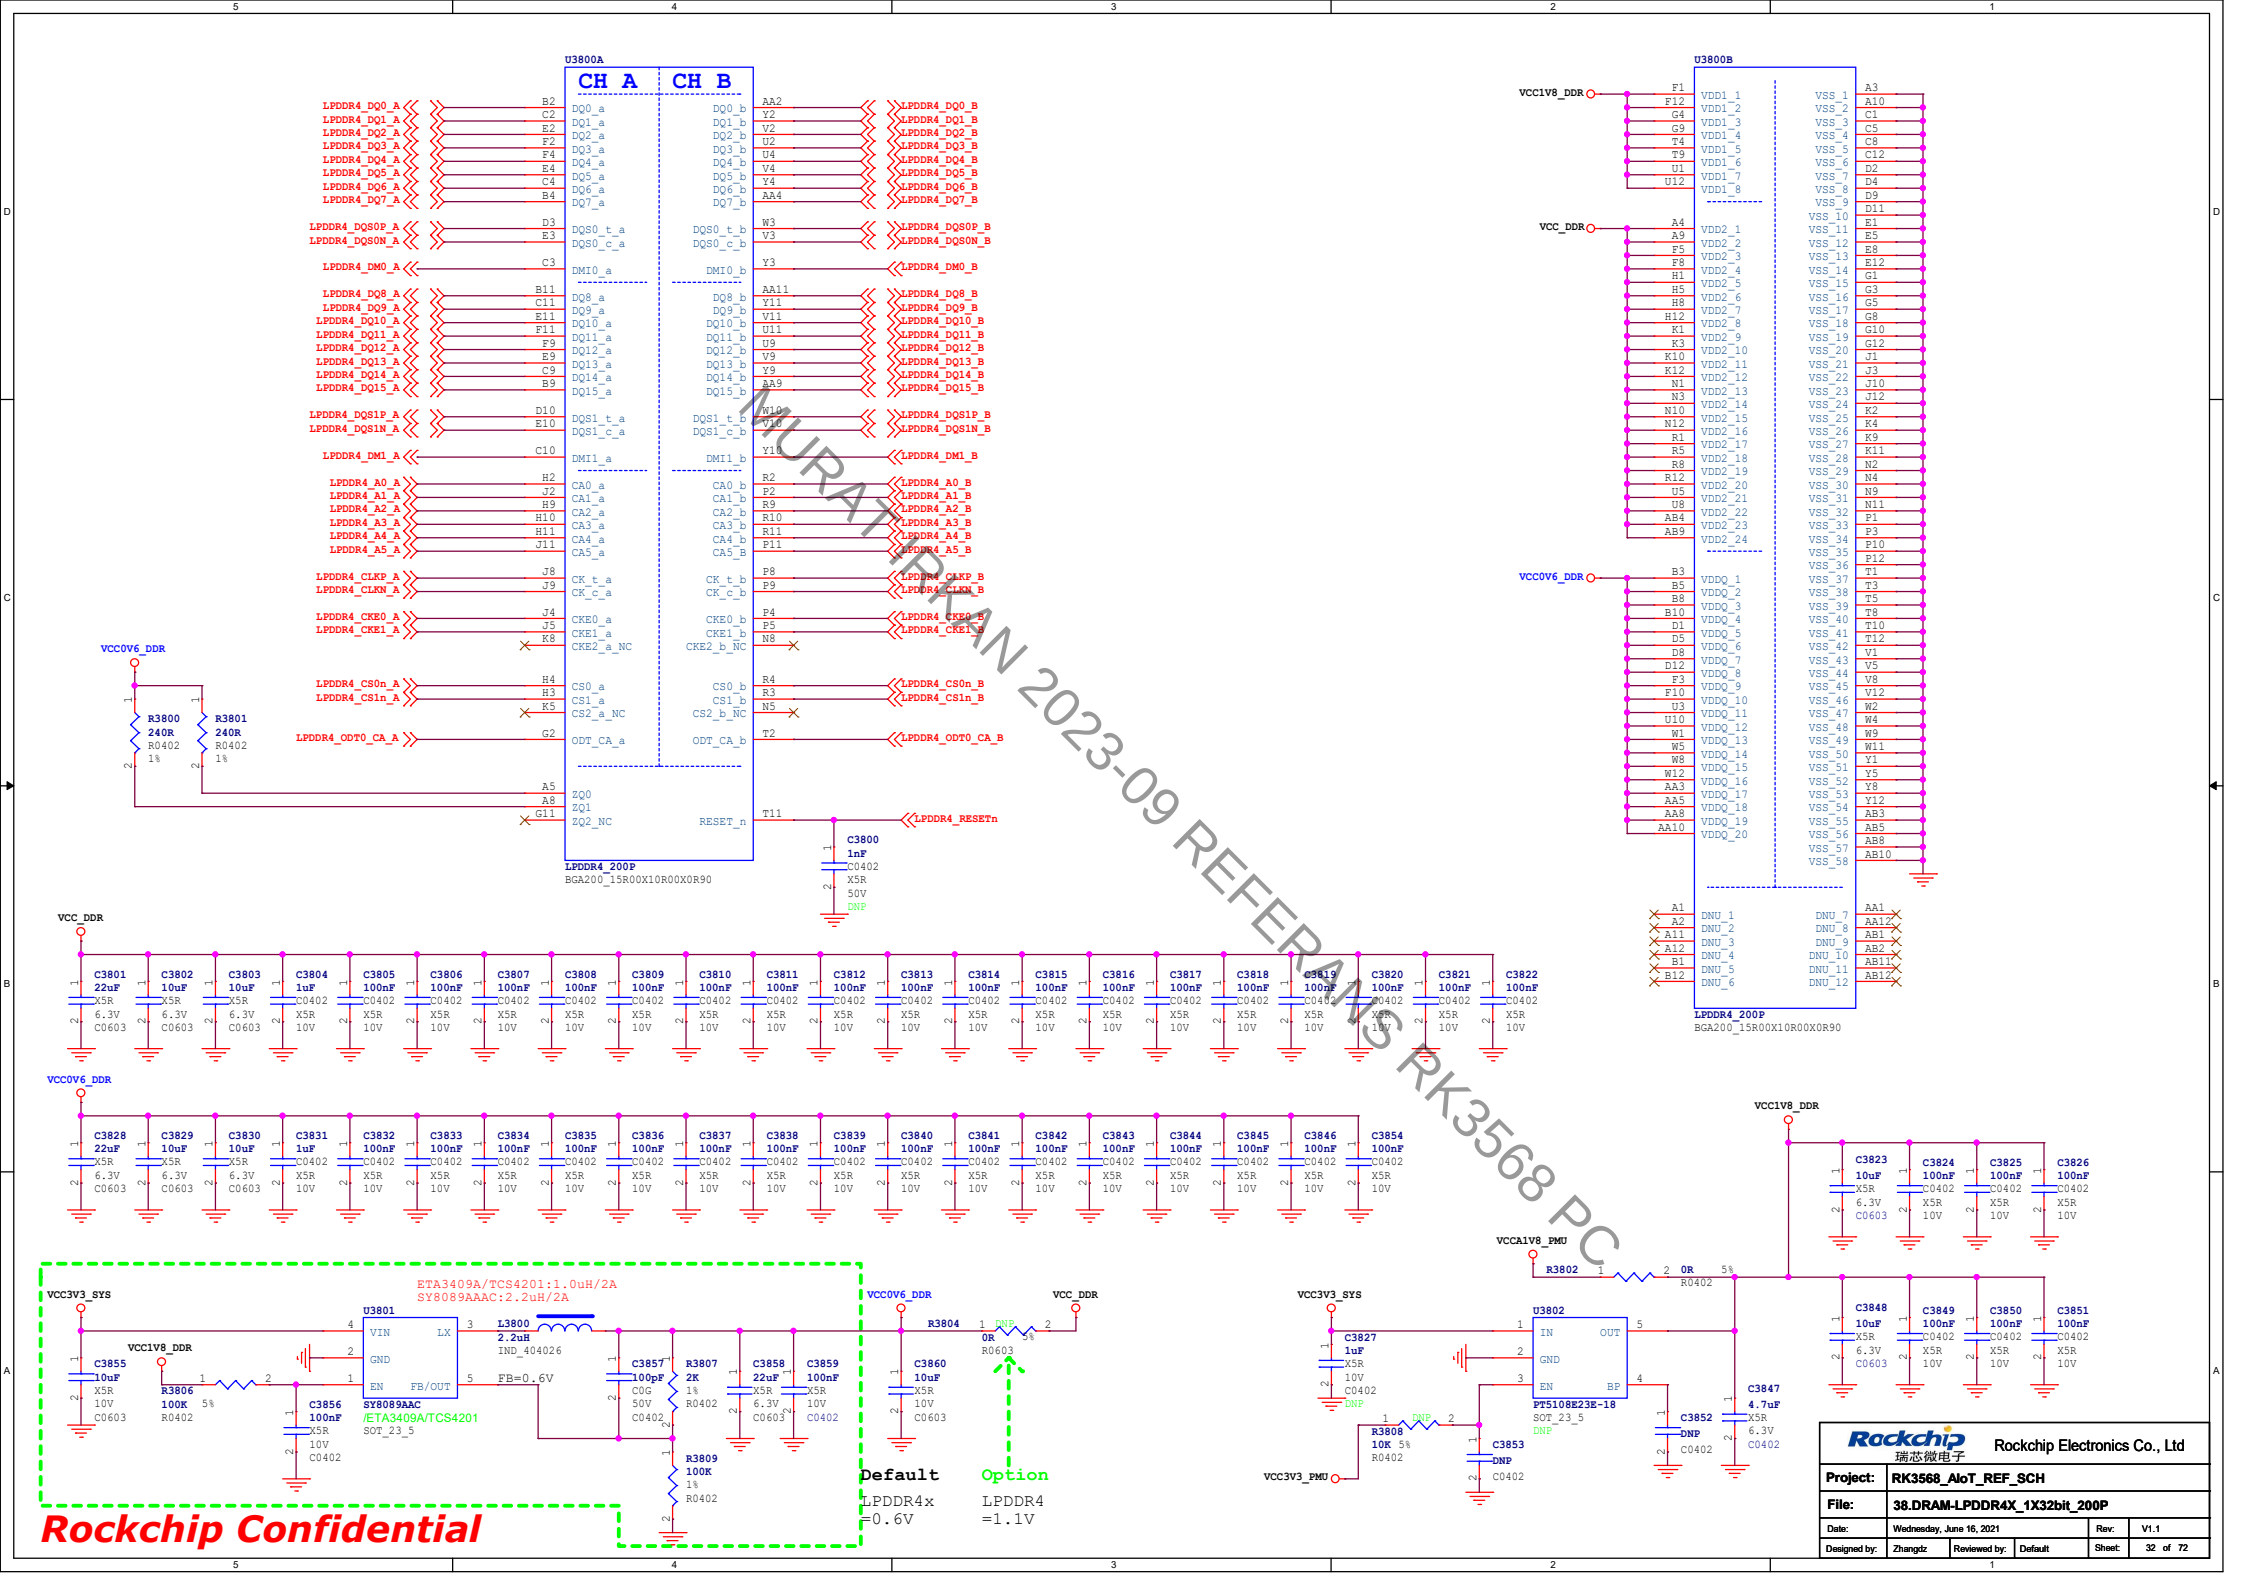

eMMC Flash

eMMC_D0/FLASH_D0
eMMC_D1/FLASH_D1
eMMC_D2/FLASH_D2
eMMC_D3/FLASH_D3
eMMC_D4/FLASH_D4
eMMC_D5/FLASH_D5
eMMC_D6/FLASH_D6
eMMC_D7/FLASH_D7
eMMC_CMD/FLASH_WRn
eMMC_CLKOUT/FLASH_DQS
eMMC_DATA_STROBE/FLASH_CLE
eMMC_RSTn/FSPI_D2/FLASH_WPn

eMMC_DATA_STROBE/FLASH_CLE — R4002 1 DNP 2 0R 5% R0402 — eMMC_DATA_STROBE
Place at branch point and FLASH_CLE Signal

eMMC_CLKOUT/FLASH_DQS — R4003 1 @eMMC 2 0R 5% R0402 — eMMC_CLKOUT
Place at branch point and FLASH_DQS Signal

eMMC_RSTn/FSPI_D2/FLASH_WPn — R4000 1 DNP 2 0R 5% R0402 — eMMC_RSTn
Place at branch point and FSPI_D2/FLASH_WPn Signal

eMMC_CMD/FLASH_WRn — R4001 1 @eMMC 2 0R 5% R0402 — eMMC_CMD
Place at branch point and FLASH_WRn Signal

Note:
No need to double layout with Nand Flash, 0R resistor can be omitted

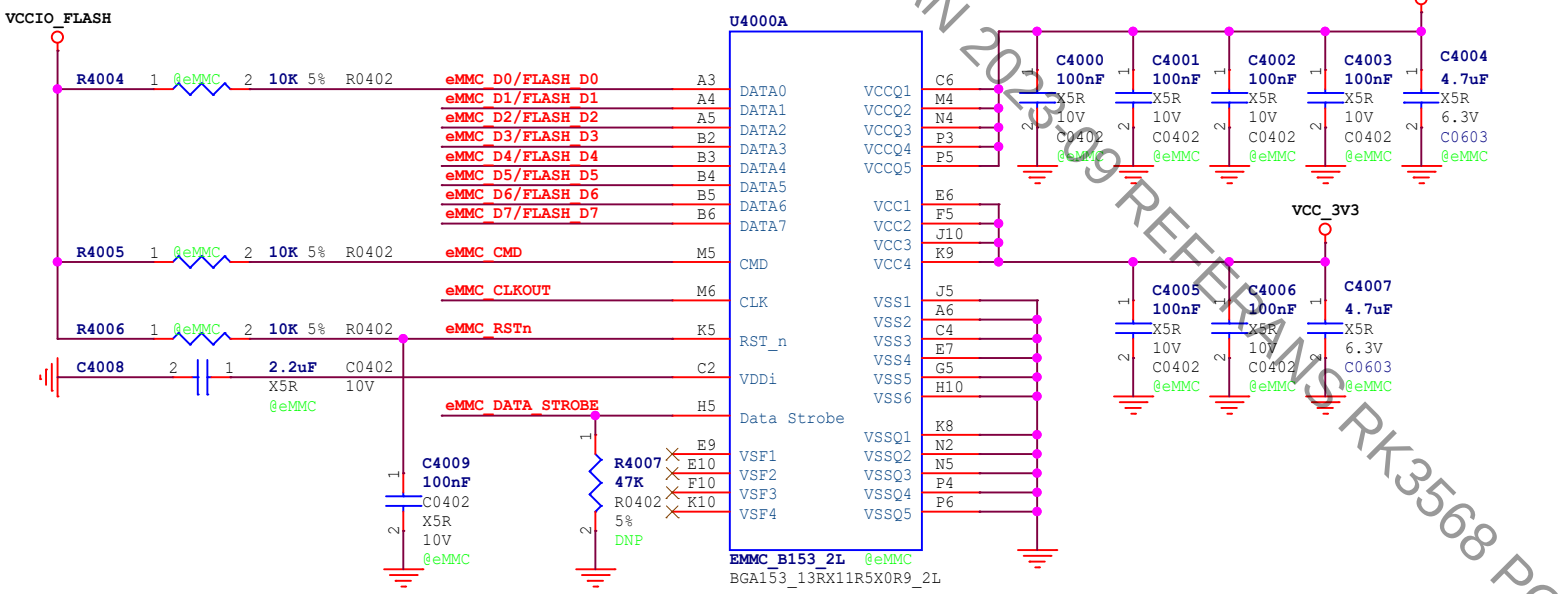

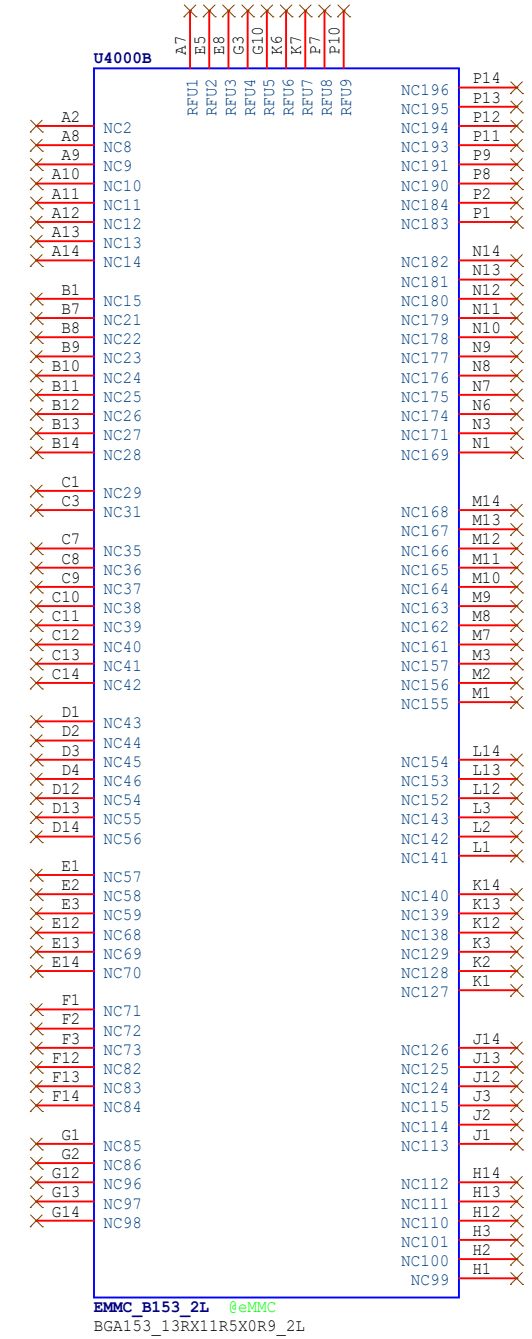

Note:
If Flash is compatible, please notice
when eMMC is used, the option is that @eMMC is mounted, @Nand is not mounted,@SPI Flash is not mounted
when Nand is used, the option is that @Nand is mounted, @eMMC is not mounted,@SPI Flash is not mounted
when SPI Flash is used, the option is that SPI Flash is mounted, @eMMC is not mounted,@Nand is not mounted

Rockchip Confidential

Rockchip 瑞芯微电子	Rockchip Electronics Co., Ltd				
Project:	RK3568_AIoT_REF_SCH				
File:	40.Flash-eMMC Flash				
Date:	Wednesday, June 16, 2021			Rev:	V1.1
Designed by:	Zhangdz	Reviewed by:	Default	Sheet:	33 of 72

Nand Flash

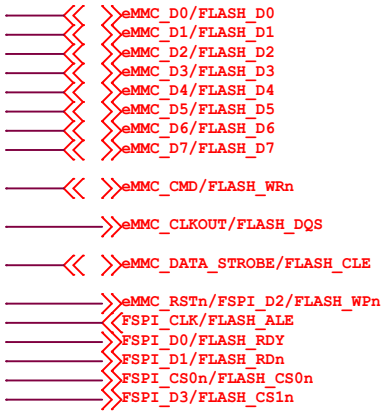

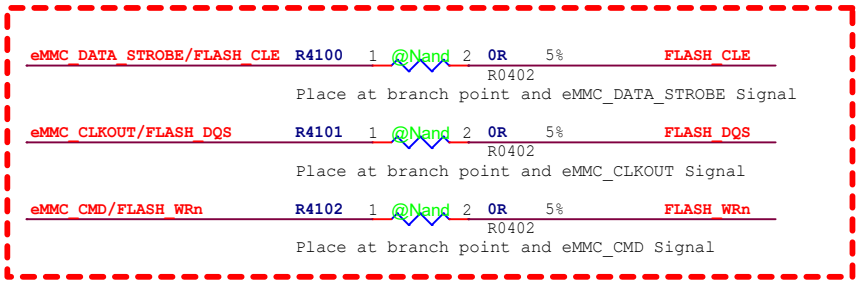

Note:

No need to double layout with eMMC, 0R resistor can be omitted

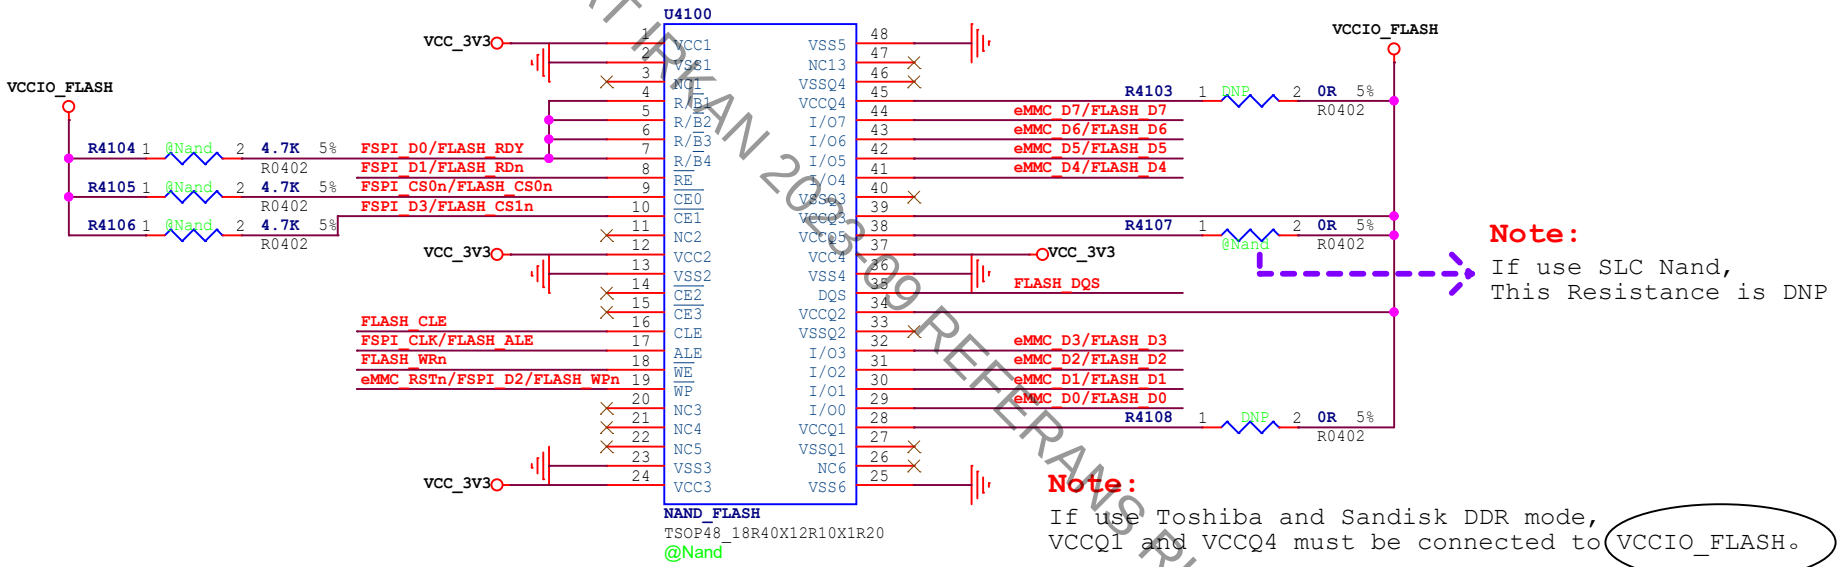

Note:

If use SLC Nand,
This Resistance is DNP

Note:

If use Toshiba and Sandisk DDR mode,
VCCQ1 and VCCQ4 must be connected to VCCIO_FLASH。

V1.1

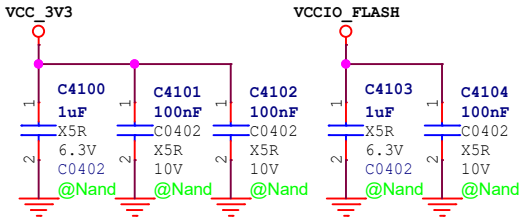

Note:

If Flash is compatible, please notice
when eMMC is used, the option is that @eMMC is mounted, @Nand is not mounted,@SPI Flash is not mounted
when Nand is used, the option is that @Nand is mounted, @eMMC is not mounted,@SPI Flash is not mounted
when SPI Flash is used, the option is that SPI Flash is mounted, @eMMC is not mounted,@Nand is not mounted

Rockchip Confidential

Rockchip 瑞芯微电子	Rockchip Electronics Co., Ltd				
Project:	RK3568_AIoT_REF_SCH				
File:	41.Flash-Nand Flash(Option)				
Date:	Wednesday, June 16, 2021			Rev:	V1.1
Designed by:	Zhangdz	Reviewed by:	Default	Sheet:	34 of 72

MicroSD Card

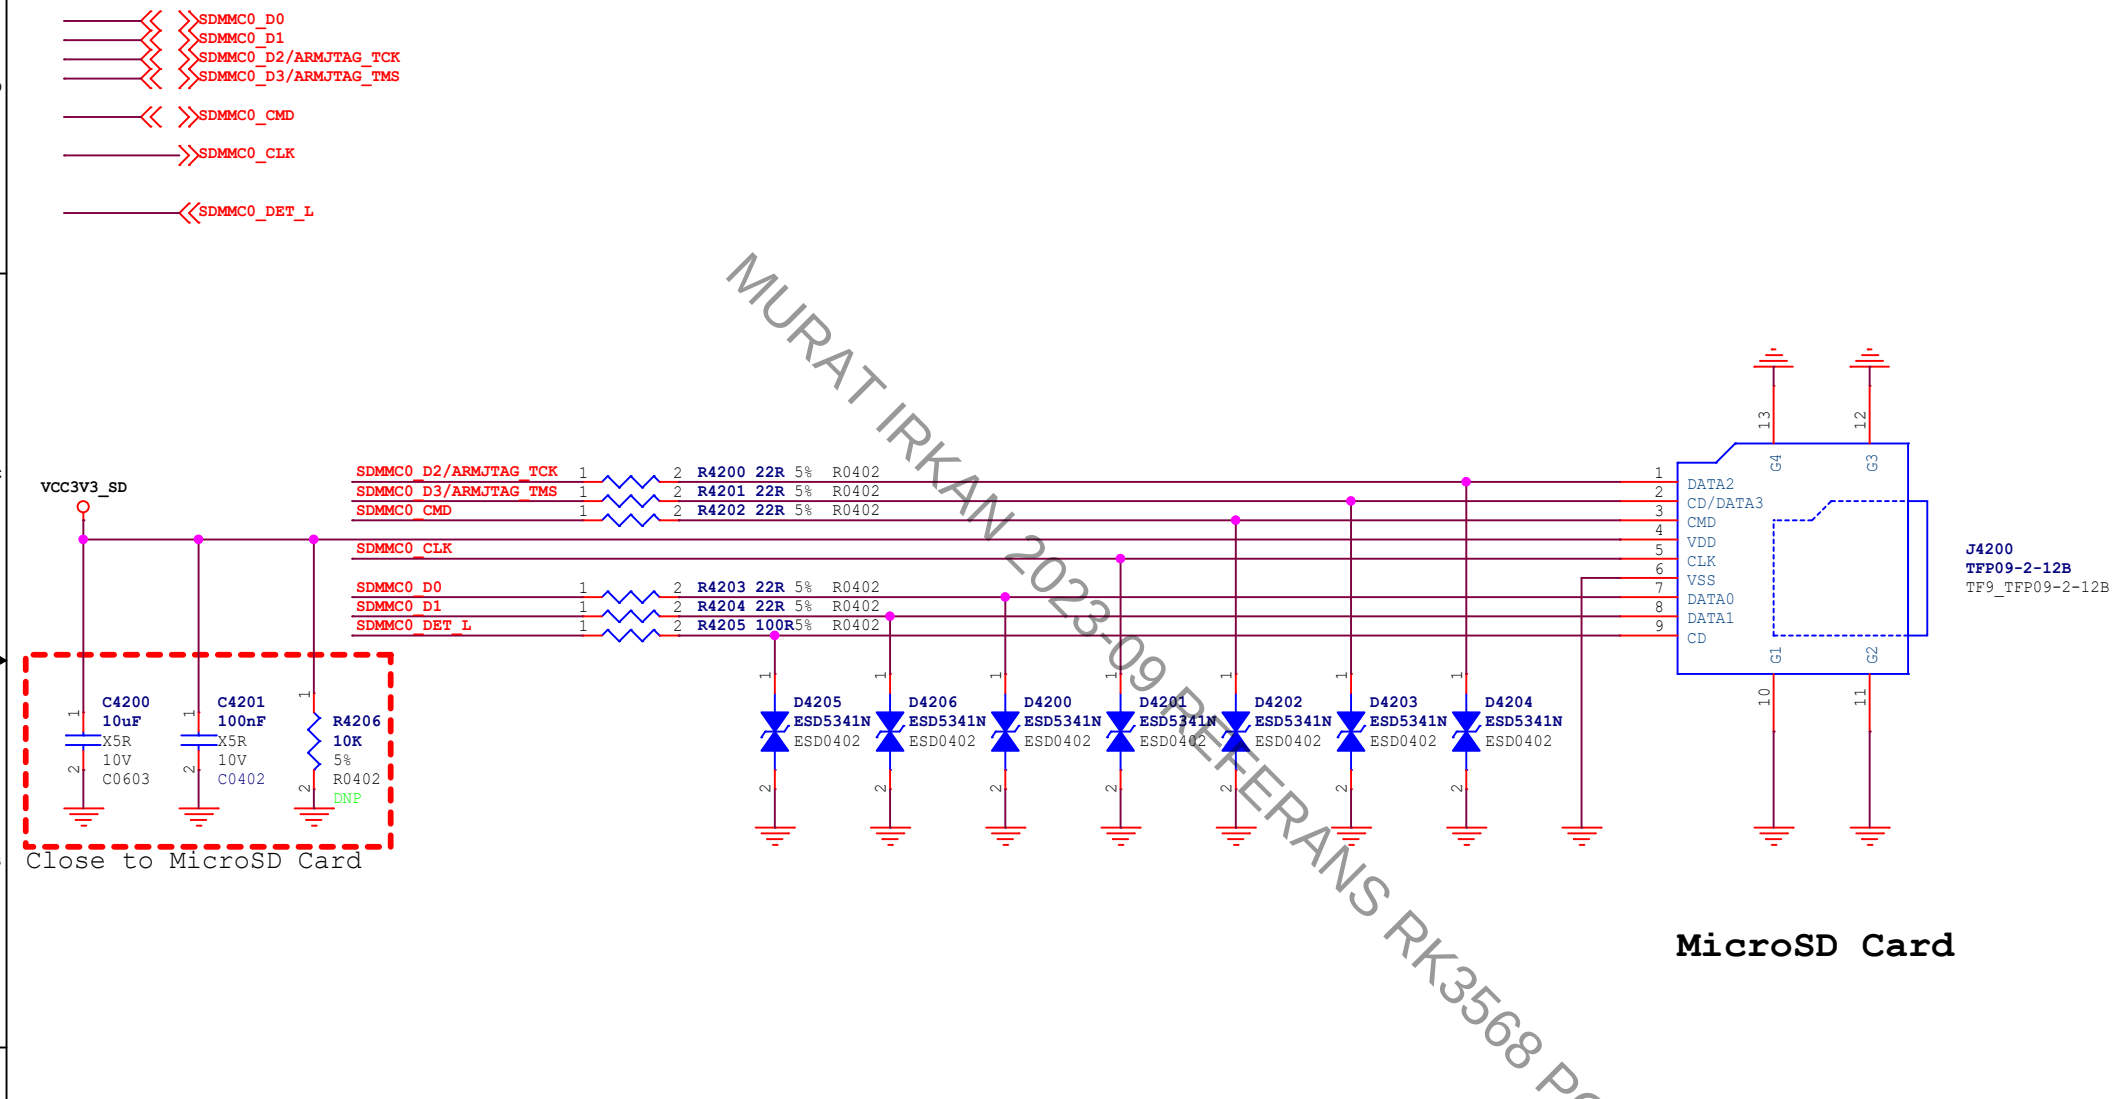

Rockchip 瑞芯微电子	Rockchip Electronics Co., Ltd				
Project:	RK3568_AIoT_REF_SCH				
File:	42.Flash-MicroSD Card				
Date:	Wednesday, June 16, 2021			Rev:	V1.1
Designed by:	Zhangdz	Reviewed by:	Default	Sheet:	35 of 72

SPI Flash

FSPI_CLK/FLASH_ALE

FSPI_D0/FLASH_RDY
FSPI_D1/FLASH_RDn
eMMC_RSTn/FSPI_D2/FLASH_WPn
FSPI_D3/FLASH_CS1n

FSPI_CS0n/FLASH_CS0n

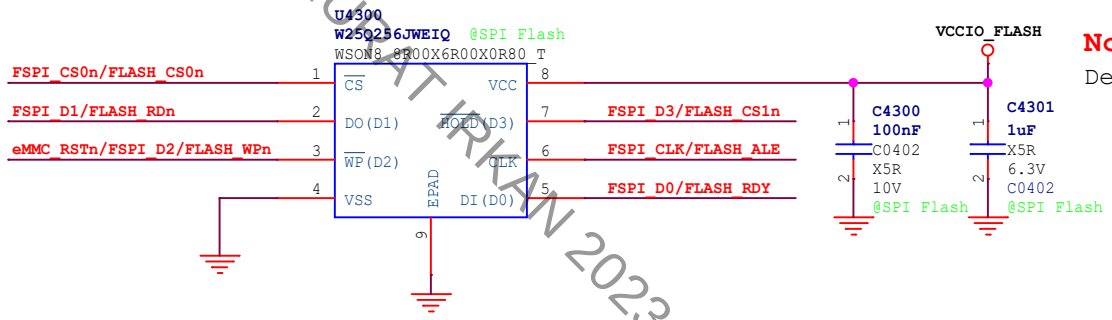

Note:
Default: 1.8V

Support:
1bit SPI NOR or SPI NAND
4bit SPI NOR or SPI NAND

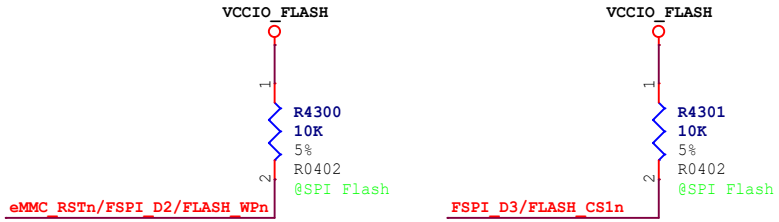

Note:
If Flash is compatible, please notice
when eMMC is used, the option is that @eMMC is mounted, @Nand is not mounted,@SPI Flash is not mounted
when Nand is used, the option is that @Nand is mounted, @eMMC is not mounted,@SPI Flash is not mounted
when SPI Flash is used, the option is that SPI Flash is mounted, @eMMC is not mounted,@Nand is not mounted

Rockchip 瑞芯微电子	Rockchip Electronics Co., Ltd				
Project:	RK3568_AIoT_REF_SCH				
File:	43.Flash-SPI FLASH(Option)				
Date:	Wednesday, June 16, 2021			Rev:	V1.1
Designed by:	Zhangdz	Reviewed by:	Default	Sheet:	36 of 72

DVP_PWREN0_H_GPIO0_B0
HDMIRX_PWREN_H_GPIO0_D6

Camera0 Power supply

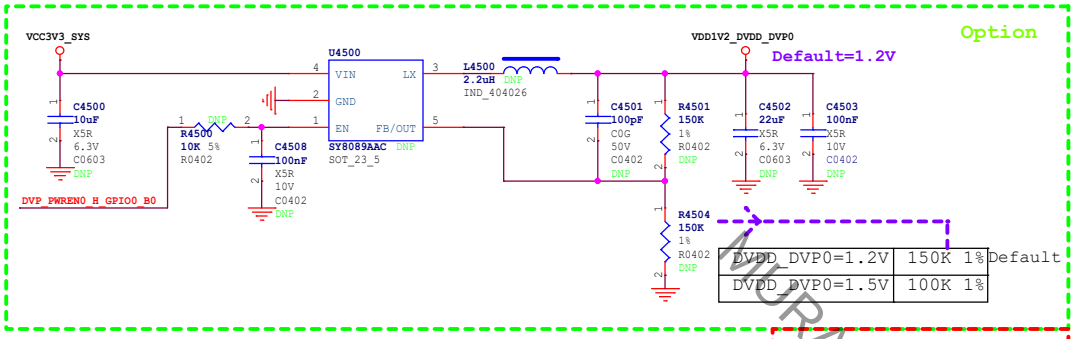

Note:
According to camera model, DCDC power supply is recommended if the DVDD current exceeds 100mA

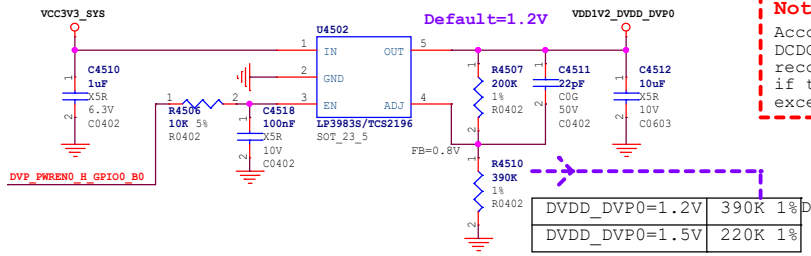

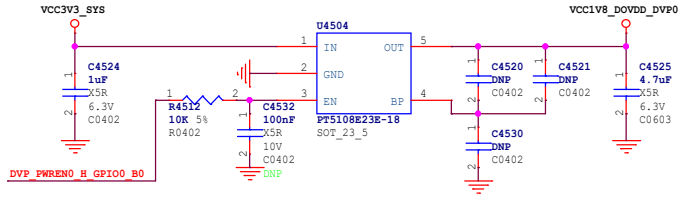

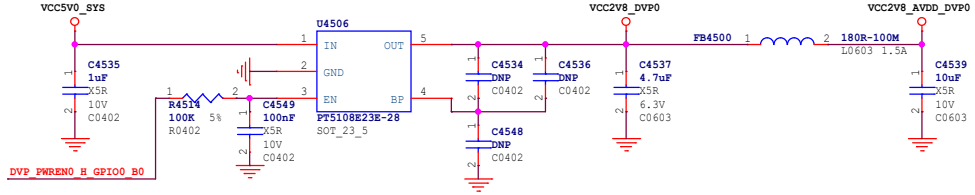

Note:
Adjust the power on sequence according to the camera model
eg:GC8034
Power on Sequence
1.8V-->1.2V-->2.8V--->MCLK-->PWDN--->RST

Camera1 Power supply

Note:
When the binocular camera is used,
If separate control is required,
separate power supply is recommended

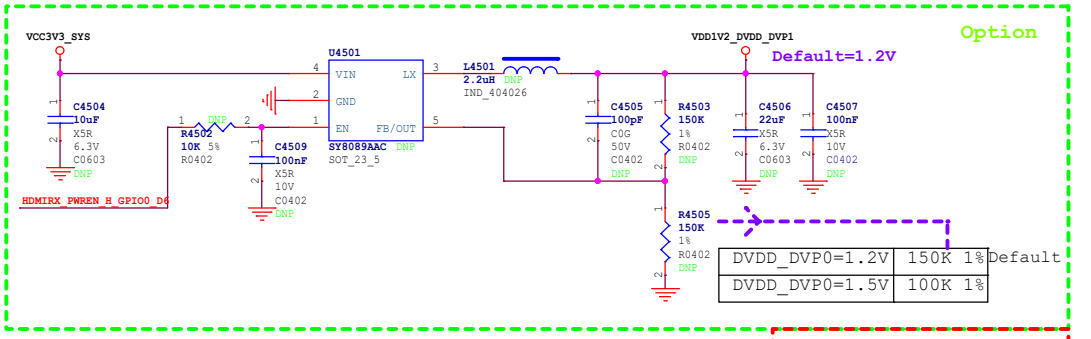

Note:
According to camera model, DCDC power supply is recommended if the DVDD current exceeds 100mA

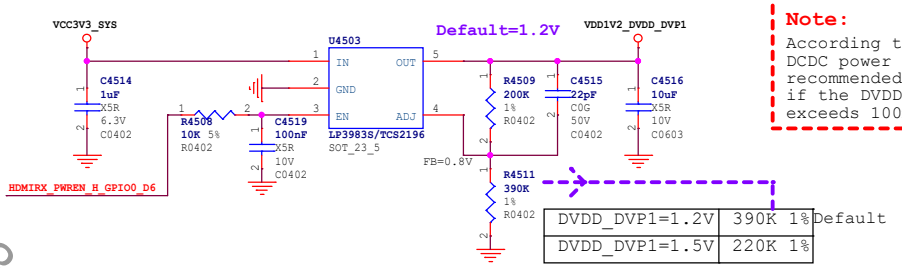

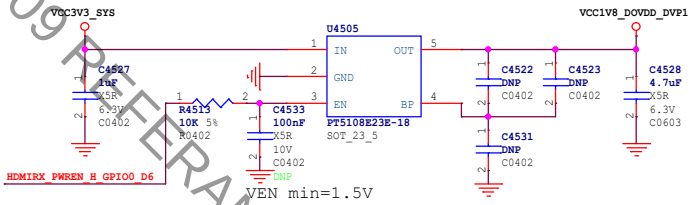

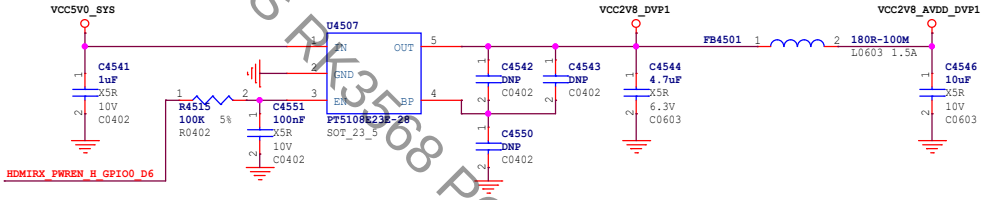

Rockchip 瑞芯微电子	Rockchip Electronics Co., Ltd				
Project:	RK3568_AIoT_REF_SCH				
File:	45.VI-Camera_Power				
Date:	Wednesday, June 16, 2021			Rev:	V1.1
Designed by:	Zhangdz	Reviewed by:	Default	Sheet:	37 of 72

Camera0:MIPI_CSI_RX 4Lanes

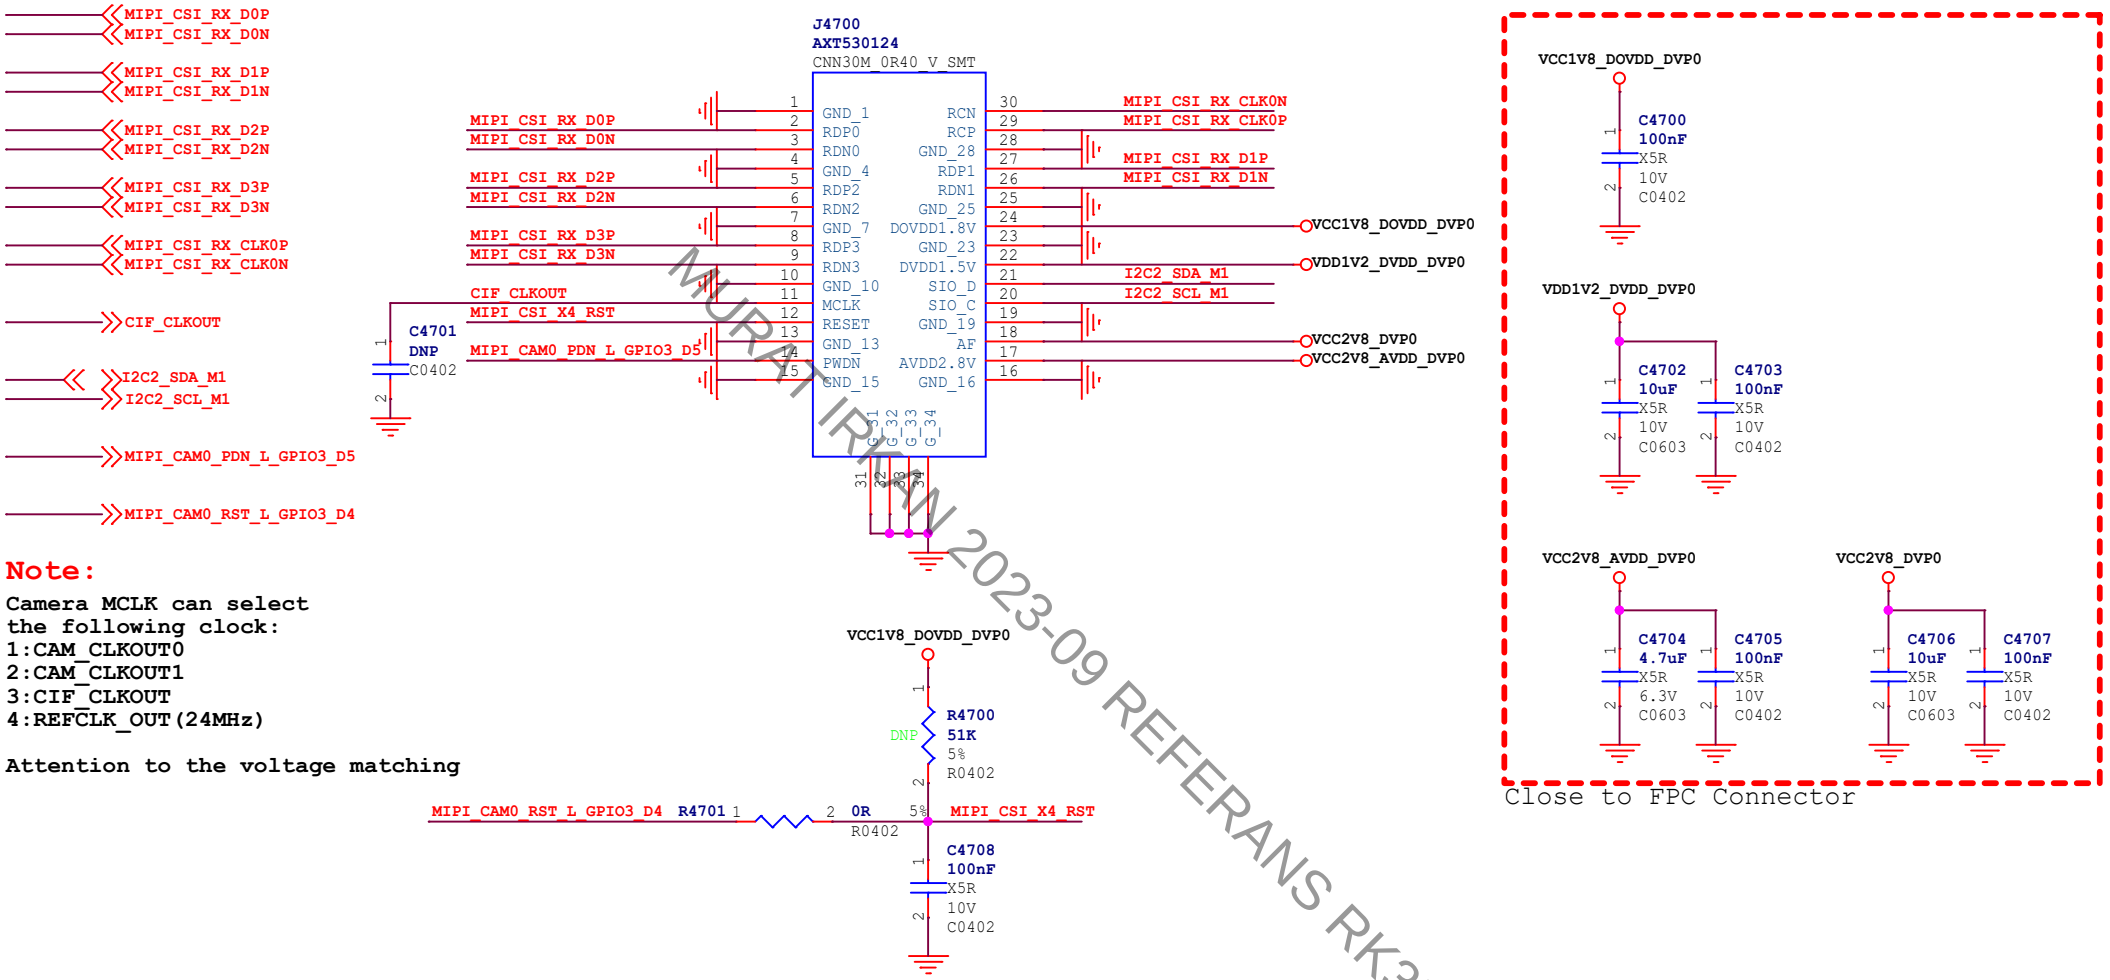

Note:

Camera MCLK can select
the following clock:
1:CAM_CLKOUT0
2:CAM_CLKOUT1
3:CIF_CLKOUT
4:REFCLK_OUT(24MHz)

Attention to the voltage matching

Rockchip 瑞芯微电子	Rockchip Electronics Co., Ltd				
Project:	RK3568_AIoT_REF_SCH				
File:	47.VI-Camera_MIPI_CSI_1x 4Lanes				
Date:	Wednesday, June 16, 2021			Rev:	V1.1
Designed by:	Zhangdz	Reviewed by:	Default	Sheet:	38 of 72

Camera0:MIPI_CSI_RX 2Lanes

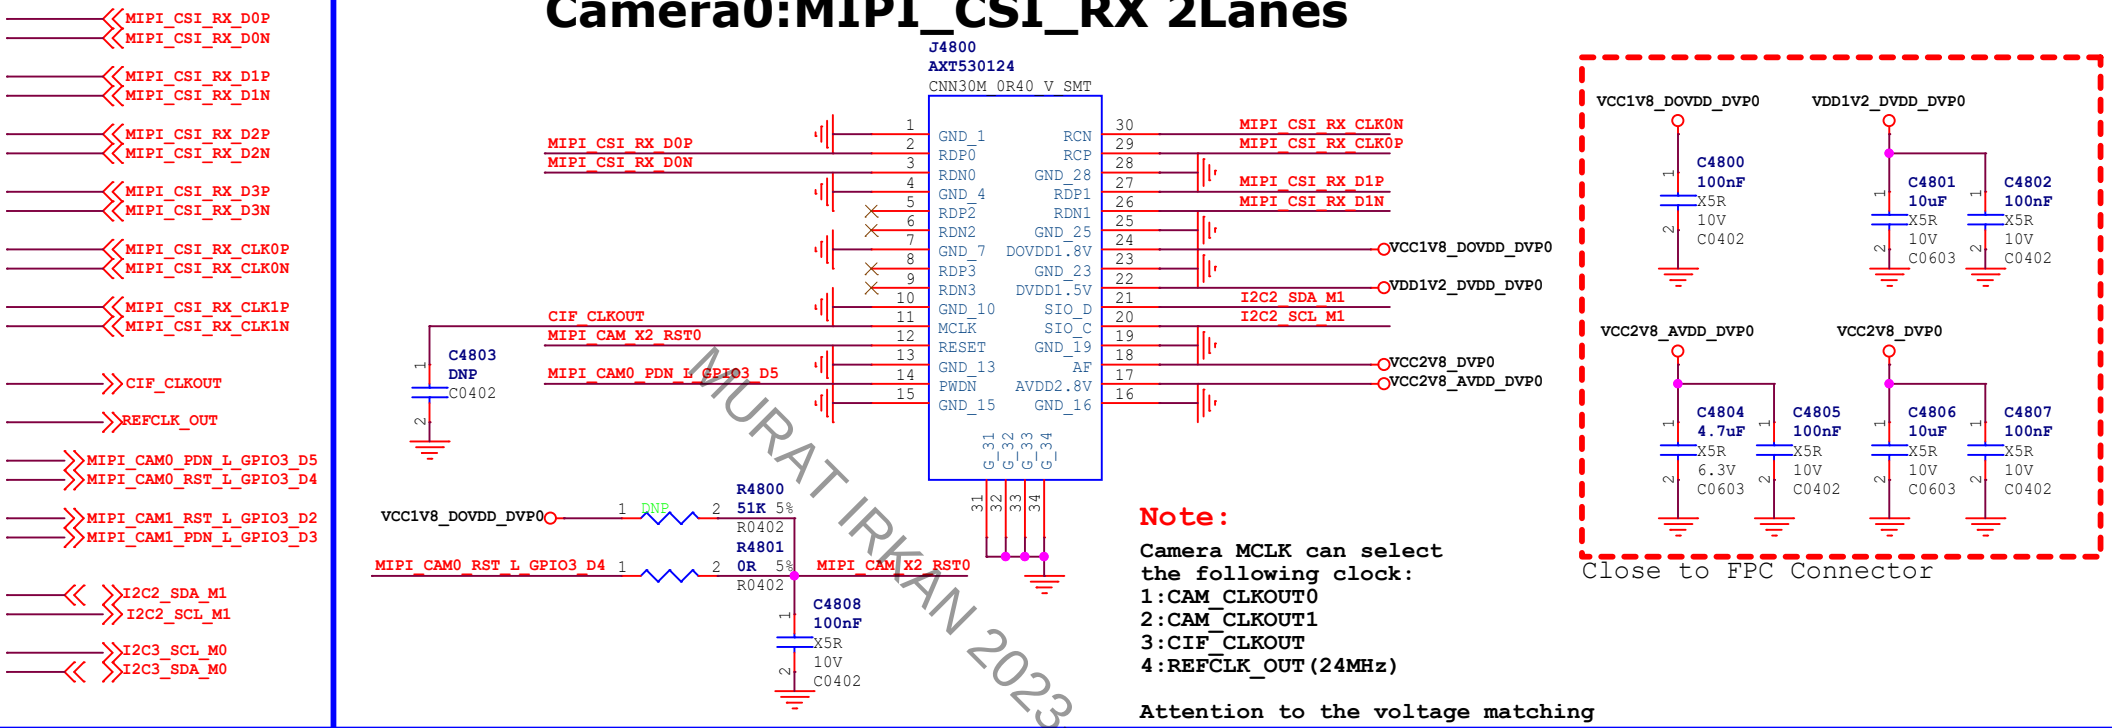

Note:

Camera MCLK can select the following clock:
1:CAM_CLKOUT0
2:CAM_CLKOUT1
3:CIF_CLKOUT
4:REFCLK_OUT(24MHz)

Attention to the voltage matching

Camera1:MIPI_CSI_RX 2Lanes

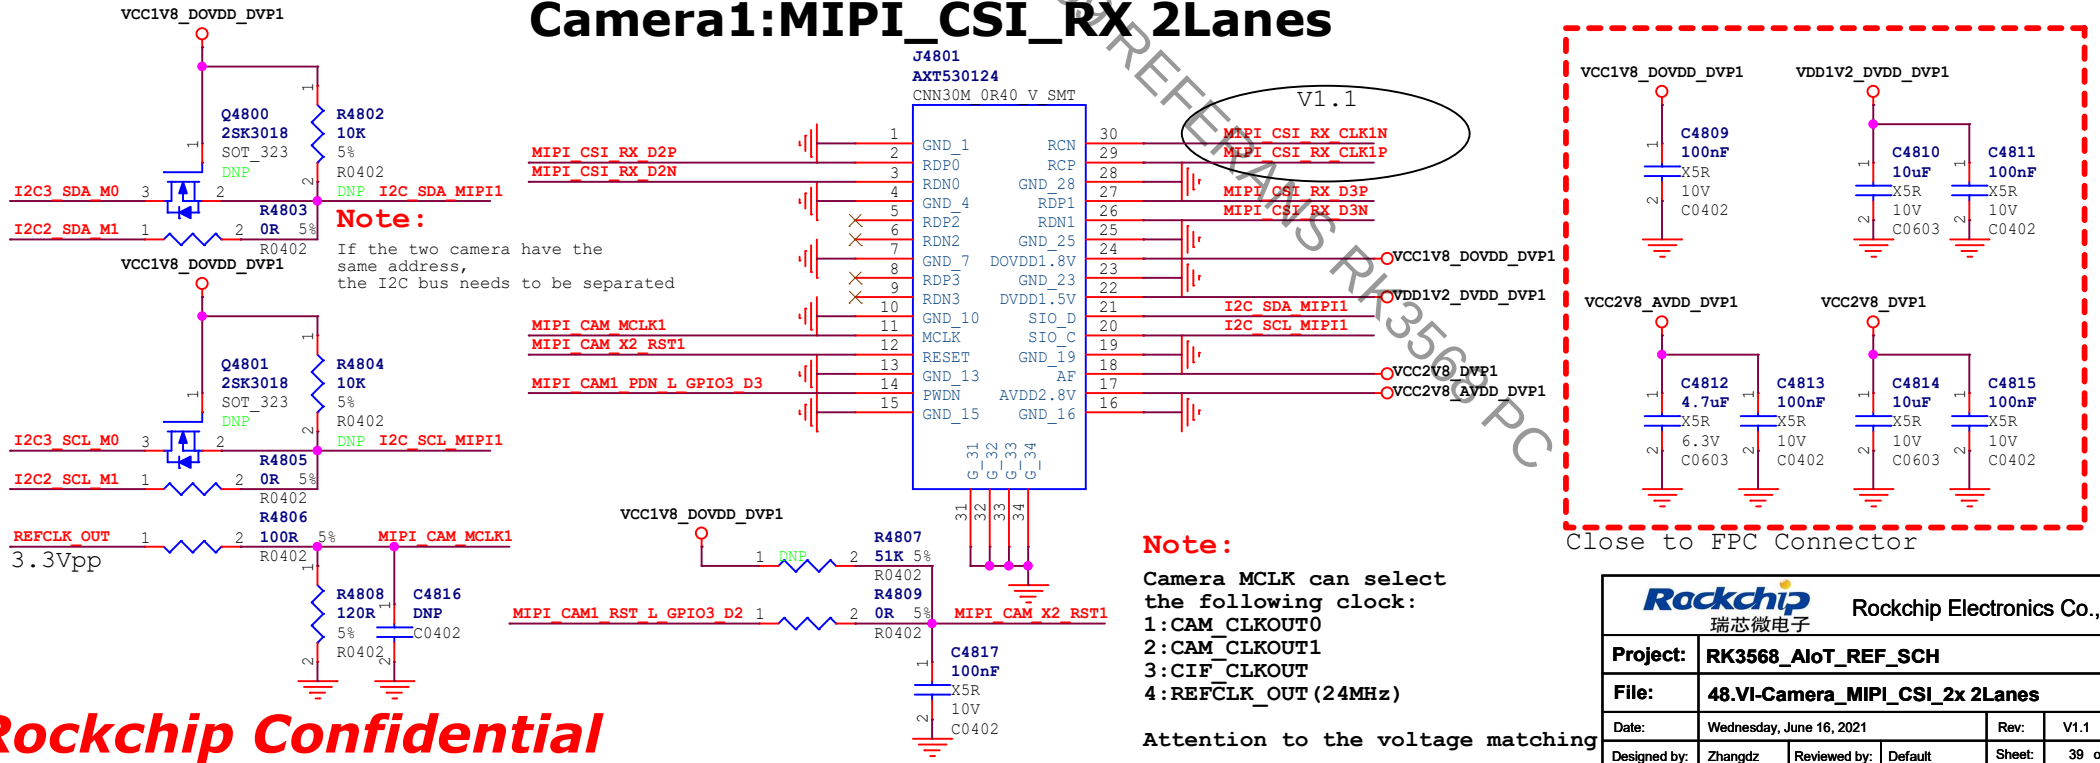

Note:

Camera MCLK can select the following clock:
1:CAM_CLKOUT0
2:CAM_CLKOUT1
3:CIF_CLKOUT
4:REFCLK_OUT(24MHz)

Attention to the voltage matching

Note:

If the two camera have the same address, the I2C bus needs to be separated

Rockchip 瑞芯微电子	Rockchip Electronics Co., Ltd				
Project:	RK3568_AIoT_REF_SCH				
File:	48.VI-Camera_MIPI_CSI_2x 2Lanes				
Date:	Wednesday, June 16, 2021			Rev:	V1.1
Designed by:	Zhangdz	Reviewed by:	Default	Sheet:	39 of 72

HDMI1.4 RX

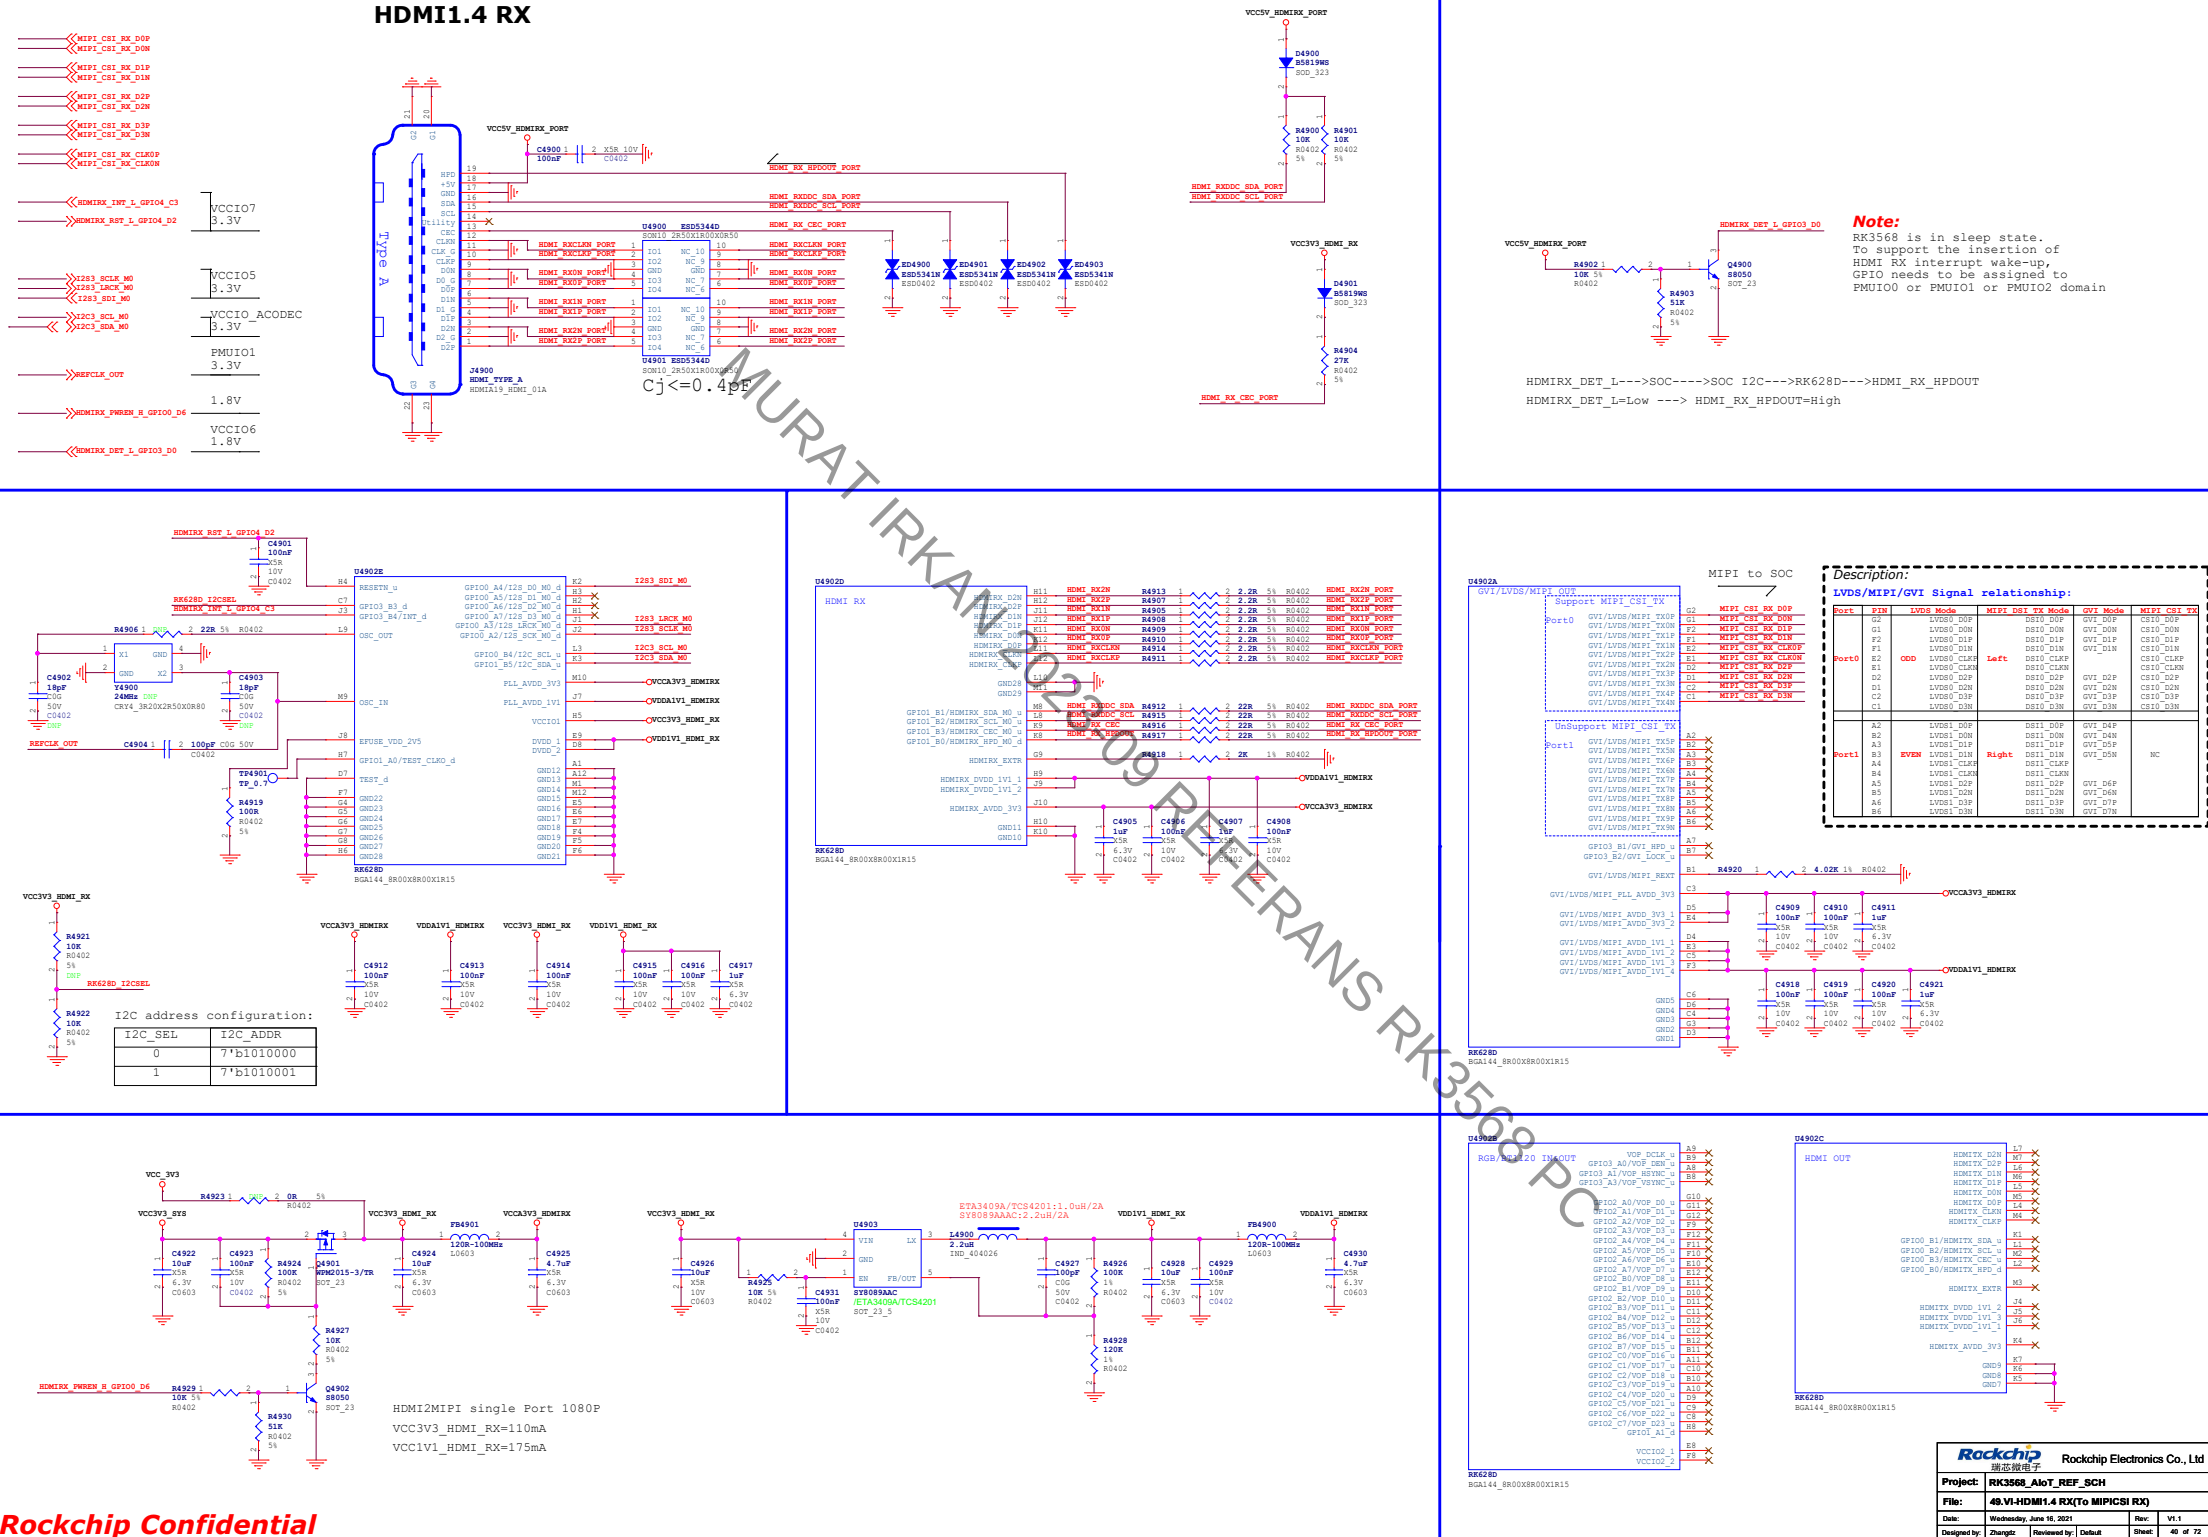

Note:
RK3568 is in sleep state.
To support the insertion of HDMI RX interrupt wake-up, GPIO needs to be assigned to PMUIO0 or PMUIO1 or PMUIO2 domain

HDMIRX_DET_L--->SOC---->SOC I2C--->RK628D--->HDMI_RX_HPDOUT
HDMIRX_DET_L=Low ---> HDMI_RX_HPDOUT=High

I2C address configuration:

I2C_SEL	I2C_ADDR
0	7'b1010000
1	7'b1010001

Description:

LVDS/MIPI/GVI Signal relationship:

Port	PIN	LVDS Mode	MIPI DSI TX Mode	GVI Mode	MIPI CSI TX
Port0	G2	LVDS0_D0P	DSI0_D0P	GVI_D0P	CSI0_D0P
	G1	LVDS0_D0N	DSI0_D0N	GVI_D0N	CSI0_D0N
	F2	LVDS0_D1P	DSI0_D1P	GVI_D1P	CSI0_D1P
	F1	LVDS0_D1N	DSI0_D1N	GVI_D1N	CSI0_D1N
	E2	LVDS0_CLKP	DSI0_CLKP		CSI0_CLKP
	E1	LVDS0_CLKN	DSI0_CLKN		CSI0_CLKN
	D2	LVDS0_D2P	DSI0_D2P	GVI_D2P	CSI0_D2P
	D1	LVDS0_D2N	DSI0_D2N	GVI_D2N	CSI0_D2N
	C2	LVDS0_D3P	DSI0_D3P	GVI_D3P	CSI0_D3P
	C1	LVDS0_D3N	DSI0_D3N	GVI_D3N	CSI0_D3N
Port1	A2	LVDS1_D0P	DSI1_D0P	GVI_D4P	
	B2	LVDS1_D0N	DSI1_D0N	GVI_D4N	
	A3	LVDS1_D1P	DSI1_D1P	GVI_D5P	
	B3	LVDS1_D1N	DSI1_D1N	GVI_D5N	NC
	A4	LVDS1_CLKP	DSI1_CLKP		
	B4	LVDS1_CLKN	DSI1_CLKN		
	A5	LVDS1_D2P	DSI1_D2P	GVI_D6P	
	B5	LVDS1_D2N	DSI1_D2N	GVI_D6N	
	A6	LVDS1_D3P	DSI1_D3P	GVI_D7P	
	B6	LVDS1_D3N	DSI1_D3N	GVI_D7N	

HDMI2MIPI single Port 1080P
VCC3V3_HDMI_RX=110mA
VCC1V1_HDMI_RX=175mA

Rockchip 瑞芯微电子	Rockchip Electronics Co., Ltd
Project:	RK3568_AIoT_REF_SCH
File:	49.V1-HDMI1.4 RX(To MIPICSI RX)
Date:	Wednesday, June 16, 2021
Rev:	V1.1
Designed by:	Zhangtz
Reviewed by:	Default
Sheet:	40 of 72

HDMI2.0 TX

HDMI_TX2P_PORT
HDMI_TX2N_PORT
HDMI_TX1P_PORT
HDMI_TX1N_PORT
HDMI_TX0P_PORT
HDMI_TX0N_PORT
HDMI_TXCLKP_PORT
HDMI_TXCLKN_PORT

HDMITX_SCL
HDMITX_SDA

HDMITX_CEC_M0
HDMI_TX_HPDIN

Cj<=0.4pF

U5000
ESD5344D
SON10_2R50X1R00X0R50

U5001 ESD5344D SON10_2R50X1R00X0R50

HDMI_TX_CEC_PORT
HDMI_TXDDC_SCL_PORT
HDMI_TXDDC_SDA_PORT
HDMI_TX_HPD_PORT

VCC5V_HDMI_TX

ED5000 ESD5341N ESD0402
ED5001 ESD5341N ESD0402
ED5002 ESD5341N ESD0402
ED5003 ESD5341N ESD0402

C5000 1uF X5R 10V C0402

J5000
HDMI_TYPE_A
HDMIA19_HDMI_01A
Type A

HDMI TX DDC

VCC_5V0
D5000 B5819WS SOD_323

VCC_3V3
R5000 10K 5% R0402
Q5000 2SK3018 SOT_323
R5001 1.8K 5% R0402
HDMITX_SCL
HDMI_TXDDC_SCL_PORT

VCC_3V3
R5002 10K 5% R0402
Q5001 2SK3018 SOT_323
R5003 1.8K 5% R0402
HDMITX_SDA
HDMI_TXDDC_SDA_PORT

HDMI TX CEC

VCC_3V3
VCC_5V0
R5006 27K 5% R0402
Q5002 2SK3018 SOT_323
HDMITX_CEC_M0
HDMI_TX_CEC_PORT

HDMI TX HPD

HDMI_TX_HPDIN R5005 1K 5% R0402 HDMI_TX_HPD_PORT
R5007 100K 5% R0402

VCC_5V0
VCC5V_HDMI_TX
D5001 B5819W SOD_123
R5004 DNP 0R 5% R0402

Rockchip 瑞芯微电子	Rockchip Electronics Co., Ltd				
Project:	RK3568_AIoT_REF_SCH				
File:	50.VO-HDMI2.0 TX				
Date:	Wednesday, June 16, 2021			Rev:	V1.1
Designed by:	Zhangdz	Reviewed by:	Default	Sheet:	41 of 72

Single-MIPI0 LCM

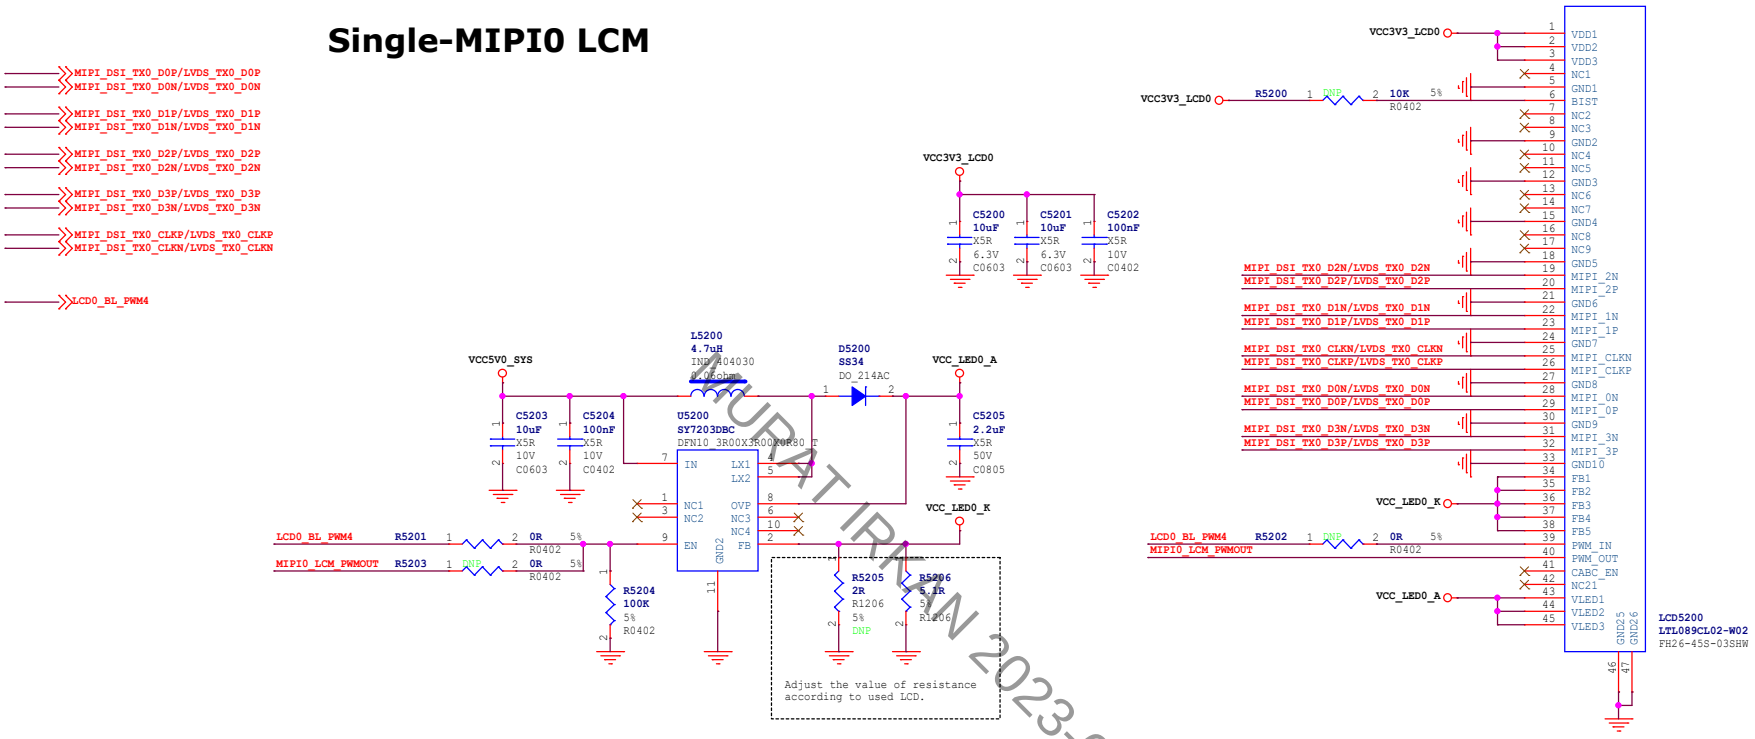

Single- MIPI1 LCM

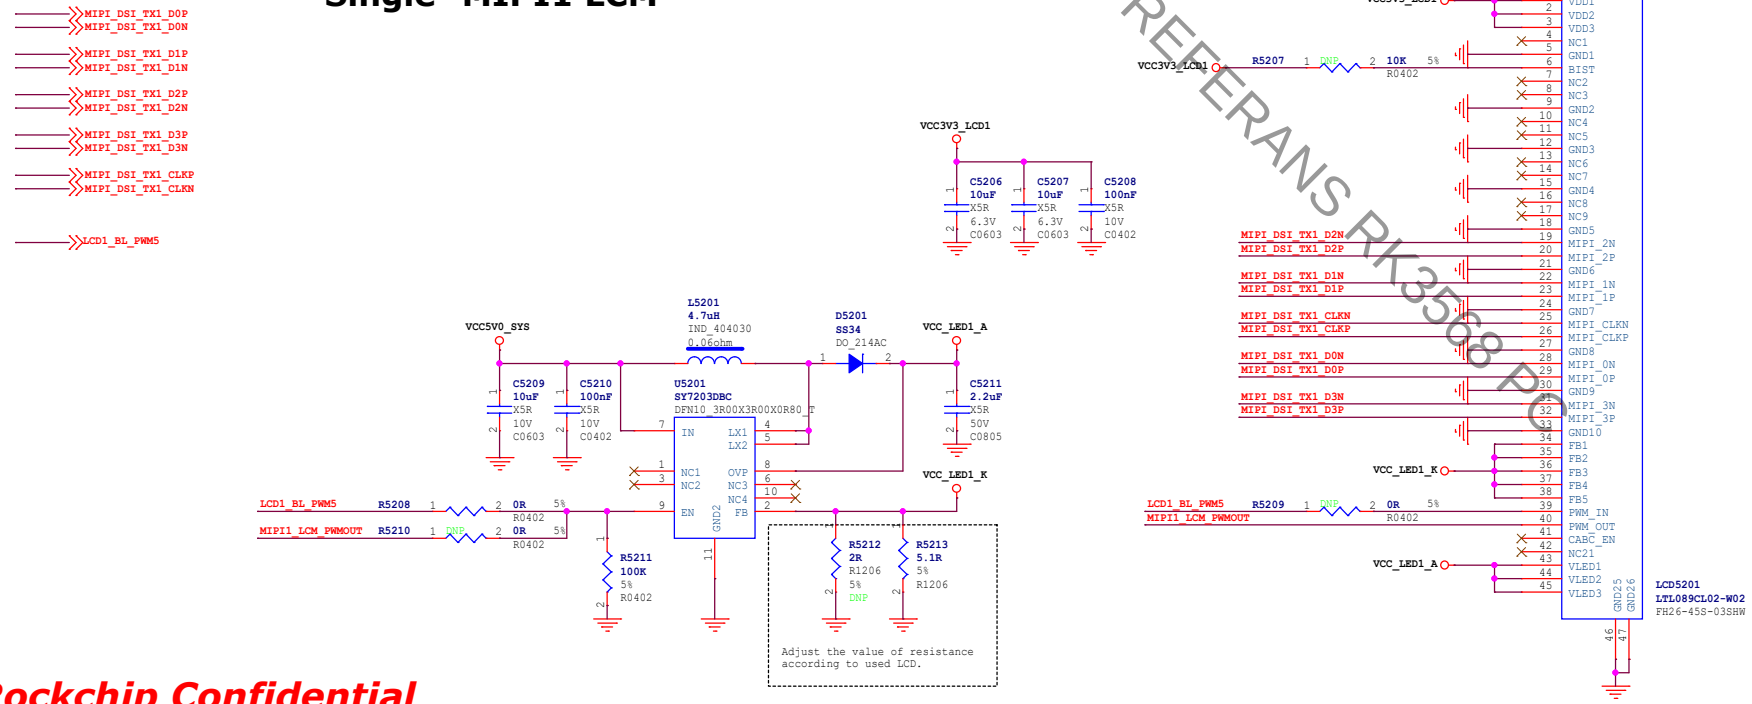

Rockchip 瑞芯微电子	Rockchip Electronics Co., Ltd				
Project:	RK3568_AIoT_REF_SCH				
File:	52.VO-LCM_MIPI_DSI_TX0/TX1				
Date:	Wednesday, June 16, 2021			Rev:	V1.1
Designed by:	Zhangdz	Reviewed by:	Default	Sheet:	42 of 72

Dual-MIPI LCM

MIPI_DSI_TX0_D0P/LVDS_TX0_D0P
MIPI_DSI_TX0_D0N/LVDS_TX0_D0N
MIPI_DSI_TX0_D1P/LVDS_TX0_D1P
MIPI_DSI_TX0_D1N/LVDS_TX0_D1N
MIPI_DSI_TX0_D2P/LVDS_TX0_D2P
MIPI_DSI_TX0_D2N/LVDS_TX0_D2N
MIPI_DSI_TX0_D3P/LVDS_TX0_D3P
MIPI_DSI_TX0_D3N/LVDS_TX0_D3N
MIPI_DSI_TX0_CLKP/LVDS_TX0_CLKP
MIPI_DSI_TX0_CLKN/LVDS_TX0_CLKN
MIPI_DSI_TX1_D0P
MIPI_DSI_TX1_D0N
MIPI_DSI_TX1_D1P
MIPI_DSI_TX1_D1N
MIPI_DSI_TX1_D2P
MIPI_DSI_TX1_D2N
MIPI_DSI_TX1_D3P
MIPI_DSI_TX1_D3N
MIPI_DSI_TX1_CLKP
MIPI_DSI_TX1_CLKN
LCD0_BL_PWM4
LCD_EN_H_GPIO3_C6
LCD_RST_L_GPIO3_C7

VCCIO6 Default:1.8v

VCC3V3_LCD0
C5300 10uF X5R 6.3V C0603
C5301 10uF X5R 6.3V C0603
C5302 100nF X5R 10V C0402

VCCA1V8_IMAGE
R5300 1 2 0R 5% R0402
VCC1V8_LCD
C5303 4.7uF X5R 6.3V C0402
C5304 100nF X5R 10V C0402

LCD_EN_H_GPIO3_C6 R5301 1 2 0R 5% R0402 LCD_EN_H
R5302 DNP R0402
LCD_RST_L_GPIO3_C7 R5303 1 2 0R 5% R0402 LCD_RST_L
R5304 DNP R0402

VCC5V0_SYS
L5300 4.7uH IND_404030 0.06ohm
D5300 SS34 DO_214AC
VCC_LED_A
C5305 10uF X5R 10V C0603
C5306 100nF X5R 10V C0402
U5300 SY7203DBC DFN10_3R00X3R00X0R80_T
IN LX1 LX2 NC1 NC2 OVP NC3 NC4 EN GND2 FB
C5307 2.2uF X5R 50V C0805
VCC_LED_K
LCD0_BL_PWM4
R5305 100K 5% R0402
R5306 2R R1206 5% DNP
R5307 5.1R 5% R1206
Adjust the value of resistance according to used LCD.

J5300
LCD_DualMIPI-61P
FH36W-61S-03SHW
LCD_CON : Dual MIPI

1 GND1
2 GND2
3 GND3
4 VCC_LED_K
5 VLED_GND1
6 VLED_GND2
7 VLED_GND3
8 VLED_GND4
9 VLED_GND5
10 VLED_GND6
11 VCC_LED_A
12 VLED2
13 VLED4
14 NC1
15 GND5
16 TP5300 TP5301 MIPI_PWM_OUT PWM
17 TE
18 GND6
19 MIPI_DSI_TX1_D2P DSI_R_2P
20 MIPI_DSI_TX1_D2N DSI_R_2N
21 GND7
22 MIPI_DSI_TX1_D1P DSI_R_1P
23 MIPI_DSI_TX1_D1N DSI_R_1N
24 GND8
25 MIPI_DSI_TX1_CLKP DSI_R_CLKP
26 MIPI_DSI_TX1_CLKN DSI_R_CLKN
27 GND9
28 MIPI_DSI_TX1_D0P DSI_R_0P
29 MIPI_DSI_TX1_D0N DSI_R_0N
30 GND10
31 MIPI_DSI_TX1_D3P DSI_R_3P
32 MIPI_DSI_TX1_D3N DSI_R_3N
33 LCD_EN_H GND11
34 EN
35 NC6
36 VCC3V3_LCD0 VBAT1
37 VBAT2
38 VBAT3
39 VBAT4
40 NC5
41 VCC1V8_LCD VDDIO1
42 VDDIO2
43 GND12
44 TP5302 DBIST(GND)
45 TE_S
46 LCD_RST_L GND13
47 RESET
48 MIPI_DSI_TX0_D2P/LVDS_TX0_D2P GND14
49 MIPI_DSI_TX0_D2N/LVDS_TX0_D2N DSI_L_2P
50 DSI_L_2N
51 MIPI_DSI_TX0_D1P/LVDS_TX0_D1P GND15
52 MIPI_DSI_TX0_D1N/LVDS_TX0_D1N DSI_L_1P
53 DSI_L_1N
54 MIPI_DSI_TX0_CLKP/LVDS_TX0_CLKP GND16
55 MIPI_DSI_TX0_CLKN/LVDS_TX0_CLKN DSI_L_CLKP
56 DSI_L_CLKN
57 MIPI_DSI_TX0_D0P/LVDS_TX0_D0P GND17
58 MIPI_DSI_TX0_D0N/LVDS_TX0_D0N DSI_L_0P
59 DSI_L_0N
60 MIPI_DSI_TX0_D3P/LVDS_TX0_D3P GND18
61 MIPI_DSI_TX0_D3N/LVDS_TX0_D3N DSI_L_3P
DSI_L_3N GND53 A1
GND19 GND54 A2

Left and Right support redistribution

Rockchip 瑞芯微电子	Rockchip Electronics Co., Ltd				
Project:	RK3568_AIoT_REF_SCH				
File:	53.VO-LCM_Dual MIPI_DSI TX				
Date:	Wednesday, June 16, 2021			Rev:	V1.1
Designed by:	Zhangdz	Reviewed by:	Default	Sheet:	43 of 72

Single-LVDS LCM

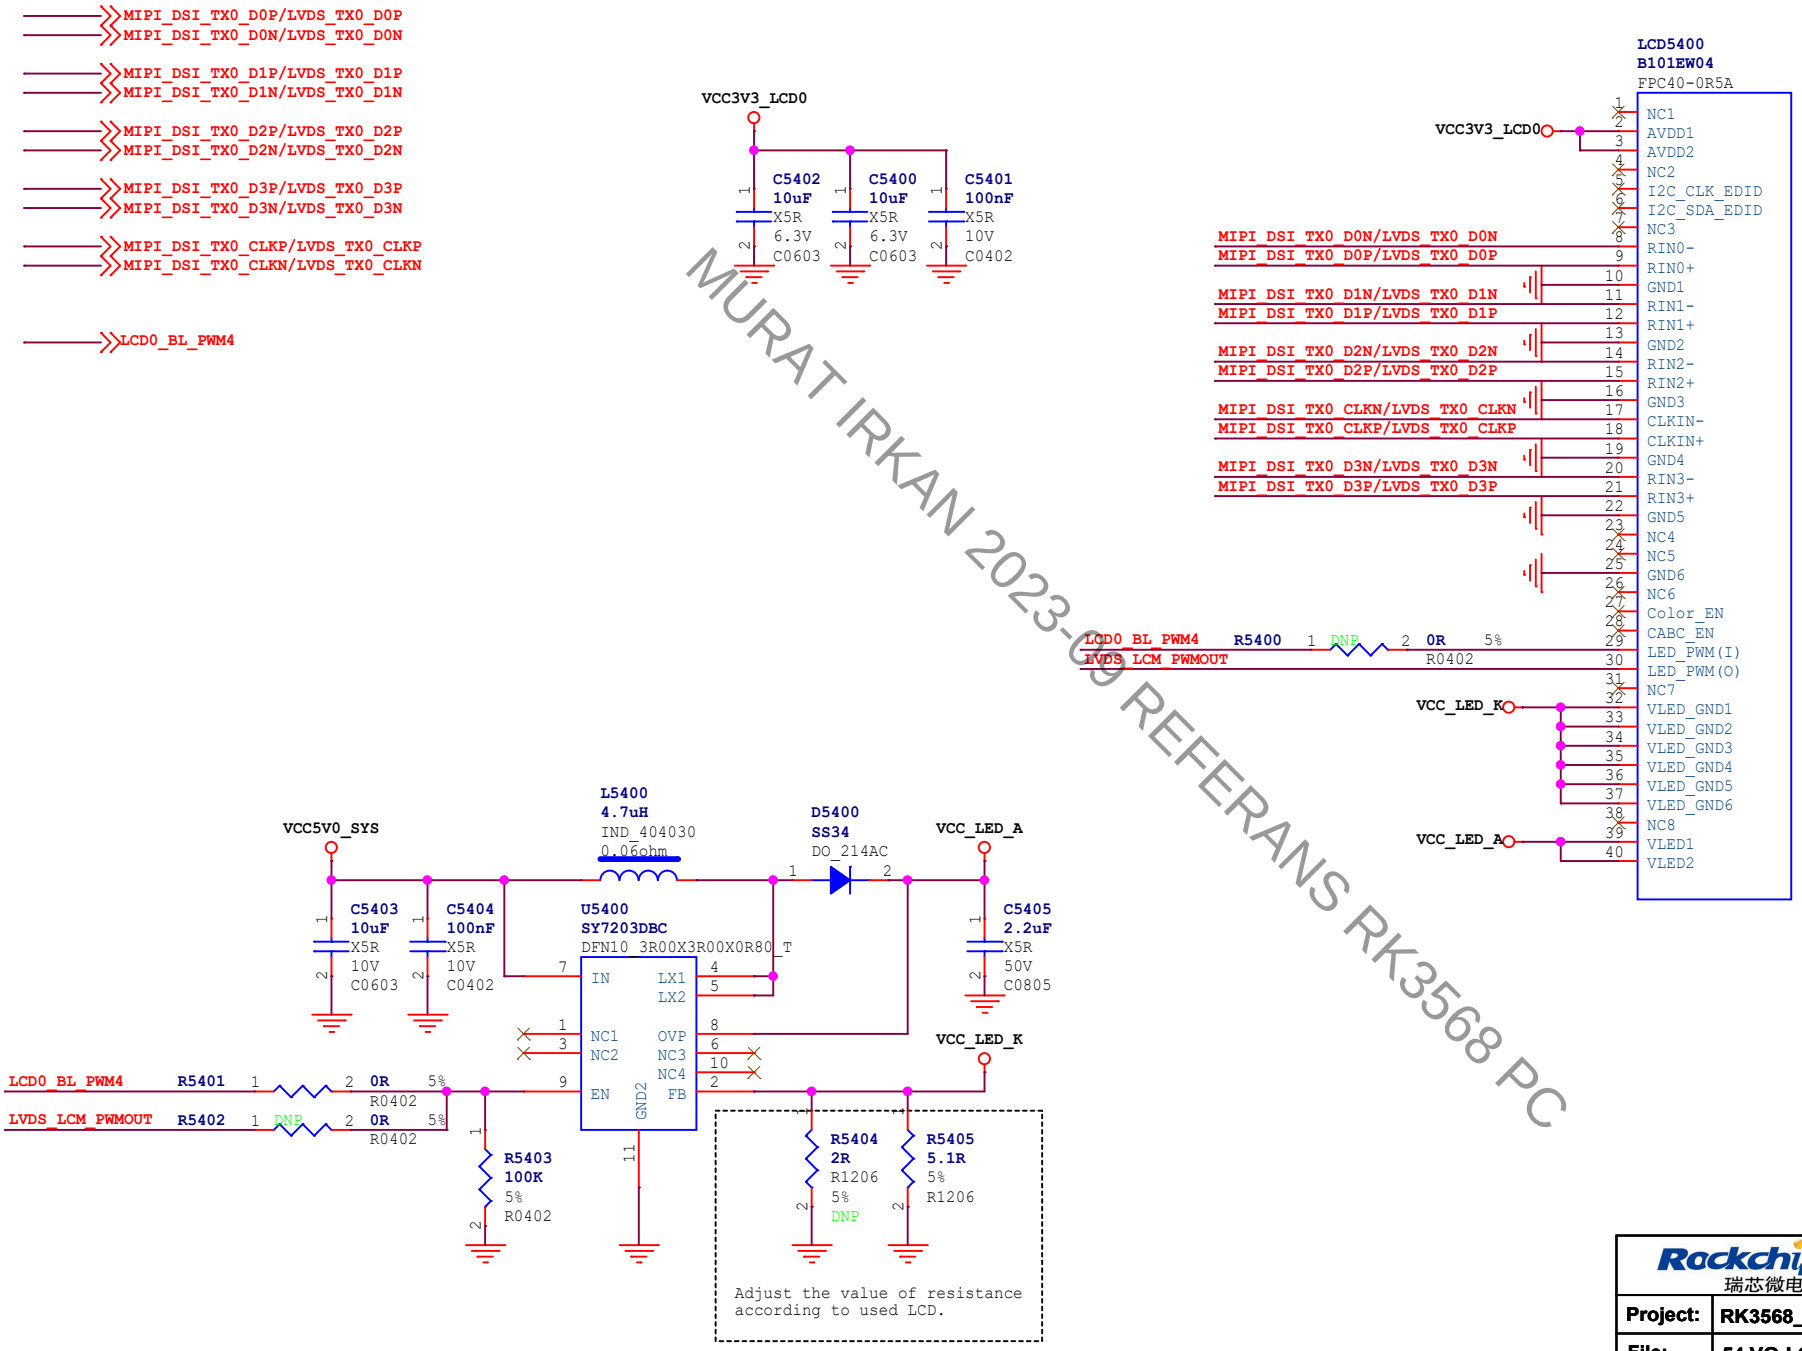

Rockchip 瑞芯微电子	Rockchip Electronics Co., Ltd				
Project:	RK3568_AIoT_REF_SCH				
File:	54.VO-LCM_LVDS TX				
Date:	Wednesday, June 16, 2021			Rev:	V1.1
Designed by:	Zhangdz	Reviewed by:	Default	Sheet:	44 of 72

Single-eDP LCM



Note:

For EDP displays with edp1.2a or above, the bias resistors R5600 and R5601 of aux are not mounted.

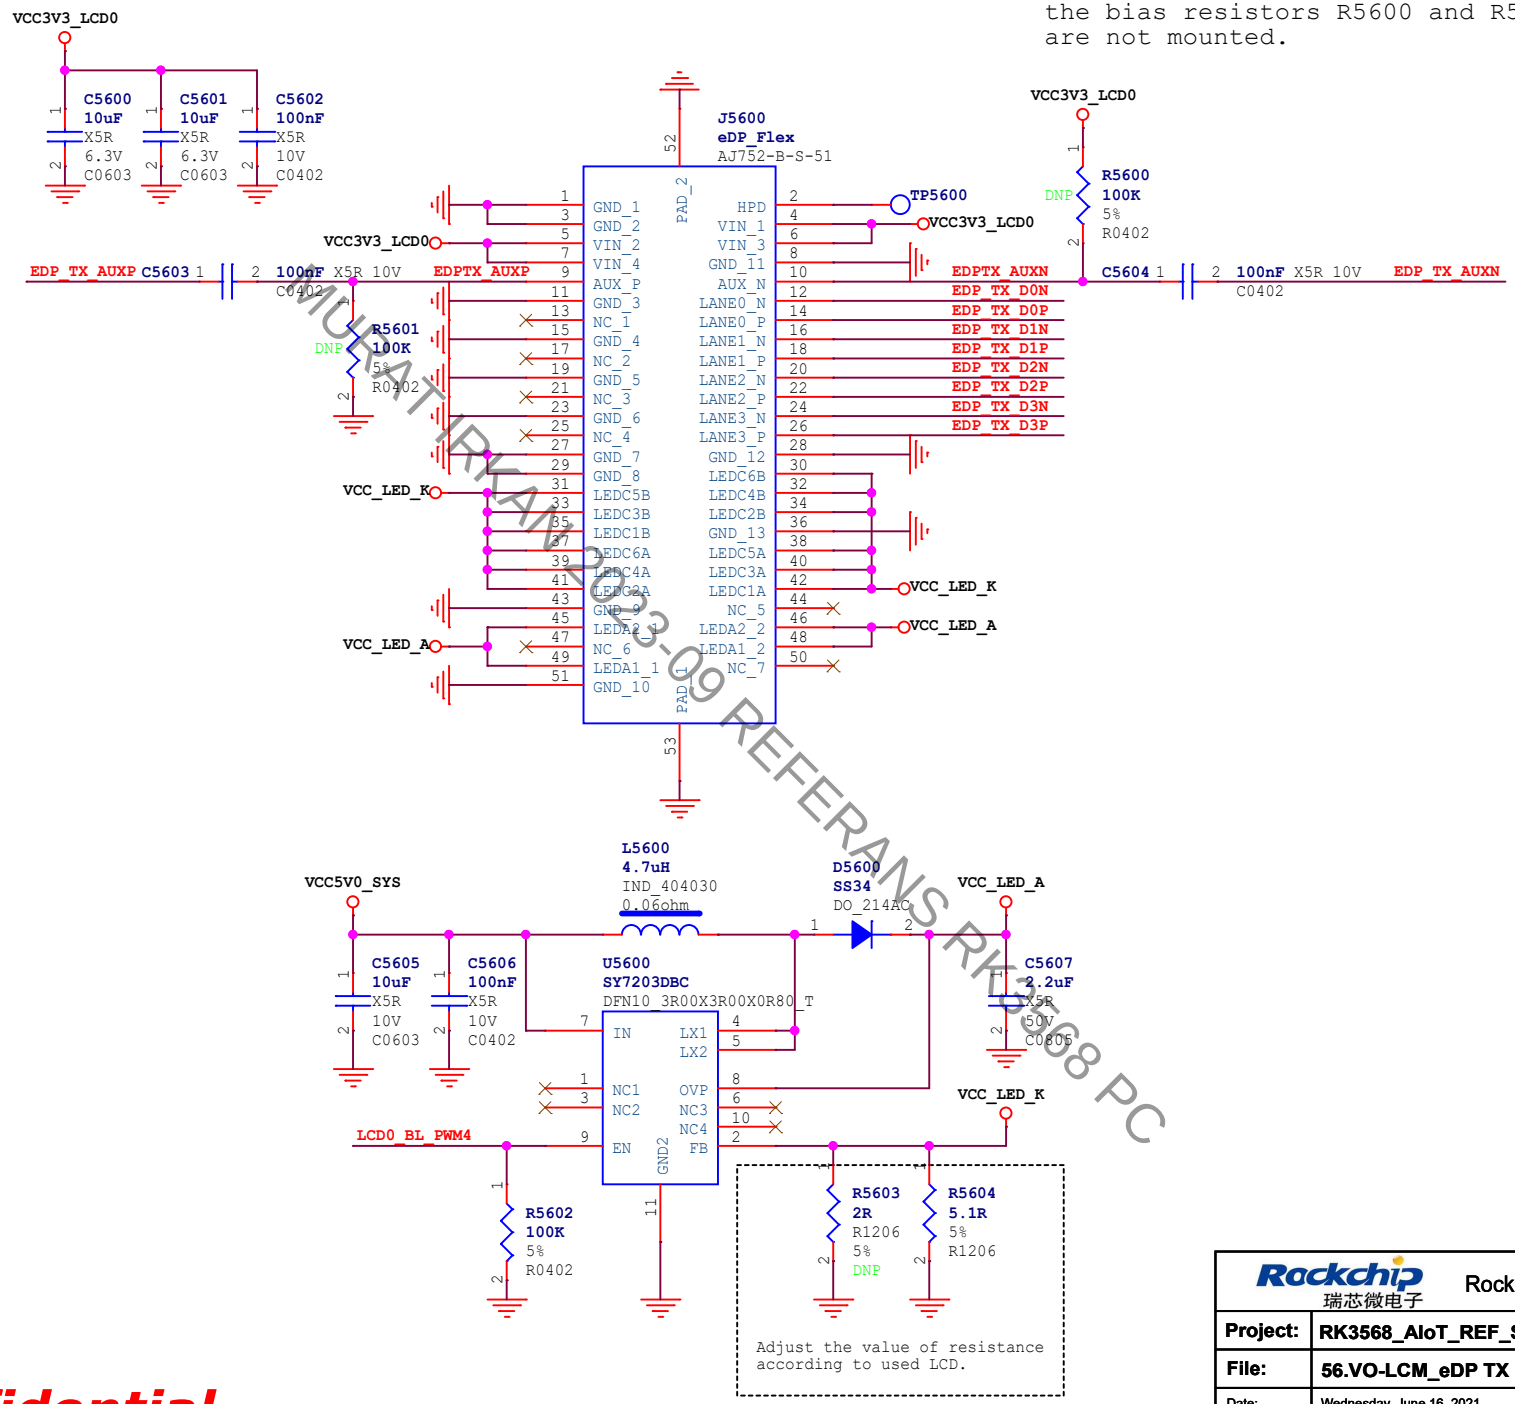

Rockchip 瑞芯微电子	Rockchip Electronics Co., Ltd				
Project:	RK3568_AIoT_REF_SCH				
File:	56.VO-LCM_eDP TX				
Date:	Wednesday, June 16, 2021			Rev:	V1.1
Designed by:	Zhangdz	Reviewed by:	Default	Sheet:	45 of 72

Touch Panel connector

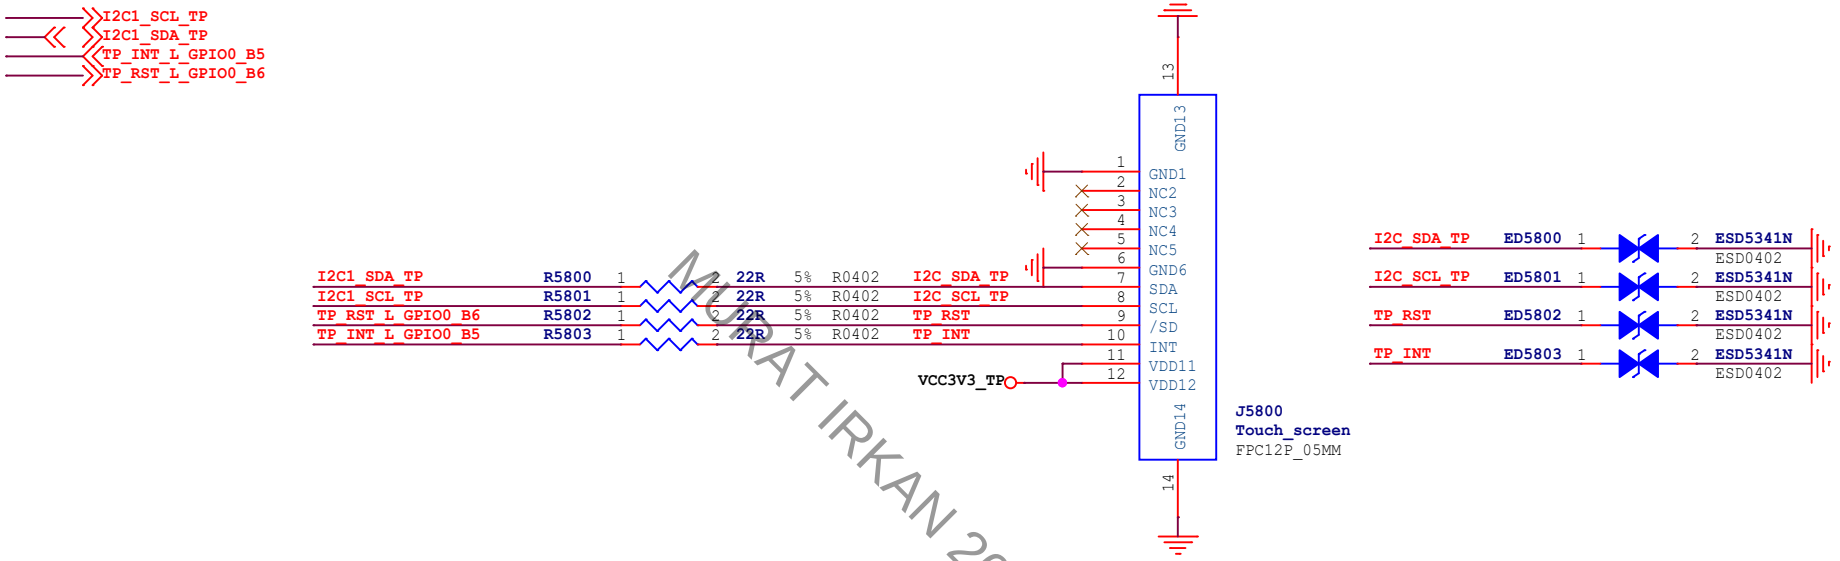

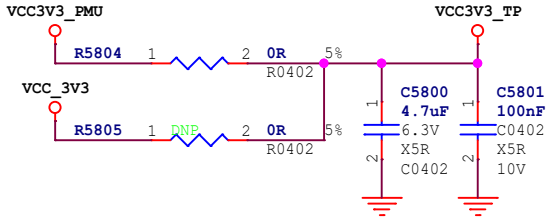

Rockchip 瑞芯微电子	Rockchip Electronics Co., Ltd				
Project:	RK3568_AIoT_REF_SCH				
File:	58.TP Connector_COF				
Date:	Wednesday, June 16, 2021			Rev:	V1.1
Designed by:	Zhangdz	Reviewed by:	Default	Sheet:	46 of 72

VGA OUT

Default:RTD2166

CH7517,IT6516:Can also support

PMUIO2
3.3V
1.8V

Power Sequence:
5v-->3.3v-->1.2v

BLM18BB220SN1D

BAT54S

550mW

Rockchip 瑞芯微电子	Rockchip Electronics Co., Ltd				
Project:	RK3568_AIoT_REF_SCH				
File:	59.VO-VGA Output(eDP To VGA)				
Date:	Wednesday, June 16, 2021			Rev:	V1.1
Designed by:	Zhangdz	Reviewed by:	Default	Sheet:	47 of 72

SDIO WIFI/BT MODULE

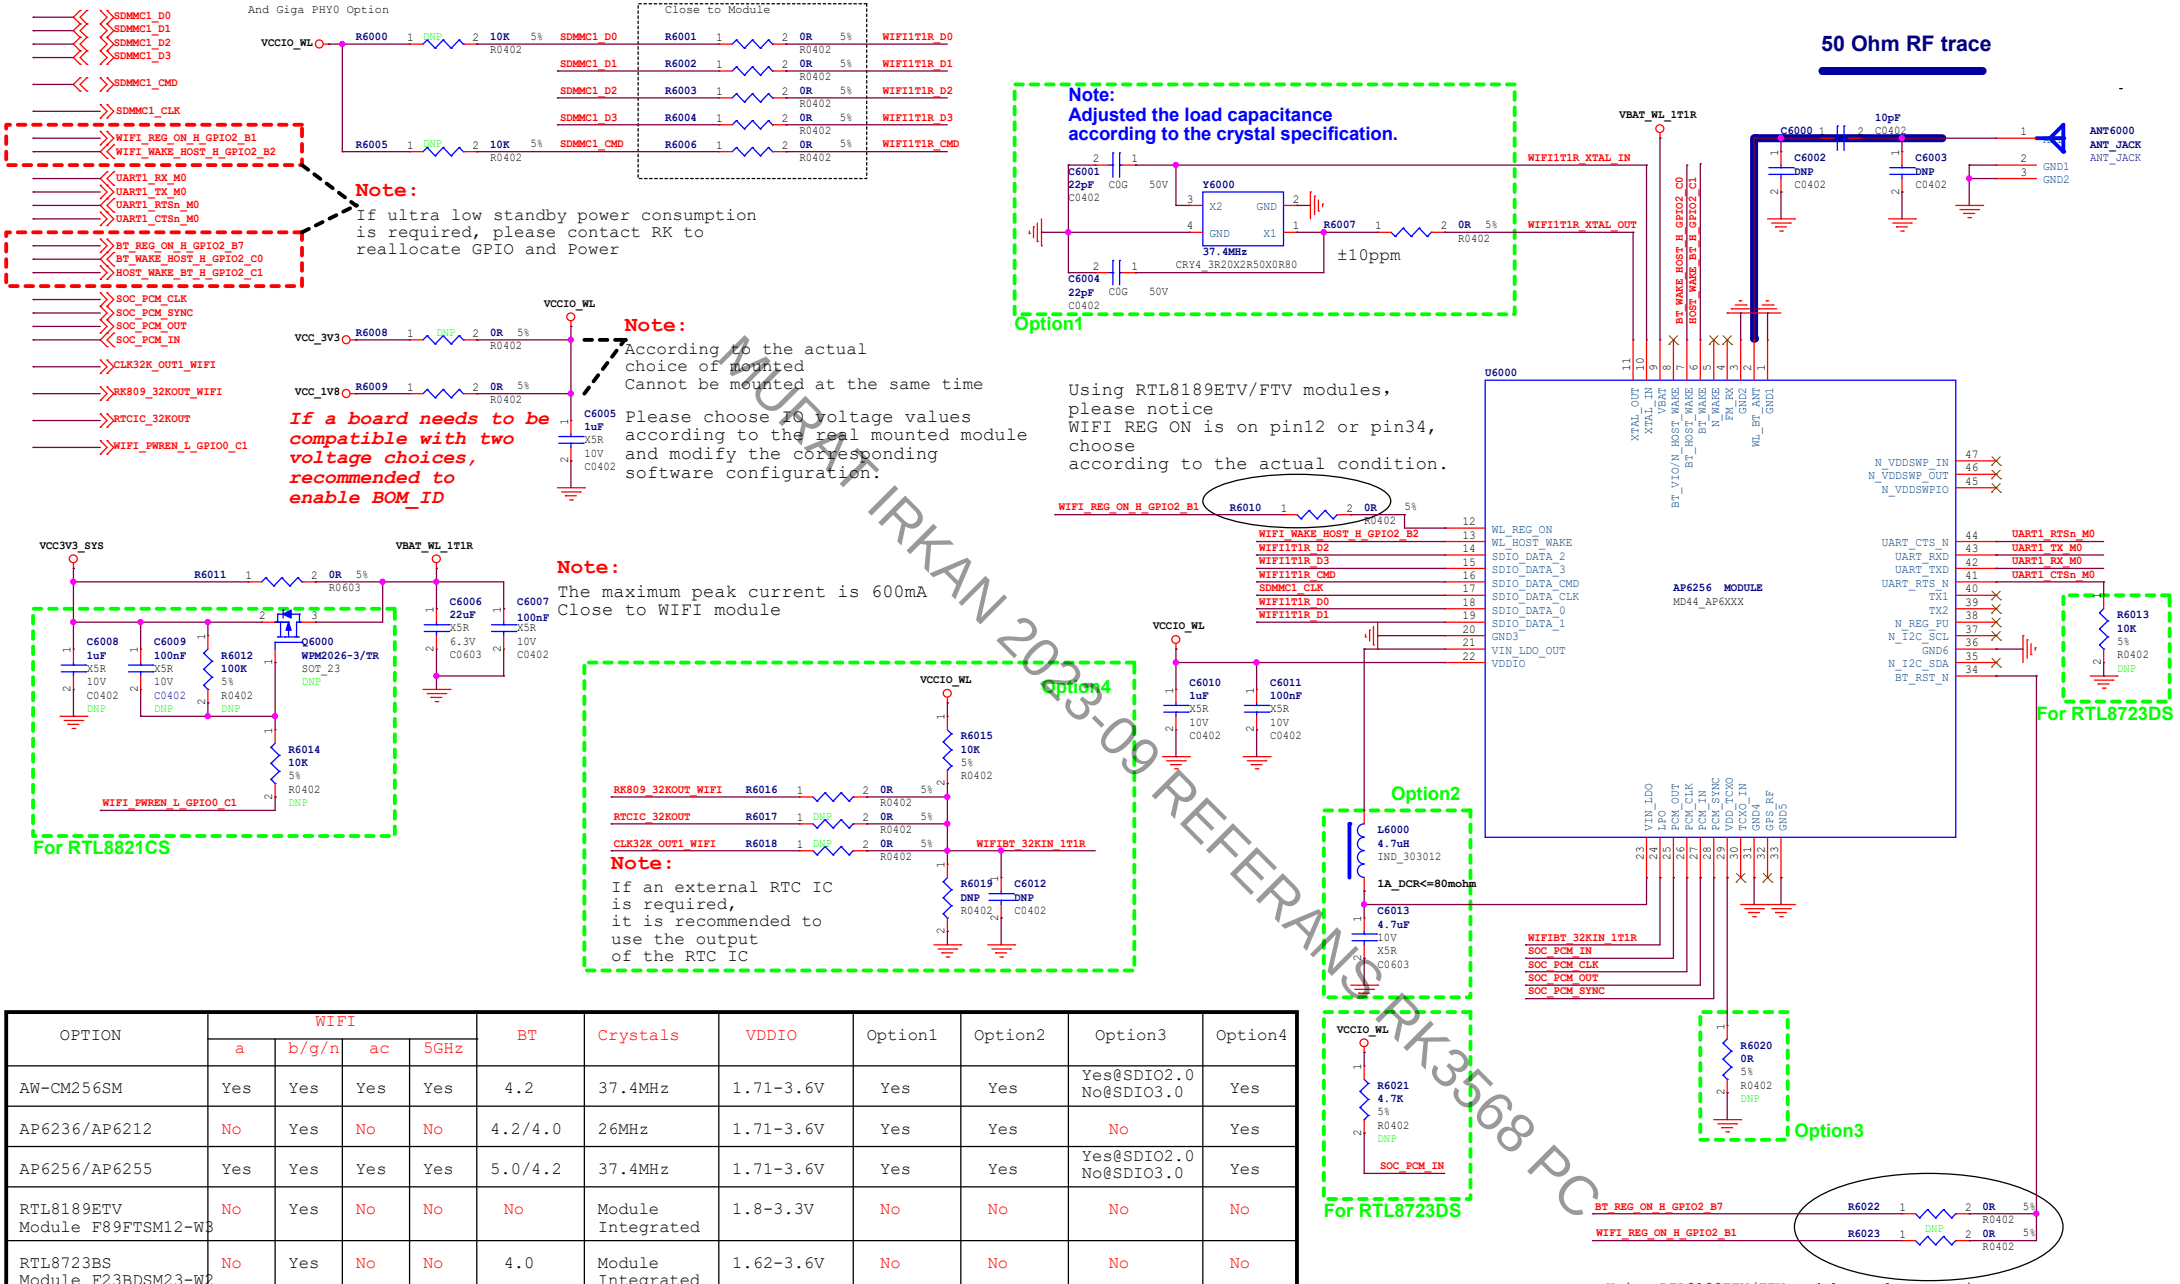

OPTION	WIFI				BT	Crystals	VDDIO	Option1	Option2	Option3	Option4
	a	b/g/n	ac	5GHz							
AW-CM256SM	Yes	Yes	Yes	Yes	4.2	37.4MHz	1.71-3.6V	Yes	Yes	Yes@SDIO2.0 No@SDIO3.0	Yes
AP6236/AP6212	No	Yes	No	No	4.2/4.0	26MHz	1.71-3.6V	Yes	Yes	No	Yes
AP6256/AP6255	Yes	Yes	Yes	Yes	5.0/4.2	37.4MHz	1.71-3.6V	Yes	Yes	Yes@SDIO2.0 No@SDIO3.0	Yes
RTL8189ETV Module F89FTSM12-W3	No	Yes	No	No	No	Module Integrated	1.8-3.3V	No	No	No	No
RTL8723BS Module F23BDSM23-W2	No	Yes	No	No	4.0	Module Integrated	1.62-3.6V	No	No	No	No
RTL8723DS Module 6223A-SRD	No	Yes	No	No	4.2	Module Integrated	1.62-3.6V	No	No	No	No
QCA9377 Module 8223A-SR	Yes	Yes	Yes	Yes	4.2	Module Integrated	1.7-3.45V	No	No	No	Yes
RTL8821CS Module 6221A-SRC	Yes	Yes	Yes	Yes	4.2	Module Integrated	1.7-3.45V	No	No	No	No

Note:
Yes: option circuit be mounted
No: option circuit not be mounted

Rockchip 瑞芯微电子	Rockchip Electronics Co., Ltd
Project:	RK3568_AIoT_REF_SCH
File:	60.WIFI/BT-SDMMC1_1T1R + UART
Date:	Wednesday, June 16, 2021
Rev:	V1.1
Designed by:	Zhangdz
Reviewed by:	Default
Sheet:	48 of 72

SDIO WIFI/BT MODULE-2T2R

And Giga PHY0 Option

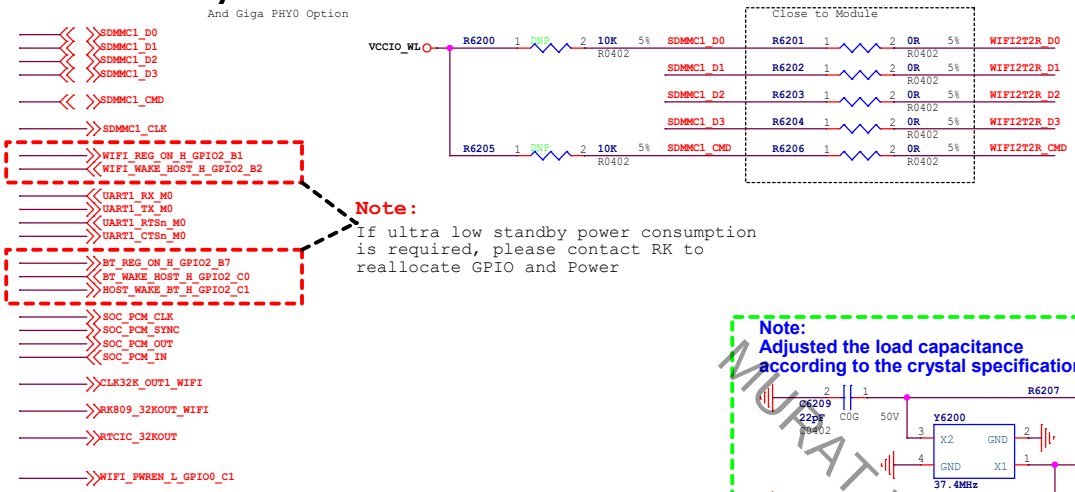

Note:

If ultra low standby power consumption is required, please contact RK to reallocate GPIO and Power

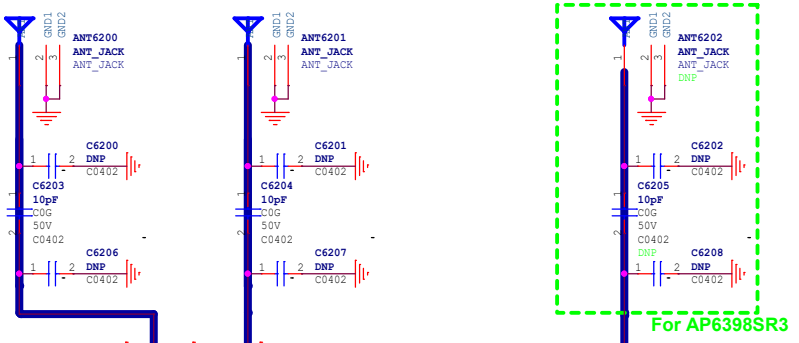

50 Ohm RF trace

Note:
Adjusted the load capacitance according to the crystal specification.

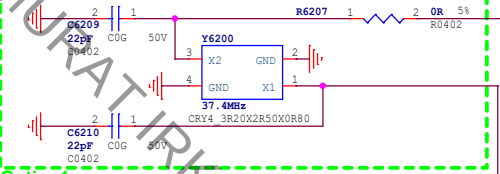

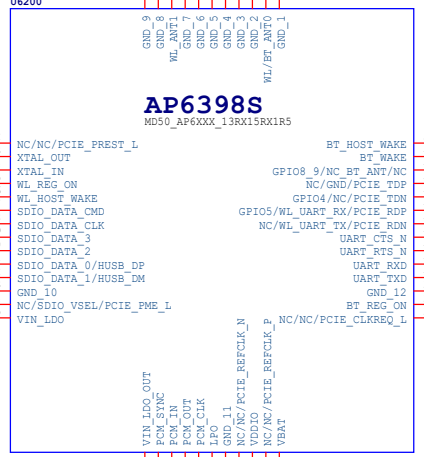

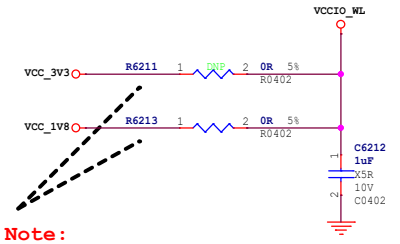

Note:

According to the actual choice of mounted
Cannot be mounted at the same time

Please choose IO voltage values according to the real mounted module and modify the corresponding software configuration.

If a board needs to be compatible with two voltage choices, recommended to enable BOM_ID



SDIO voltage select:
0: 3.3V 1:1.8V



Note:

If an external RTC IC is required, it is recommended to use the output of the RTC IC

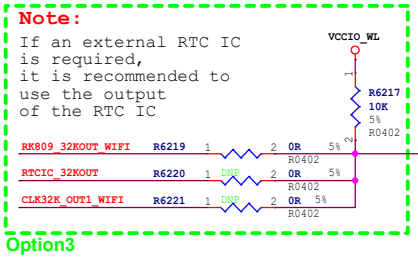

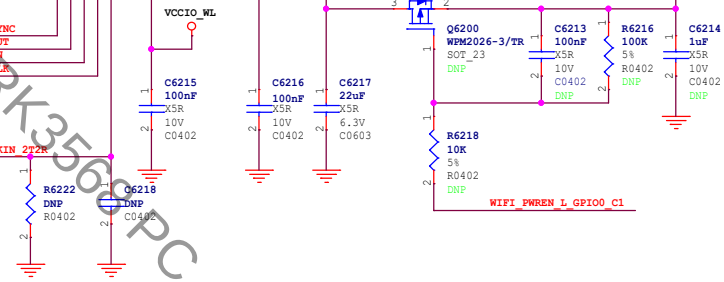

OPTION	WIFI				BT	Crystals	VDDIO	Option1	Option2	Option3
	a	b/g/n	ac	5GHz						
AP6398S	Yes	Yes	Yes	Yes	5.0	37.4MHz	1.71-3.6V	Yes	Yes	Yes
AP6356S	Yes	Yes	Yes	Yes	4.1	37.4MHz	1.71-3.6V	Yes	Yes	Yes
RTL8822BS Module	Yes	Yes	Yes	Yes	4.1	Module Integrated	1.71-3.6V	No	No	No

Note:
Yes: option circuit be mounted
No: option circuit not be mounted

Rockchip 瑞芯微电子	Rockchip Electronics Co., Ltd		
Project:	RK3568_AIoT_REF_SCH		
File:	62.WIFI/BT-SDMMC1_2T2R + UART		
Date:	Wednesday, June 16, 2021	Rev:	V1.1
Designed by: Zhangdz	Reviewed by: Default	Sheet:	49 of 72

PCIe WIFI6/BT MODULE-2T2R

WIFI_REG_ON_H_GPIO2_B1
WIFI_WAKE_HOST_H_GPIO2_B2
UART1_RX_M0
UART1_TX_M0
UART1_RTSn_M0
UART1_CTSn_M0
BT_REG_ON_H_GPIO2_B7
BT_WAKE_HOST_H_GPIO2_C0
HOST_WAKE_BT_H_GPIO2_C1
SOC_PCM_CLK
SOC_PCM_SYNC
SOC_PCM_OUT
SOC_PCM_IN
CLK32K_OUT1_WIFI
RK809_32KOUT_WIFI
RTCIC_32KOUT

Note:
If ultra low standby power consumption is required, please contact RK to reallocate GPIO and Power

PCIE20_TXP
PCIE20_TXN
PCIE20_RXP
PCIE20_RXN
PCIE20_REFCLKP
PCIE20_REFCLKN
PCIE20_CLKREQn_M1
PCIE20_WAKEn_M1
PCIE20_PERSTn_M1

Note:
Adjusted the load capacitance according to the crystal specification.

ANT6400 ANT_JACK
ANT6401 ANT_JACK
ANT6402 ANT_JACK
C6400 DNP C0402
C6401 DNP C0402
C6402 DNP C0402
C6403 10pF C0G 50V C0402
C6404 DNP C0402
C6405 DNP C0402
C6406 DNP C0402
R6400 0R 5% R0402
R6401 0R 5% R0402
V1.1

50 Ohm RF trace
For AP6275PR3

U6400
PCIE_PERST_L
XTAL_IN
XTAL_OUT
WL_REG_ON
WL_HOST_WAKE/WL_GPIO_0
NC1
NC2
BT_PCM_OUT
BT_PCM_IN
BT_PCM_SYNC
BT_PCM_CLK
GND10
PCIE_PME_L
CBUCK_0P9
BT_HOST_WAKE
BT_WAKE
NC4
PCIE_TX_P
PCIE_TX_N
PCIE_RX_P
PCIE_RX_N
BT_UART_CTS_N
BT_UART_RTS_N
BT_UART_RXD
BT_UART_TXD
GND14
BT_REG_ON
PCIE_CLKREQ_L
AP6275P/AP6275PR3
MD50_AP6XXX_13RX15RX1R5

PCIE20_PERSTn_1V8
WIFI_REG_ON_H_GPIO2_B1
WIFI_WAKE_HOST_H_GPIO2_B2
SOC_PCM_IN
SOC_PCM_OUT
SOC_PCM_SYNC
SOC_PCM_CLK
PCIE20_WAKEn_1V8
BT_WAKE_HOST_H_GPIO2_C0
HOST_WAKE_BT_H_GPIO2_C1
PCIE_TDP C6408 100nF C0201 X5R 10V PCIE20_RXP
PCIE_TDN C6410 100nF C0201 X5R 10V PCIE20_RXN
PCIE_RDP C6411 100nF C0201 X5R 10V PCIE20_TXP
PCIE_RDN C6412 100nF C0201 X5R 10V PCIE20_TXN
UART1_RTSn_M0
UART1_CTSn_M0
UART1_TX_M0
UART1_RX_M0
BT_REG_ON_H_GPIO2_B7
PCIE20_CLKREQn_1V8

Y6400 37.4MHz CRY4_3R20X2R50X0R80
C6407 22pF C0G 50V C0402
C6409 22pF C0G 50V C0402
R6402 0R 5% R0402

VCCIO_WL
Q6400 2SK3018 SOT_323
R6403 10K 5% R0402
PCIE20_CLKREQn_M1
PCIE20_CLKREQn_1V8
Q6401 2SK3018 SOT_323
R6405 10K 5% R0402
PCIE20_WAKEn_M1
PCIE20_WAKEn_1V8

PCIE20_PERSTn_M1 R6407 10K 5% R0402 PCIE20_PERSTn_1V8
R6408 12K 5% R0402

C6413 4.7uF 10V X5R C0603
L6400 2.2uH IND_303015 1A_DCR<=80mohm
L6401 2.2uH IND_303015 1A_DCR<=80mohm
C6418 4.7uF 10V X5R C0603

VCC3V3_PCIEWL_VBAT
VCC3V3_SYS
C6414 100nF X5R 10V C0402
C6415 22uF X5R 10V C0805
R6404 0R 5% R0603
Max:1.2A

VCCIO_WL
VCC_1V8
C6416 100nF X5R 10V C0402
C6417 4.7uF 10V X5R C0603
R6406 0R 5% R0402
Max:0.3A

PCIE_REFCLKP
PCIE_REFCLKN
C6419 100pF C0201 X5R 25V
C6420 100pF C0201 X5R 25V
PCIE20_REFCLKP
PCIE20_REFCLKN

R6409 10K 5% R0402
RK809_32KOUT_WIFI R6410 0R 5% R0402
RTCIC_32KOUT R6411 DNP 0R 5% R0402
CLK32K_OUT1_WIFI R6412 DNP 0R 5% R0402
PCIE_WIFIBT_32KIN
R6413 DNP R0402
C6421 DNP C0402

Rockchip 瑞芯微电子	Rockchip Electronics Co., Ltd				
Project:	RK3568_AIoT_REF_SCH				
File:	64.WIFI6/BT-PCIe_2T2R + UART				
Date:	Wednesday, June 16, 2021			Rev:	V1.1
Designed by:	Zhangdz	Reviewed by:	Default	Sheet:	50 of 72

FE PHY0

And SDIO WIFI Option

GMAC0_TXD0
GMAC0_TXD1
GMAC0_TXEN
GMAC0_RXD0
GMAC0_RXD1
GMAC0_RXDV_CRS
GMAC0_RXER
GMAC0_MCLKINOUT
GMAC0_MDC
GMAC0_MDIO
ETH0_REFCLKO_25M
GMAC0_RSTn_GPIO3_B7

Option

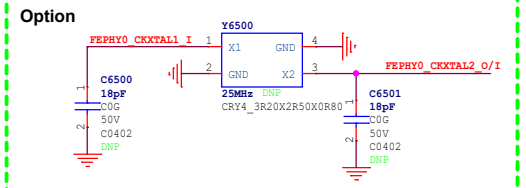

Default



Default: Refclk:MAC output,PHY input



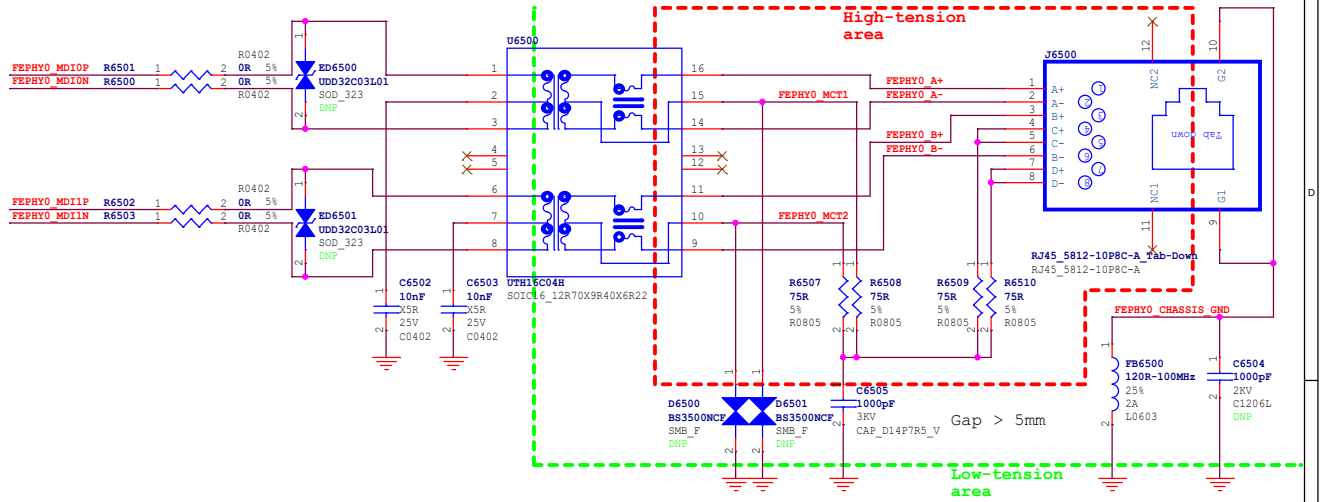

Note:

RTL8201F/YT8512C only support 3.3V IO
VCCIO4 must be changed to 3.3V power supply

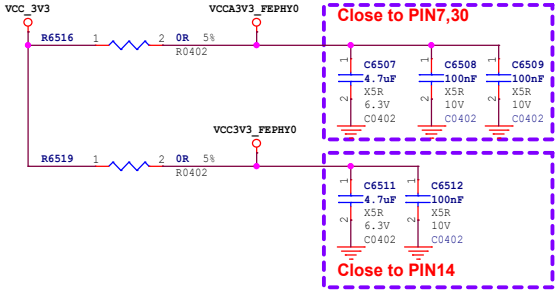

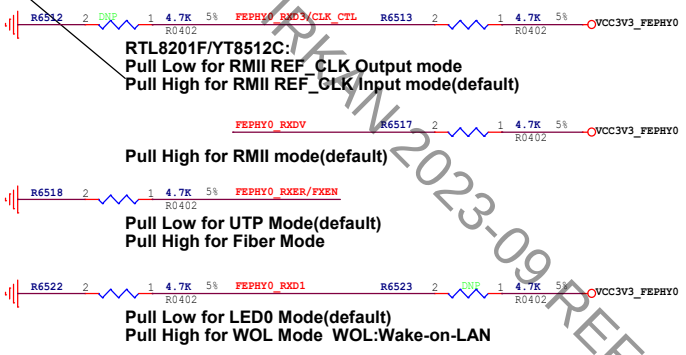

Default:LED

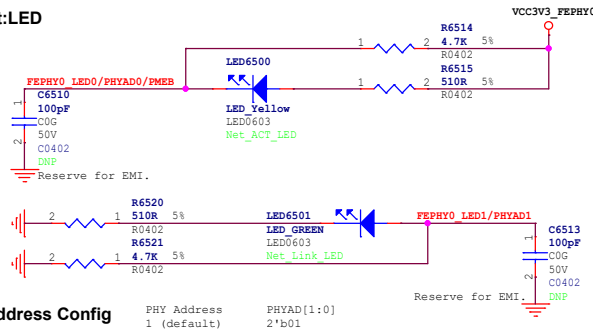

PHY Address Config

PHY Address	PHYAD[1:0]
1 (default)	2'b01

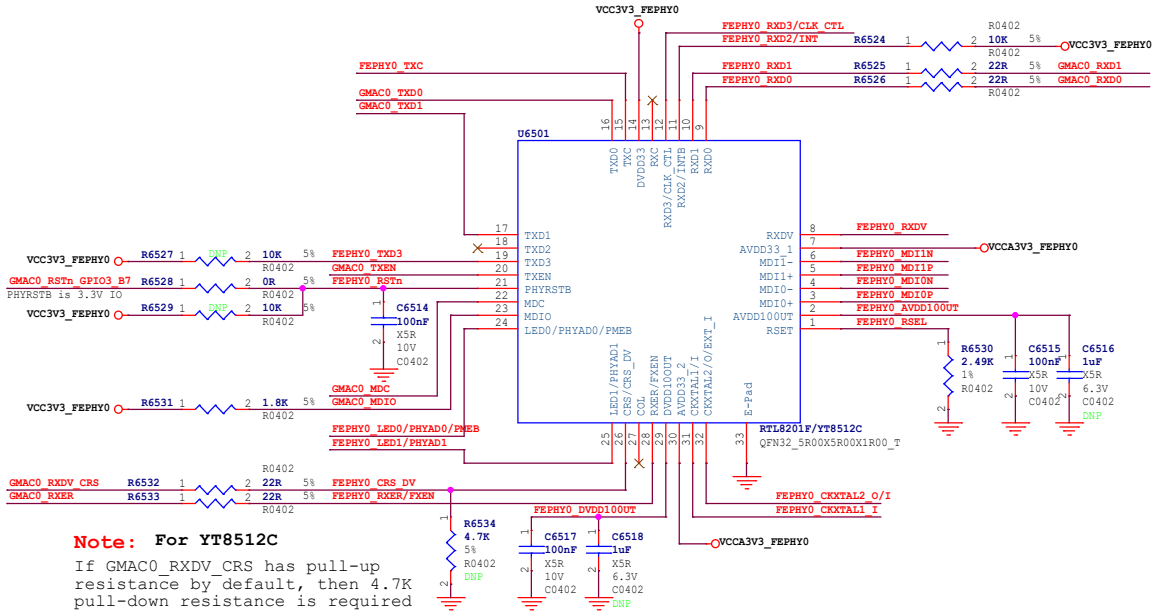

Note: For YT8512C

If GMAC0_RXDV_CRS has pull-up resistance by default, then 4.7K pull-down resistance is required

Default

Refclk:MAC output,PHY input

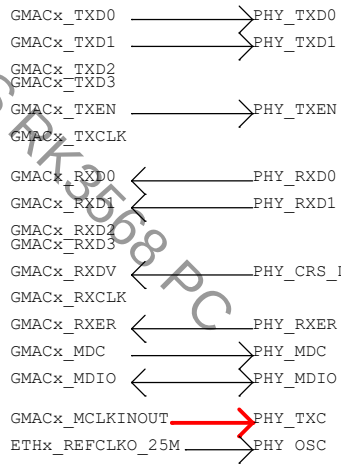

Refclk:MAC input,PHY output

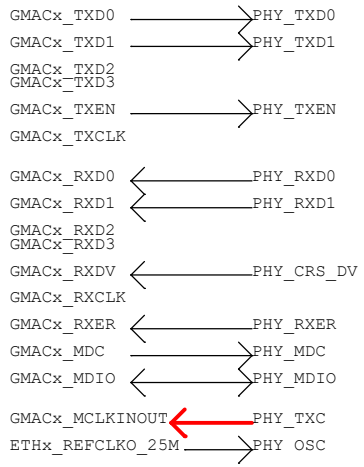

Rockchip 瑞芯微电子	Rockchip Electronics Co., Ltd				
Project:	RK3568_AIoT_REF_SCH				
File:	65.Ethernet-FEPHY_RMII0				
Date:	Wednesday, June 16, 2021			Rev:	V1.1
Designed by:	Zhangdz	Reviewed by:	Default	Sheet:	51 of 72

Giga PHY0

And SDIO WIFI Option

GMAC0_TXD0
GMAC0_TXD1
GMAC0_TXD2
GMAC0_TXD3
GMAC0_TXEN
GMAC0_TXCLK
GMAC0_RXD0
GMAC0_RXD1
GMAC0_RXD2
GMAC0_RXD3
GMAC0_RXDV_CRS
GMAC0_RXCLK
ETH0_REFCLKO_25M
GMAC0_MCLKINOUT
GMAC0_MDC
GMAC0_MDIO
GMAC0_RSTn_GPIO3_B7
GMAC0_INT/PMEB_GPIO3_C0

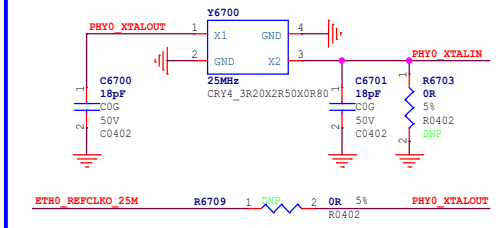

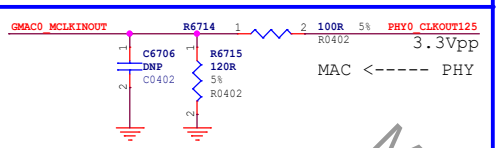

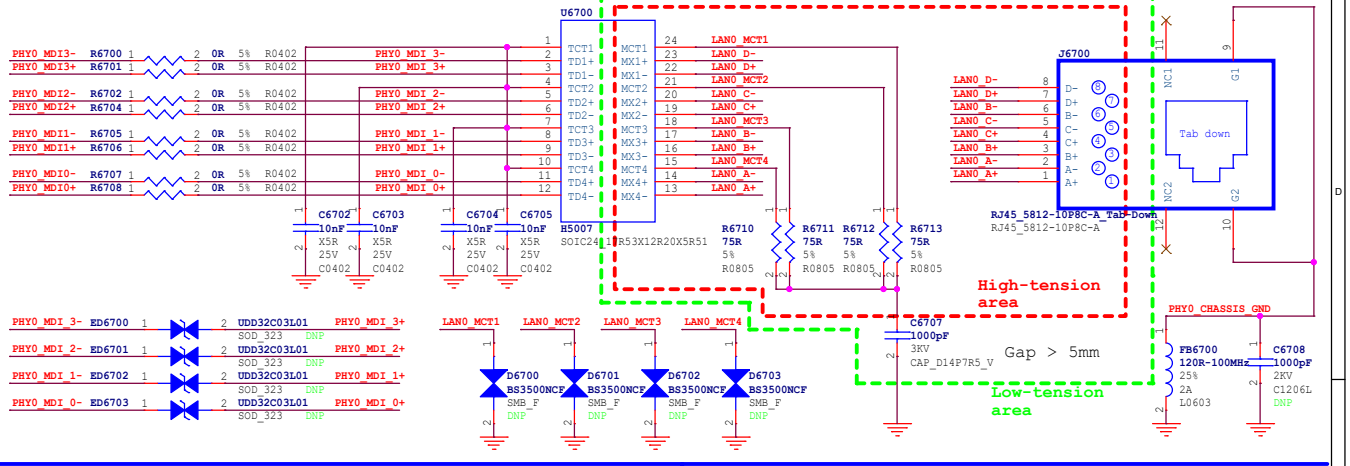

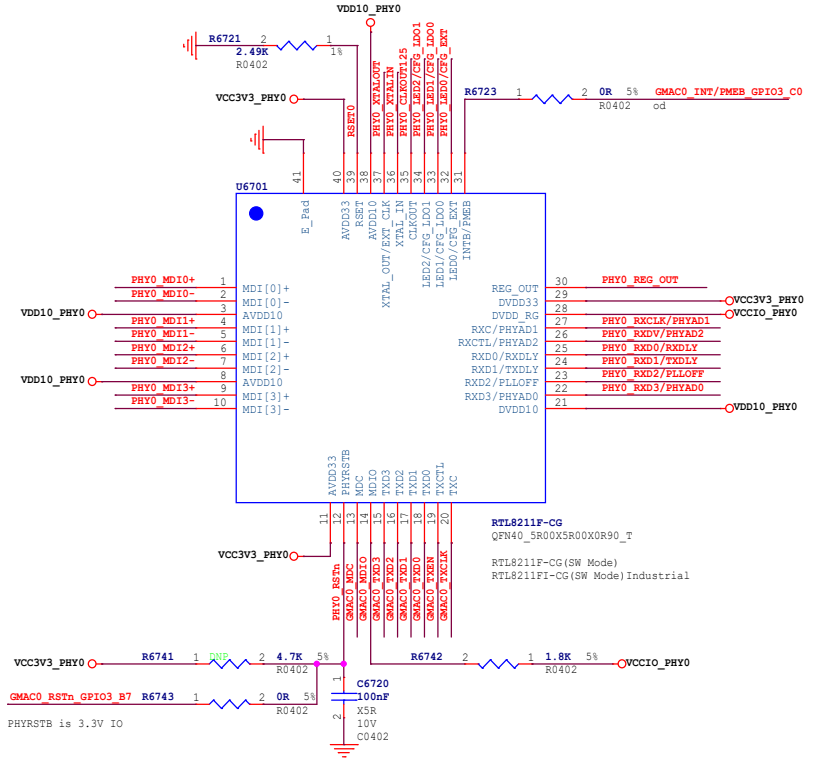

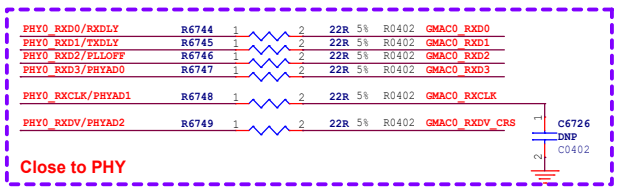

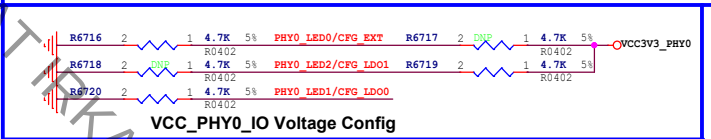

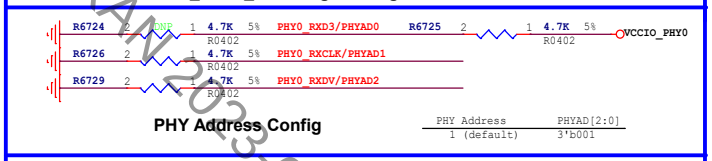

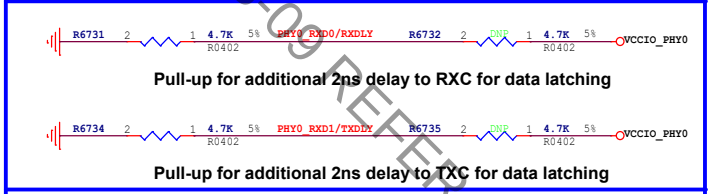

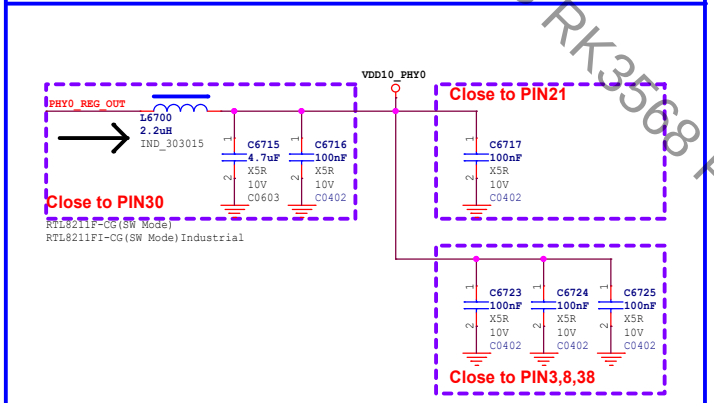

RGMII Power Source	CFG_EXT	CFG_LDO[1:0]	
External 3.3V	1'b1	2'b00	
External 1.8V	1'b1	2'b10	
Internal 1.8V (default)	1'b0	2'b10	

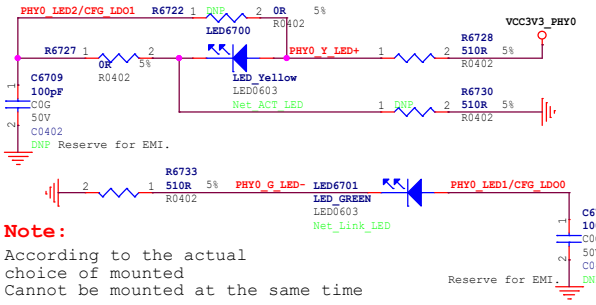

Note:

According to the actual choice of mounted
Cannot be mounted at the same time

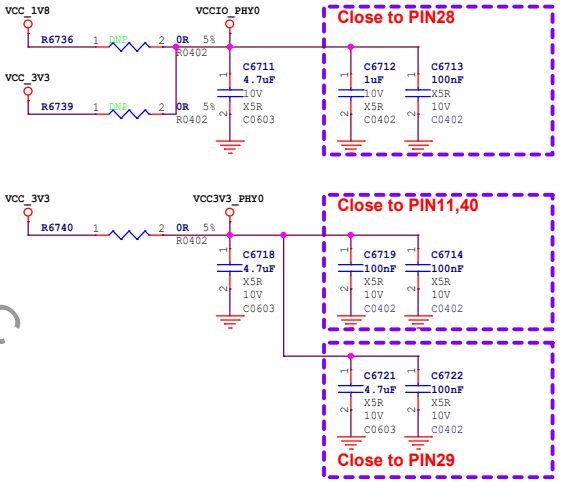

Rockchip 瑞芯微电子	Rockchip Electronics Co., Ltd		
Project:	RK3568_AIoT_REF_SCH		
File:	67.Ethernet-GEPHY_RGMII0		
Date:	Wednesday, June 16, 2021	Rev:	V1.1
Designed by:	Zhangdz	Reviewed by: Default	Sheet: 52 of 72

Giga PHY1

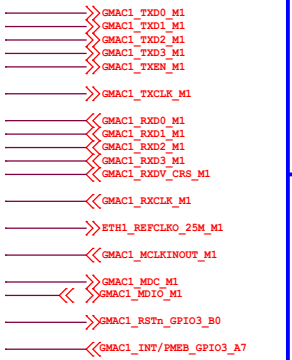

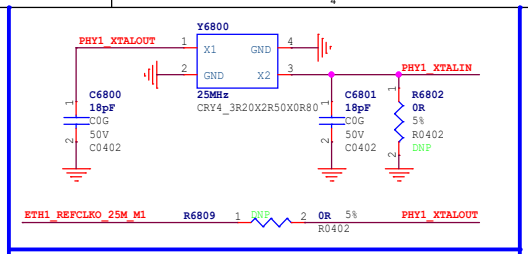

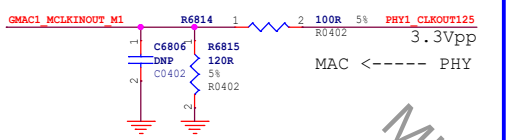

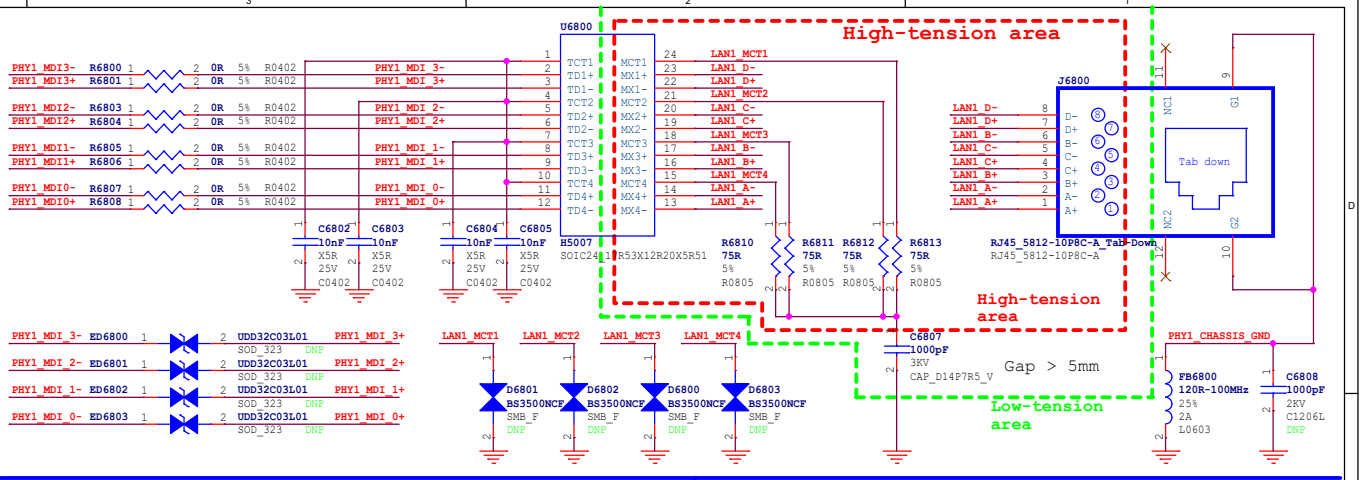

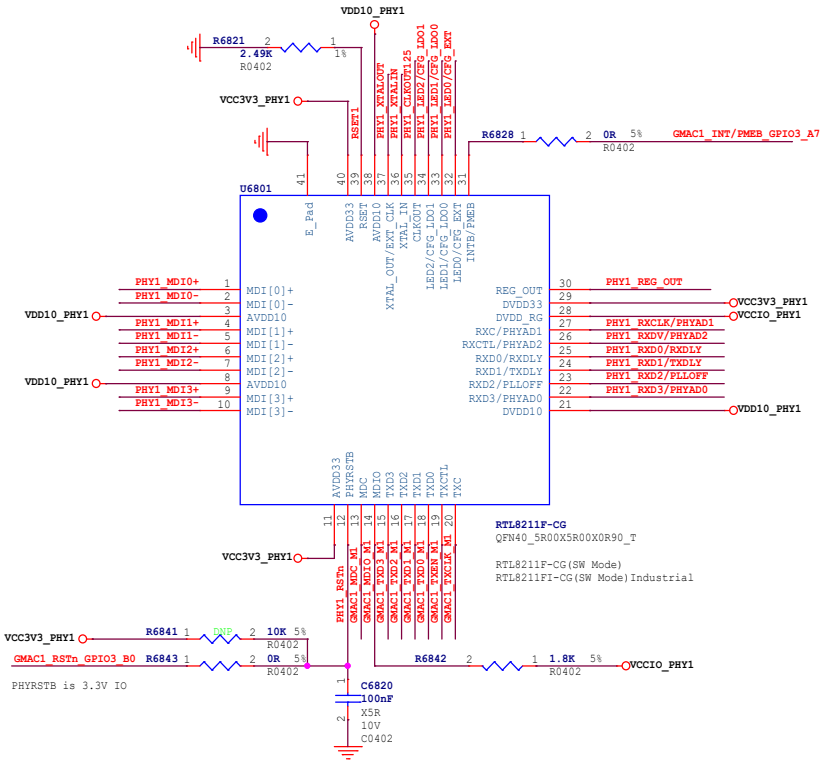

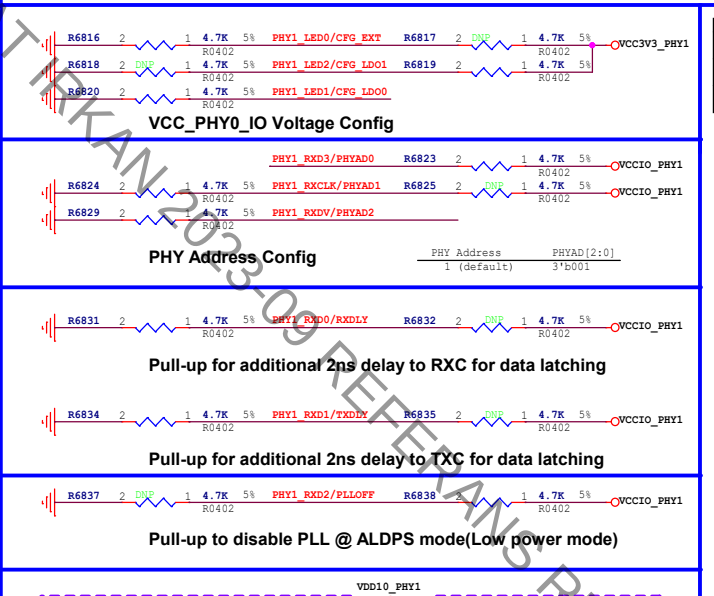

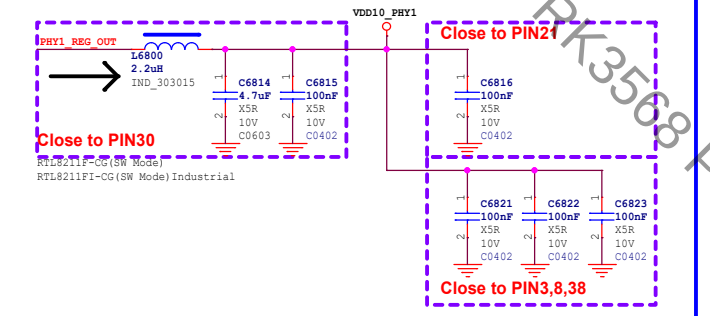

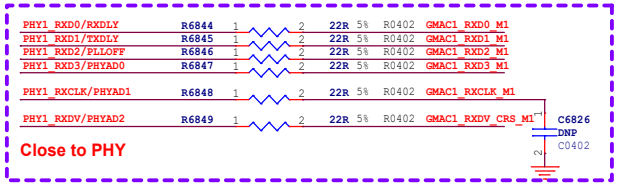

RGMII Power Source	CFG_EXT	CFG_LDO[1:0]	
External 3.3V	1'b1	2'b00	
External 1.8V	1'b1	2'b10	
Internal 1.8V(default)	1'b0	2'b10	

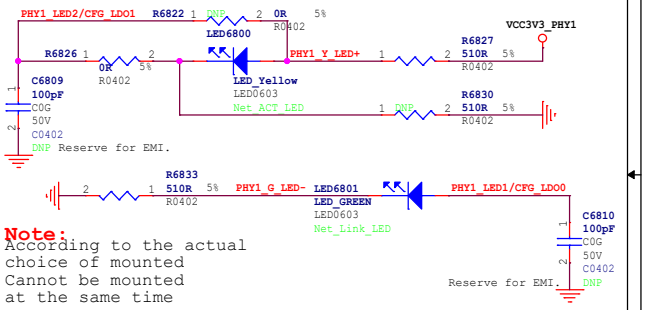

Note:
According to the actual choice of mounted Cannot be mounted at the same time

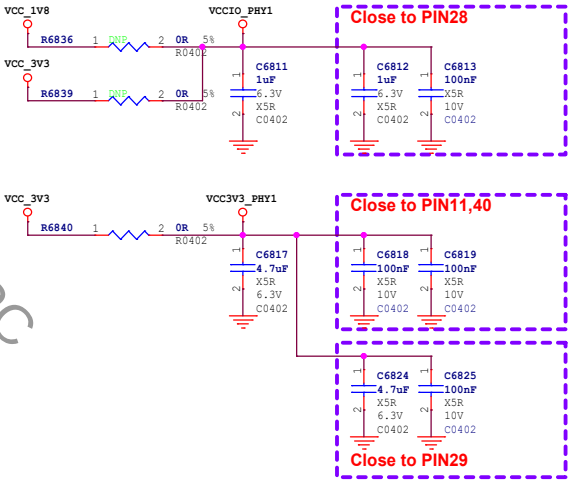

Rockchip 瑞芯微电子	Rockchip Electronics Co., Ltd				
Project:	RK3568_AIoT_REF_SCH				
File:	68.Ethernet-GEPHY_RGMII1_M1				
Date:	Wednesday, June 16, 2021			Rev:	V1.1
Designed by:	Zhangdz	Reviewed by:	Default	Sheet:	53 of 72

PCIE Ethernet



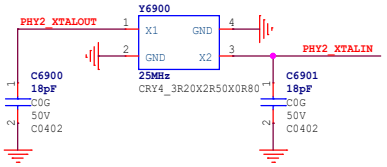

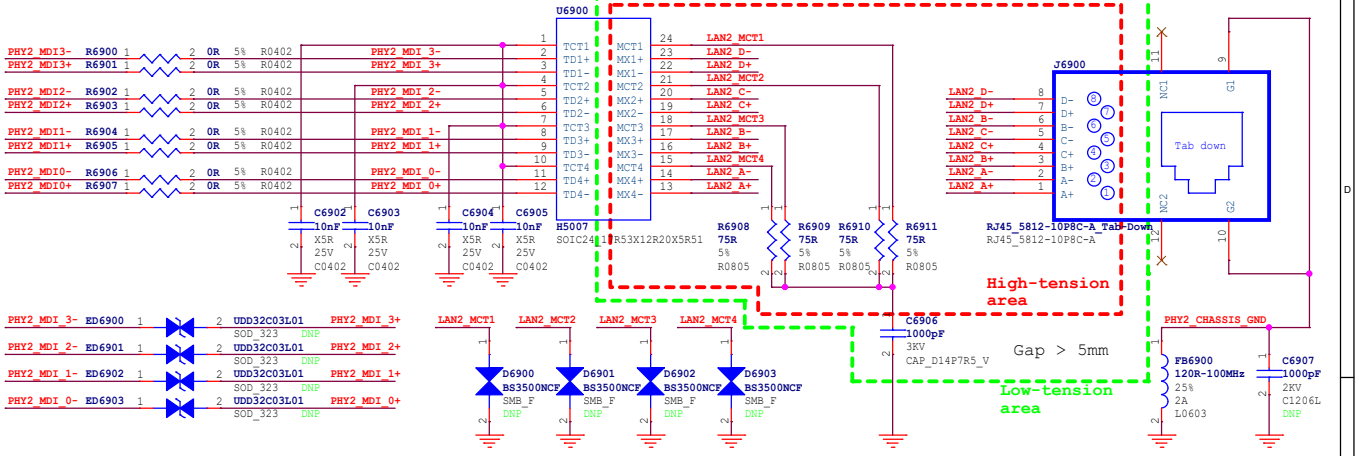

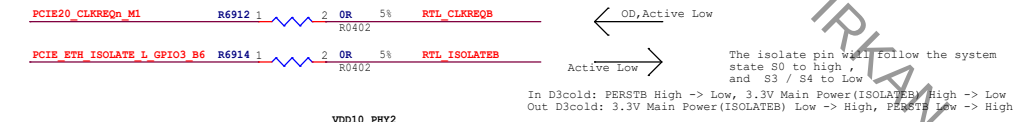

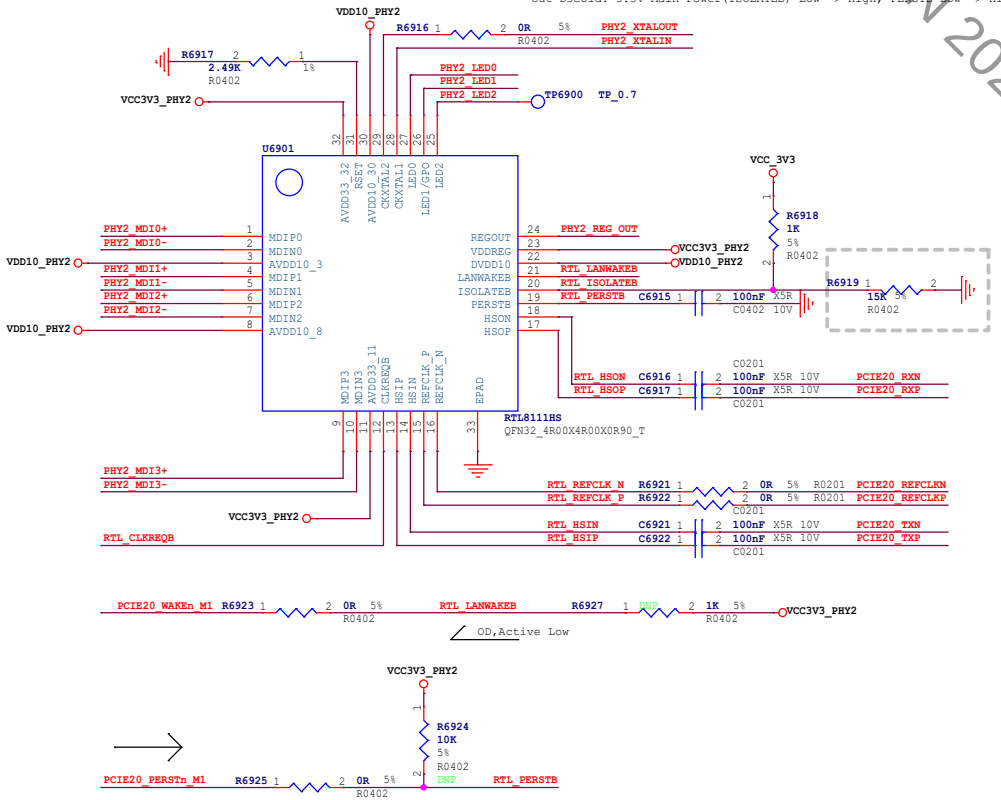

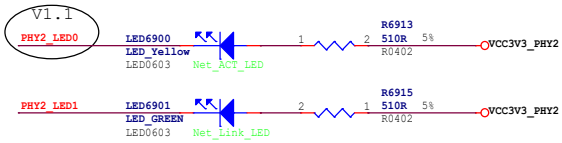

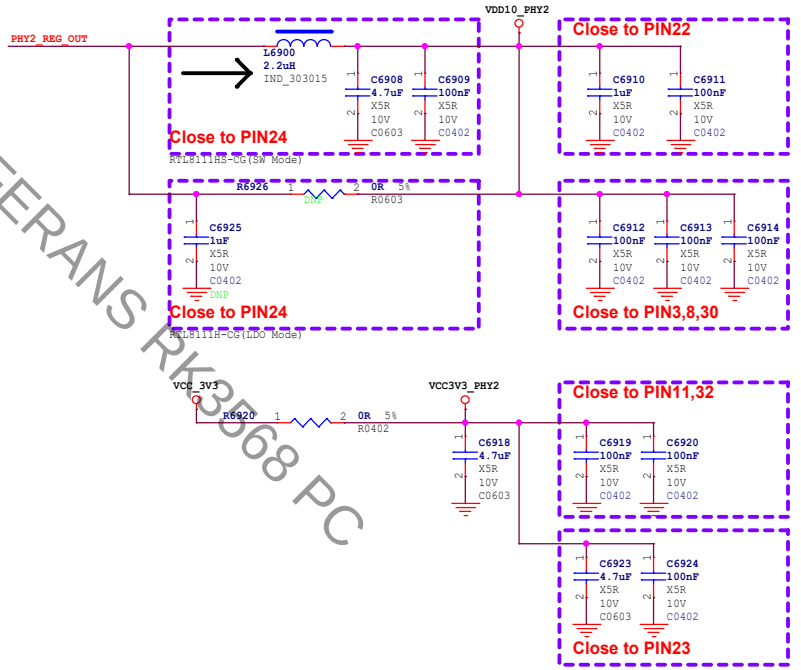

Rockchip 瑞芯微电子	Rockchip Electronics Co., Ltd				
Project:	RK3568_AIoT_REF_SCH				
File:	69.Ethernet-PCIE Ethernet				
Date:	Wednesday, June 16, 2021			Rev:	V1.1
Designed by:	Zhangdz	Reviewed by:	Default	Sheet:	54 of 72

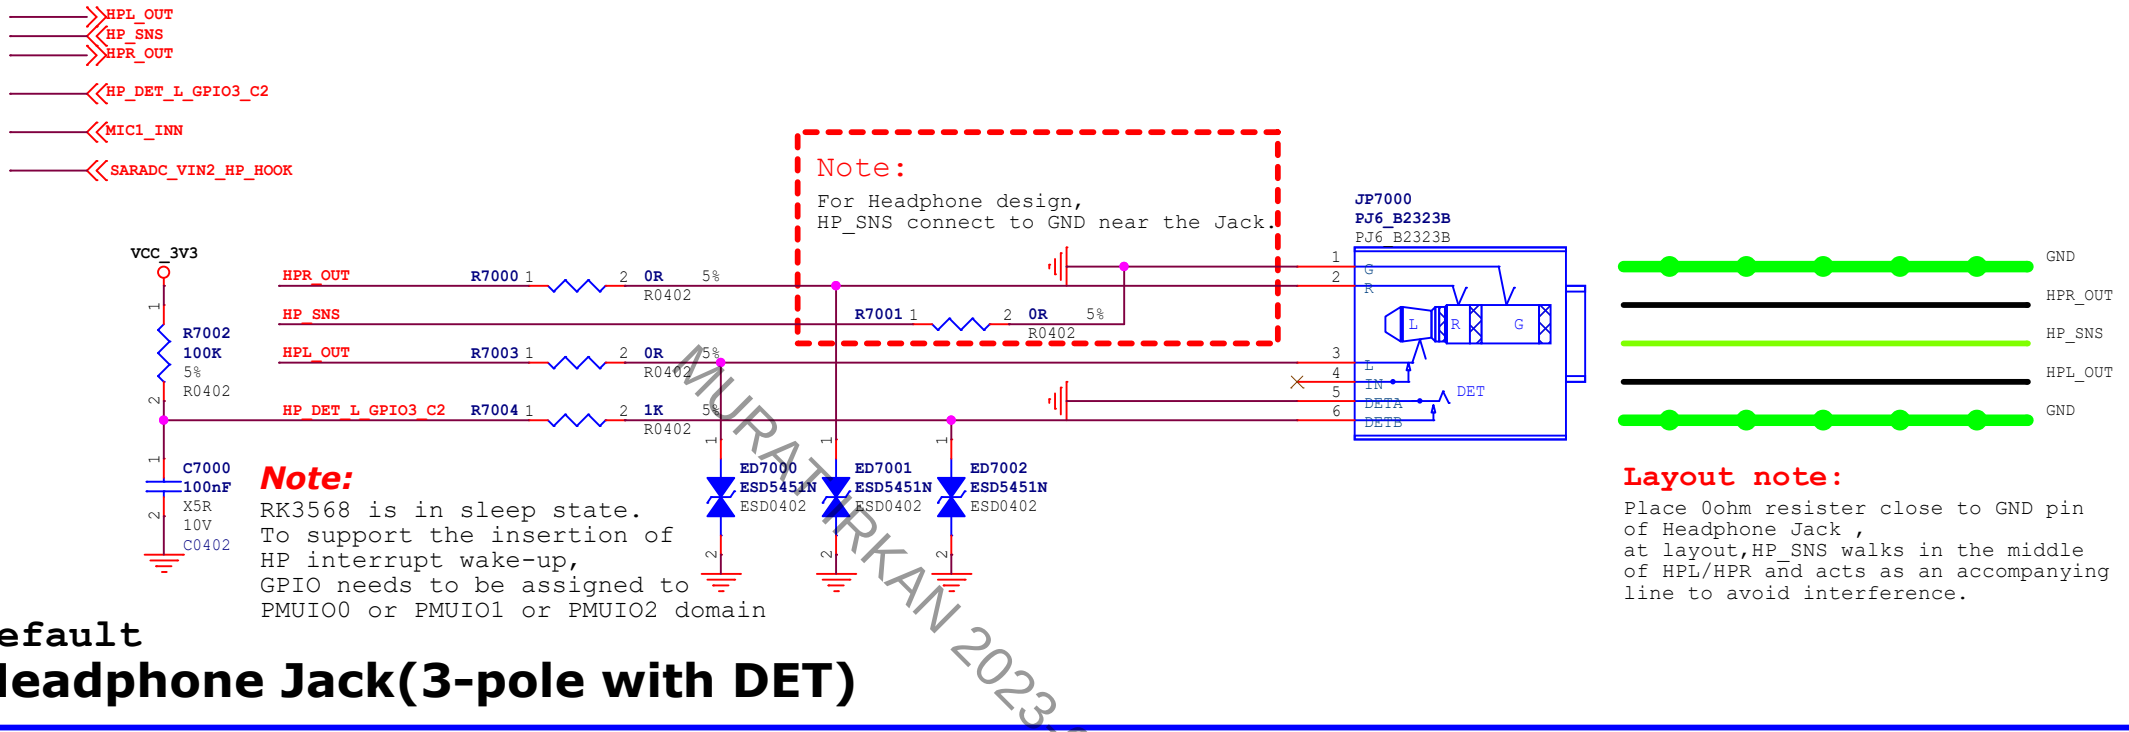

Default

Headphone Jack(3-pole with DET)

Headphone Jack(4-pole with DET & MIC)

Option

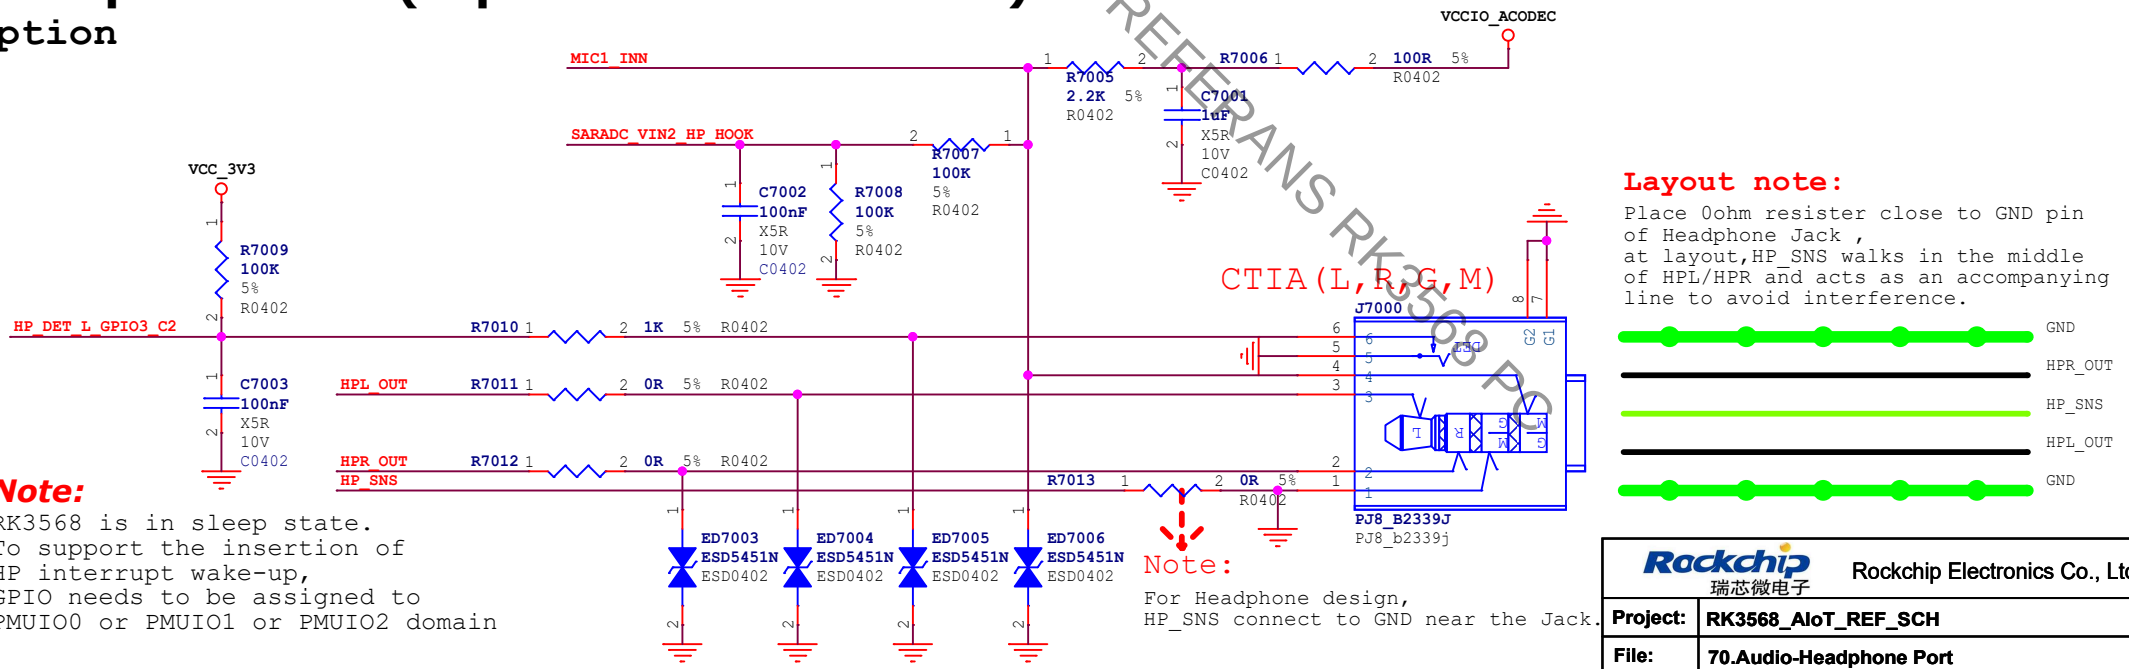

Rockchip Confidential

Rockchip 瑞芯微电子	Rockchip Electronics Co., Ltd				
Project:	RK3568_AIoT_REF_SCH				
File:	70.Audio-Headphone Port				
Date:	Wednesday, June 16, 2021			Rev:	V1.1
Designed by:	Zhangdz	Reviewed by:	Default	Sheet:	55 of 72

SPKN_OUT
SPKP_OUT

MIC1_INP
MIC1_INN

Default
MIC for 3-pole Headphone Jack

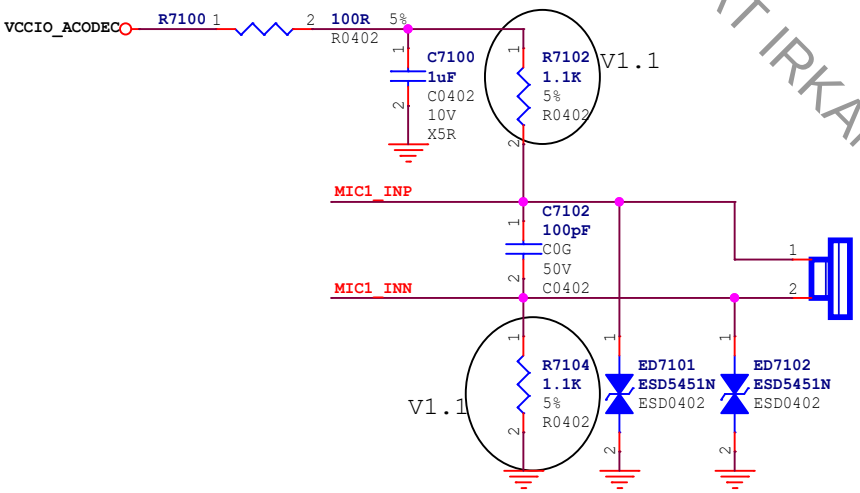

Option
MIC for 4-pole Headphone Jack

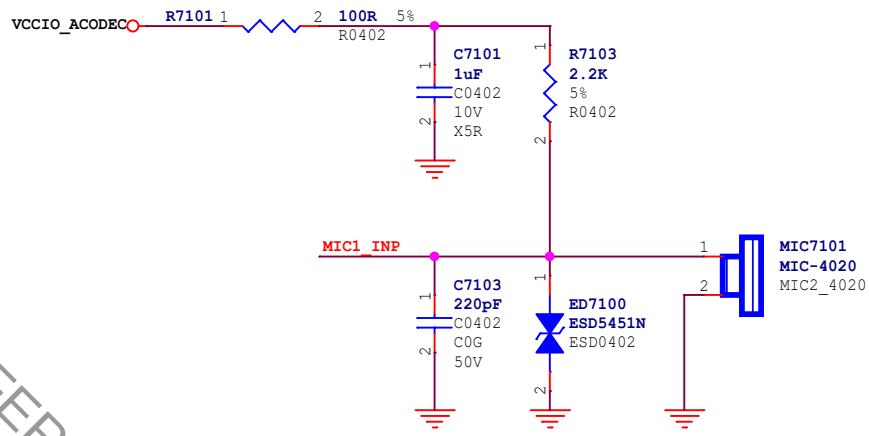

SPK

Note:8ohm/1.3W
Speaker Output

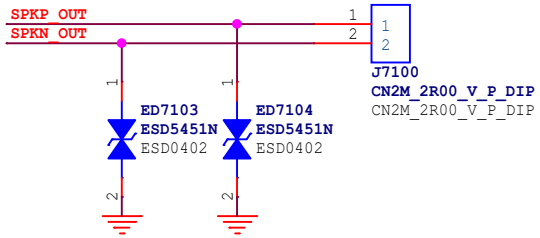

Rockchip 瑞芯微电子	Rockchip Electronics Co., Ltd				
Project:	RK3568_AIoT_REF_SCH				
File:	71.Audio-SingleMic+RK809_SPK				
Date:	Wednesday, June 16, 2021			Rev:	V1.1
Designed by:	Zhangdz	Reviewed by:	Default	Sheet:	56 of 72

MicArray

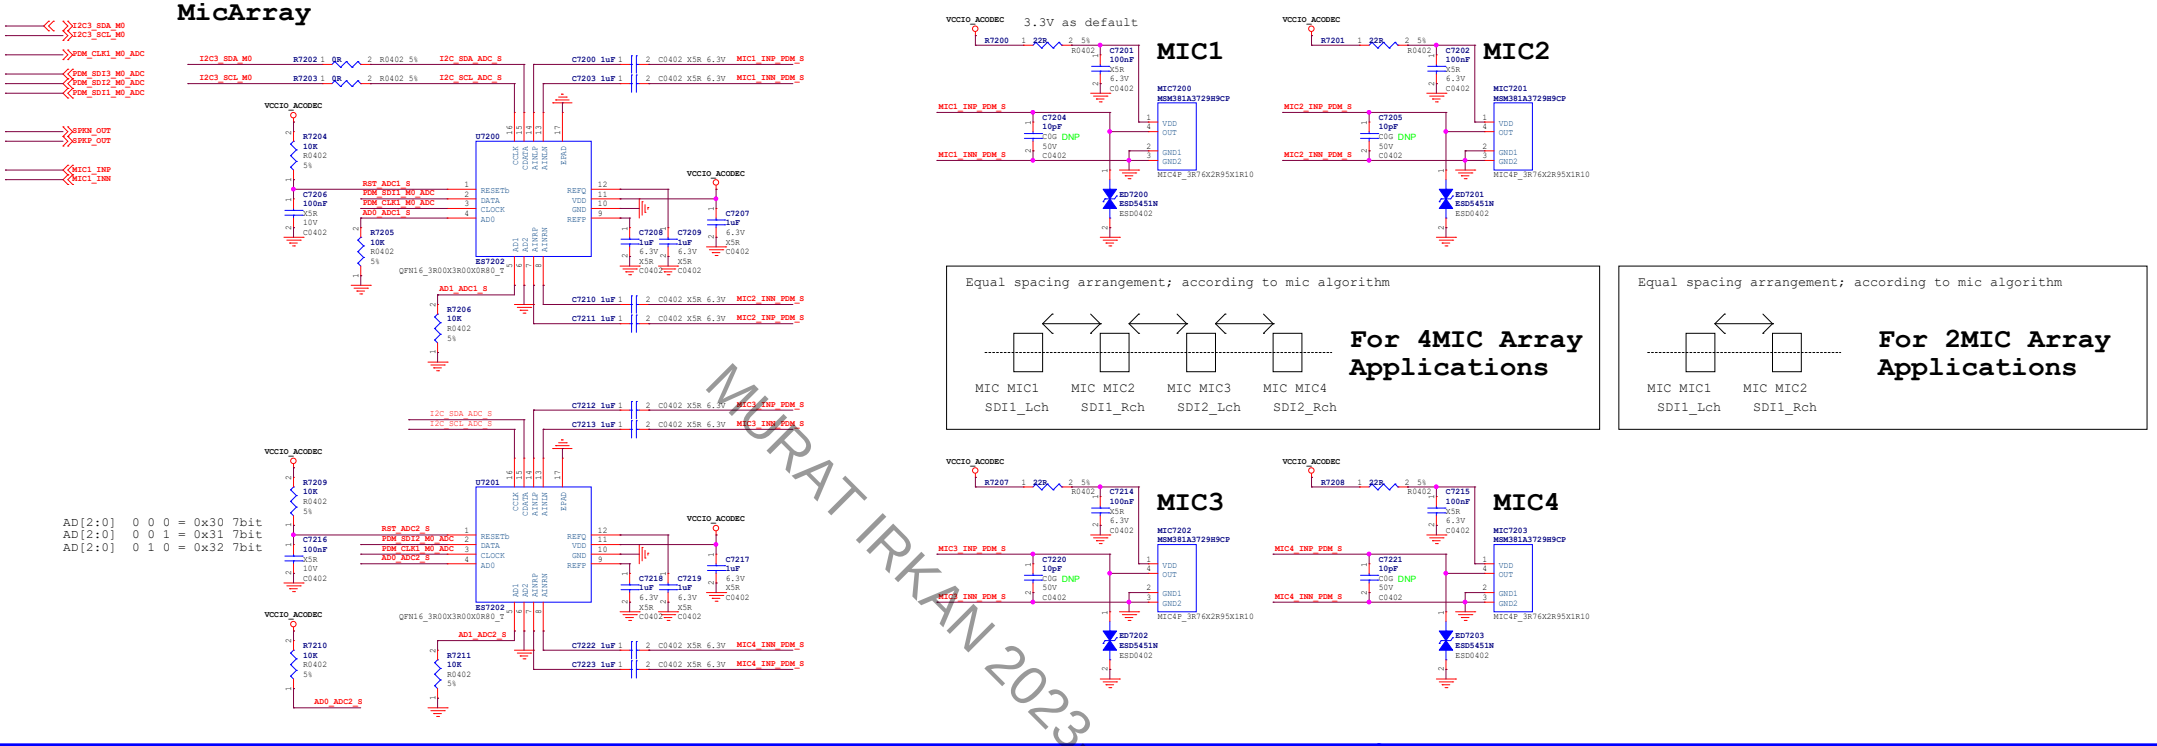

Option1

Loopback for Mono Speaker

(External ADC, better performance)

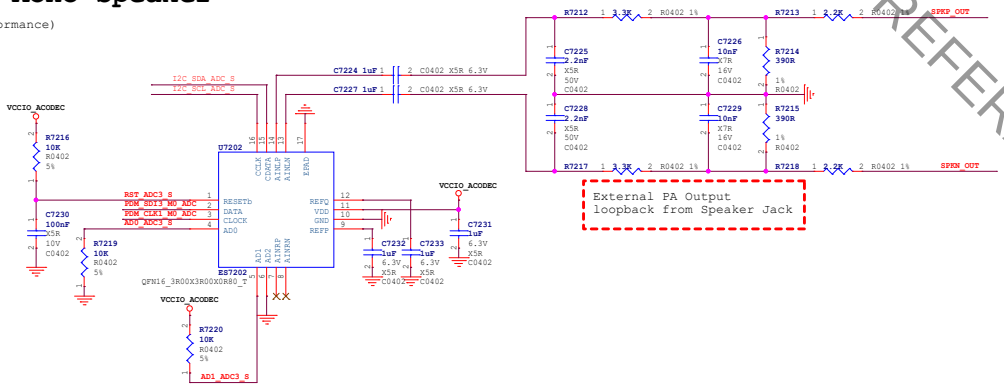

RK809-5 SPK

Note:8ohm/1.3W
Speaker Output



Option2

Loopback for Mono Speaker

(Available while No MIC is connected to RK809-5)
(cost-effective)

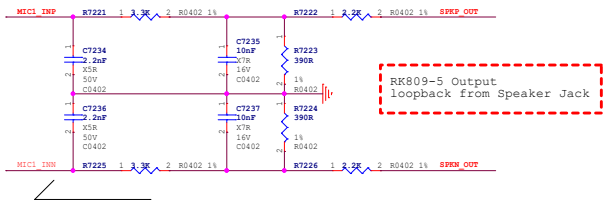

Rockchip 瑞芯微电子	Rockchip Electronics Co., Ltd
Project:	RK3568_AIoT_REF_SCH
File:	72.Audio-MicArray+RK809_SPK
Date:	Wednesday, June 16, 2021
Rev:	V1.1
Designed by:	Zhangtz
Reviewed by:	Default
Sheet:	57 of 72

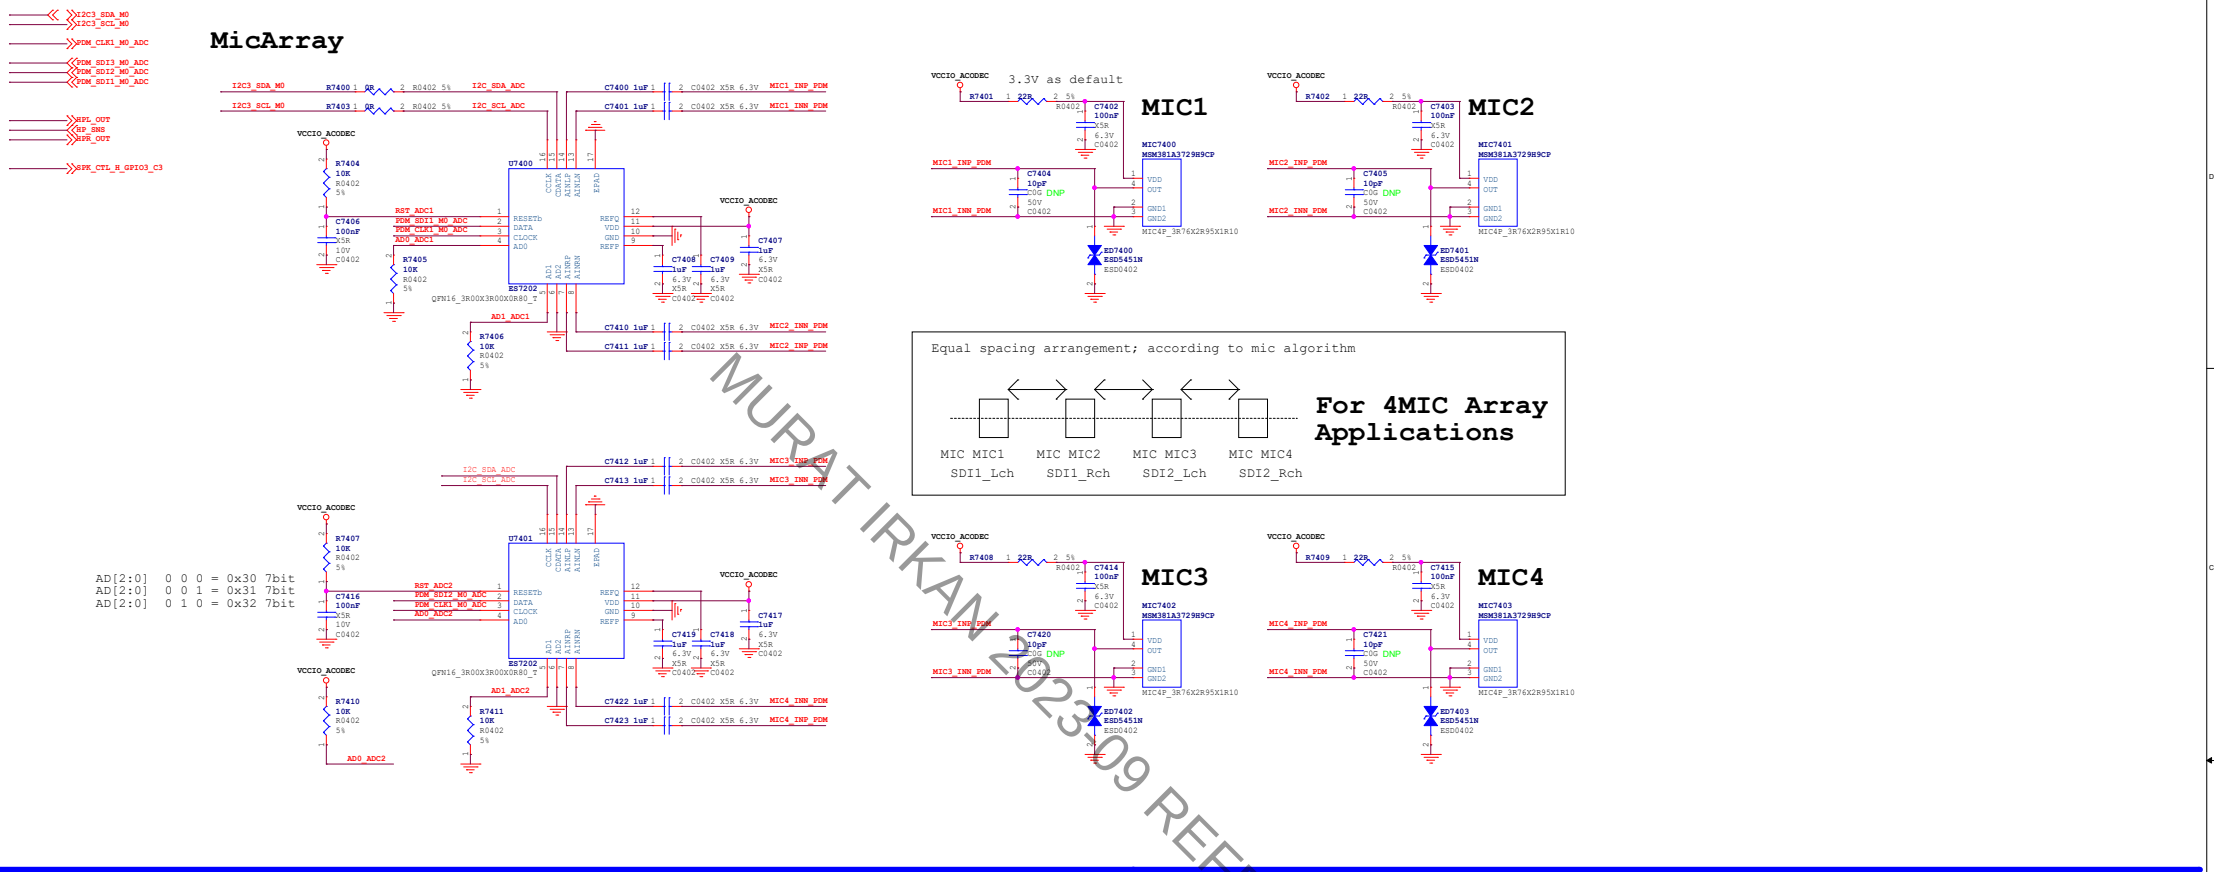

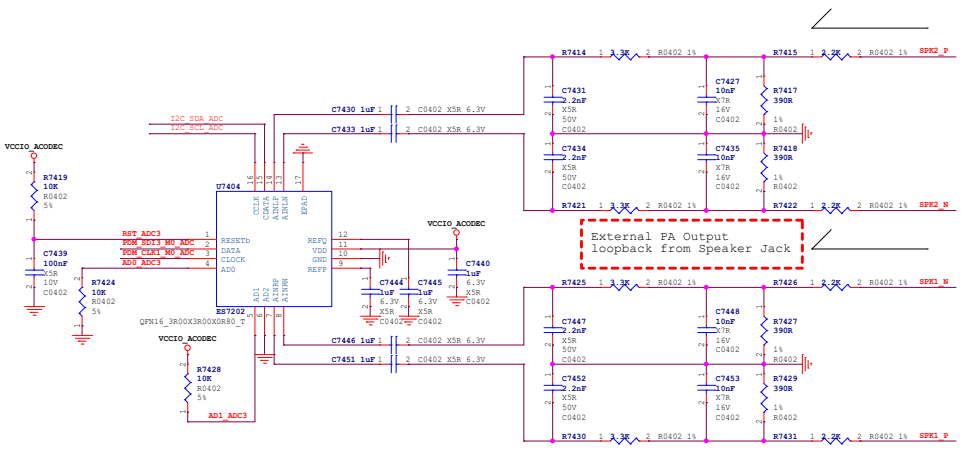

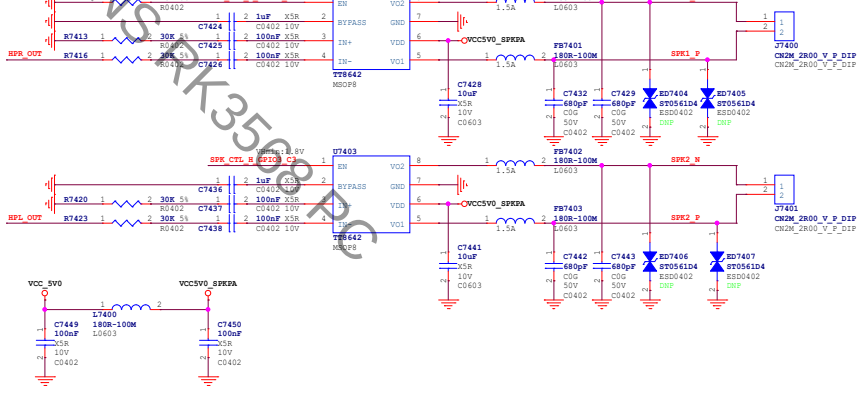

Rockchip 瑞芯微电子	Rockchip Electronics Co., Ltd		
Project:	RK3568_AIoT_REF_SCH		
File:	74.Audio-MicArray+EXT Dual_SPK		
Date:	Wednesday, June 16, 2021	Rev:	V1.1
Designed by: Zhangtz	Reviewed by: Default	Sheet:	58 of 72

SATA0_TXP
SATA0_TXN
SATA0_RXP
SATA0_RXN
SATA1_TXP
SATA1_TXN
SATA1_RXP
SATA1_RXN
SATA2_TXP
SATA2_TXN
SATA2_RXP
SATA2_RXN
SATA0_ACT_LED
SATA1_ACT_LED
SATA2_ACT_LED

SATA3.0 Port0 Option

And USB3 OTG0 option, Can support SATA0+USB2 OTG0

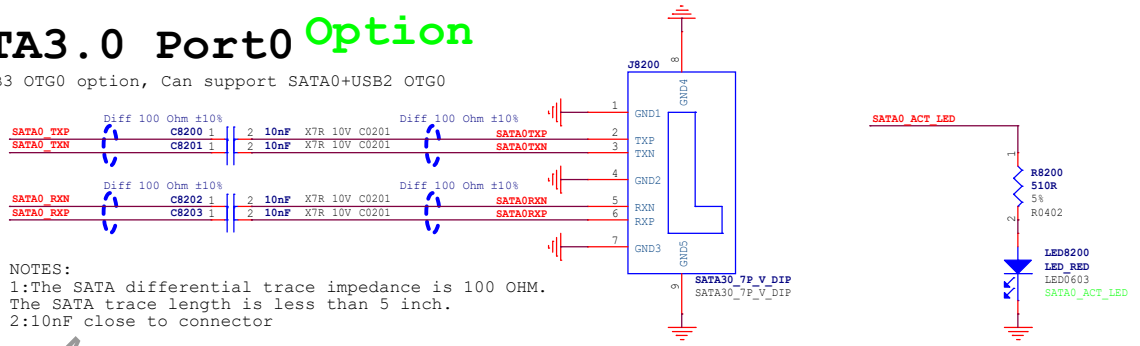

NOTES:
1:The SATA differential trace impedance is 100 OHM.
The SATA trace length is less than 5 inch.
2:10nF close to connector

SATA3.0 Port1 Option

And USB3 HOST1 option, Can support SATA1+USB2 HOST1

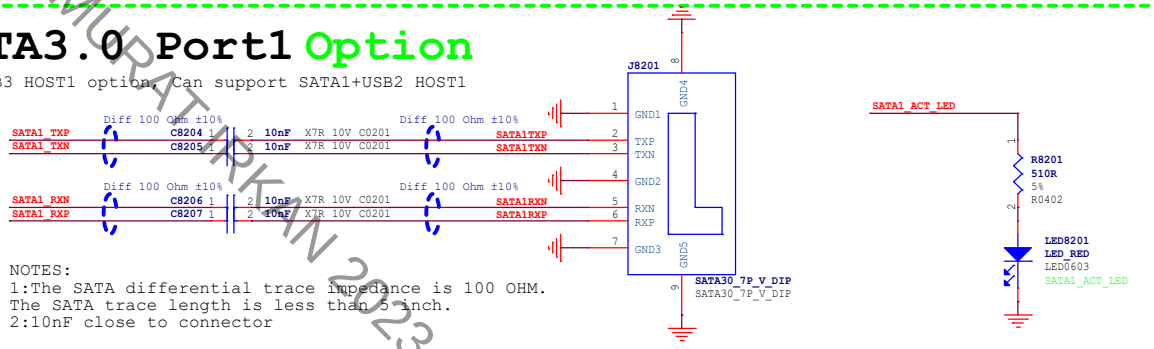

NOTES:
1:The SATA differential trace impedance is 100 OHM.
The SATA trace length is less than 5 inch.
2:10nF close to connector

SATA3.0 Port2

And PCIe2.0 option

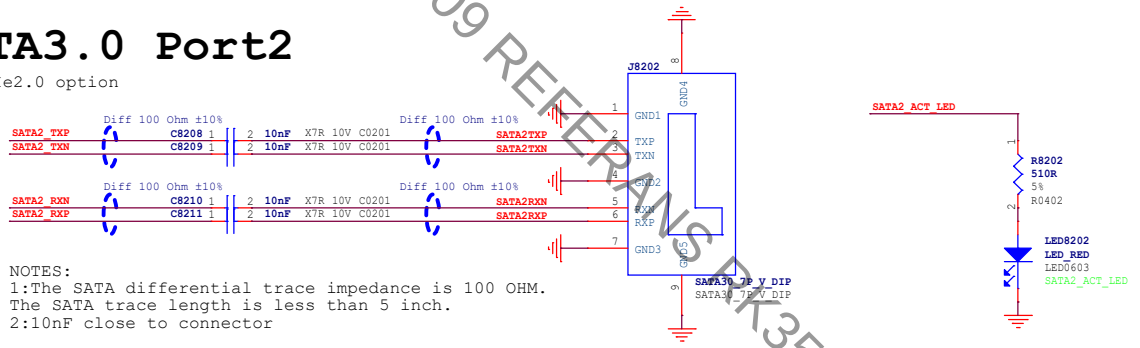

NOTES:
1:The SATA differential trace impedance is 100 OHM.
The SATA trace length is less than 5 inch.
2:10nF close to connector

SATA Power

The current is estimated according to the actual number of SATA
High power switching separate power supply is recommended for more than 2

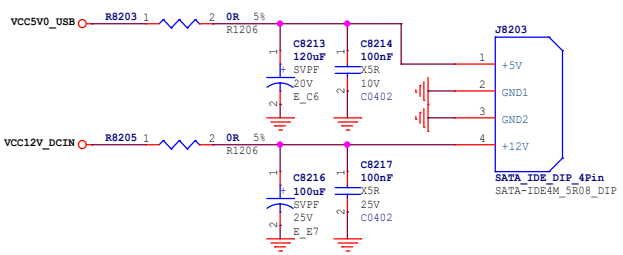

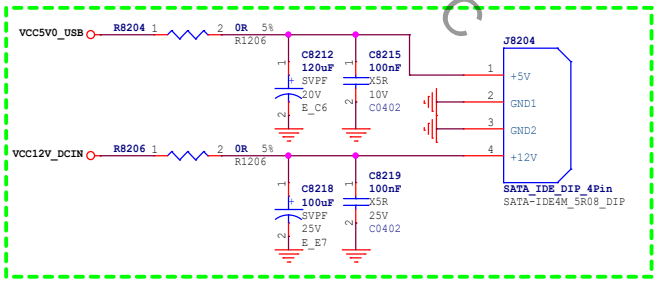

Option

Rockchip 瑞芯微电子	Rockchip Electronics Co., Ltd				
Project:	RK3568_AIoT_REF_SCH				
File:	82.SATA-SATA3.0 Slot_7P				
Date:	Wednesday, June 16, 2021			Rev:	V1.1
Designed by:	Zhangdz	Reviewed by:	Default	Sheet:	59 of 72

PCIe2.0 x1 Slot

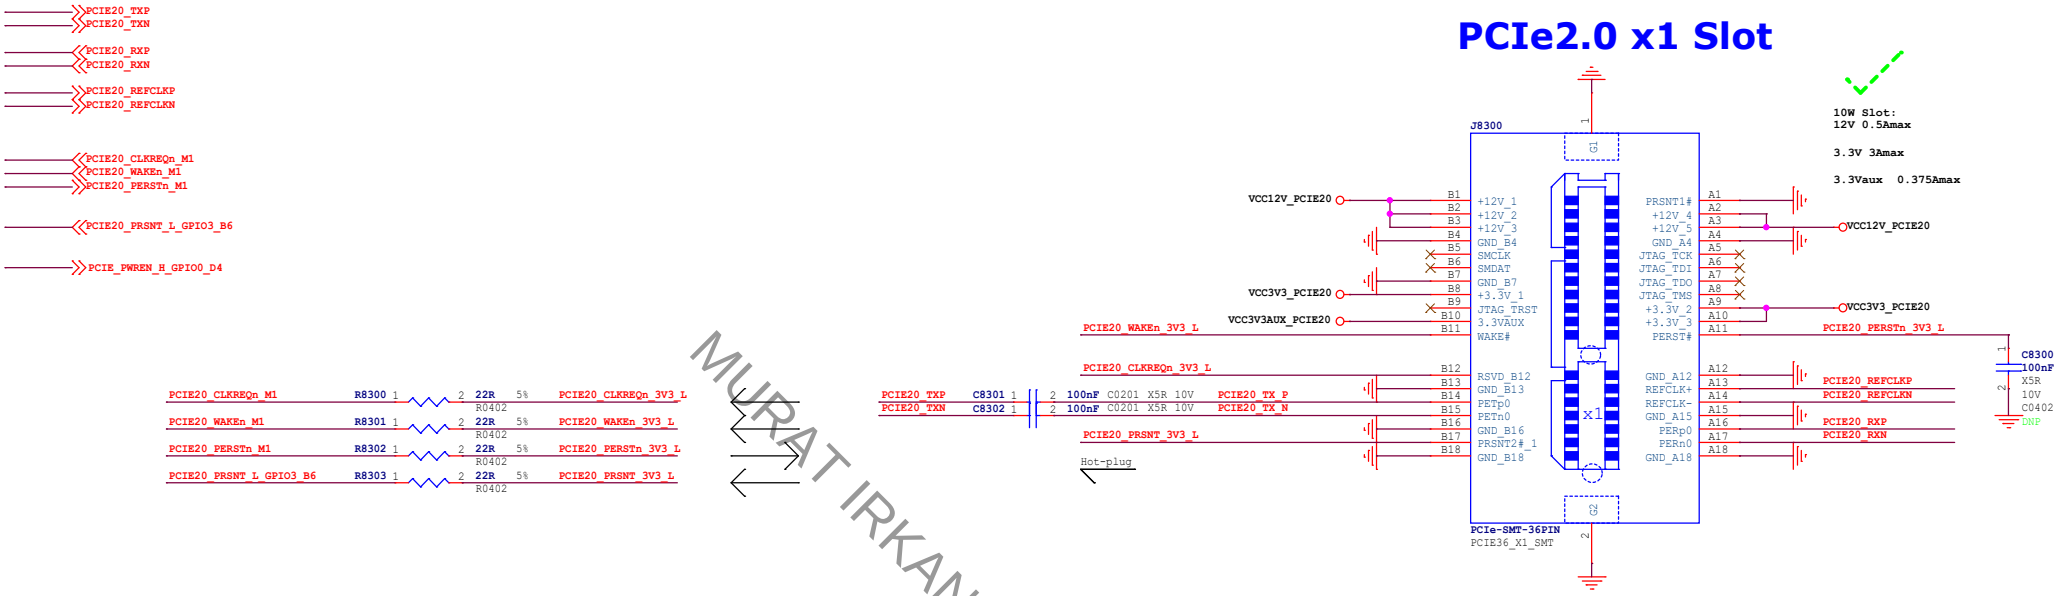

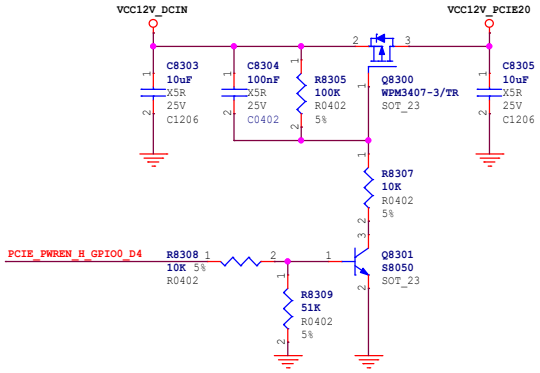

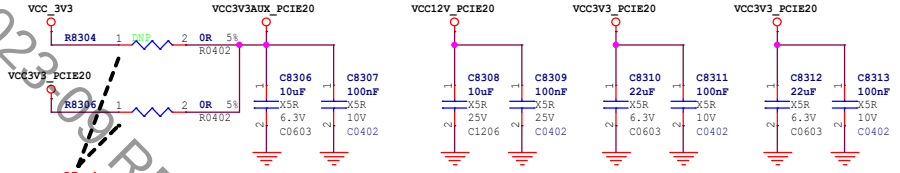

Note:
According to the actual choice of mounted
Cannot be mounted at the same time

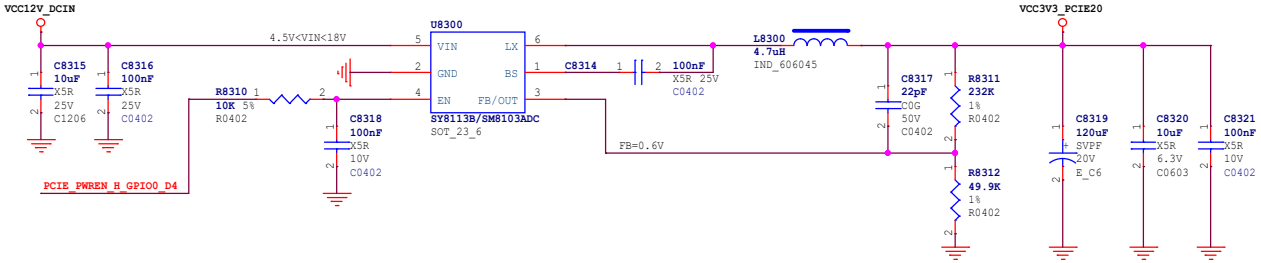

Rockchip 瑞芯微电子	Rockchip Electronics Co., Ltd				
Project:	RK3568_AIoT_REF_SCH				
File:	83.PCIE-PCIE2.0_1x1Lane_RC_36P				
Date:	Wednesday, June 16, 2021			Rev:	V1.1
Designed by:	Zhangdz	Reviewed by:	Default	Sheet:	60 of 72

PCIe3.0 x 2Lanes (X 4Slot)

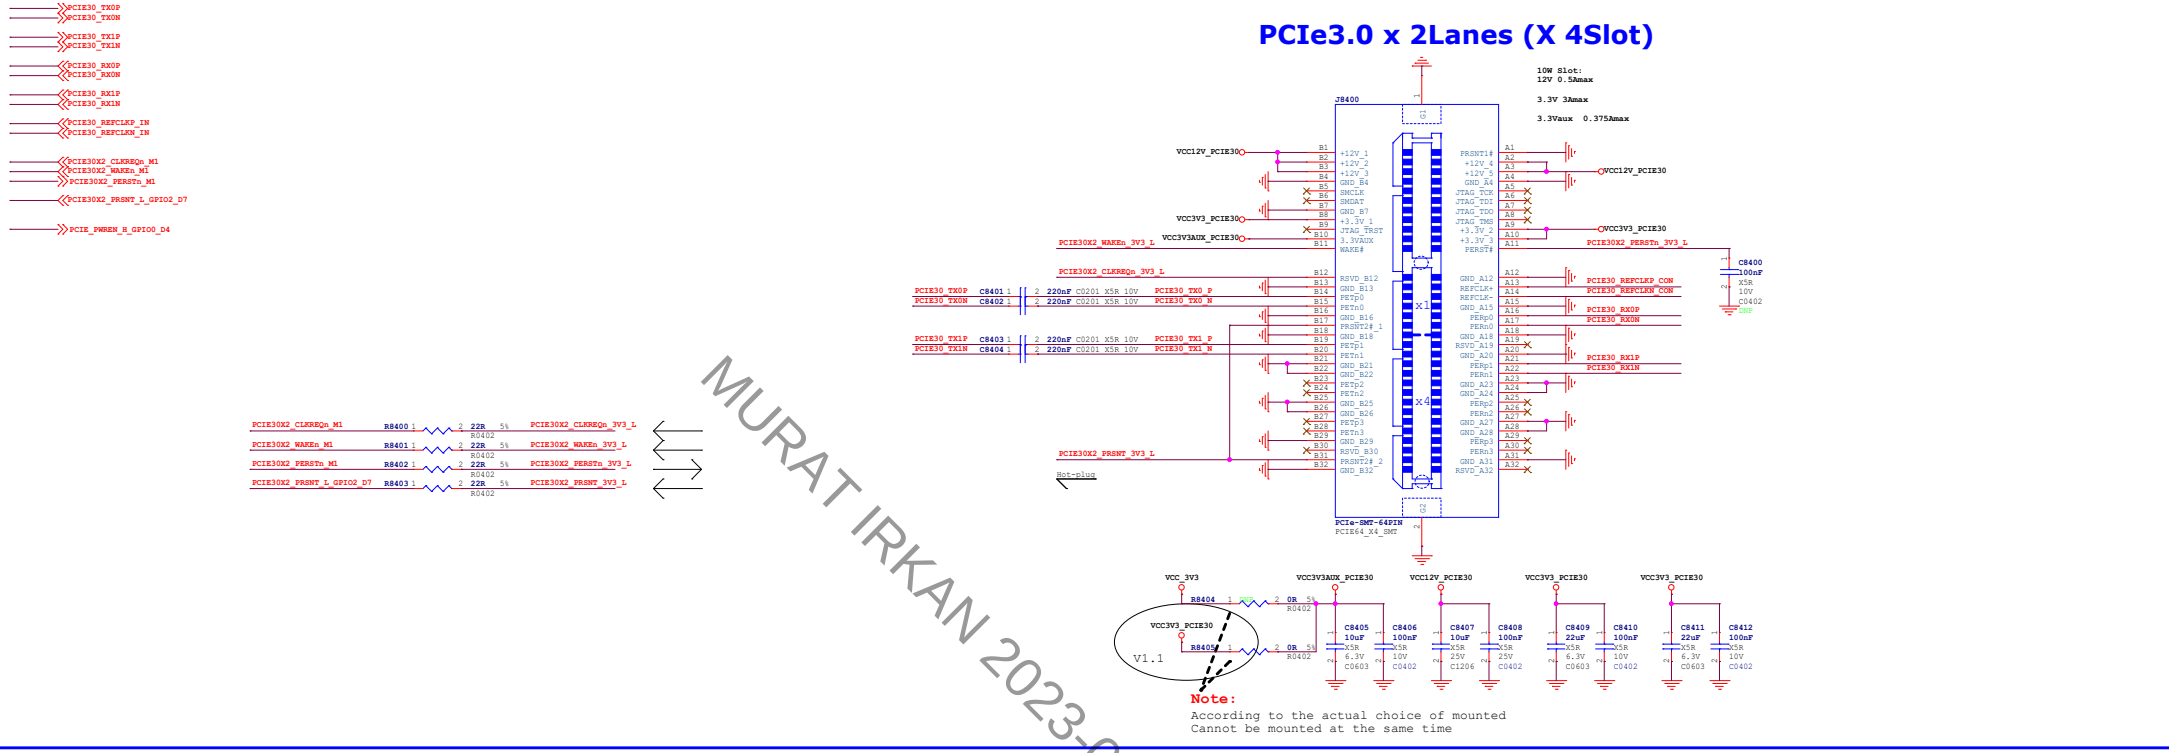

Note:
According to the actual choice of mounted
Cannot be mounted at the same time

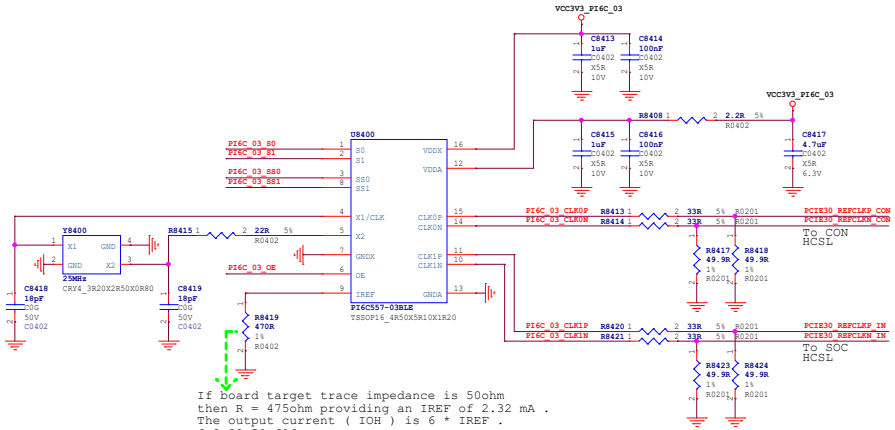

If board target trace impedance is 50ohm
then R = 475ohm providing an IREF of 2.32 mA .
The output current (IOH) is 6 * IREF .
6x2.32X50=696mV

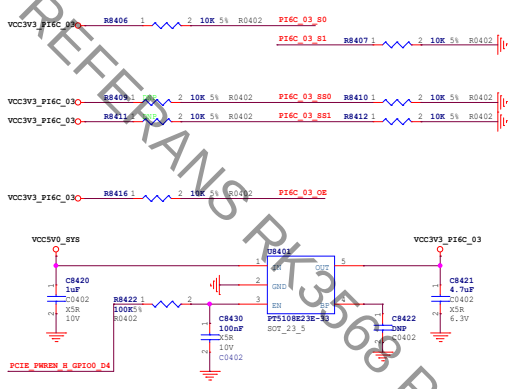

PI6C_S1	PI6C_S0	Out Freq
0	1	100MHz

PI6C_SS1	PI6C_SS0	Spread %
0	0	No Spread
0	1	-0.5
1	0	-1.0
1	1	No Spread

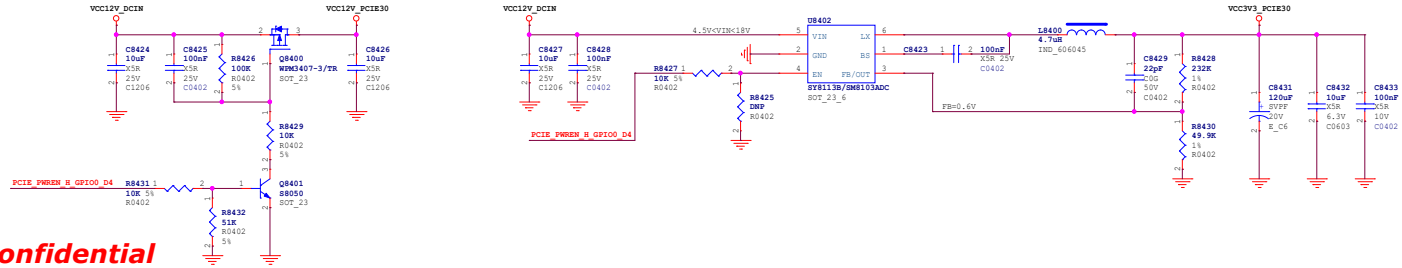

Rockchip Confidential

Rockchip 瑞芯微电子	Rockchip Electronics Co., Ltd		
Project:	RK3568_AIoT_REF_SCH		
File:	84.PCIE-PCIE3.0_1x2Lanes_RC_64P		
Date:	Wednesday, June 16, 2021	Rev:	V1.1
Designed by: Zhangtz	Reviewed by: Default	Sheet:	61 of 72

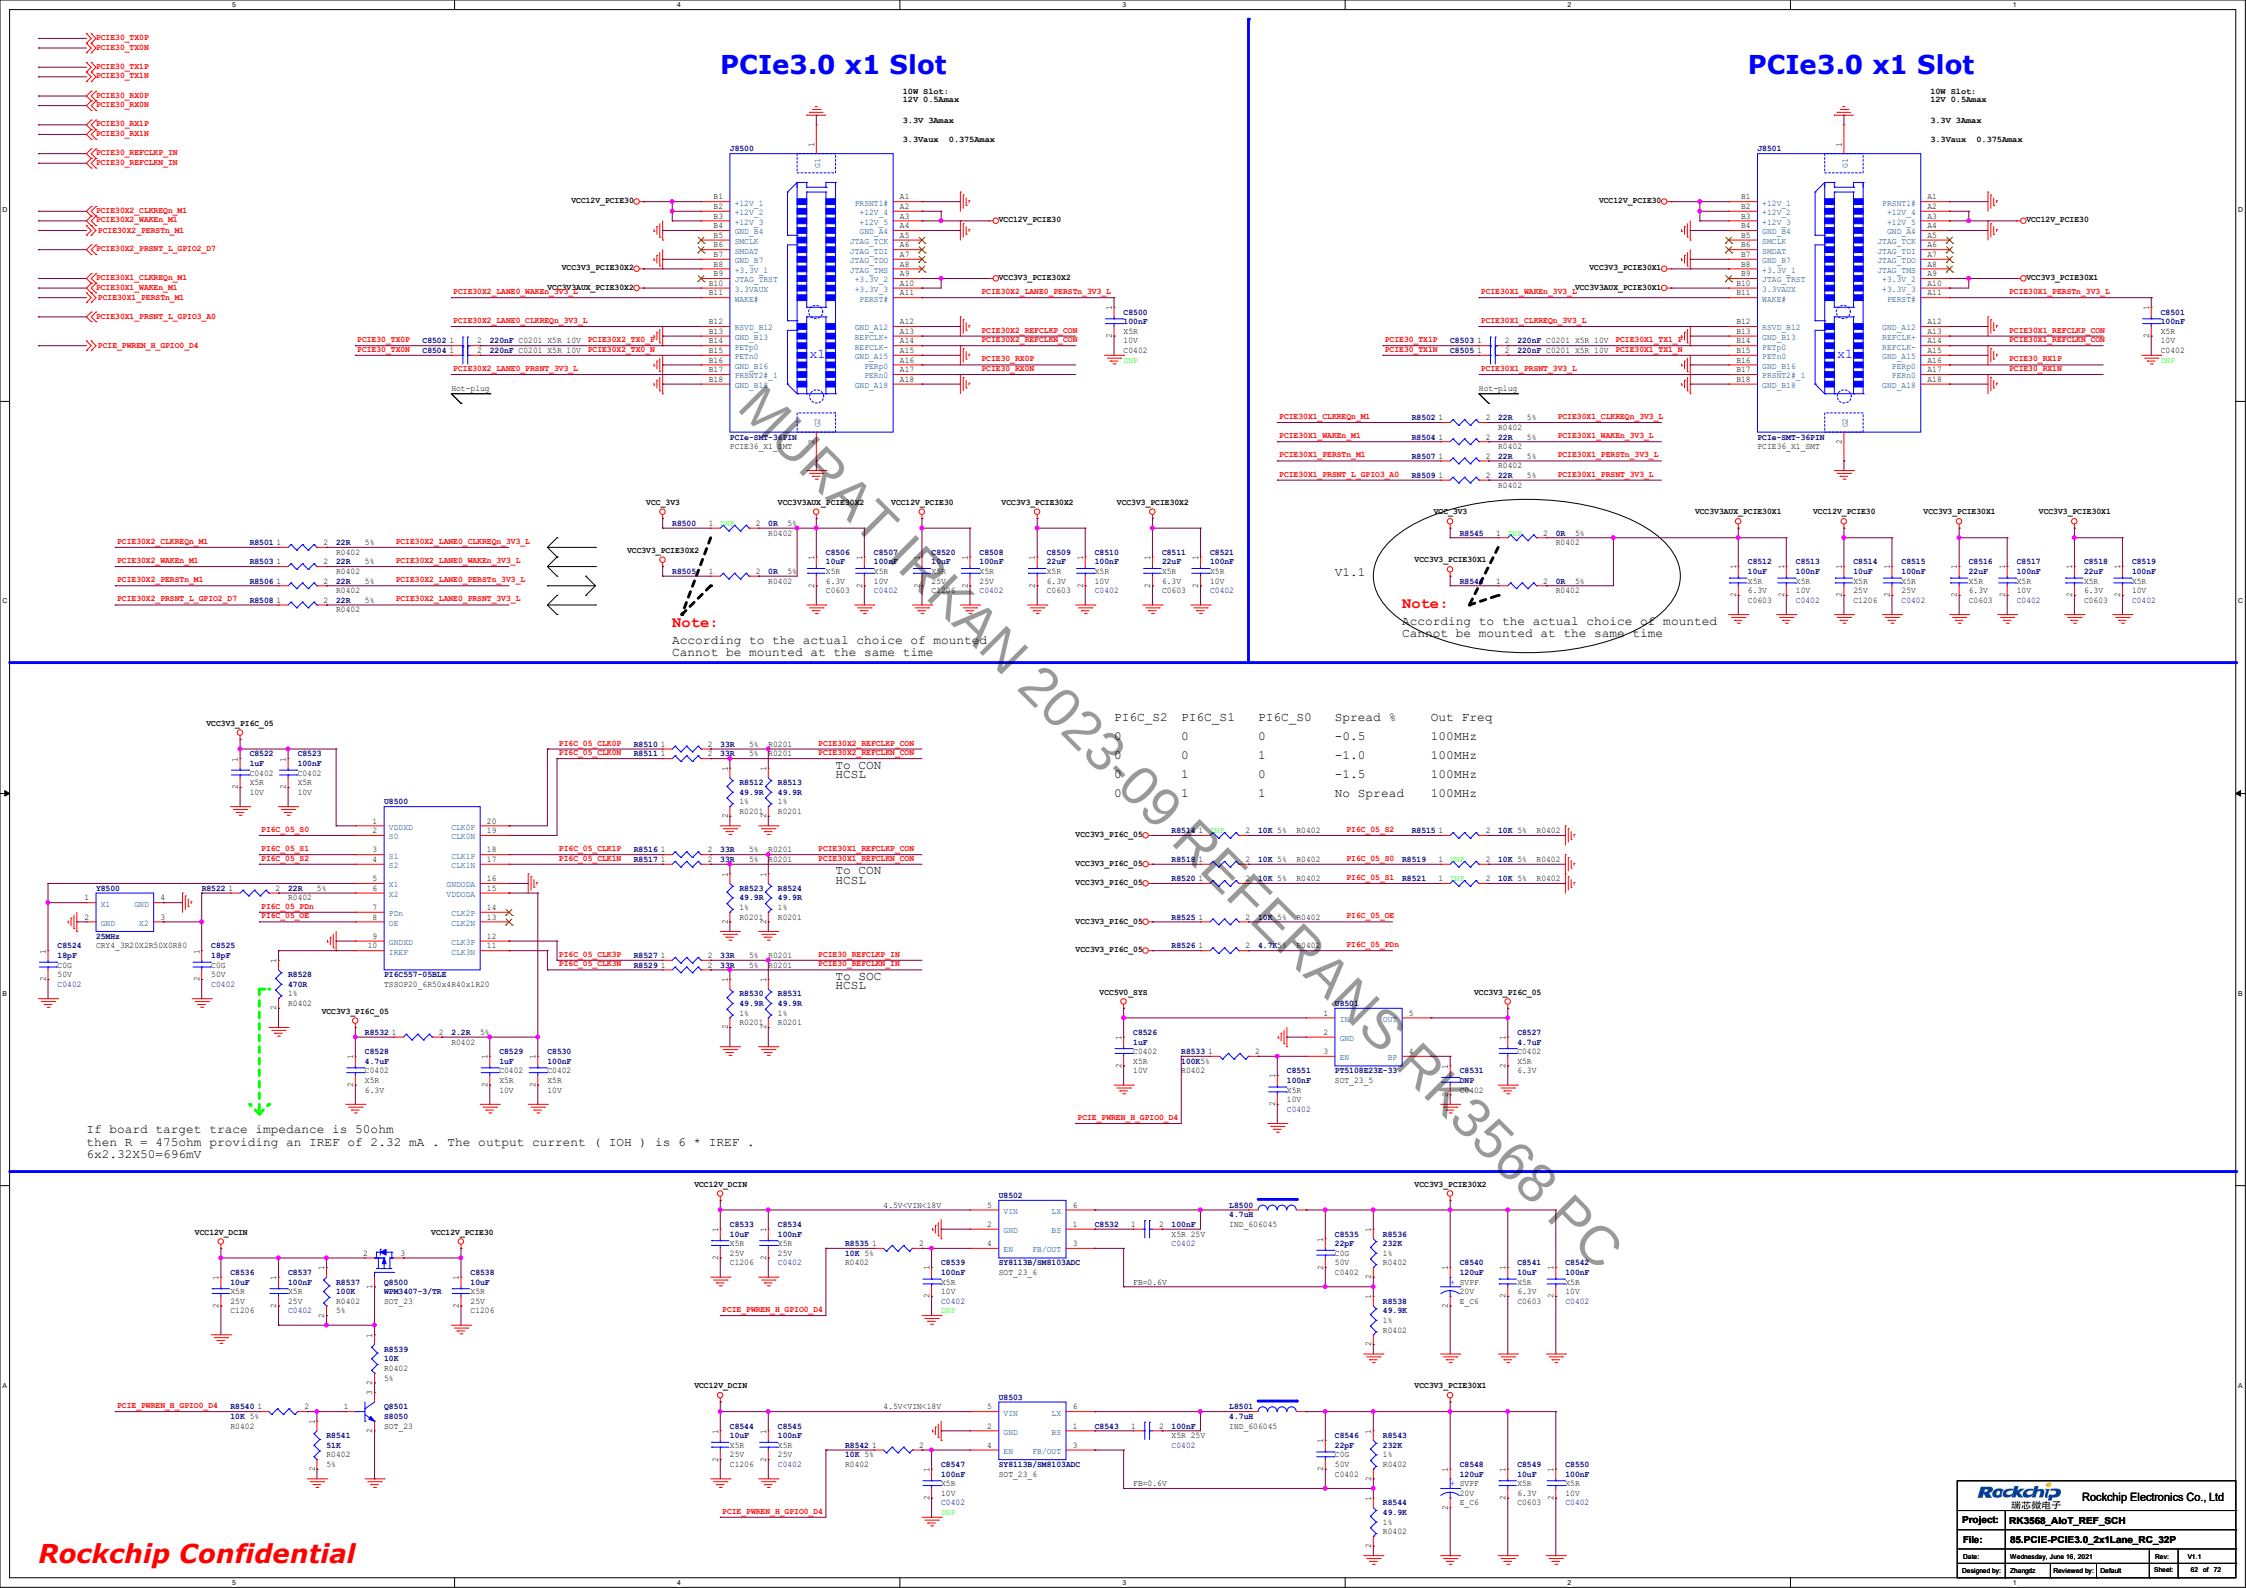
PCIe3.0 x1 Slot
PCIe3.0 x1 Slot
PCIE30_TX0P
PCIE30_TX0N
PCIE30_TX1P
PCIE30_TX1N
PCIE30_RX0P
PCIE30_RX0N
PCIE30_RX1P
PCIE30_RX1N
PCIE30_REFCLKP_IN
PCIE30_REFCLKN_IN
PCIE30X2_CLKREQn_M1
PCIE30X2_WAKEn_M1
PCIE30X2_PERSTn_M1
PCIE30X2_PRSNT_L_GPIO2_D7
PCIE30X1_CLKREQn_M1
PCIE30X1_WAKEn_M1
PCIE30X1_PERSTn_M1
PCIE30X1_PRSNT_L_GPIO3_A0
PCIE_PWREN_H_GPIO0_D4
10W Slot:
12V 0.5Amax
3.3V 3Amax
3.3Vaux 0.375Amax
J8500
J8501
PCIe-SMT-36PIN
PCIE36_X1_SMT
Hot-plug
Note:
According to the actual choice of mounted
Cannot be mounted at the same time
V1.1
MURAT IKRAN 2023-09 REFERANS RK3568 PC
PI6C_S2 PI6C_S1 PI6C_S0 Spread % Out Freq
0 0 0 -0.5 100MHz
0 0 1 -1.0 100MHz
0 1 0 -1.5 100MHz
0 1 1 No Spread 100MHz
U8500
P16C557-05BLE
To_CON HCSL
To_SOC HCSL
If board target trace impedance is 50ohm
then R = 475ohm providing an IREF of 2.32 mA . The output current (IOH) is 6 * IREF .
6x2.32X50=696mV
U8502
U8503
SY8113B/SM8103ADC
Rockchip Confidential
Rockchip Electronics Co., Ltd
Project: RK3568_AIoT_REF_SCH
File: 85.PCIE-PCIE3.0_2x1Lane_RC_32P
Date: Wednesday, June 16, 2021
Rev: V1.1
Designed by: Zhangtz
Reviewed by: Default
Sheet: 62 of 72

PCIe3.0 x2 EP Mode-EDGE

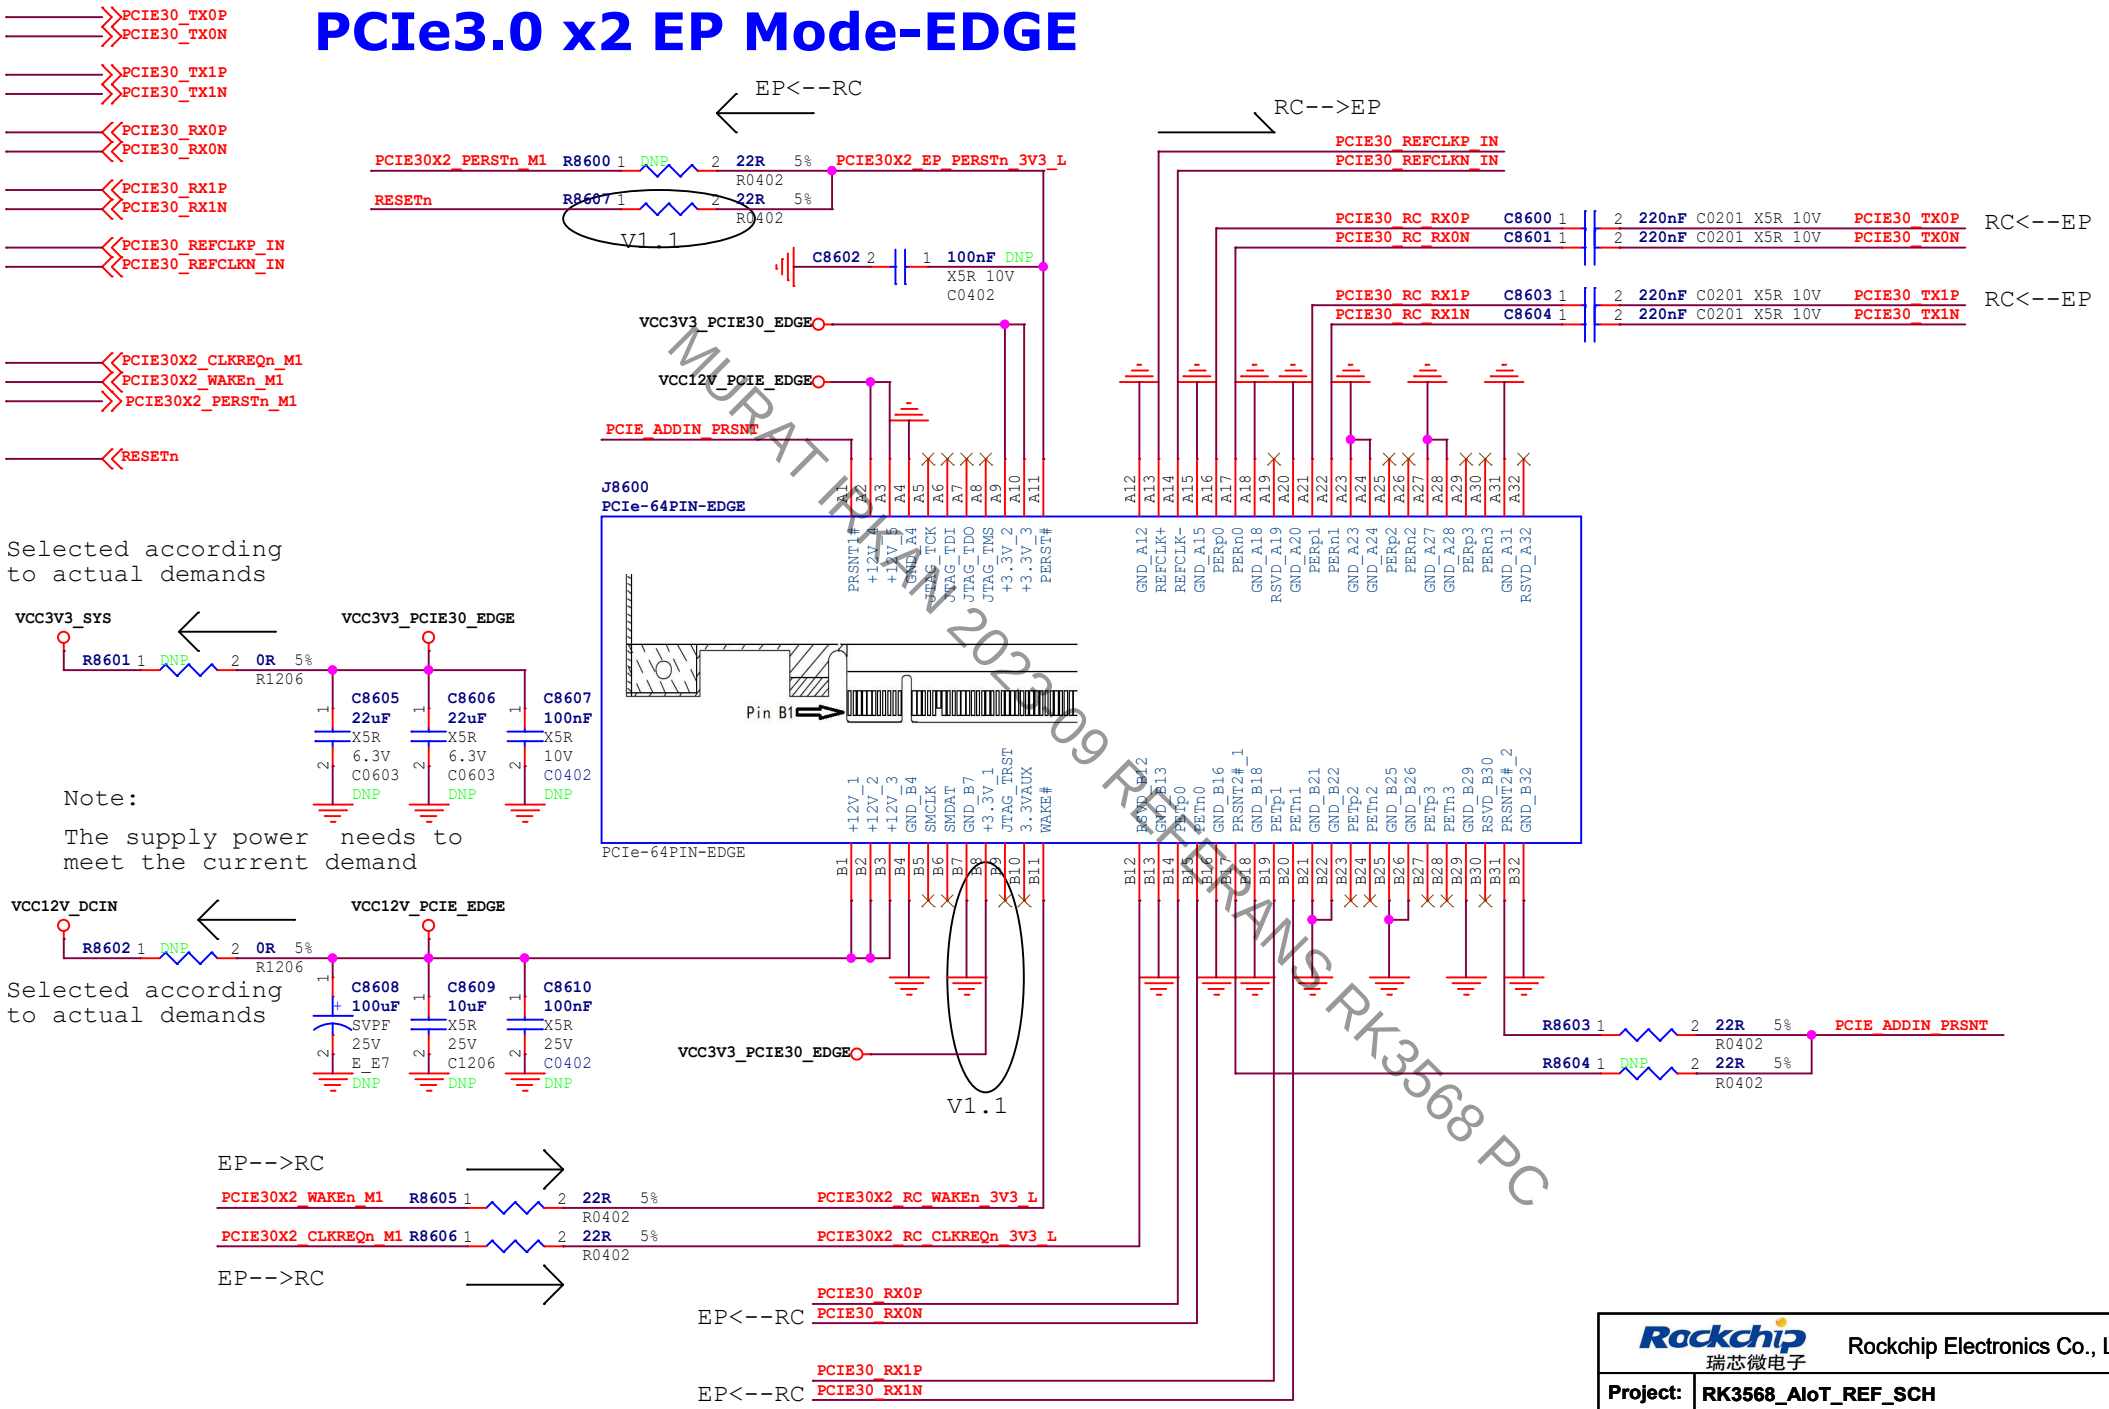

Rockchip 瑞芯微电子	Rockchip Electronics Co., Ltd				
Project:	RK3568_AIoT_REF_SCH				
File:	86.PCIE-PCIE3.0_1x2Lanes_EP_64P				
Date:	Wednesday, June 16, 2021			Rev:	V1.1
Designed by:	Zhangdz	Reviewed by:	Default	Sheet:	63 of 72

MiniPCIe2.0 Slot_Support 4G module

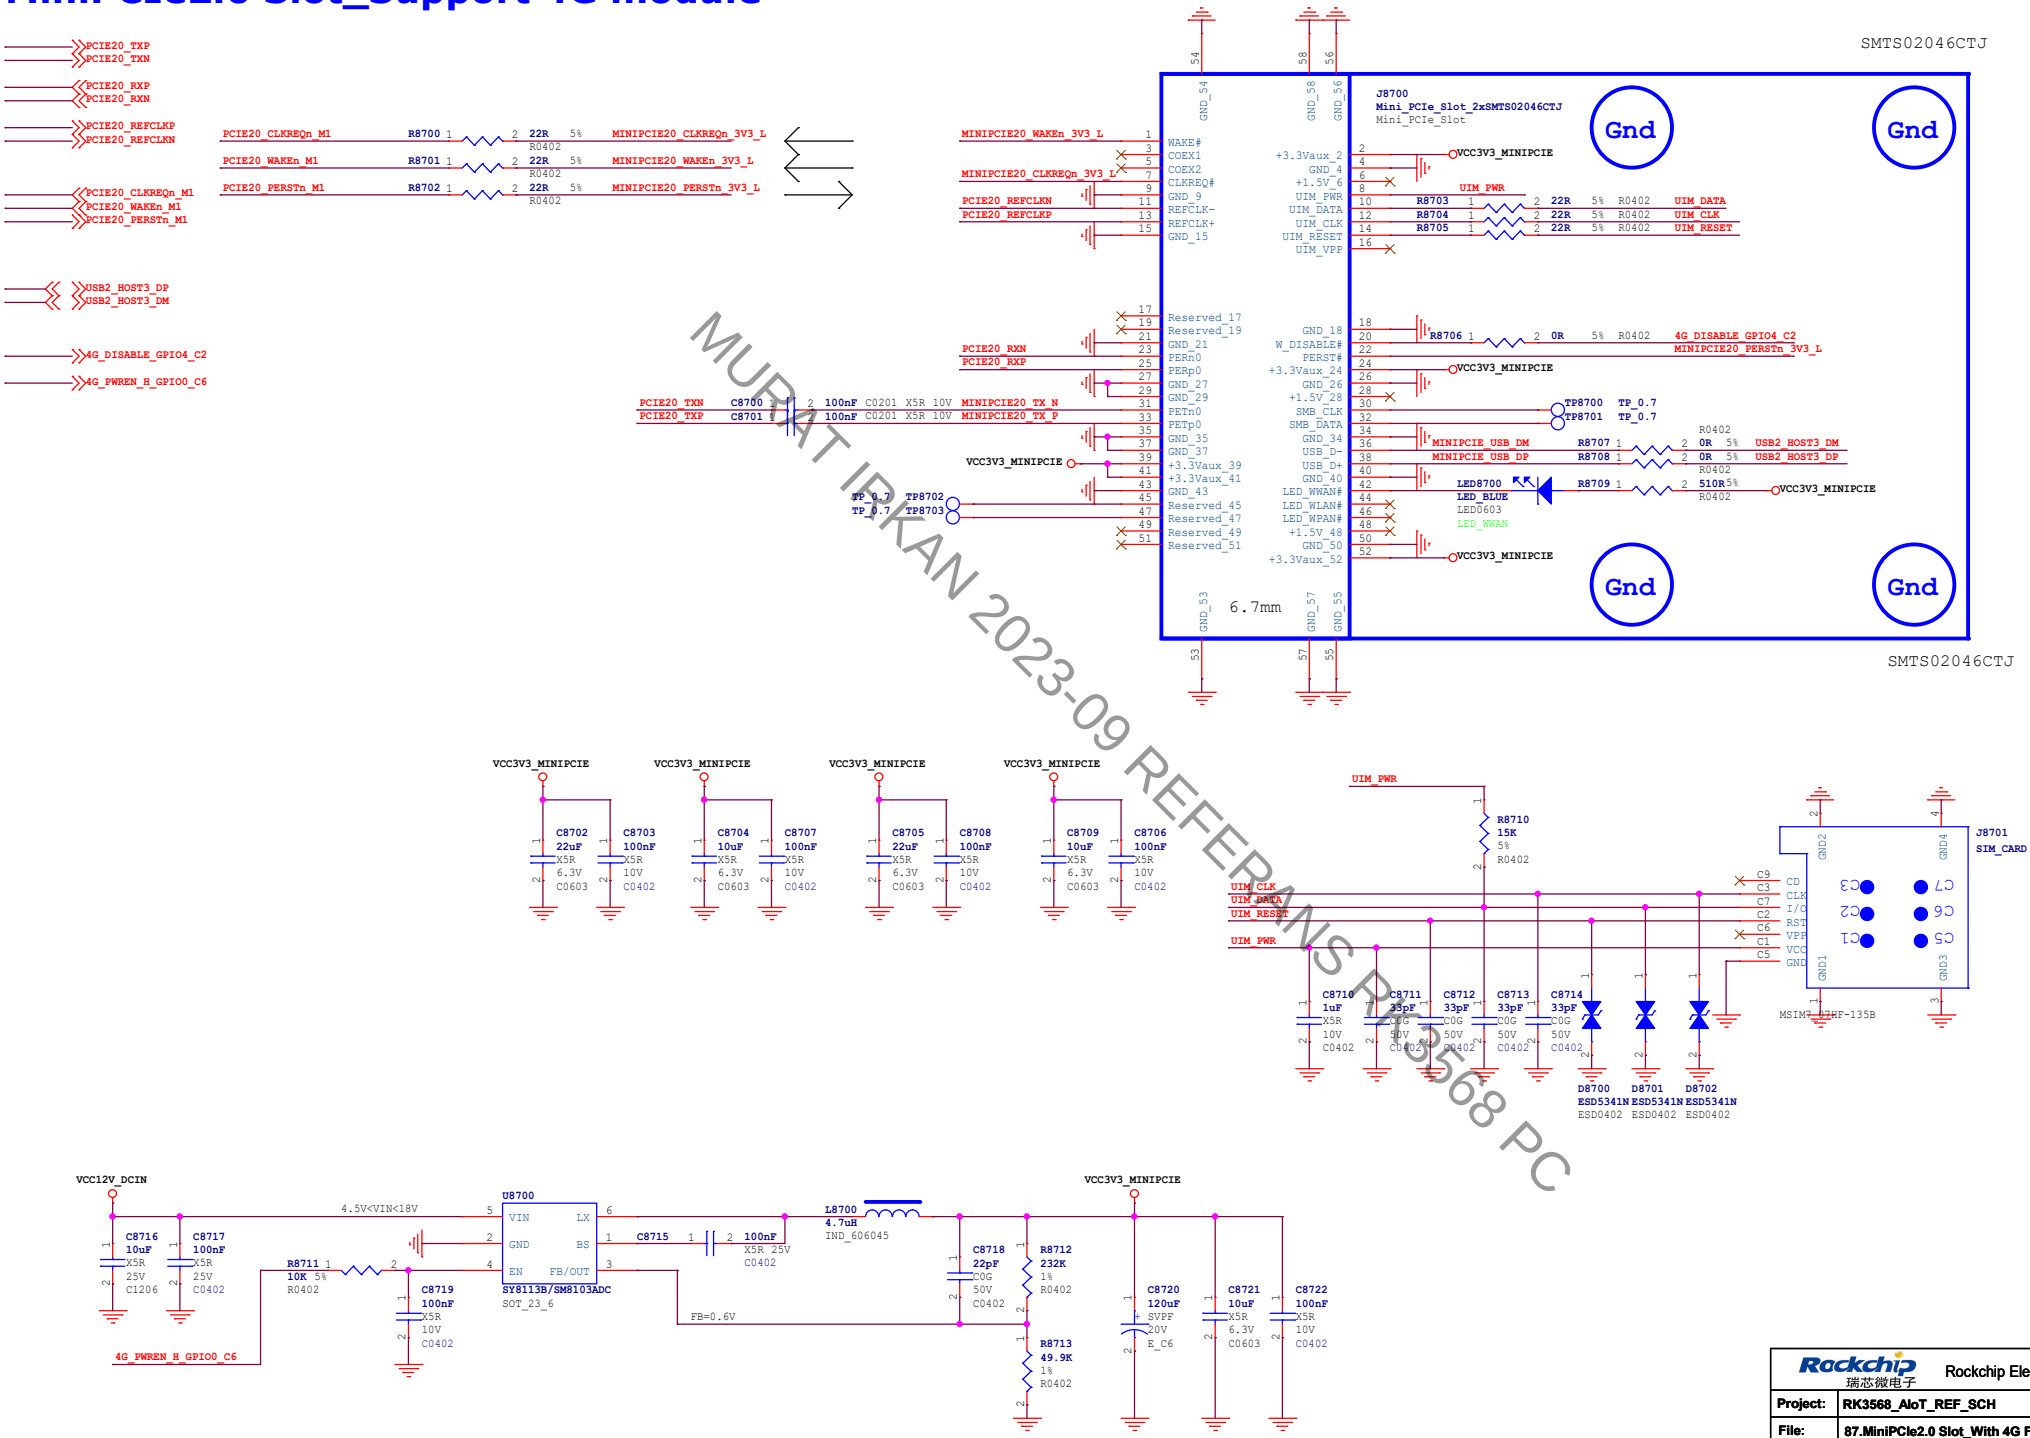

Rockchip 瑞芯微电子	Rockchip Electronics Co., Ltd				
Project:	RK3568_AIoT_REF_SCH				
File:	87.MiniPCIe2.0 Slot_With 4G Fun				
Date:	Wednesday, June 16, 2021			Rev:	V1.1
Designed by:	Zhangdz	Reviewed by:	Default	Sheet:	64 of 72

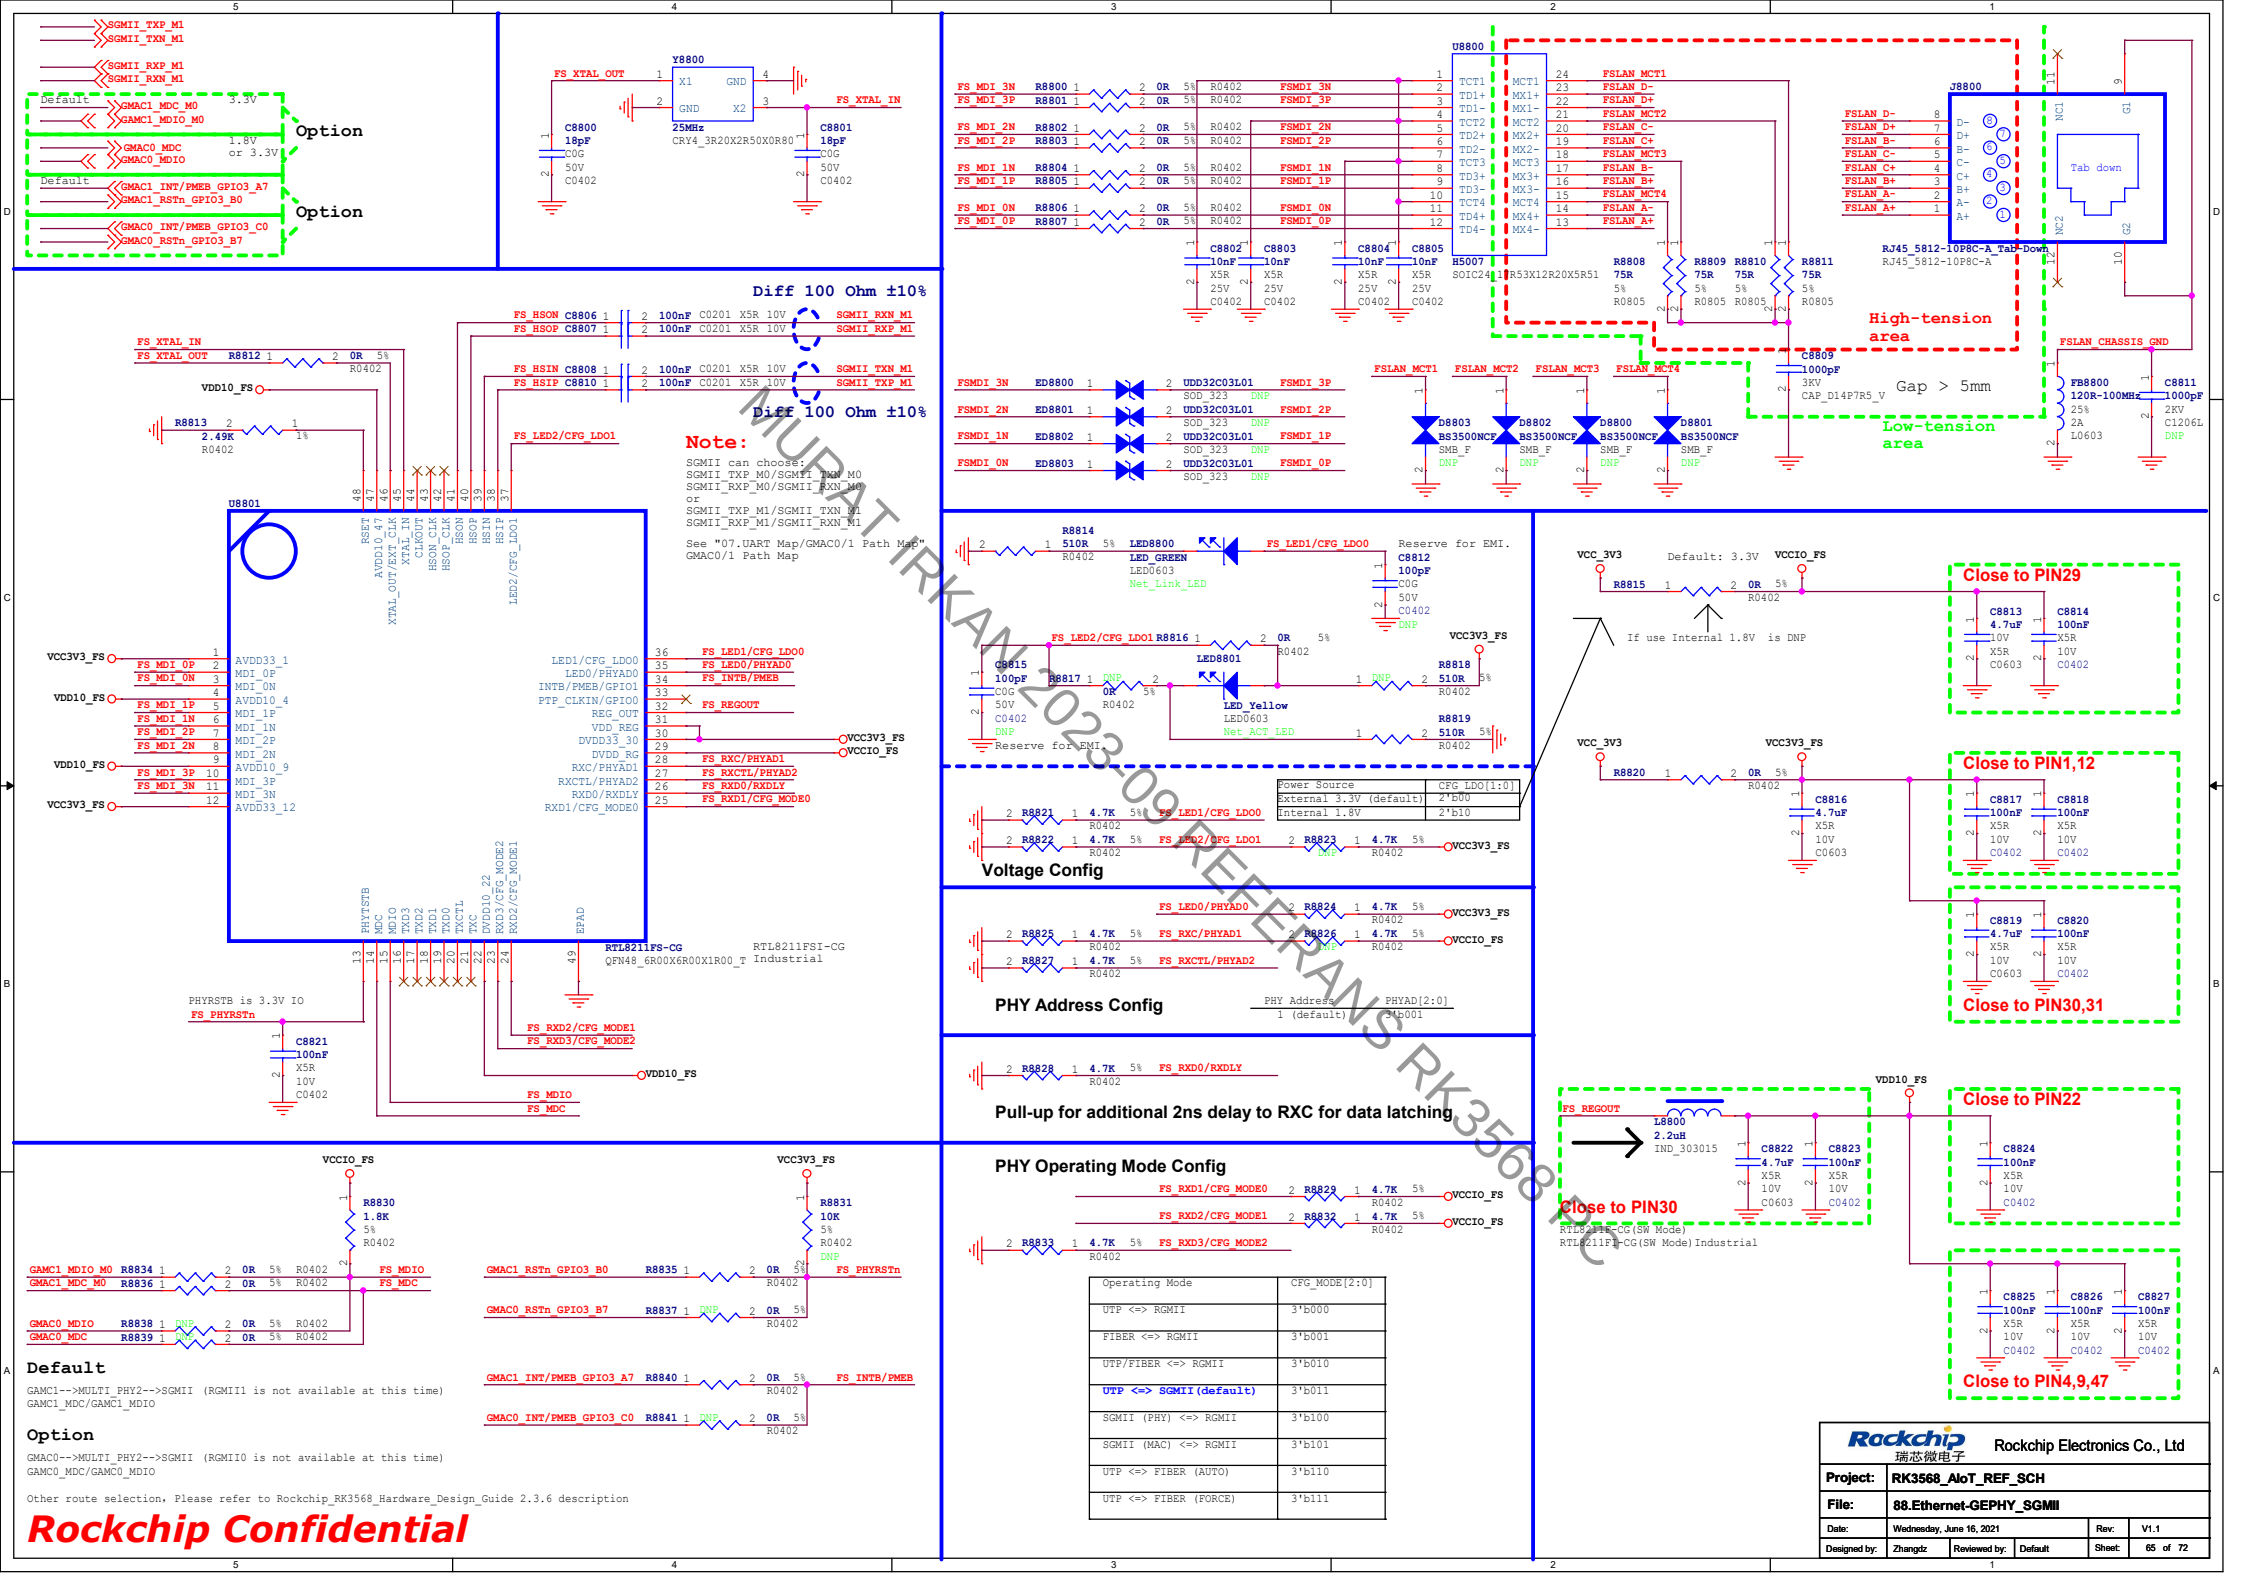
SGMII_TXP_M1
SGMII_TXN_M1
SGMII_RXP_M1
SGMII_RXN_M1
Default
GMAC1_MDC_M0
GAMC1_MDIO_M0
3.3V
1.8V or 3.3V
Option
GMAC0_MDC
GMAC0_MDIO
Default
GMAC1_INT/PMEB_GPIO3_A7
GMAC1_RSTn_GPIO3_B0
Option
GMAC0_INT/PMEB_GPIO3_C0
GMAC0_RSTn_GPIO3_B7
Y8800
FS_XTAL_OUT
FS_XTAL_IN
25MHz
CRY4_3R20X2R50X0R80
C8800 18pF C0G 50V C0402
C8801 18pF C0G 50V C0402
U8800
FS_MDI_3N R8800
FS_MDI_3P R8801
FS_MDI_2N R8802
FS_MDI_2P R8803
FS_MDI_1N R8804
FS_MDI_1P R8805
FS_MDI_0N R8806
FS_MDI_0P R8807
0R 5% R0402
FSMDI_3N
FSMDI_3P
FSMDI_2N
FSMDI_2P
FSMDI_1N
FSMDI_1P
FSMDI_0N
FSMDI_0P
C8802 C8803 C8804 C8805 10nF X5R 25V C0402
H5007 SOIC24_11R53X12R20X5R51
FSLAN_MCT1
FSLAN_D-
FSLAN_D+
FSLAN_MCT2
FSLAN_C-
FSLAN_C+
FSLAN_MCT3
FSLAN_B-
FSLAN_B+
FSLAN_MCT4
FSLAN_A-
FSLAN_A+
R8808 R8809 R8810 R8811 75R 5% R0805
High-tension area
J8800
RJ45_5812-10P8C-A_Tab-Down
RJ45_5812-10P8C-A
Tab down
FSLAN_CHASSIS_GND
FB8800 120R-100MHz 25% 2A L0603
C8811 1000pF 2KV C1206L DNP
C8809 1000pF 3KV CAP_D14P7R5_V
Gap > 5mm
Low-tension area
FSMDI_3N ED8800
FSMDI_2N ED8801
FSMDI_1N ED8802
FSMDI_0N ED8803
UDD32C03L01 SOD_323 DNP
FSLAN_MCT1 FSLAN_MCT2 FSLAN_MCT3 FSLAN_MCT4
D8803 D8802 D8800 D8801 BS3500NCE SMB_F DNP
Diff 100 Ohm ±10%
FS_HSON C8806
FS_HSOP C8807
FS_HSIN C8808
FS_HSIP C8810
100nF C0201 X5R 10V
SGMII_RXN_M1
SGMII_RXP_M1
SGMII_TXN_M1
SGMII_TXP_M1
Diff 100 Ohm ±10%
FS_XTAL_IN
FS_XTAL_OUT
R8812 0R 5% R0402
VDD10_FS
R8813 2.49K 1% R0402
FS_LED2/CFG_LDO1
Note:
SGMII can choose:
SGMII_TXP_M0/SGMII_TXN_M0
SGMII_RXP_M0/SGMII_RXN_M0
or
SGMII_TXP_M1/SGMII_TXN_M1
SGMII_RXP_M1/SGMII_RXN_M1
See "07.UART Map/GMAC0/1 Path Map"
GMAC0/1 Path Map
U8801
RSET
AVDD1_0.47
XTAL_IN
XTAL_OUT/EXT_CLK
CLKOUT
HSON_CLK
HSOP_CLK
HSON
HSOP
HSIN
HSIP
LED2/CFG_LDO1
VCC3V3_FS
VDD10_FS
FS_MDI_0P
FS_MDI_0N
FS_MDI_1P
FS_MDI_1N
FS_MDI_2P
FS_MDI_2N
FS_MDI_3P
FS_MDI_3N
AVDD33_1
MDI_0P
MDI_0N
AVDD10_4
MDI_1P
MDI_1N
MDI_2P
MDI_2N
AVDD10_9
MDI_3P
MDI_3N
AVDD33_12
LED1/CFG_LDO0
LED0/PHYAD0
INTB/PMEB/GPIO1
PTP_CLKIN/GPIO0
REG_OUT
VDD_REG
DVDD33_30
DVDD_RG
RXC/PHYAD1
RXCTL/PHYAD2
RXD0/RXDLY
RXD1/CFG_MODE0
FS_LED1/CFG_LDO0
FS_LED0/PHYAD0
FS_INTB/PMEB
FS_REGOUT
FS_RXC/PHYAD1
FS_RXCTL/PHYAD2
FS_RXD0/RXDLY
FS_RXD1/CFG_MODE0
VCC3V3_FS
VCCIO_FS
PHYSTB
MDC
MDIO
TXD3
TXD2
TXD1
TXD0
TXCTL
TXC
DVDD10_22
RXD3/CFG_MODE2
RXD2/CFG_MODE1
EPAD
RTL8211FS-CG QFN48_6R00X6R00X1R00_T
RTL8211FSI-CG Industrial
PHYRSTB is 3.3V IO
FS_PHYRSTn
C8821 100nF X5R 10V C0402
FS_RXD2/CFG_MODE1
FS_RXD3/CFG_MODE2
FS_MDIO
FS_MDC
VDD10_FS
R8814 510R 5% R0402
LED8800 LED_GREEN LED0603 Net_Link_LED
FS_LED1/CFG_LDO0
Reserve for EMI.
C8812 100pF C0G 50V C0402 DNP
FS_LED2/CFG_LDO1 R8816 0R 5% R0402
C8815 100pF C0G 50V C0402 DNP
R8817 DNP 0R 5% R0402
LED8801
LED_Yellow LED0603 Net_ACT_LED
R8818 510R 5% R0402
R8819 510R 5% R0402
Reserve for EMI
Power Source | CFG_LDO[1:0]
External 3.3V (default) | 2'b00
Internal 1.8V | 2'b10
R8821 4.7K 5% R0402 FS_LED1/CFG_LDO0
R8822 4.7K 5% R0402 FS_LED2/CFG_LDO1
R8823 DNP 4.7K 5% R0402 VCC3V3_FS
Voltage Config
FS_LED0/PHYAD0 R8824 4.7K 5% R0402 VCC3V3_FS
FS_RXC/PHYAD1 R8826 DNP 4.7K 5% R0402 VCCIO_FS
R8825 4.7K 5% R0402 FS_RXCTL/PHYAD2
R8827 4.7K 5% R0402
PHY Address Config
PHY Address | PHYAD[2:0]
1 (default) | 3'b001
R8828 4.7K 5% R0402 FS_RXD0/RXDLY
Pull-up for additional 2ns delay to RXC for data latching
PHY Operating Mode Config
FS_RXD1/CFG_MODE0 R8829 4.7K 5% R0402 VCCIO_FS
FS_RXD2/CFG_MODE1 R8832 4.7K 5% R0402 VCCIO_FS
R8833 4.7K 5% R0402 FS_RXD3/CFG_MODE2
Operating Mode | CFG_MODE[2:0]
UTP <=> RGMII | 3'b000
FIBER <=> RGMII | 3'b001
UTP/FIBER <=> RGMII | 3'b010
UTP <=> SGMII(default) | 3'b011
SGMII (PHY) <=> RGMII | 3'b100
SGMII (MAC) <=> RGMII | 3'b101
UTP <=> FIBER (AUTO) | 3'b110
UTP <=> FIBER (FORCE) | 3'b111
VCC_3V3
Default: 3.3V
VCCIO_FS
R8815 0R 5% R0402
If use Internal 1.8V is DNP
C8813 4.7uF 10V X5R C0603
C8814 100nF 10V X5R C0402
Close to PIN29
VCC_3V3
VCC3V3_FS
R8820 0R 5% R0402
C8816 4.7uF 10V X5R C0603
C8817 100nF 10V X5R C0402
C8818 100nF 10V X5R C0402
Close to PIN1,12
C8819 4.7uF 10V X5R C0603
C8820 100nF 10V X5R C0402
Close to PIN30,31
VDD10_FS
FS_REGOUT
L8800 2.2uH IND_303015
C8822 4.7uF 10V X5R C0603
C8823 100nF 10V X5R C0402
Close to PIN30
RTL8211FS-CG(SW Mode)
RTL8211FSI-CG(SW Mode)Industrial
C8824 100nF 10V X5R C0402
Close to PIN22
C8825 100nF 10V X5R C0402
C8826 100nF 10V X5R C0402
C8827 100nF 10V X5R C0402
Close to PIN4,9,47
VCCIO_FS
R8830 1.8K 5% R0402
VCC3V3_FS
R8831 10K 5% R0402 DNP
GAMC1_MDIO_M0 R8834 0R 5% R0402 FS_MDIO
GMAC1_MDC_M0 R8836 0R 5% R0402 FS_MDC
GMAC0_MDIO R8838 DNP 0R 5% R0402
GMAC0_MDC R8839 DNP 0R 5% R0402
GMAC1_RSTn_GPIO3_B0 R8835 0R 5% R0402 FS_PHYRSTn
GMAC0_RSTn_GPIO3_B7 R8837 DNP 0R 5% R0402
GMAC1_INT/PMEB_GPIO3_A7 R8840 0R 5% R0402 FS_INTB/PMEB
GMAC0_INT/PMEB_GPIO3_C0 R8841 DNP 0R 5% R0402
Default
GAMC1-->MULTI_PHY2-->SGMII (RGMII1 is not available at this time)
GAMC1_MDC/GAMC1_MDIO
Option
GMAC0-->MULTI_PHY2-->SGMII (RGMII0 is not available at this time)
GAMC0_MDC/GAMC0_MDIO
Other route selection, Please refer to Rockchip_RK3568_Hardware_Design_Guide 2.3.6 description
Rockchip Confidential
MURAT IRKAN 2022-09 REFERANS RK3568 PC
Rockchip 瑞芯微电子
Rockchip Electronics Co., Ltd
Project: RK3568_AIoT_REF_SCH
File: 88.Ethernet-GEPHY_SGMII
Date: Wednesday, June 16, 2021
Rev: V1.1
Designed by: Zhangdz
Reviewed by: Default
Sheet: 65 of 72

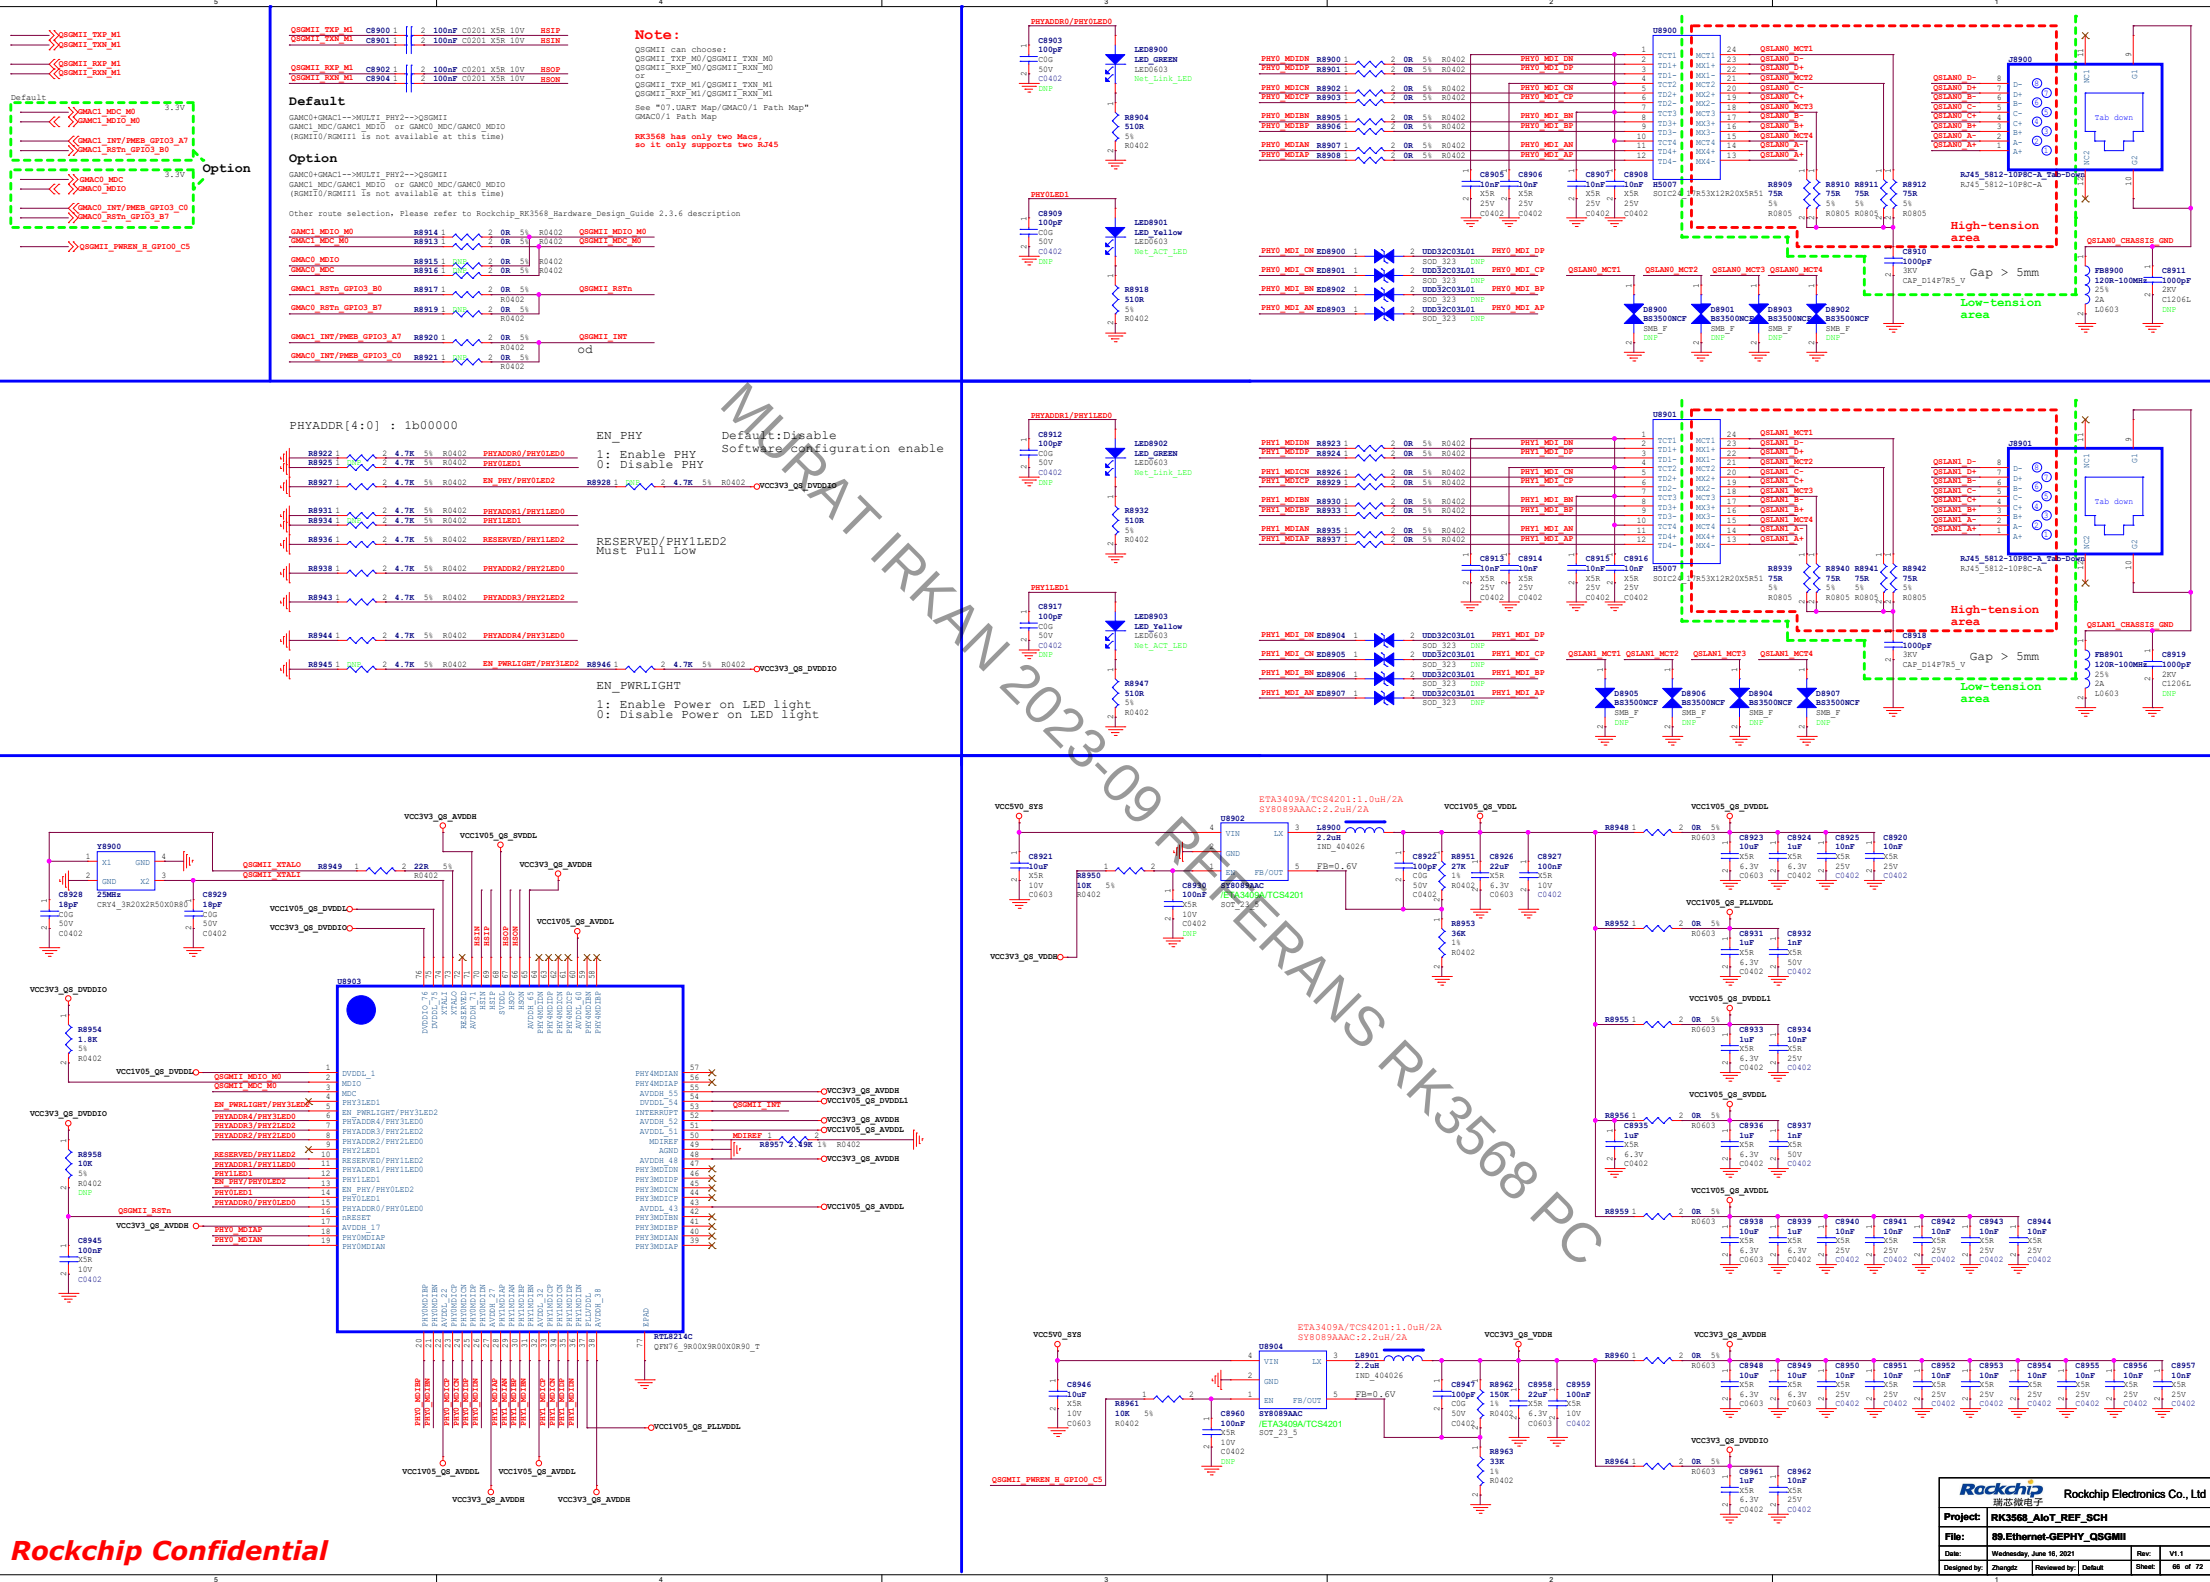

PWM3_IR

IR Receiver

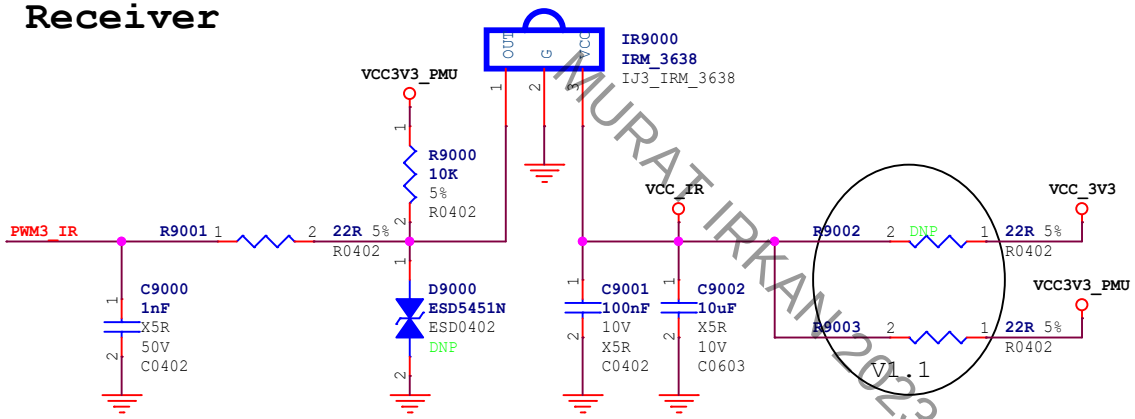

Rockchip 瑞芯微电子	Rockchip Electronics Co., Ltd				
Project:	RK3568_AIoT_REF_SCH				
File:	90.IR Receiver				
Date:	Wednesday, June 16, 2021			Rev:	V1.1
Designed by:	Zhangdz	Reviewed by:	Default	Sheet:	67 of 72

UART2_RX_M0_DEBUG
UART2_TX_M0_DEBUG

Debug UART2

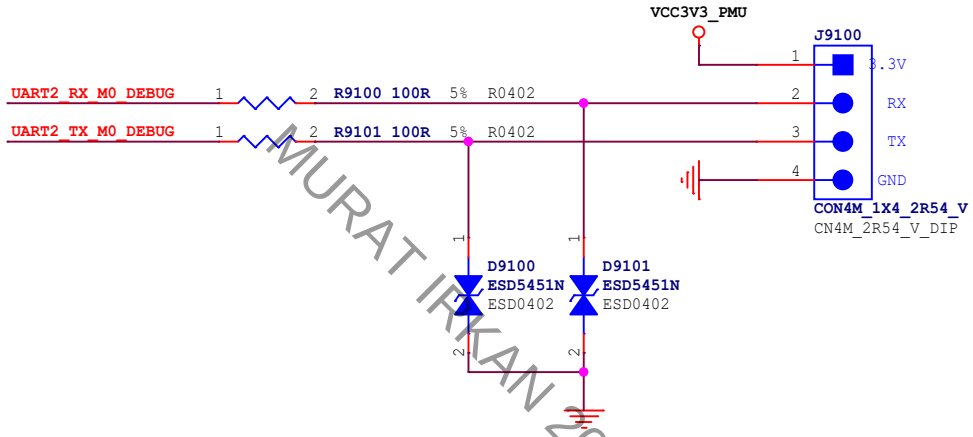

Rockchip 瑞芯微电子	Rockchip Electronics Co., Ltd				
Project:	RK3568_AIoT_REF_SCH				
File:	91.Debug UART				
Date:	Wednesday, June 16, 2021			Rev:	V1.1
Designed by:	Zhangdz	Reviewed by:	Default	Sheet:	68 of 72

Key Array

SARADC_VIN0_KEY/RECOVERY

SARADC_VIN4
SARADC_VIN5
SARADC_VIN6
SARADC_VIN7

RESETn

RK809_PWRON

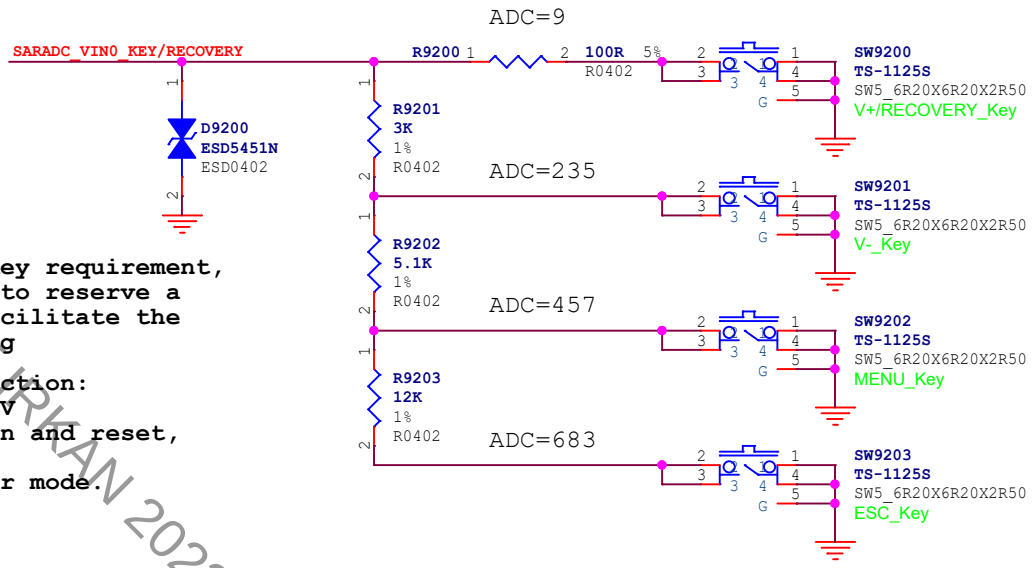

Note:

If there is no Key requirement, It is suggested to reserve a SW9200 Key to facilitate the development debug

RECOVERY_Key function: If SARADC_VIN0=0V at after power on and reset, then system will enter into loader mode.

PowerOn/OFF_Key

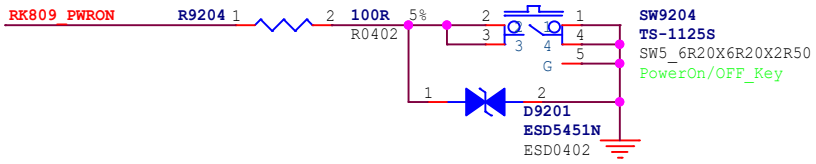

Reset_Key

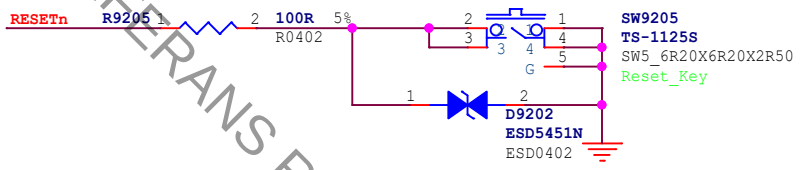

SARADC

Voltage range:0v-1.8V

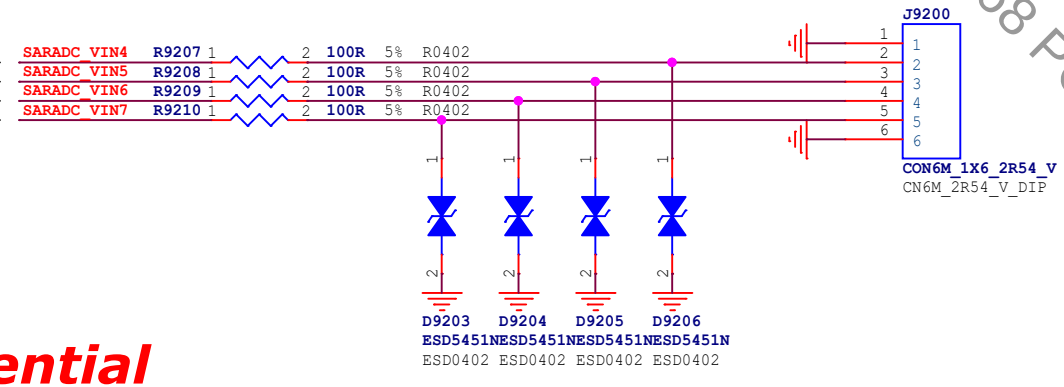

Rockchip Confidential

Rockchip 瑞芯微电子	Rockchip Electronics Co., Ltd				
Project:	RK3568_AIoT_REF_SCH				
File:	92.KEY Array/SARADC				
Date:	Wednesday, June 16, 2021			Rev:	V1.1
Designed by:	Zhangdz	Reviewed by:	Default	Sheet:	69 of 72

Working_LEDEN_H_GPIO0_B7

SARADC_VIN1_HW_ID

SARADC_VIN3_BOM_ID

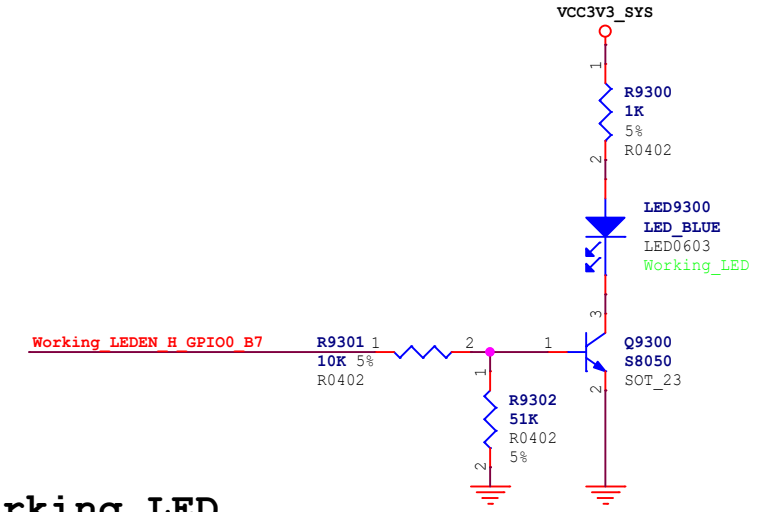

Working LED

HW_ID

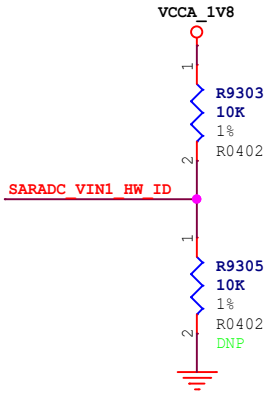

SARADC_VIN1	Up Resistance	Down Resistance
HW_ID0	10K	DNP
HW_ID1	10K	110K
HW_ID2	20K	100K
HW_ID3	33K	100K
HW_ID4	18K	36K
HW_ID5	36K	51K
HW_ID6	51K	51K
HW_ID7	51K	36K
HW_ID8	36K	18K
HW_ID9	100K	33K
HW_ID10	100K	20K
HW_ID11	110K	10K
HW_ID12	DNP	10K

BOM_ID

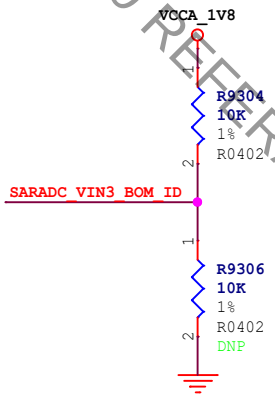

SARADC_VIN3	Up Resistance	Down Resistance
BOM_ID0	10K	DNP
BOM_ID1	10K	110K
BOM_ID2	20K	100K
BOM_ID3	33K	100K
BOM_ID4	18K	36K
BOM_ID5	36K	51K
BOM_ID6	51K	51K
BOM_ID7	51K	36K
BOM_ID8	36K	18K
BOM_ID9	100K	33K
BOM_ID10	100K	20K
BOM_ID11	110K	10K
BOM_ID12	DNP	10K

Rockchip 瑞芯微电子	Rockchip Electronics Co., Ltd				
Project:	RK3568_AIoT_REF_SCH				
File:	93.LED/HW_ID/BOM_ID				
Date:	Wednesday, June 16, 2021			Rev:	V1.1
Designed by:	Zhangdz	Reviewed by:	Default	Sheet:	70 of 72

UART9_TX_M1
UART9_RX_M1
UART4_RX_M1
UART4_TX_M1
UART3_TX_M1
UART3_RX_M1
UART7_TX_M1
UART7_RX_M1
RS485_DIR_GPIO3_B5
UART6_TX_M1
UART6_RX_M1
CAN0_TX_M1
CAN0_RX_M1

UART3_M1

Default, and GMAC0 RST/INT Option

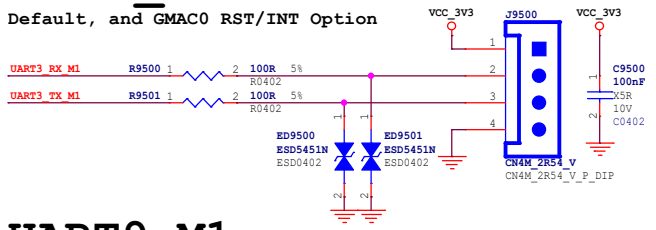

UART4_M1

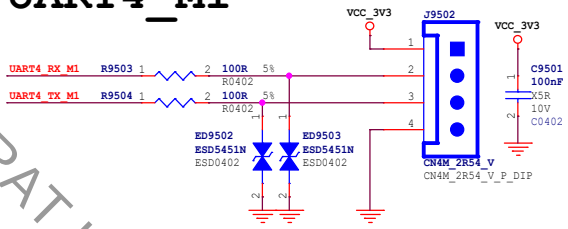

UART9_M1

Default, and SATA LED0/1 Option

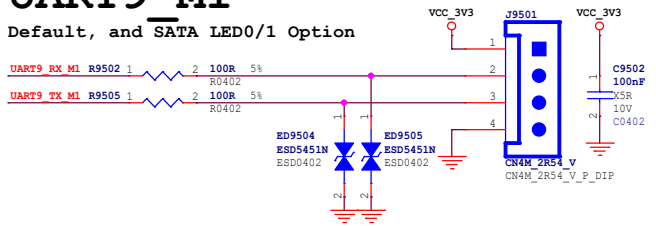

UART7_M1 To RS485

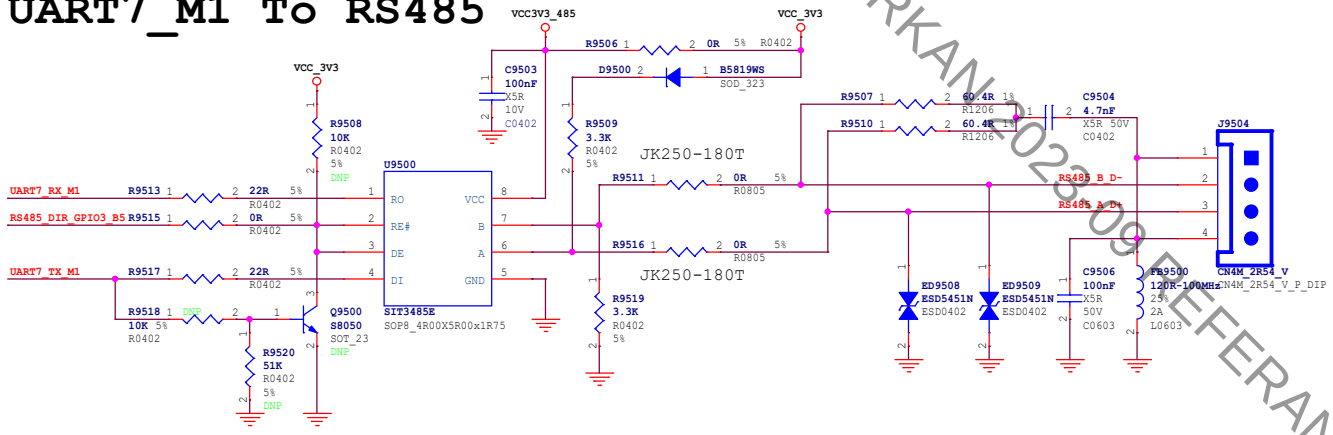

UART6_M1-Option

If no MicroSD Card function:

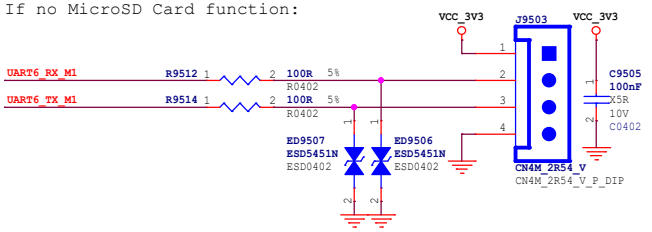

CAN0_M1-Option

If no MicroSD Card function:

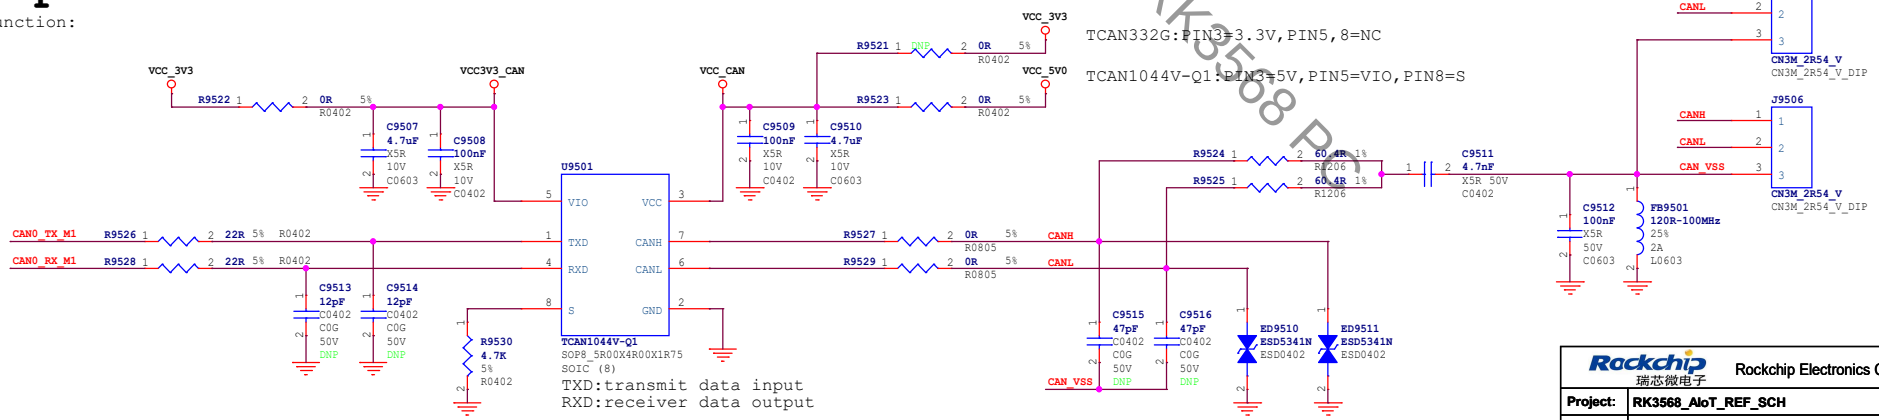

Rockchip 瑞芯微电子	Rockchip Electronics Co., Ltd				
Project:	RK3568_AIoT_REF_SCH				
File:	95.UART/RS485/CAN Port				
Date:	Wednesday, June 16, 2021			Rev:	V1.1
Designed by:	Zhangdz	Reviewed by:	Default	Sheet:	71 of 72

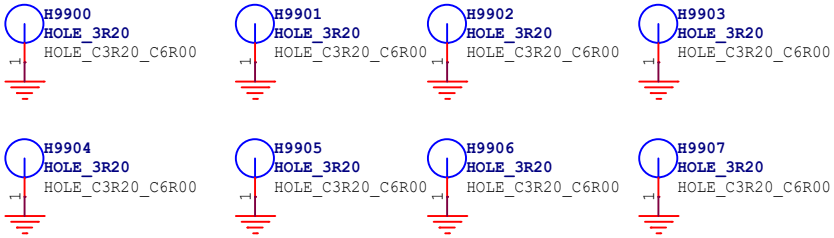

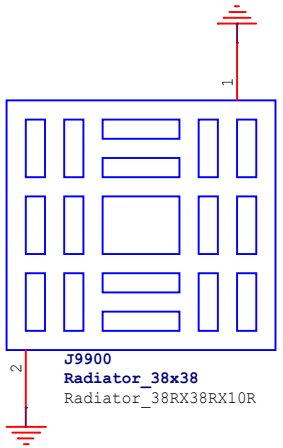

TOP Mark

BOTTOM Mark

Rockchip 瑞芯微电子	Rockchip Electronics Co., Ltd				
Project:	RK3568_AIoT_REF_SCH				
File:	99.Mark/Hole/Heatsink				
Date:	Wednesday, June 16, 2021			Rev:	V1.1
Designed by:	Zhangdz	Reviewed by:	Default	Sheet:	72 of 72