EVB Schematics For RK3568

RK_EVB1_RK3568_DDR4P216SD6_V1.0

Main Functions Introduction

1) PMIC: RK809-5+DiscretePower
2) RAM: DDR4 2x16Bit
3) ROM: eMMC5.1+SPI Falsh,Option Nand Flash
4) Support: Micro SD Card3.0
5) Support: 1 x USB3.0 OTG + 1 x USB3.0 HOST + 2 x USB2.0 HOST
6) Support: 1 x SATA3.0 Connector (7pin) + 4 pin Power Connector
7) Support: 1 x 2Lanes PCIe3.0 Connector (RC Mode)
8) Support: 1 x 4Lanes MIPI CSI Camera or 2 x 2Lanes MIPI CSI Camera
9) Support: Parallel CIF Connector(Option-Ext Board)
10) Support: 1 x HDMI2.0 TX
11) Support: eDP to VGA TX or 1 x 4Lanes eDP with Touch Connector(Option)
12) Support: 2 x 4Lanes MIPI DSI or 1 x 4Lanes MIPI DSI + 1 x LVDS with Touch Connector
13) Support: a/b/g/n/ac 2X2 WIFI,BT5.0
14) Support: 2 x 10/100/1000 Ethernet(RGMII)
15) Support: IR Receiver
16) Support: Optical S/PDIF TX
17) Support: Headphone output,1 x ECM MIC and Speaker out(1.3W@8ohm)
18) Support: Array MIC Connector(Ext Board PDM)
19) Support: Gyroscope+G-sensor
20) Support: Array Key(MENU,VOL+,VOL-,ESC),Reset,Power on/off Key
21) Support: 3 x UART + 2 x UART(Option)
22) Support: 1 x CAN FD
23) Support: 5 x SARADC
24) Support: Debug UART to USB connector and JTAG Connector

Rockchip Confidential

Firefly www.t-firefly.com

Title: Cover Page		
File: ROC-3568-PC		REV: 00
Create Date: Monday, March 30, 2020	Page Num: 1	
Modify Date: Wednesday, May 19, 2021	Page Total: 45	

Table of Content

Generate Bill of Materials

Header:

Item\tPart\tDescription\tPCB Footprint\tReference\tQuantity\tOption

Combined property string:

{Item}\t{Value}\t{Description}\t{PCB Footprint}\t{Reference}\t{Quantity}\t{Option}

Description

Note

Option

Notes

NOTE 1:
Component parameter description
1. DNP stands for component not mounted temporarily
2. If Value or option is DNP, which means the area is reserved without being mounted

NOTE 2:
Please use our recommended components to avoid too many changes.
For more informations about the second source,please refer to our AVL.

Firefly www.t-firefly.com

Title: Index and Notes		
File: ROC-3568-PC		REV: V0.1
Create Date: Monday, March 30, 2020	Page Num: 2	
Modify Date: Wednesday, May 19, 2021	Page Total: 45	

Revision History

Version	Date	By	Change Dsecription	Approved
V1.0	2020-09-08	Zhangdz	1:Revision preliminary version	

RK3568 Ref Block Diagram

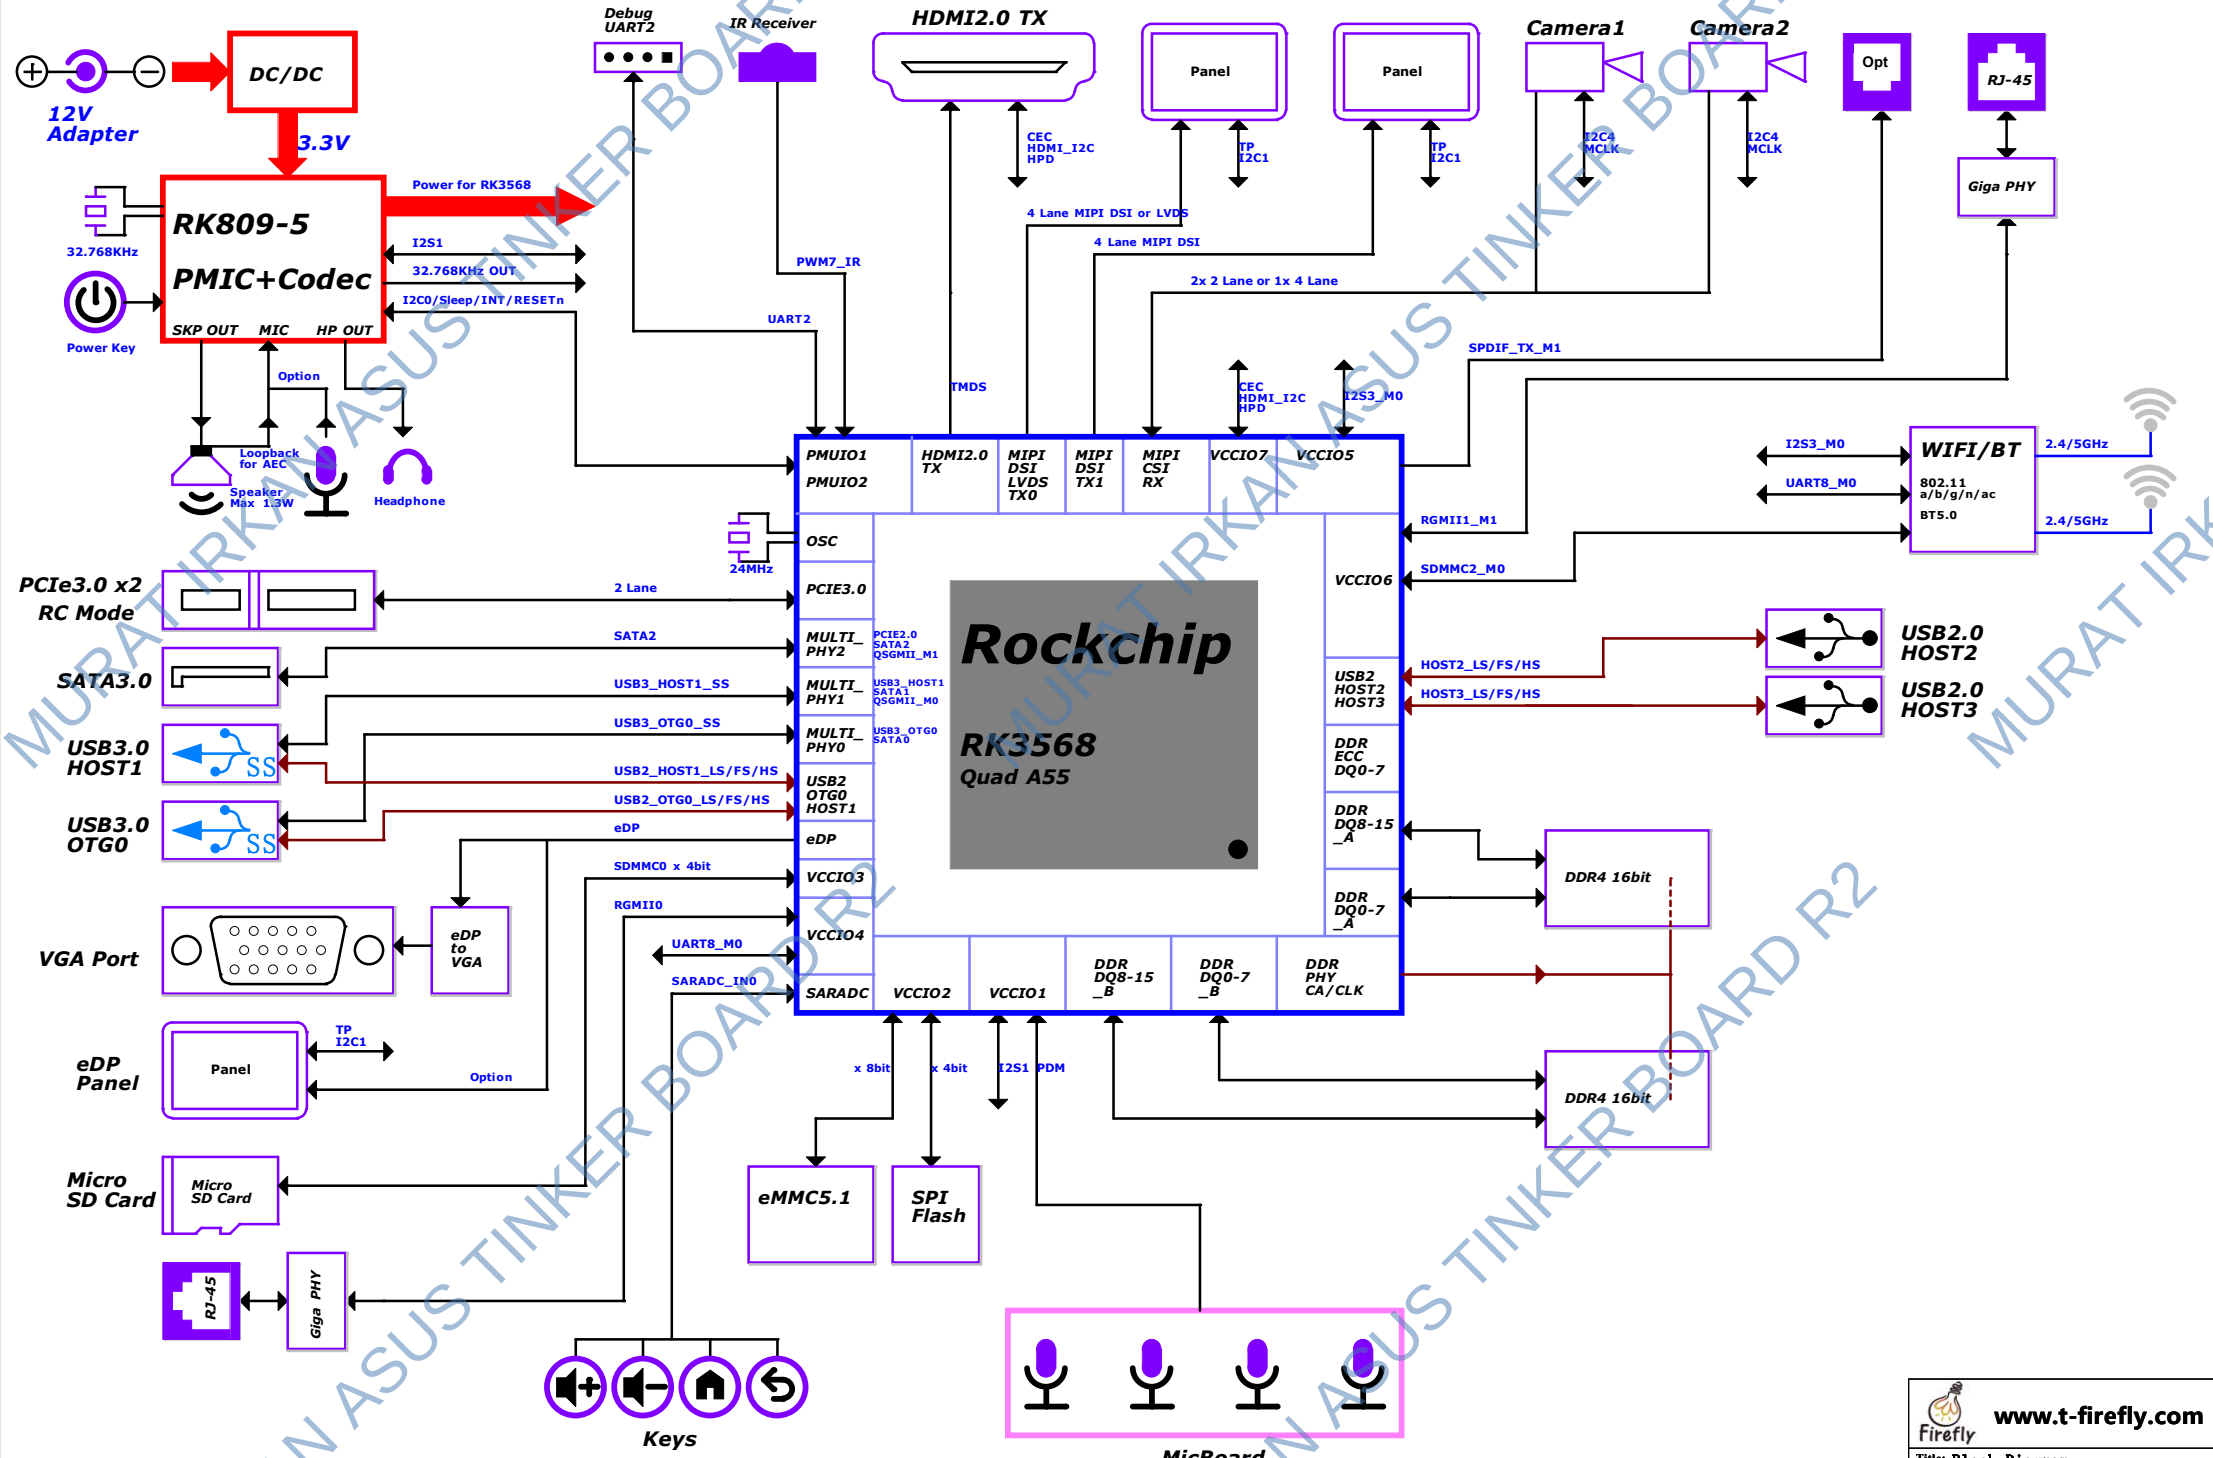

Firefly www.t-firefly.com

Title:	Block Diagram
File:	ROC-3568-PC
REV:	V0.1
Create Date:	Monday, June 01, 2020
Page Num:	4
Modify Date:	Wednesday, May 19, 2021
Page Total:	45

Power Diagram

12V Adapter

DC/DC 3000mA Seq:0 Max:

VCC3V3_SYS

RK809-5

Power on Sequence

VCC1	BUCK1 0.5V~2.4V, 2.5A max	Seq:1	VDD_LOGIC Max:	RK3568_Logic
VCC2	BUCK2 0.5V~2.4V, 2.5A max	Seq:2	VDD_GPU Max:	RK3568_GPU
VCC3	BUCK3 0.5V~2.4V, 1.5A max	Seq:3	VCC_DDR Max:	RK3568_DDR_VDDQ
VCC4	BUCK4 0.5V~3.4V, 1.5A max	OFF	VDD_NPU Max:	RK3568_NPU
	LDO1 0.6V~3.4V, 400mA max	OFF	VDDA0V9_IMAGE Max:	
VCC5	LDO2 0.6V~3.4V, 400mA max	Seq:1	VDDA_0V9 Max:	
	LDO3 0.6V~3.4V, 100mA max	Seq:1	VDDA0V9_PMU Max:	
	LDO4(Codec VDDIO) 0.6V~3.4V, 400mA max	OFF	VCCIO_ACODEC Max:	VCCIO1--I2S1/PDM MIC
VCC6	LDO5 0.6V~3.4V, 400mA max	Seq:4	VCCIO_SD Max:	VCCIO3--SDMMC0
	LDO6 0.6V~3.4V, 400mA max	Seq:2	VCC3V3_PMU Max:	PMUIO1/ PMUIO2
	LDO7 0.6V~3.4V, 400mA max	Seq:2	VCCA_1V8 Max:	
VCC7	LDO8 0.6V~3.4V, 400mA max	Seq:2	VCCA1V8_PMU Max:	PMUPLL_AVDD_1V8
	LDO9 0.6V~3.4V, 400mA max	OFF	VCCA1V8_IMAGE Max:	
VCC8	Switch2 2.1 A max, Rdson=100mΩ	Seq:4	VCC3V3_SD Max:	Micro SD Card
	Switch1 2.1 A max, Rdson=90mΩ	Seq:4	VCC_3V3 Max:	
VCC9	BUCK5: 1.5V~3.6V, 2.5 A max	Seq:2	VCC_1V8 Max:	
VCC_RTC				

VCC5V0_SYS → EXT DC/DC ,5A Seq:2A → VDD_CPU Max: → RK3568_CPU

EXT LDO ,0.3A Seq:2A → VCC2V5_DDR Max: → DDR4 DRAM

VCC3V3_SYS → Mos-->LCD Panel Max:; Mos-->VCC3V3_VGA Max:; RTC IC Max:

MOS OFF → PCIe Slot Max:; SATA Max:

DC/DC 3000mA Seq:0 → VCC5V0_USB Max: → SATA Max:; USB HOST Max:

DC/DC 3000mA Seq:0 → VCC5V0_SYS Max: → VCC5V_HDMI_TX Max:; RK809_SPK_PA Max:; CAN transceiver IC Max:; MIPI-CSI_RX_CON Max:; MIPI/LVDS_Panel_CON0/1 Max:; eDP_Panel_CON/VGA OUT Max:; MIC Expand Board Max:; RGMII/CIF/EBC Expand Board Max:; MOS → VCC5V0_VGA Max:; LDO → VCC3V3_PI6C Max:; LDO → VCC3V3_BU Max:

DC/DC 3000mA → VCC3V3_PCIE Max:

VDDA0V9_IMAGE → MIPI_CSI_RX_AVDD_0V9 Max:; MIPI_DSI_TX0/LVDS_TX0_AVDD_0V9 Max:; MIPI_DSI_TX1_AVDD_0V9 Max:; EDP_TX_AVDD_0V9 Max:; HDMI_TX_AVDD_0V9 Max:

VDDA_0V9 → SYSPLL_AVDD_0V9 Max:; USB2_AVDD_0V9 Max:; USB3_AVDD_0V9 Max:; MULTI_PHY_AVDD_0V9 Max:; PCIE30_AVDD_0V9 Max:

VDDA0V9_PMU → PMU_VDD_LOGIC_0V9 Max:; PMUPLL_AVDD_0V9 Max:

VCCA_1V8 → SYSPLL_AVDD_1V8 Max:; USB2_AVDD_1V8 Max:; USB3_AVDD_1V8 Max:; MULTI_PHY_AVDD_1V8 Max:; PCIE30_AVDD_1V8 Max:; SARADC_AVDD_1V8 Max:

VCCA1V8_IMAGE → MIPI_CSI_RX_AVDD_1V8 Max:; MIPI_DSI_TX0/LVDS_TX0_AVDD_1V8 Max:; MIPI_DSI_TX1_AVDD_1V8 Max:; EDP_TX_AVDD_1V8 Max:; HDMI_TX_AVDD_1V8 Max:

VCC_3V3 → USB3_AVDD_3V3 Max:; USB2_AVDD_3V3 Max:; VCCIO5,VCCIO7 Max:; eMMC_VCC / Nand_VCC Max:; VCC3V3_PHY0/1 Max:; VCC3V3_TP Max:; VCC3V3_SPDIF Max:; VCC3V3_WL_VBAT Max:; Sensor/IR Receiver Max:; UART Device Max:; CAN IC Max:; MIC Expand Board Max:; RGMII/CIF/EBC Expand Board Max:; MIC(Option) Max:; FSUSB30MUX Max:; Max:

VCC_1V8 → OTP_VCC18 Max:; VCCIO2(Default) --eMMC/Nand IO Max:; VCCIO4(Default) --WIFI/BT IO Max:; VCCIO5(Default) Max:; VCCIO6(Default) Max:; GIGa PHY0/1 IO Max:

Firefly www.t-firefly.com
Title: Power Diagram
File: ROC-3568-PC REV: V0.1
Create Date: Thursday, June 04, 2020 Page Num: 5
Modify Date: Wednesday, May 19, 2021 Page Total: 45

Power Sequence

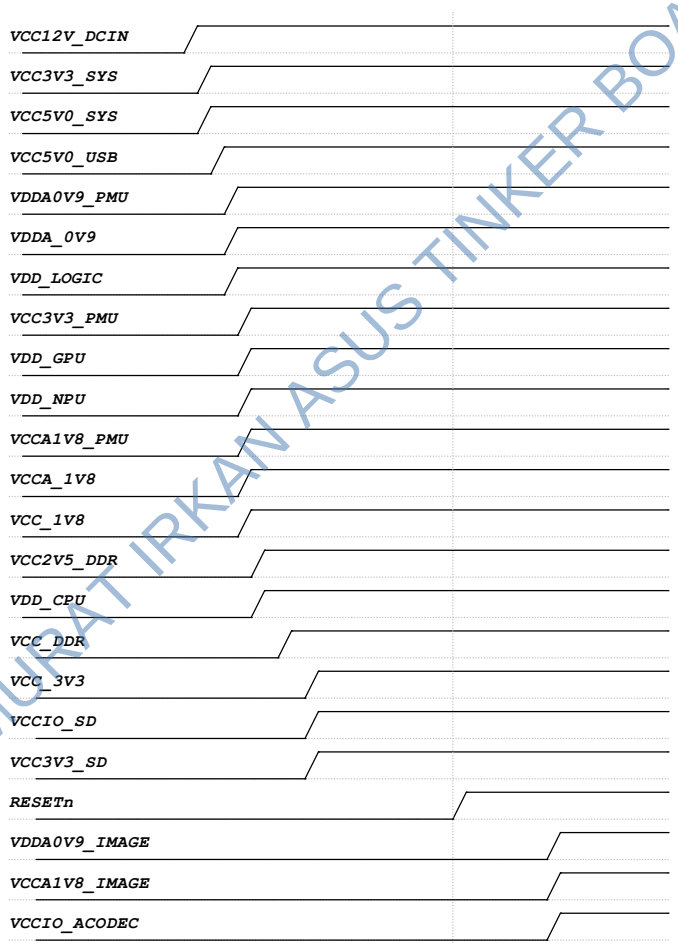

Power Supply	PMIC Channel	Supply Limit	Power Name	Time Slot	Default Voltage	Default ON/OFF	Sleep ON/OFF	Peak Current	Sleep Current
VCC3V3_SYS	RK809_BUCK1	2.5A	VDD_LOGIC	Slot:1	0.9V	ON	OFF	TBD	TBD
VCC3V3_SYS	RK809_BUCK2	2.5A	VDD_GPU	Slot:2	0.9V	ON	OFF	TBD	TBD
VCC3V3_SYS	RK809_BUCK3	1.5A	VCC_DDR	Slot:3	ADJ FB=0.8V	ON	ON	TBD	TBD
VCC3V3_SYS	RK809_BUCK4	1.5A	VDD_NPU	N/A	0.9V	OFF	OFF	TBD	TBD
VCC3V3_SYS	RK809_LDO1	0.4A	VDDA0V9_IMAGE	N/A	0.9V	OFF	OFF	TBD	TBD
	RK809_LDO2	0.4A	VDDA_0V9	Slot:1	0.9V	ON	OFF	TBD	TBD
	RK809_LDO3	0.1A	VDDA0V9_PMU	Slot:1	0.9V	ON	ON	TBD	TBD
VCC3V3_SYS	RK809_LDO4	0.4A	VCCIO_ACODEC	N/A	3.3V	OFF	OFF	TBD	TBD
	RK809_LDO5	0.4A	VCCIO_SD	Slot:4	3.3V	ON	OFF	TBD	TBD
	RK809_LDO6	0.4A	VCC3V3_PMU	Slot:2	3.3V	ON	ON	TBD	TBD
VCC3V3_SYS	RK809_LDO7	0.4A	VCCA_1V8	Slot:2	1.8V	ON	OFF	TBD	TBD
	RK809_LDO8	0.4A	VCCA1V8_PMU	Slot:2	1.8V	ON	ON	TBD	TBD
	RK809_LDO9	0.4A	VCCA1V8_IMAGE	N/A	1.8V	OFF	OFF	TBD	TBD
VCC3V3_SYS	RK809_SW2 100mohm	2.1A	VCC3V3_SD	Slot:4	3.3V	ON	OFF	TBD	TBD
VCC3V3_SYS	RK809_SW1 90mohm	2.1A	VCC_3V3	Slot:4	3.3V	ON	OFF	TBD	TBD
	RK809_BUCK5	2.5A	VCC_1V8	Slot:2	1.8V	ON	OFF	TBD	TBD
	RK809_RESETn			Slot:4+5					
VCC12V_DCIN	EXT BUCK	3.0A	VCC3V3_SYS	Slot:0	3.3V	ON	ON	TBD	TBD
VCC12V_DCIN	EXT BUCK	3.0A	VCC5V0_SYS	Slot:0	5.0V	ON	OFF	TBD	TBD
VCC5V0_SYS	EXT BUCK	6.0A	VDD_CPU	Slot:2A	1.025V	ON	OFF	TBD	TBD
VCC3V3_SYS	EXT LDO	0.3A	VCC2V5_DDR	Slot:2A	2.5V	ON	ON	TBD	TBD

IO Power Domain Map

Updates must be Revision accordingly!

IO Domain	Pin Num	Support IO Voltage		Actual assigned IO Domain Voltage			Notes
		3.3V	1.8V	Supply Power Net Name	Power Source	Voltage	
PMUIO1	Pin Y20	✓	✗	VCC3V3_PMU	VCC3V3_PMU	3.3V	
PMUIO2	Pin W19	✓	✓	VCC3V3_PMU	VCC3V3_PMU	3.3V	
VCCIO1	Pin H17	✓	✓	VCCIO_ACODEC	VCCIO_ACODEC	3.3V	
VCCIO2	Pin H18	✓	✓	VCCIO_FLASH	VCC_1V8	1.8V	PIN "FLASH_VOL_SEL" must be logic High if VCCIO_FLASH=3.3V,FLASH_VOL_SEL must be logic low
VCCIO3	Pin L22	✓	✓	VCCIO_SD	VCCIO_SD	3.3V	
VCCIO4	Pin J21	✓	✓	VCCIO4	VCC_1V8	1.8V	
VCCIO5	Pin V10 Pin V11	✓	✓	VCCIO5	VCC_3V3	3.3V	
VCCIO6	Pin R9 Pin U9	✓	✓	VCCIO6	VCC_1V8	1.8V	
VCCIO7	Pin V12	✓	✓	VCCIO7	VCC_3V3	3.3V	

Firefly www.t-firefly.com

Title: Power Sequence/IO Domain Map		
File: ROC-3568-PC		REV: V0.1
Create Date: Monday, March 30, 2020	Page	Num: 6
Modify Date: Wednesday, May 19, 2021	Page	Total: 45

UART MAP

Rockchip Confidential

RK3568

- UART0
- UART1 — M0 / M1
- UART2 — M0 / M1 — UART2_M0 → USB To UART IC for Debug
- UART3 — M0 / M1 — UART3_M1 → ● ● ● ■
- UART4 — M0 / M1 — UART4_M1 → ● ● ● ■
- UART5 — M0 / M1 — UART5_M0 → ● ● ● ■ (If no MicroSD Card function)
- UART6 — M0 / M1 — UART6_M1 → ● ● ● ■ (If no MicroSD Card function)
- UART7 — M0 / M1 / M2
- UART8 — M0 / M1 — UART8_M0 → BT
- UART9 — M0 / M1 / M2 — UART9_M1 → ● ● ● ■

www.t-firefly.com

Title: UART Map	
File: ROC-3568-PC	REV: V0.1
Create Date: Friday, April 03, 2020	Page Num: 7
Modify Date: Wednesday, May 19, 2021	Page Total: 45

I2C MAP

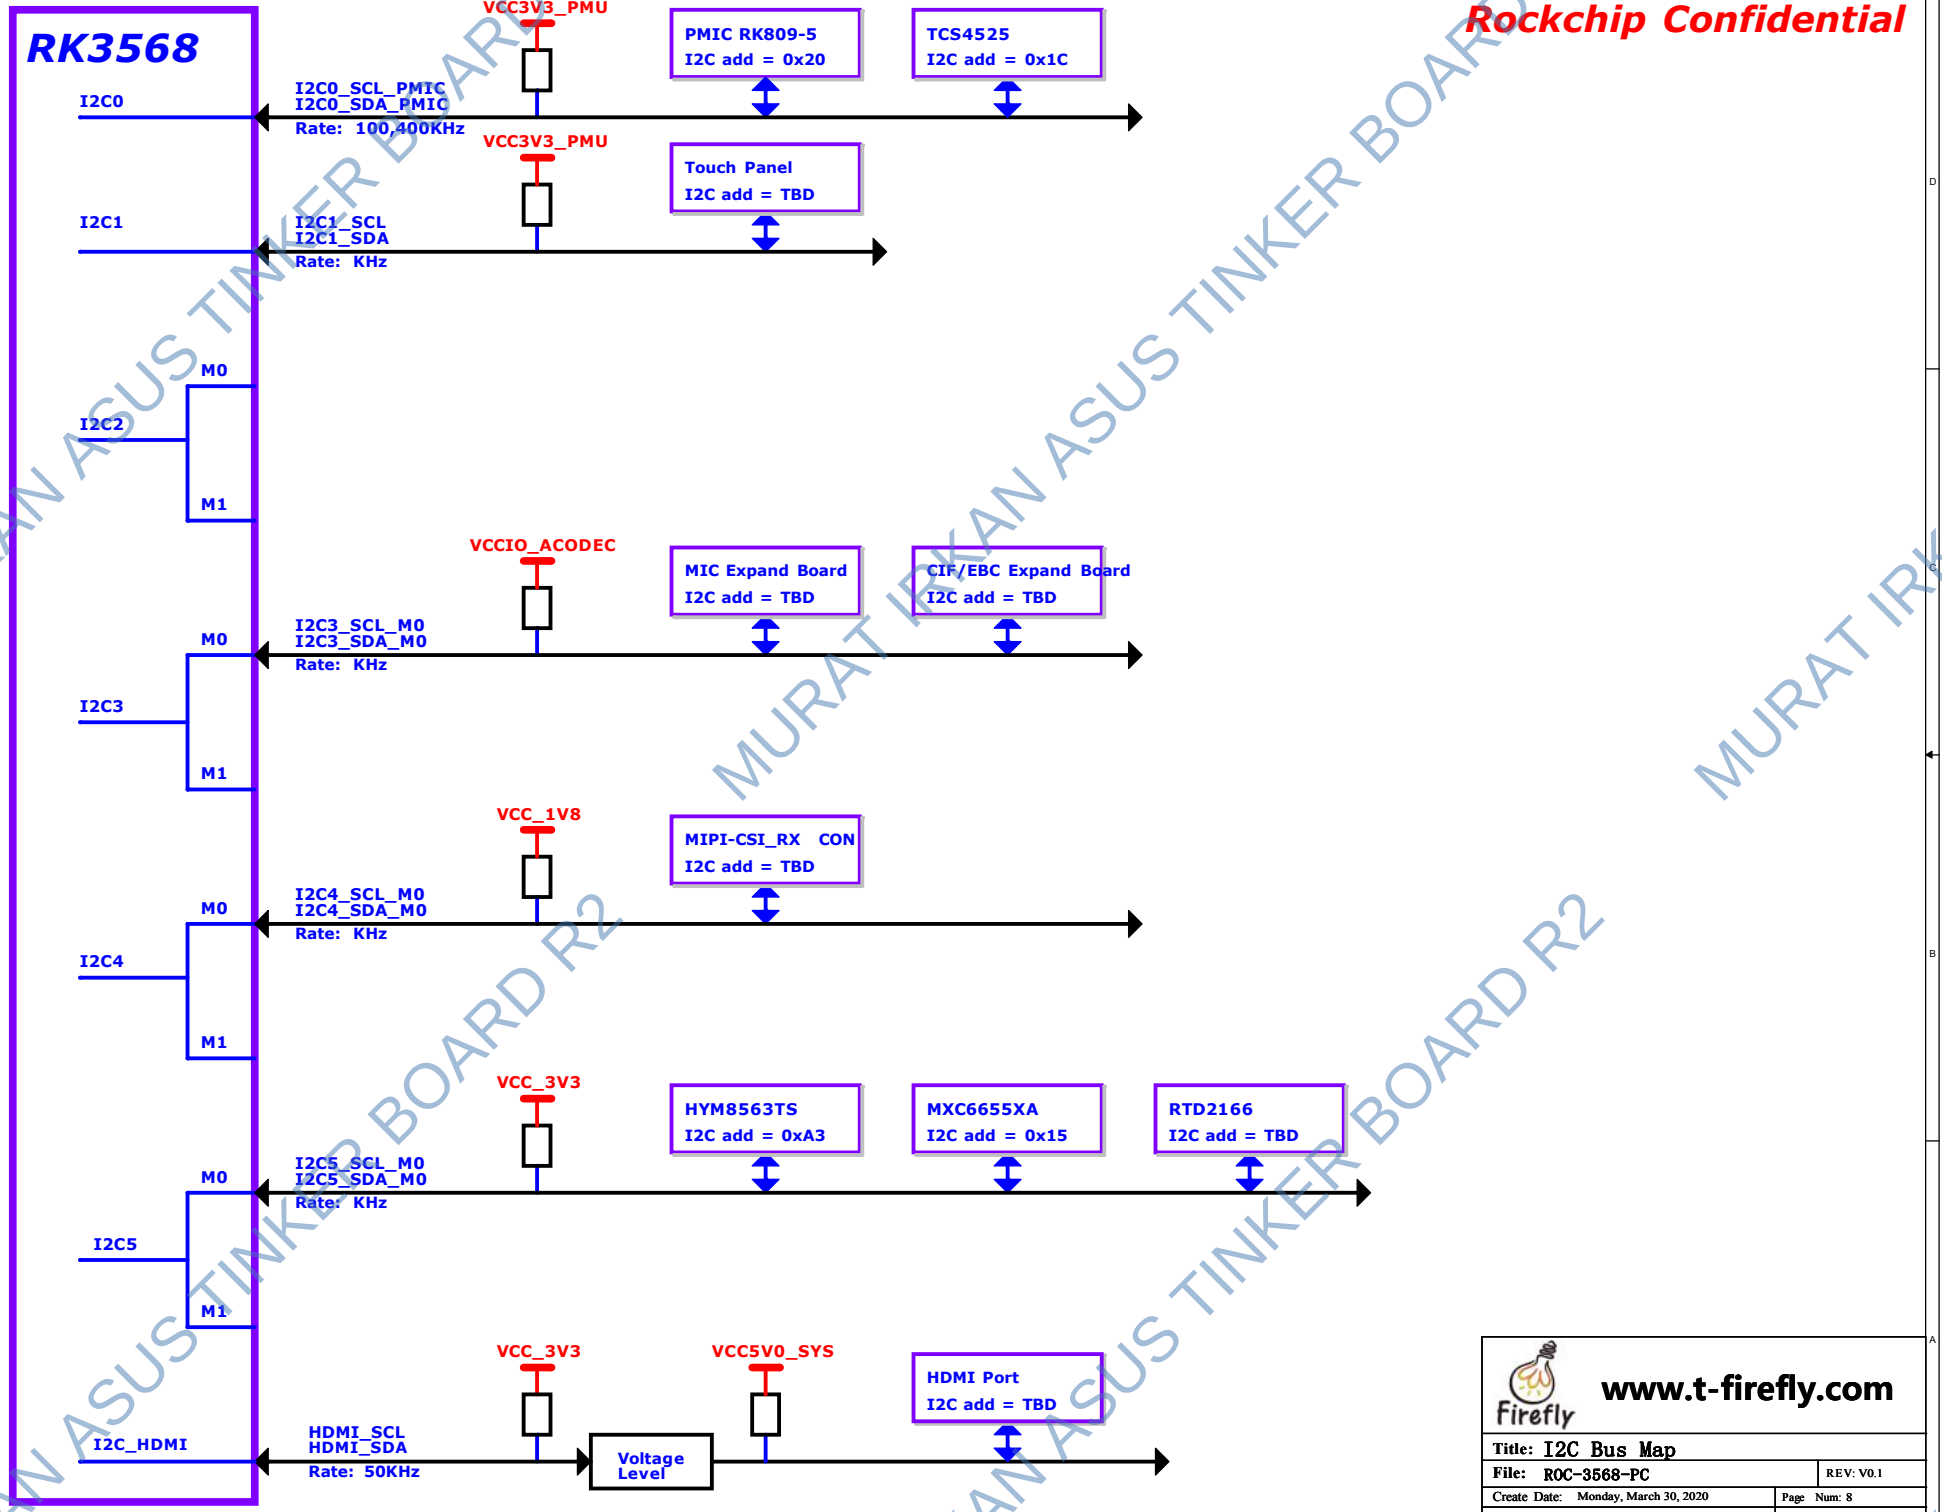

Firefly www.t-firefly.com

Title: I2C Bus Map		
File: ROC-3568-PC		REV: V0.1
Create Date: Monday, March 30, 2020	Page Num: 8	
Modify Date: Wednesday, May 19, 2021	Page Total: 45	

USB3.0 OTG0

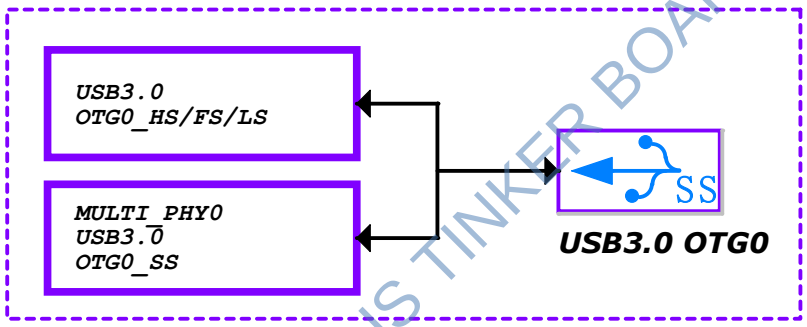

USB3.0 HOST1

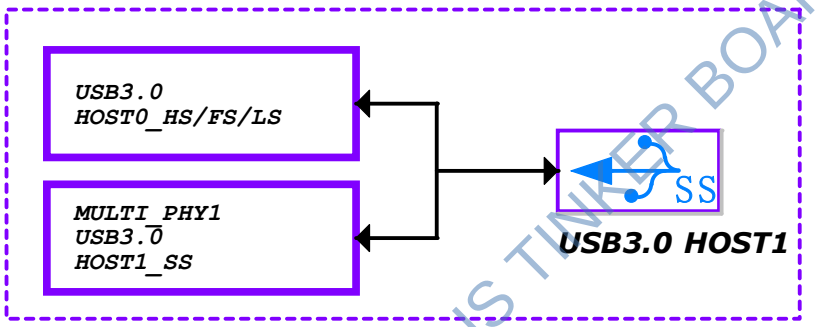

PCIe3.0 PHY

Option1	PCIe3.0 x2Lane	PCIE30_REFCLK (RC/EP:input)	PCIE30_TX0 PCIE30_RX0 PCIE30_TX1 PCIE30_RX1	PCIE30X2_CLKREQn PCIE30X2_WAKEn PCIE30X2_PERSTn PCIE30X2_BUTTONRSTn	RC or EP
Option2	PCIe3.0 x1Lane + PCIe3.0 x1Lane	PCIE30_REFCLK (RC:input)	PCIE30_TX0 PCIE30_RX0	PCIE30X2_CLKREQn PCIE30X2_WAKEn PCIE30X2_PERSTn PCIE30X2_BUTTONRSTn	Only RC
			PCIE30_TX1 PCIE30_RX1	PCIE30X1_CLKREQn PCIE30X1_WAKEn PCIE30X1_PERSTn PCIE30X1_BUTTONRSTn	Only RC

PCIe3.0 REFCLK

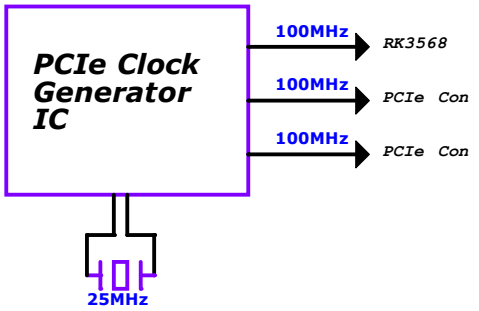

PCIe2.0 PHY

MULTI_ PHY2	PCIe2.0 x1Lane	PCIE20_REFCLK (RC:output)	PCIE20_TX PCIE20_RX	PCIE20_CLKREQn PCIE20_WAKEn PCIE20_PERSTn PCIE20_BUTTONRSTn	Only RC

PCIe2.0 REFCLK

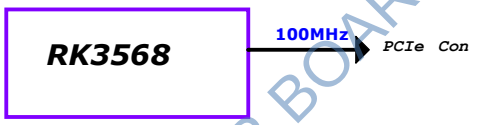

Firefly www.t-firefly.com

Title: USB3/PCIE30 Fun Map		
File: ROC-3568-PC		REV: V0.1
Create Date: Monday, March 30, 2020	Page Num: 9	
Modify Date: Wednesday, May 19, 2021	Page Total: 45	

RK3568_ABCDE (Power&Gnd)

RK3568 TINKER BOARD 3N

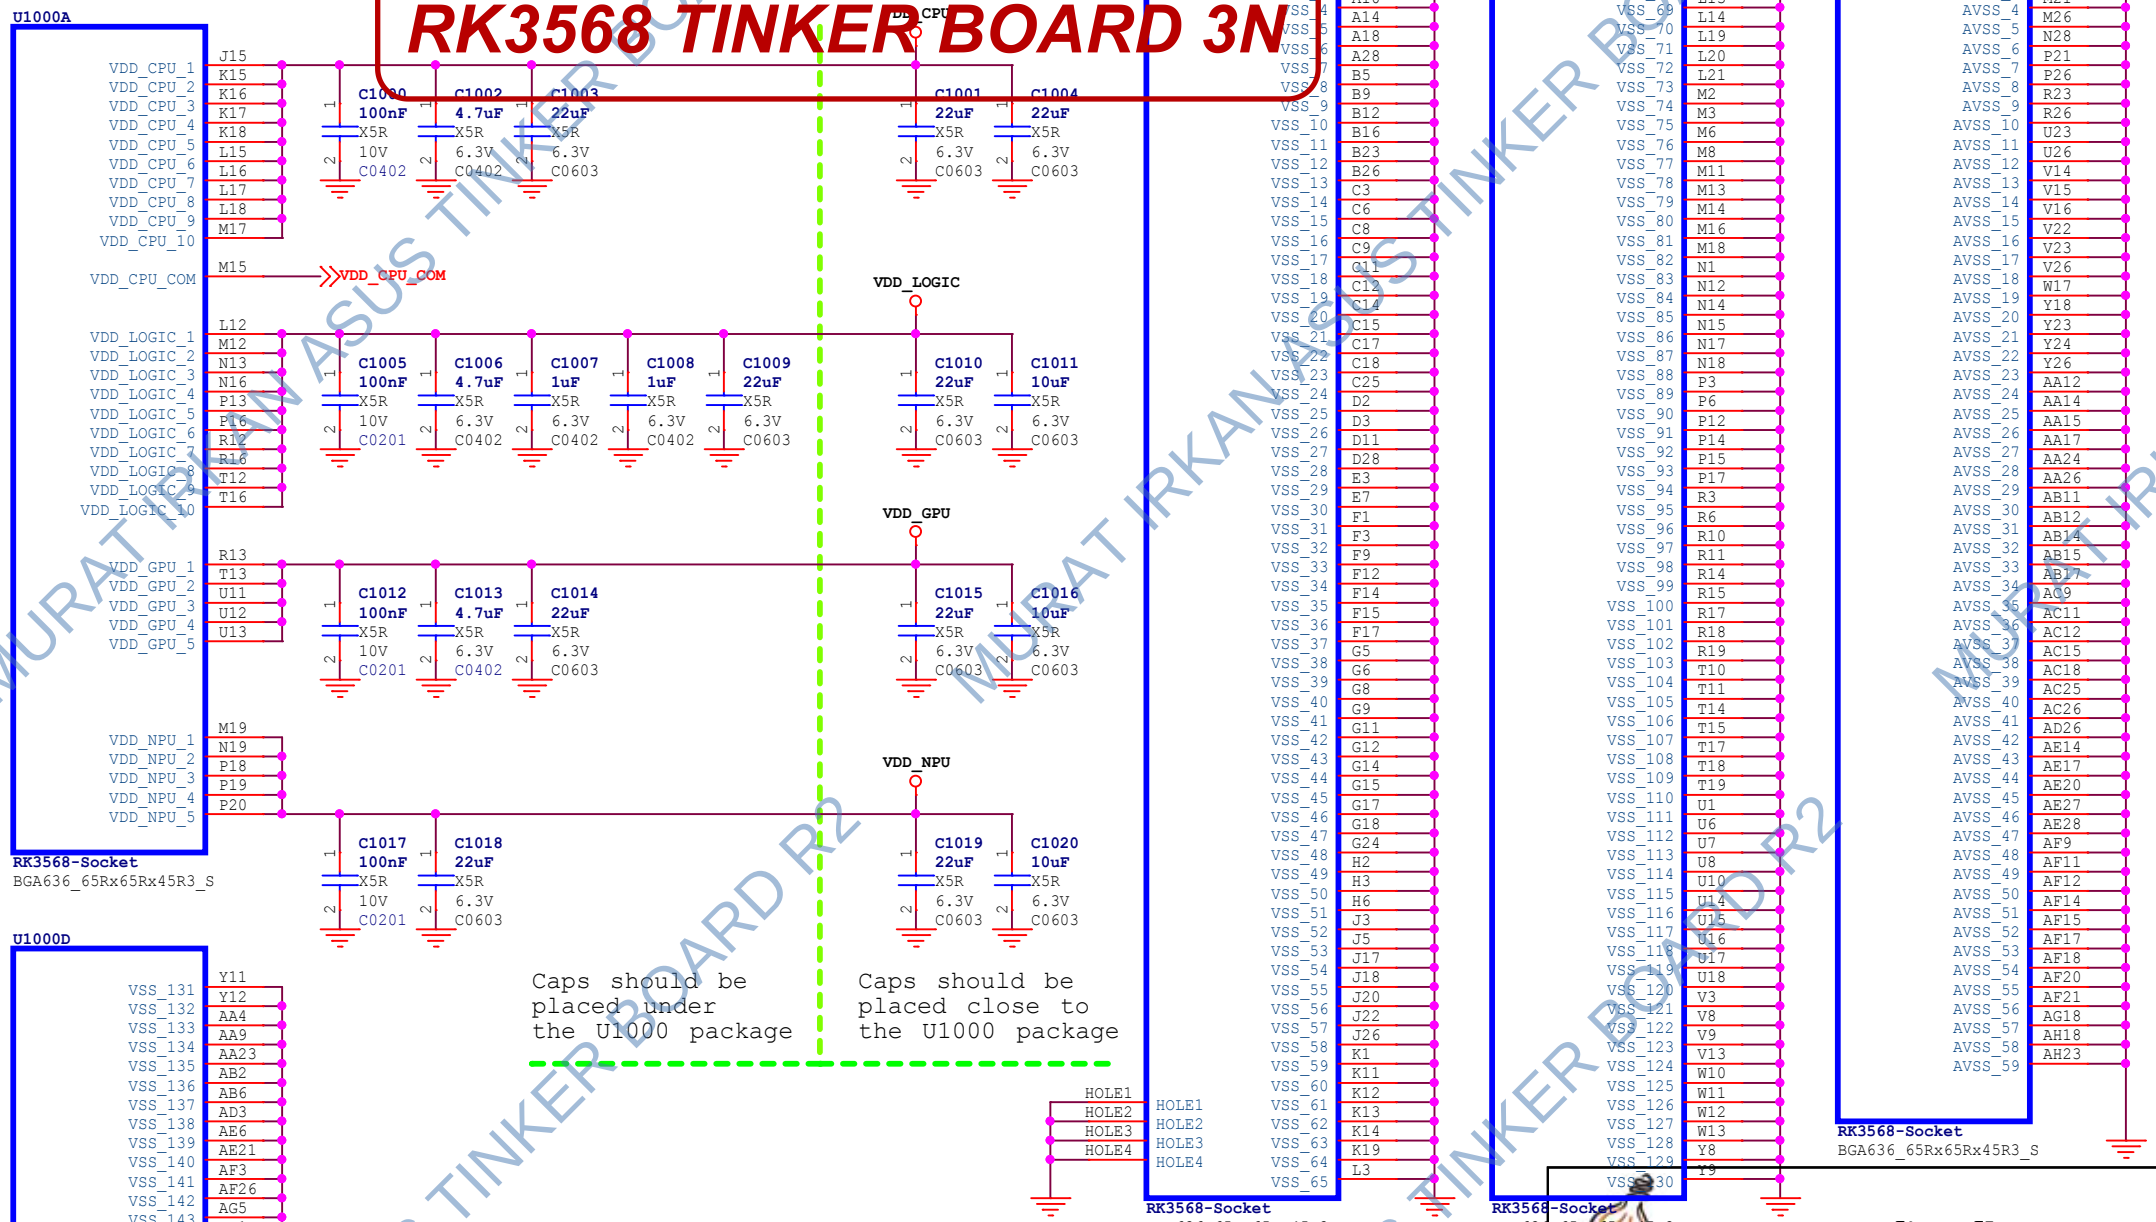

Rockchip Confidential

www.t-firefly.com

Title: RK3568_Power/GND		
File: ROC-3568-PC		REV: V0.1
Create Date: Monday, March 30, 2020	Page Num: 10	
Modify Date: Wednesday, May 19, 2021	Page Total: 45	

RK3568_F (DDR PHY)

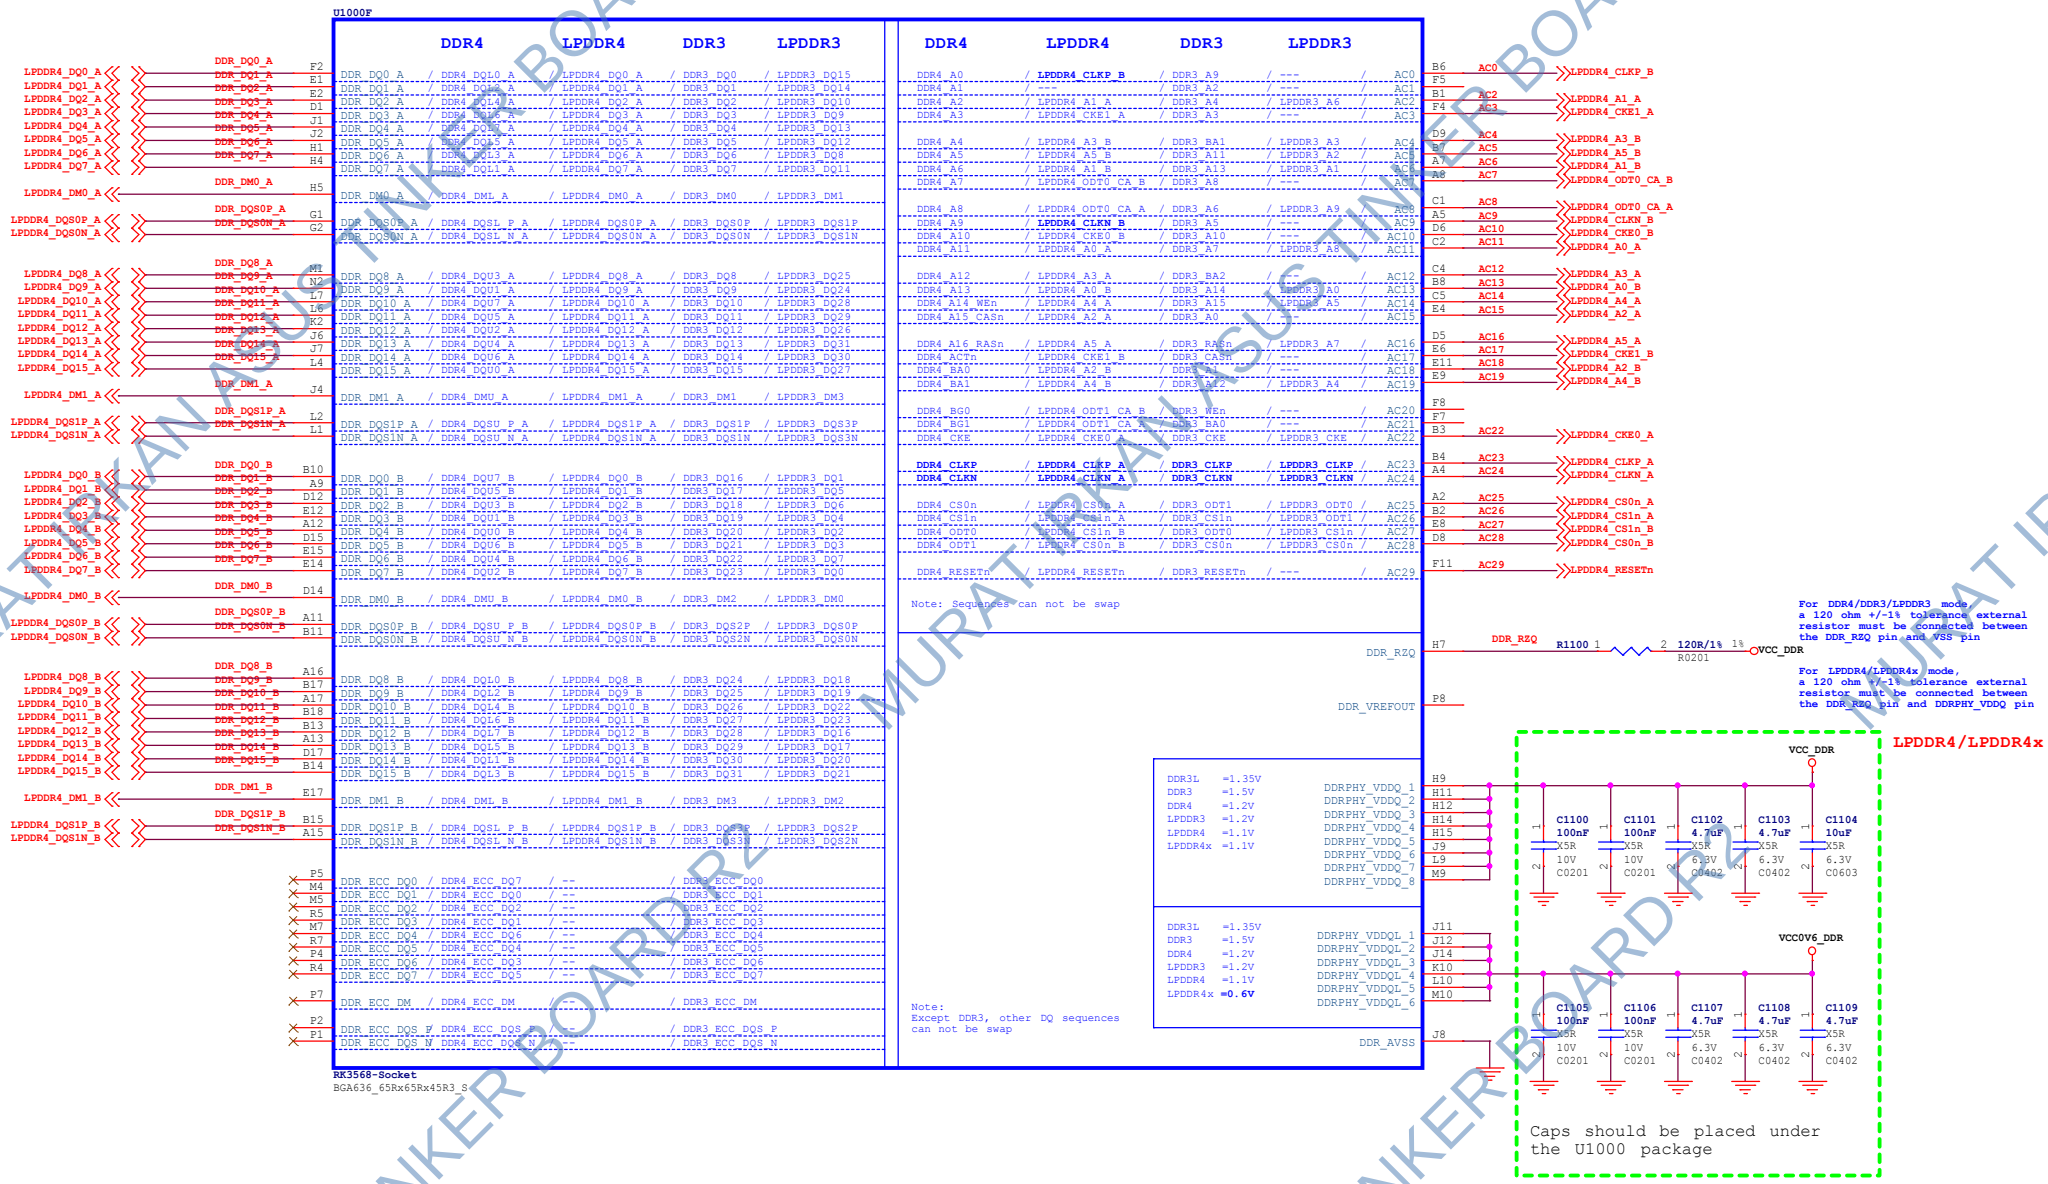

For DDR4/DDR3/LPDDR3 mode, a 120 ohm +/-1% tolerance external resistor must be connected between the DDR_RZQ pin and VSS pin

For LPDDR4/LPDDR4x mode, a 120 ohm +/-1% tolerance external resistor must be connected between the DDR_RZQ pin and DDRPHY_VDDQ pin

Title:	RK3568_DDR_PHY
File:	ROC-3568-PC
REV:	V0.1
Create Date:	Monday, March 30, 2020
Page Num:	11
Modify Date:	Wednesday, May 19, 2021
Page Total:	45

www.t-firefly.com

RK3568_G(OSC/PLL/PMUIO1/2)

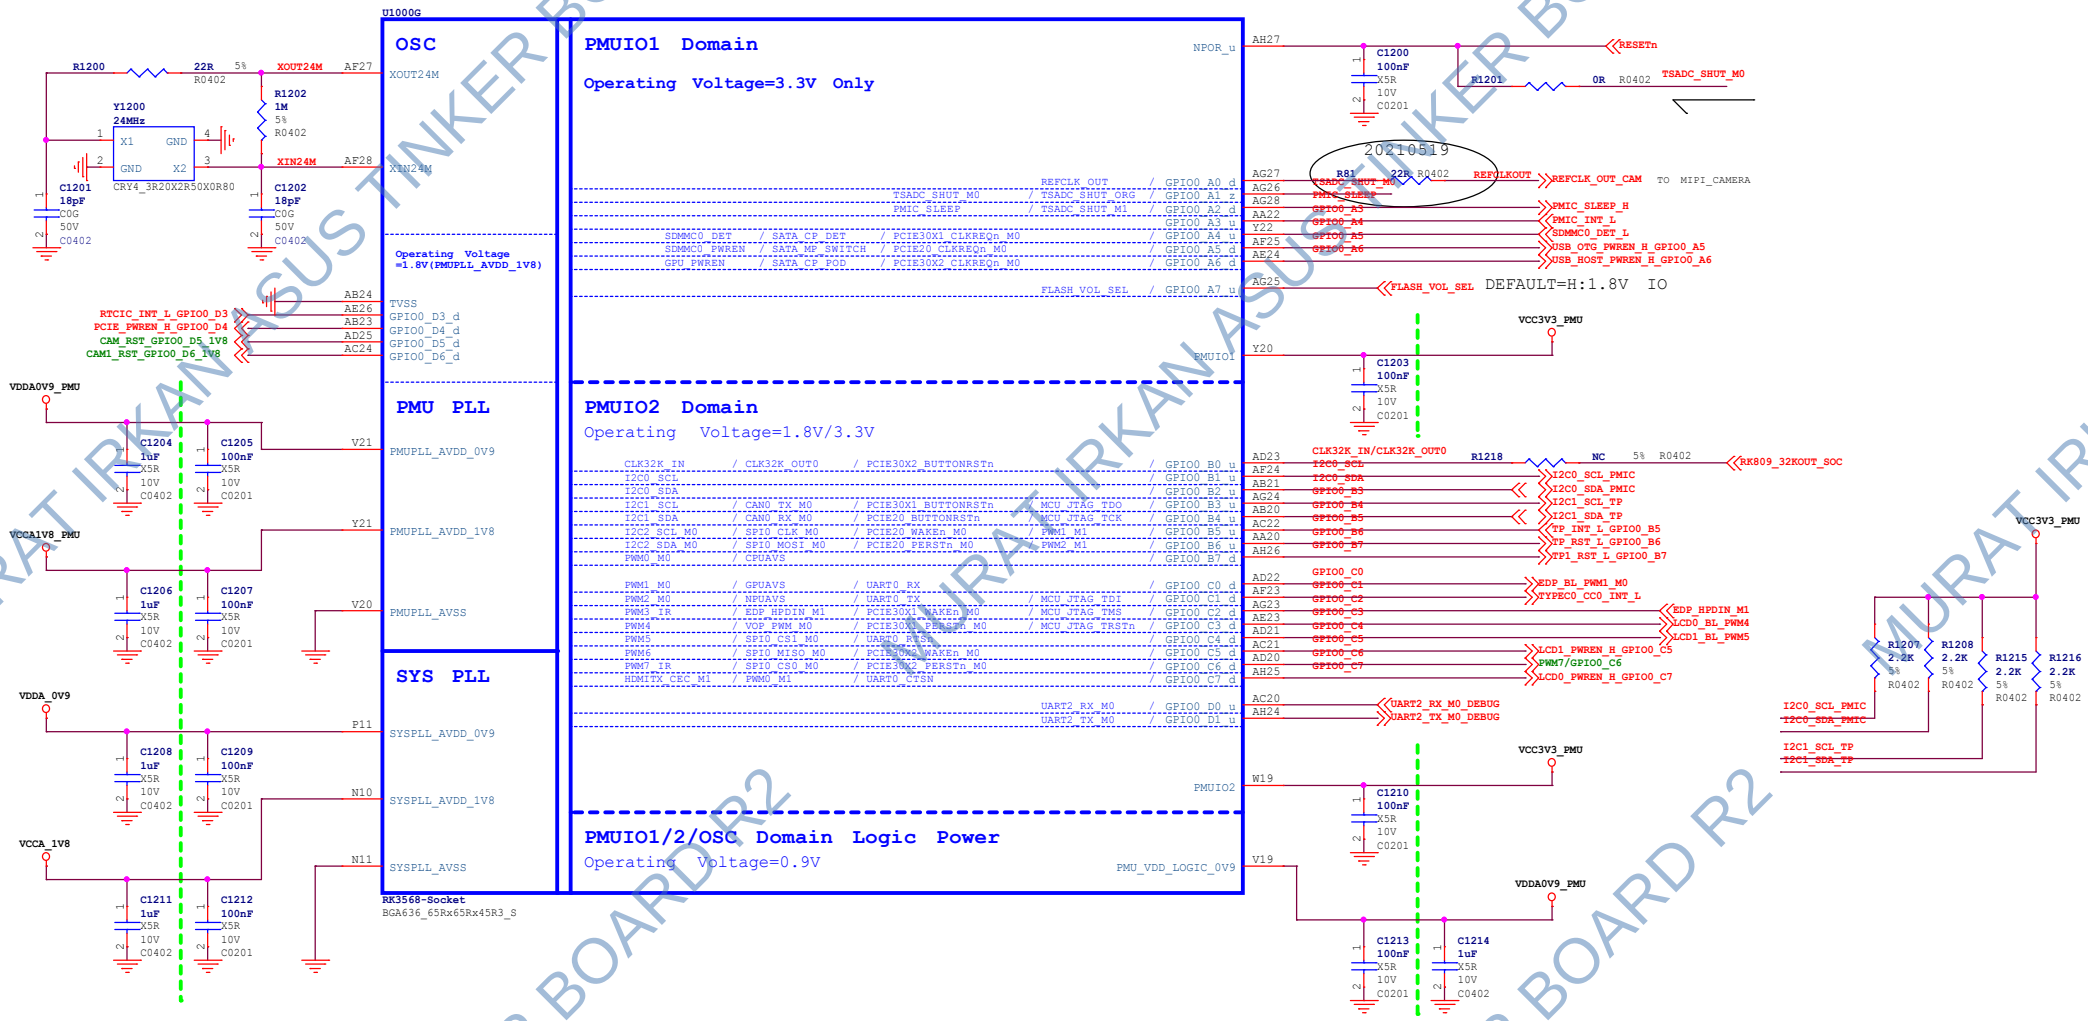

Note:
Caps of between dashed green lines and U1000 should be placed under the U1000 package.
Other caps should be placed close to the U1000 package

Rockchip Confidential

www.t-firefly.com

Title: RK3568_OSC/PLL/PMUIO		
File: ROC-3568-PC		REV: V0.1
Create Date: Monday, March 30, 2020	Page Num: 12	
Modify Date: Wednesday, May 19, 2021	Page Total: 45	

RK3568_I(VCCIO2 Domain)

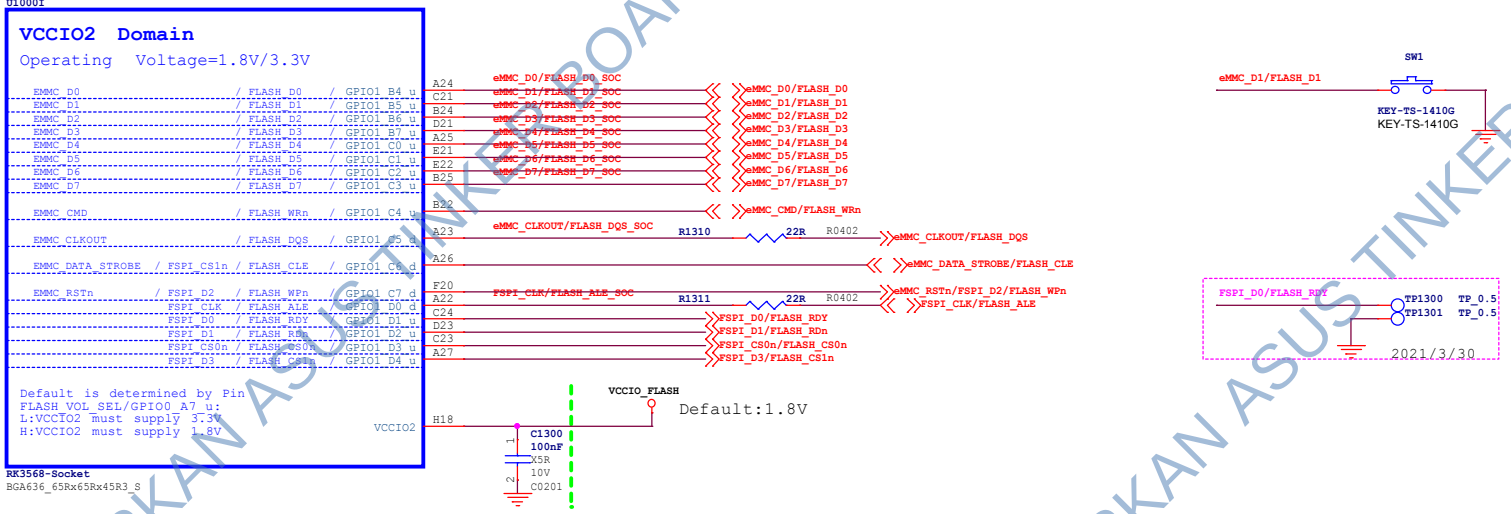

RK3568_J(VCCIO3 Domain)

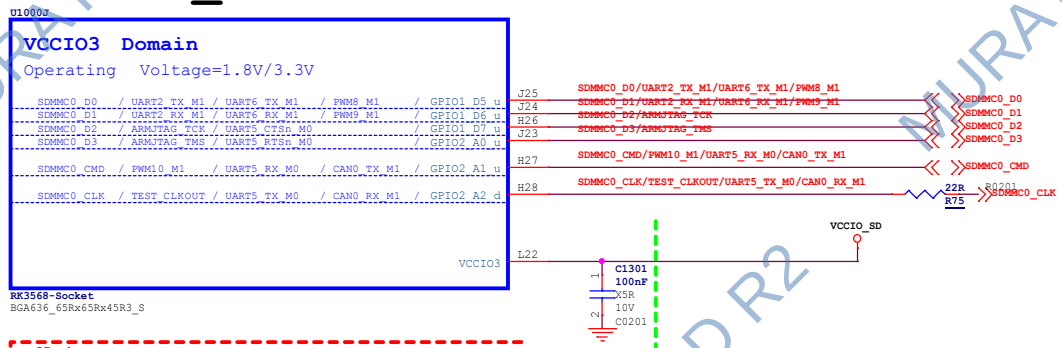

Note:

Caps of between dashed green lines and U1000 should be placed under the U1000 package

www.t-firefly.com

Title:	RK3568_Flash/SD Controller
File:	ROC-3568-PC
REV:	V0.1
Create Date:	Monday, March 30, 2020
Page Num:	13
Modify Date:	Wednesday, May 19, 2021
Page Total:	45

RK3568_U(USB3.0/SATA/QSGMII/PCIe2.0 x1)

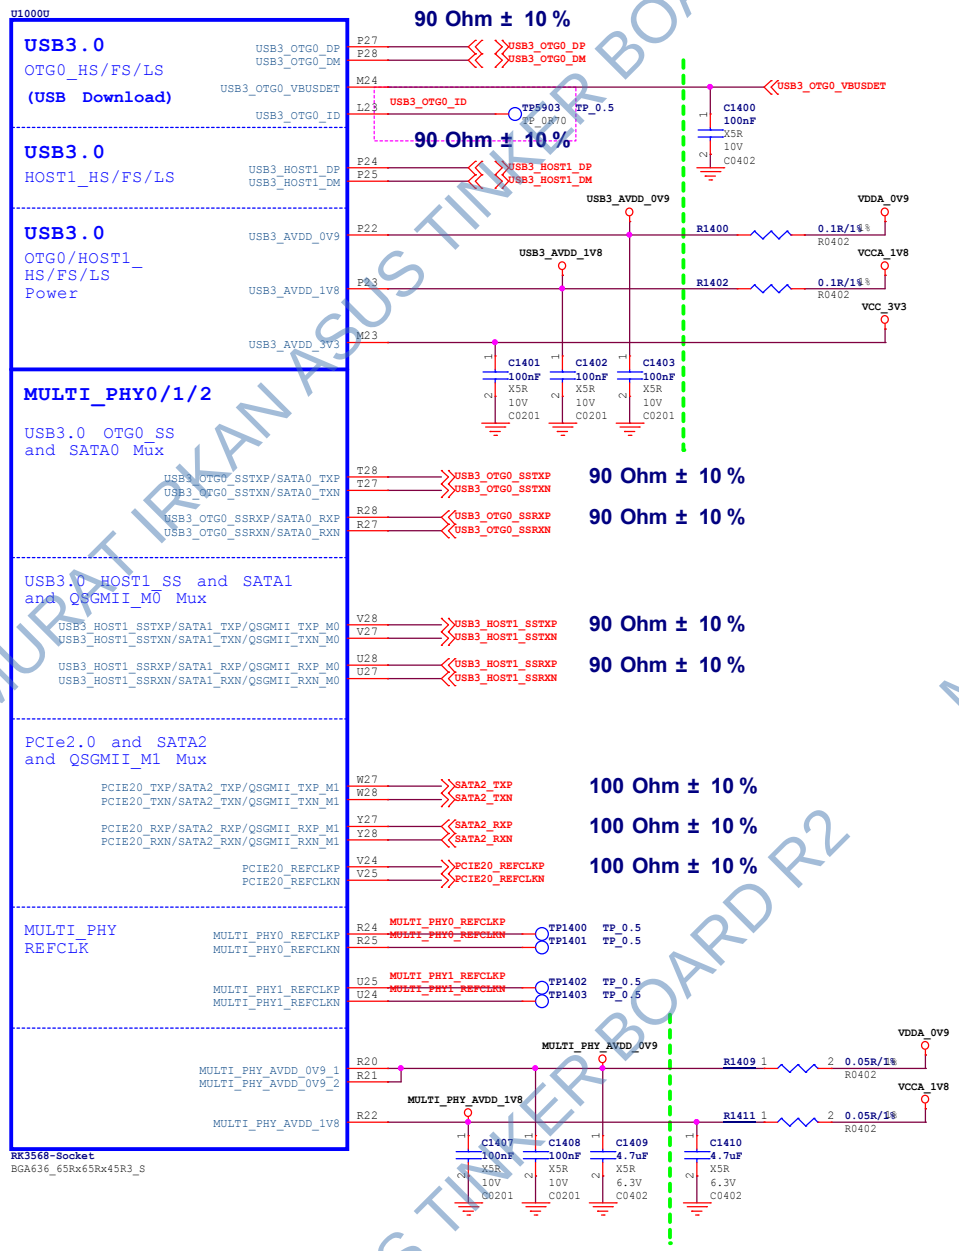

Note:
Caps of between dashed green lines and U1000 should be placed under the U1000 package.
Other caps should be placed close to the U1000 package

Rockchip Confidential

RK3568_V(USB2.0 HOST)

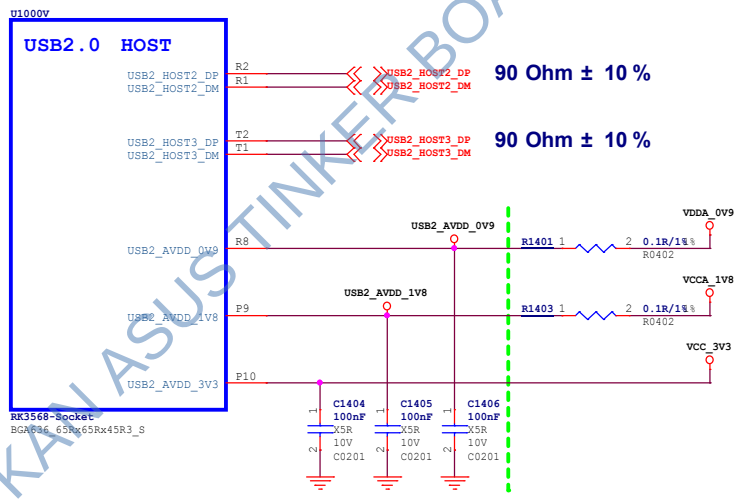

RK3568_W(PCIe3.0 x2)

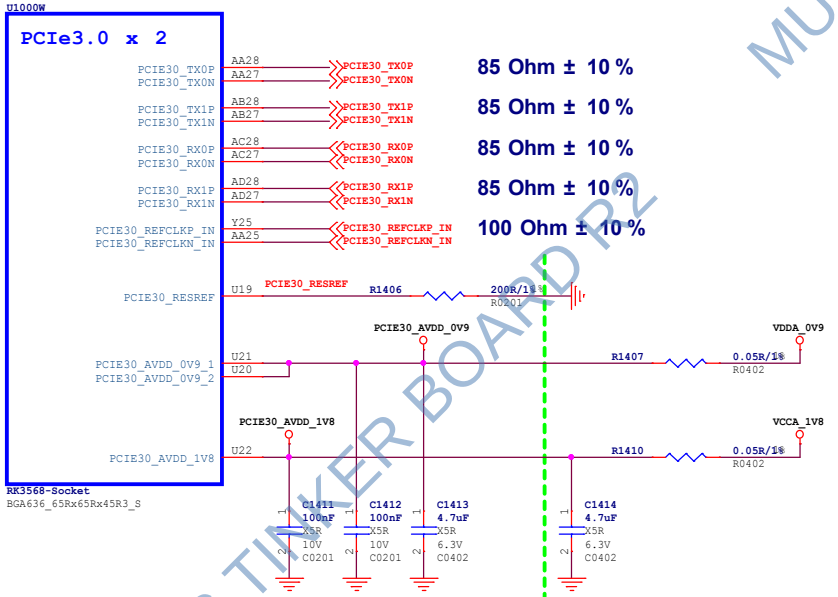

www.t-firefly.com

Title:	RK3568_USB/PCIe/SATA_PHY
File:	ROC-3568-PC
REV:	V0.1
Create Date:	Monday, March 30, 2020
Page Num:	14
Modify Date:	Wednesday, May 19, 2021
Page Total:	45

RK3568_K(VCCIO4 Domain)

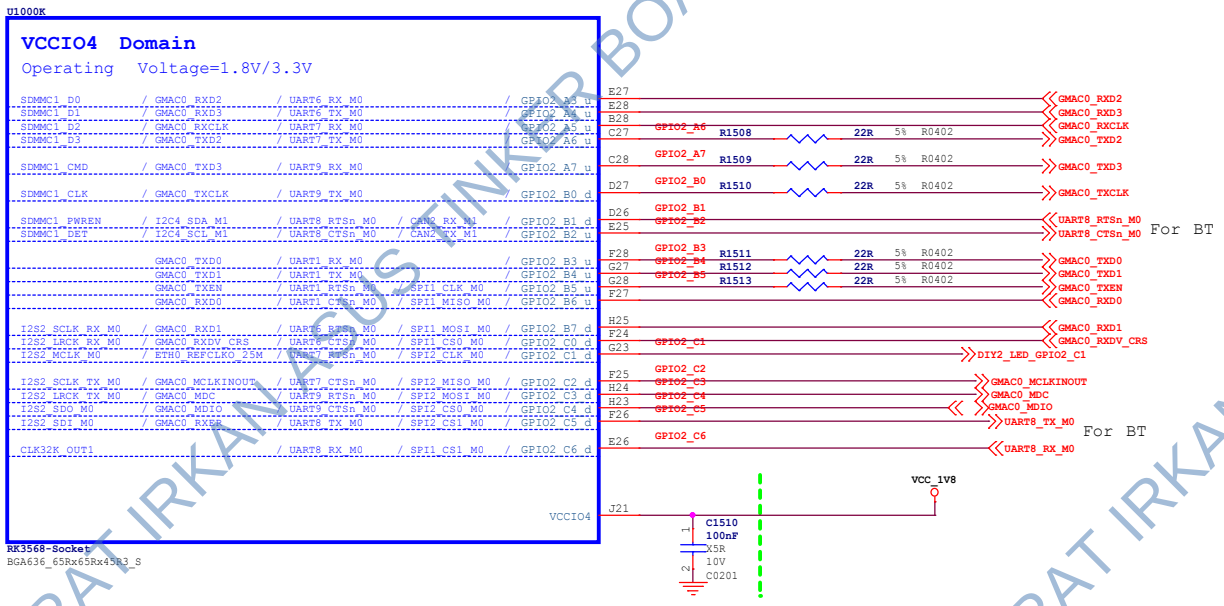

RK3568_N(VCCIO7 Domain)

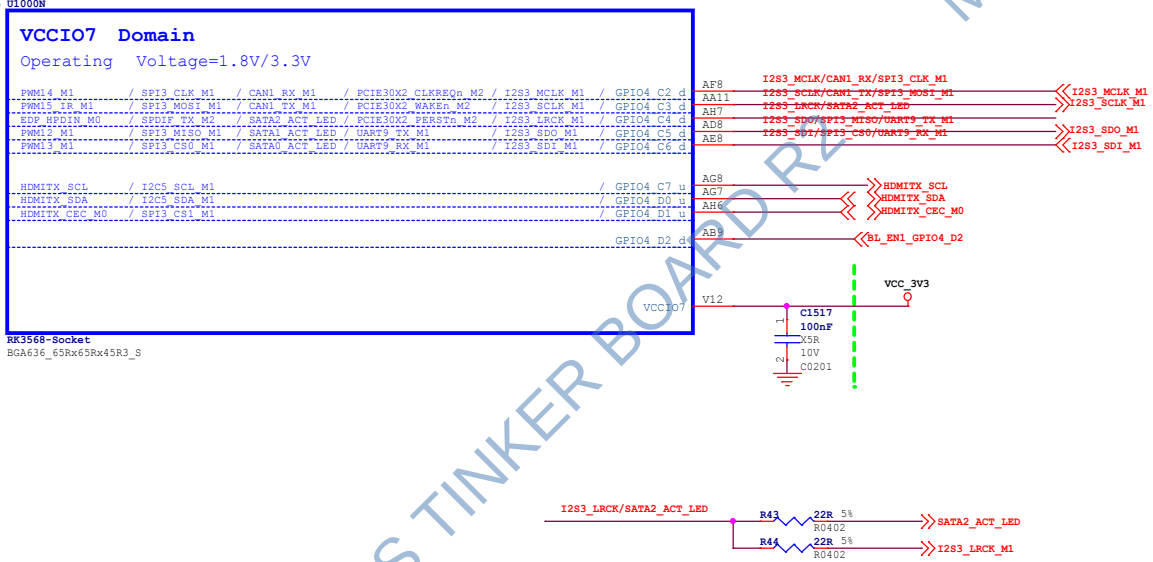

RK3568_O(SARADC/OTP)

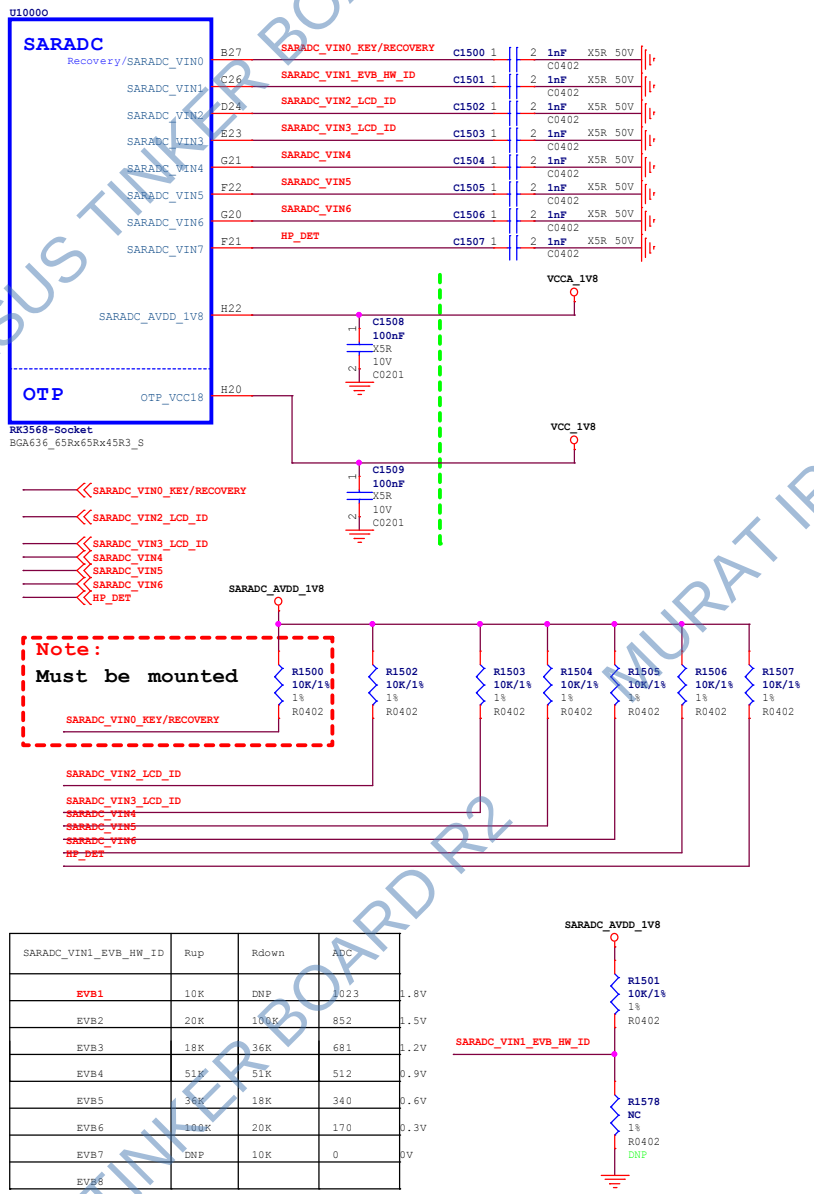

SARADC_VIN1_EVB_HW_ID	Rup	Rdown	ADC	
EVB1	10K	DNP	1023	1.8V
EVB2	20K	100K	852	1.5V
EVB3	18K	36K	681	1.2V
EVB4	51K	51K	512	0.9V
EVB5	36K	18K	340	0.6V
EVB6	100K	20K	170	0.3V
EVB7	DNP	10K	0	0V
EVB8				

Note:
Caps of between dashed green lines and U1000 should be placed under the U1000 package

www.t-firefly.com

Title:	RK3568_SARADC/GPIO	
File:	ROC-3568-PC	REV: V0.1
Create Date:	Monday, March 30, 2020	Page Num: 15
Modify Date:	Wednesday, May 19, 2021	Page Total: 45

RK3568_P(MIPI_CSI_RX)

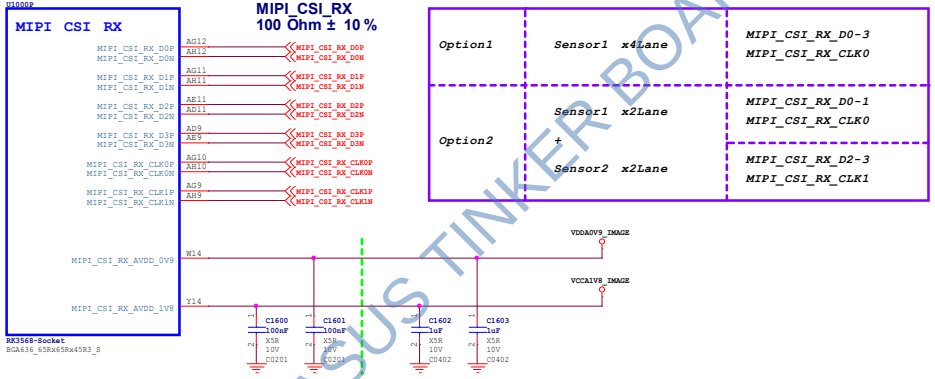

Option1	Sensor1 x4Lane	MIPI_CSI_RX_D0-3 MIPI_CSI_RX_CLK0
Option2	Sensor1 x2Lane + Sensor2 x2Lane	MIPI_CSI_RX_D0-1 MIPI_CSI_RX_CLK0 MIPI_CSI_RX_D2-3 MIPI_CSI_RX_CLK1

RK3568_M(VCCIO6 Domain)

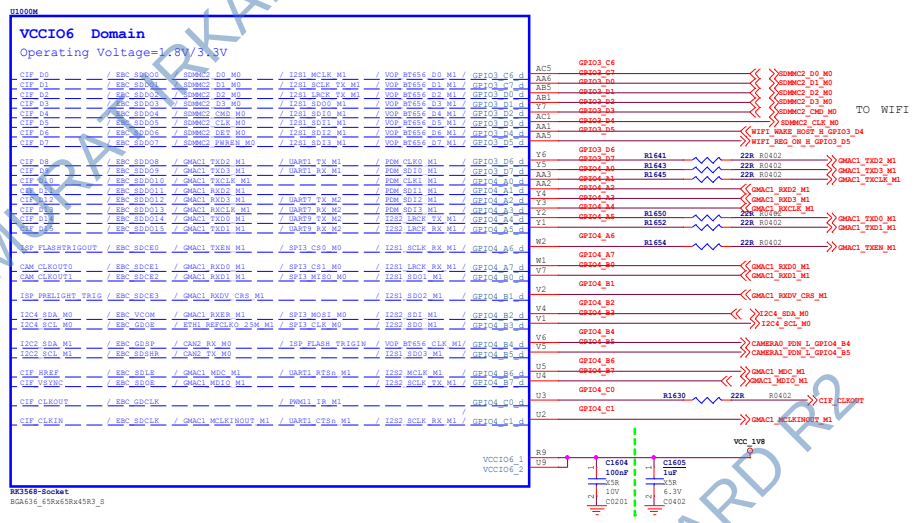

Mode	16bit	12bit	10bit	8bit
CIF_D0	D0	--	--	--
CIF_D1	D1	--	--	--
CIF_D2	D2	--	--	--
CIF_D3	D3	--	--	--
CIF_D4	D4	D0	--	--
CIF_D5	D5	D1	--	--
CIF_D6	D6	D2	D0	--
CIF_D7	D7	D3	D1	--
CIF_D8	D8	D4	D2	D0
CIF_D9	D9	D5	D3	D1
CIF_D10	D10	D6	D4	D2
CIF_D11	D11	D7	D5	D3
CIF_D12	D12	D8	D6	D4
CIF_D13	D13	D9	D7	D5
CIF_D14	D14	D10	D8	D6
CIF_D15	D15	D11	D9	D7

Support BT601 YCbCr 422 8bit input
Support BT656 YCbCr 422 8bit input
Support RAW 8/10/12bit input
Support BT1120 YCbCr 422 8/10/12/16bit input, single/dual-edge sampling
Support 2/4 mixed BT656/BT1120 YCbCr 422 8bit input

Note:
Caps of between dashed green lines and U1000 should be placed under the U1000 package.
Other caps should be placed close to the U1000 package

www.t-firefly.com

Title:	RK3568 VI Interface
File:	ROC-3568-PC
REV:	V0.1
Create Date:	Monday, March 30, 2020
Page Num:	16
Modify Date:	Wednesday, May 19, 2021
Page Total:	45

RK3568_R(MIPI_DSI_TX0/LVDS_TX0)

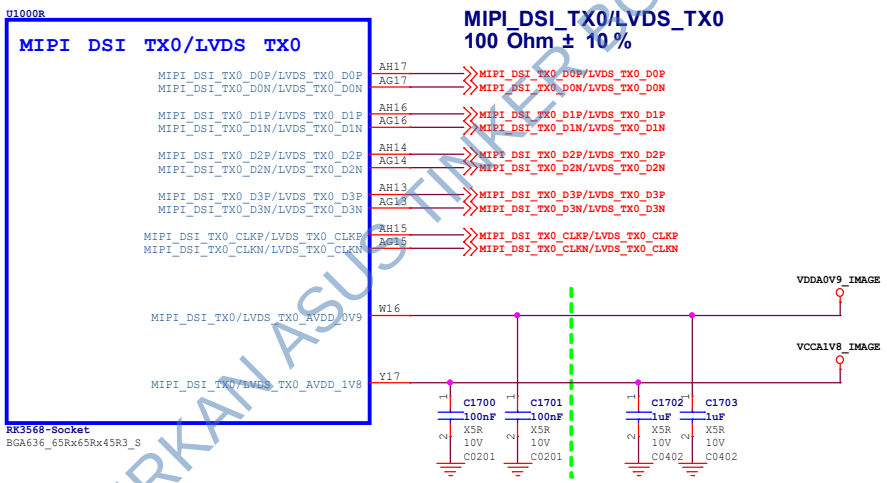

RK3568_S(MIPI_DSI_TX1)

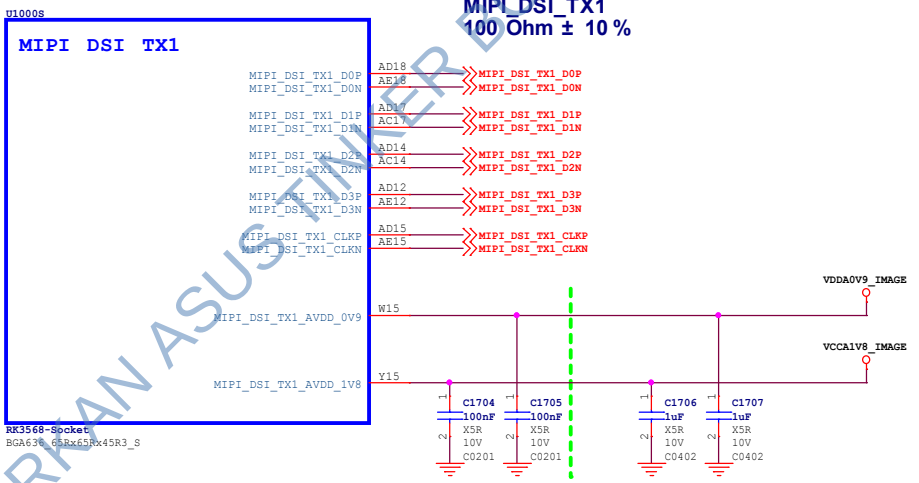

RK3568_T(eDP TX)

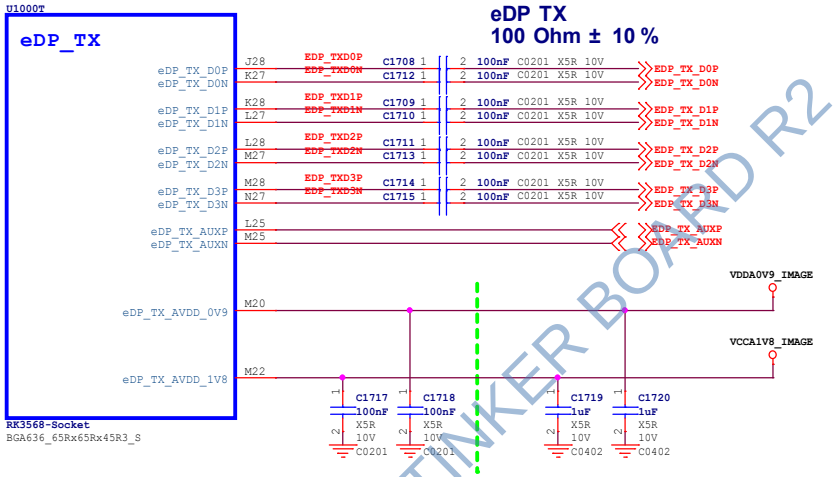

Note:
Caps of between dashed green lines and U1000 should be placed under the U1000 package.
Other caps should be placed close to the U1000 package

Rockchip Confidential

RK3568_Q(HDMI2.0 TX)

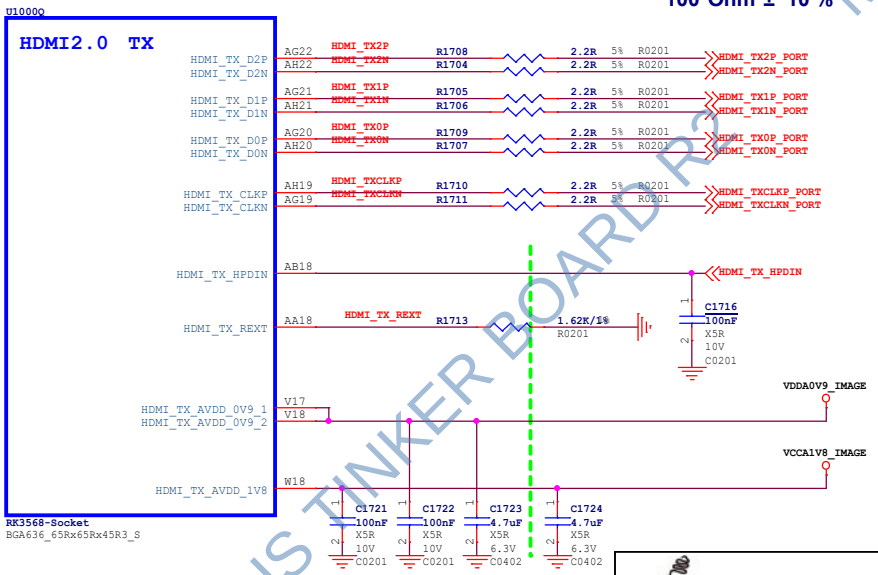

www.t-firefly.com

Title: RK3568_V0 Interface_1		
File: ROC-3568-PC		REV: V0.1
Create Date: Monday, March 30, 2020	Page:	Num: 17
Modify Date: Wednesday, May 19, 2021	Page:	Total: 45

RK3568_L(VCCIO5 Domain)

U1000L

VCCIO5 Domain

Operating Voltage=1.8V/3.3V

LCDC_D0	/ VOP_BT656_D0_M0	/ SPI0_MISO_M1	/ PCIE20_CLKREQn_M1	/ I2S1_MCLK_M2	/ GPIO2_D0_d
LCDC_D1	/ VOP_BT656_D1_M0	/ SPI0_MOSI_M1	/ PCIE20_WAKEn_M1	/ I2S1_SCLK_TX_M2	/ GPIO2_D1_d
LCDC_D2	/ VOP_BT656_D2_M0	/ SPI0_CS0_M1	/ PCIE30X1_CLKREQn_M1	/ I2S1_LRCK_TX_M2	/ GPIO2_D2_d
LCDC_D3	/ VOP_BT656_D3_M0	/ SPI0_CLK_M1	/ PCIE30X1_WAKEn_M1	/ I2S1_SDI0_M2	/ GPIO2_D3_d
LCDC_D4	/ VOP_BT656_D4_M0	/ SPI2_CS1_M1	/ PCIE30X2_CLKREQn_M1	/ I2S1_SDI1_M2	/ GPIO2_D4_d
LCDC_D5	/ VOP_BT656_D5_M0	/ SPI2_CS0_M1	/ PCIE30X2_WAKEn_M1	/ I2S1_SDI2_M2	/ GPIO2_D5_d
LCDC_D6	/ VOP_BT656_D6_M0	/ SPI2_MOSI_M1	/ PCIE30X2_PERSTn_M1	/ I2S1_SDI3_M2	/ GPIO2_D6_d
LCDC_D7	/ VOP_BT656_D7_M0	/ SPI2_MISO_M1	/ UART8_TX_M1	/ I2S1_SDO0_M2	/ GPIO2_D7_d
LCDC_CLK	/ VOP_BT656_CLK_M0	/ SPI2_CLK_M1	/ UART8_RX_M1	/ I2S1_SDO1_M2	/ GPIO3_A0_d
LCDC_D8	/ VOP_BT1120_D0	/ SPI1_CS0_M1	/ PCIE30X1_PERSTn_M1	/ SDMMC2_D0_M1	/ GPIO3_A1_d
LCDC_D9	/ VOP_BT1120_D1	/ GMAC1_TXD2_M0	/ I2S3_MCLK_M0	/ SDMMC2_D1_M1	/ GPIO3_A2_d
LCDC_D10	/ VOP_BT1120_D2	/ GMAC1_TXD3_M0	/ I2S3_SCLK_M0	/ SDMMC2_D2_M1	/ GPIO3_A3_d
LCDC_D11	/ VOP_BT1120_D3	/ GMAC1_RXD2_M0	/ I2S3_LRCK_M0	/ SDMMC2_D3_M1	/ GPIO3_A4_d
LCDC_D12	/ VOP_BT1120_D4	/ GMAC1_RXD3_M0	/ I2S3_SDO_M0	/ SDMMC2_CMD_M1	/ GPIO3_A5_d
LCDC_D13	/ VOP_BT1120_CLK	/ GMAC1_TXCLK_M0	/ I2S3_SDI_M0	/ SDMMC2_CLK_M1	/ GPIO3_A6_d
LCDC_D14	/ VOP_BT1120_D5	/ GMAC1_RXCLK_M0		/ SDMMC2_DET_M1	/ GPIO3_A7_d
LCDC_D15	/ VOP_BT1120_D6	/ ETH1_REFCLKO_25M_M0		/ SDMMC2_PWREN_M1	/ GPIO3_B0_d
LCDC_D16	/ VOP_BT1120_D7	/ GMAC1_RXD0_M0	/ UART4_RX_M1	/ PWM8_M0	/ GPIO3_B1_d
LCDC_D17	/ VOP_BT1120_D8	/ GMAC1_RXD1_M0	/ UART4_TX_M1	/ PWM9_M0	/ GPIO3_B2_d
LCDC_D18	/ VOP_BT1120_D9	/ GMAC1_RXDV_CRS_M0	/ I2C5_SCL_M0	/ PDM_SDI0_M2	/ GPIO3_B3_d
LCDC_D19	/ VOP_BT1120_D10	/ GMAC1_RXER_M0	/ I2C5_SDA_M0	/ PDM_SDI1_M2	/ GPIO3_B4_d
LCDC_D20	/ VOP_BT1120_D11	/ GMAC1_TXD0_M0	/ I2C3_SCL_M1	/ PWM10_M0	/ GPIO3_B5_d
LCDC_D21	/ VOP_BT1120_D12	/ GMAC1_TXD1_M0	/ I2C3_SDA_M1	/ PWM11_IR_M0	/ GPIO3_B6_d
LCDC_D22	/ PWM12_M0	/ GMAC1_TXEN_M0	/ UART3_TX_M1	/ PDM_SDI2_M2	/ GPIO3_B7_d
LCDC_D23	/ PWM13_M0	/ GMAC1_MCLKINOUT_M0	/ UART3_RX_M1	/ PDM_SDI3_M2	/ GPIO3_C0_d
LCDC_HSYNC	/ VOP_BT1120_D13	/ SPI1_MOSI_M1	/ PCIE20_PERSTn_M1	/ I2S1_SDO2_M2	/ GPIO3_C1_d
LCDC_VSYNC	/ VOP_BT1120_D14	/ SPI1_MISO_M1	/ UART5_TX_M1	/ I2S1_SDO3_M2	/ GPIO3_C2_d
LCDC_DEN	/ VOP_BT1120_D15	/ SPI1_CLK_M1	/ UART5_RX_M1	/ I2S1_SCLK_RX_M2	/ GPIO3_C3_d
PWM14_M0	/ VOP_PWM_M1	/ GMAC1_MDC_M0	/ UART7_TX_M1	/ PDM_CLK1_M2	/ GPIO3_C4_d
PWM15_IR_M0	/ SPDIF_TX_M1	/ GMAC1_MDIO_M0	/ UART7_RX_M1	/ I2S1_LRCK_RX_M2	/ GPIO3_C5_d

VCCIO5_1
VCCIO5_2

RK3568-Socket
BGA636_65Rx65Rx45R3_S

AG6 GMAC1_INT/PMEB_GPIO2_D0
AD7 GMAC1_RSTn_GPIO2_D1
AC8 GMAC0_INT/PMEB_GPIO2_D2
AC7 GMAC0_RSTn_GPIO2_D3
AF5 PCIE30X2_CLKREQn_M1
AF6 PCIE30X2_WAKEn_M1
AD6 PCIE30X2_PERSTn_M1
AH5 TP1_INT_GPIO2_D7_3V3

AH4 BT_REG_ON_H_GPIO3_A0
AB8 BT_WAKE_HOST_H_GPIO3_A1
AE5 HOST_WAKE_BT_H_GPIO3_A2
AG4 I2S3_SCLK_M0
AF4 I2S3_LRCK_M0
AH3 I2S3_SDO_M0
AG3 I2S3_SDI_M0
for BT

AH2 PCIECLKIC_OE_H_GPIO3_A7
AG2 BL_EN0_GPIO3_B0

AG1 UART4_RX_M1
AF2 UART4_TX_M1
AF1 I2C5_SCL_M0
AE1 I2C5_SDA_M0
AE2 LCD0_RST_GPIO3_B5
AE3 LCD1_RST_GPIO3_B6
AD4 UART3_TX_M1
AD2 UART3_RX_M1

AD1 GSENSOR_INT_L_GPIO3_C1
AA7 USB30_SW_GPIO3_C2
AC4 EDP_BL_EN

AC3 UART7_TX_M1/PWM14_M0
AC2 UART7_RX_M1/SPDIF_TX_M1 PWM14_M0 SPDIF_TX_M1

V10
V11
C1800 100nF X5R 10V C0201
C1801 1uF X5R 6.3V C0402 DNP
VCC_3V3

VCC_3V3
R1800 10K 5% R0402
R1801 10K 5% R0402
GMAC1_INT/PMEB_GPIO2_D0
GMAC0_INT/PMEB_GPIO2_D2
od

VCC_3V3
R1802 2.2K 5% R0402
R1803 2.2K 5% R0402
I2C5_SCL_M0
I2C5_SDA_M0

Note:
Caps of between dashed green lines and U1000 should be placed under the U1000 package

Rockchip Confidential

www.t-firefly.com

Title: RK3568_V0_Interface_2		
File: ROC-3568-PC		REV: V0.1
Create Date: Wednesday, May 06, 2020	Page Num: 18	
Modify Date: Wednesday, May 19, 2021	Page Total: 45	

RK3568_H(VCCIO1 Domain)

U1000H

VCCIO1 Domain

Operating Voltage=1.8V/3.3V

I2C3_SDA_M0	/ UART3_RX_M0	/ CAN1_RX_M0	/ AUDIOPWM_LOUT_P	/ ACODEC_ADC_DATA	/ GPIO1_A0_u
I2C3_SCL_M0	/ UART3_TX_M0	/ CAN1_TX_M0	/ AUDIOPWM_LOUT_N	/ ACODEC_ADC_CLK	/ GPIO1_A1_u
I2S1_MCLK_M0	/ UART3_RTSn_M0	/ SCR_CLK	/ PCIE30X1_PERSTn_M2		/ GPIO1_A2_d
I2S1_SCLK_TX_M0	/ UART3_CTSn_M0	/ SCR_IO	/ PCIE30X1_WAKEn_M2	/ ACODEC_DAC_CLK	/ GPIO1_A3_d
I2S1_SCLK_RX_M0	/ UART4_RX_M0	/ PDM_CLK1_M0	/ SPDIF_TX_M0		/ GPIO1_A4_d
I2S1_LRCK_TX_M0	/ UART4_RTSn_M0	/ SCR_RST	/ PCIE30X1_CLKREQn_M2	/ ACODEC_DAC_SYNC	/ GPIO1_A5_d
I2S1_LRCK_RX_M0	/ UART4_TX_M0	/ PDM_CLK0_M0	/ AUDIOPWM_ROUT_P		/ GPIO1_A6_d
I2S1_SDO0_M0	/ UART4_CTSn_M0	/ SCR_DET	/ AUDIOPWM_ROUT_N	/ ACODEC_DAC_DATAL	/ GPIO1_A7_d
I2S1_SDO1_M0	/ I2S1_SDI3_M0	/ PDM_SDI3_M0	/ PCIE20_CLKREQn_M2	/ ACODEC_DAC_DATAR	/ GPIO1_B0_d
I2S1_SDO2_M0	/ I2S1_SDI2_M0	/ PDM_SDI2_M0	/ PCIE20_WAKEn_M2	/ ACODEC_ADC_SYNC	/ GPIO1_B1_d
I2S1_SDO3_M0	/ I2S1_SDI1_M0	/ PDM_SDI1_M0	/ PCIE20_PERSTn_M2		/ GPIO1_B2_d
	I2S1_SDI0_M0	/ PDM_SDI0_M0			/ GPIO1_B3_d

VCCIO1

RK3568-Socket

BGA636_65Rx65Rx45R3_S

Default:RK809+PDM MIC

D18 I2C3_SDA → I2C3_SDA_M0
E18 I2C3_SCL → I2C3_SCL_M0
A19 I2S1_MCLK_M0 → I2S1_MCLK_M0_RK809
B19 I2S1_SCLK_TX_M0 → I2S1_SCLK_TX_M0_RK809
F18 I2S1_SCLK_RX_M0/PDM_CLK1_M0/GPIO1_A4 → HUB_RST_GPIO1_A4_d
A20 I2S1_LRCK_TX_M0 → I2S1_LRCK_TX_M0_RK809
C20 I2S1_LRCK_RX_M0/PDM_CLK0_M0 → PDM_CLK0_M0_RK809
B20 I2S1_SDO0_M0 → I2S1_SDO0_M0_RK809
D20 GPIO1_B0 → DIY1_LED_GPIO1_B0
E20 GPIO1_B1 → WORK_LED_GPIO1_B1
A21 GPIO1_B2 → DIY_LED_GPIO1_B2
B21 I2S1_SDI0_M0/PDM_SDI0_M0 → I2S1_SDI0_M0/PDM_SDI0_M0_RK809

VCCIO_ACODEC

H17 — C1900 100nF X5R 10V C0201

VCCIO_ACODEC

R1905 2.2K 5% R0402 — R1906 2.2K 5% R0402

I2C3_SDA_M0
I2C3_SCL_M0

Note:
Caps of between dashed green lines and U1000 should be placed under the U1000 package

Rockchip Confidential

www.t-firefly.com

Title: RK3568 Audio Interface		
File: ROC-3568-PC		REV: V0.1
Create Date: Monday, March 30, 2020	Page Num: 19	
Modify Date: Wednesday, May 19, 2021	Page Total: 45	

12V/3A DCIN

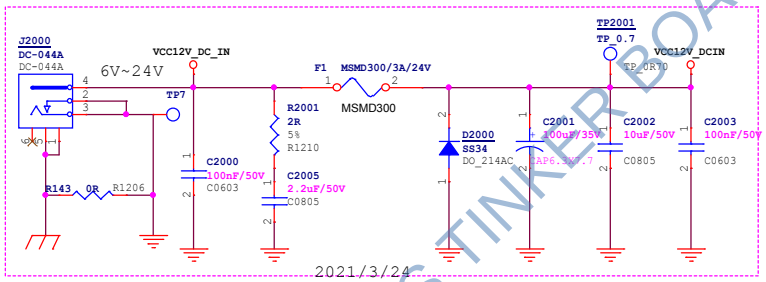

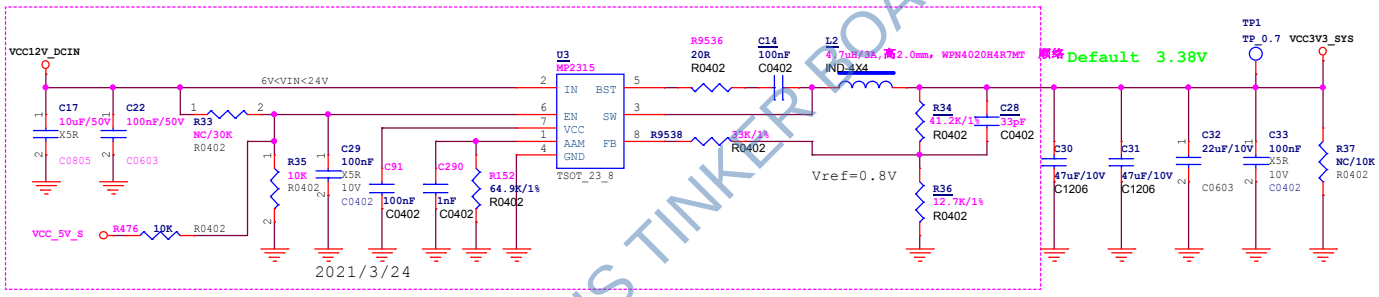

VCC3V3_SYS

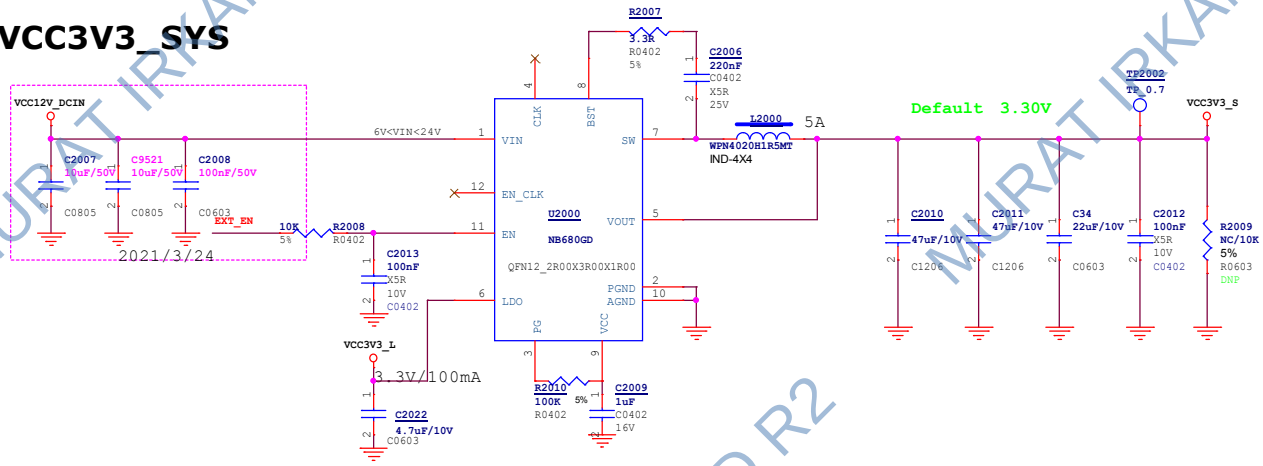

VCC5V0_SYS

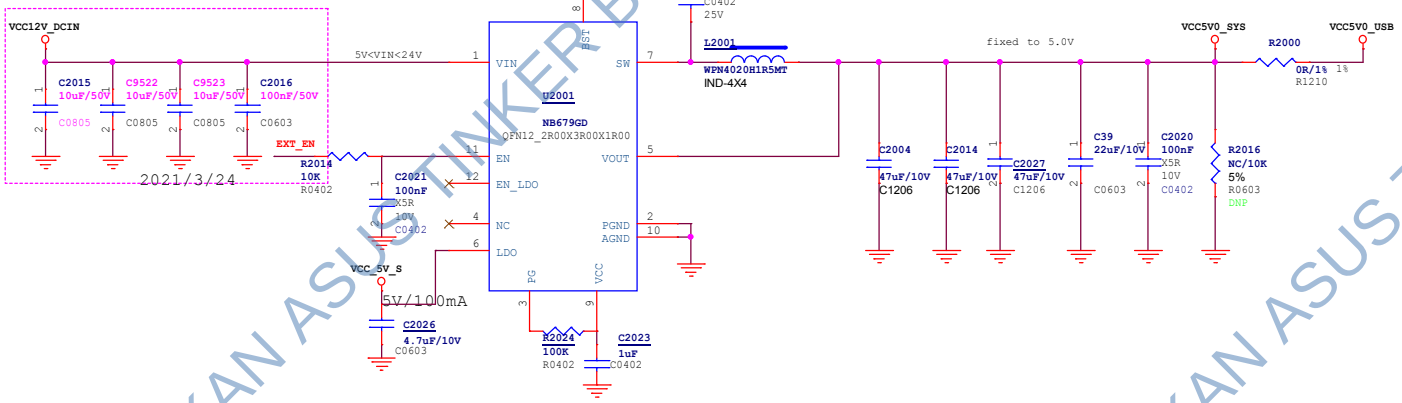

EXT_EN

Firefly www.t-firefly.com

Title: Power_DC IN		
File: ROC-3568-PC		REV: V0.1
Create Date: Monday, May 18, 2020	Page:	Num: 20
Modify Date: Wednesday, May 19, 2021	Page:	Total: 45

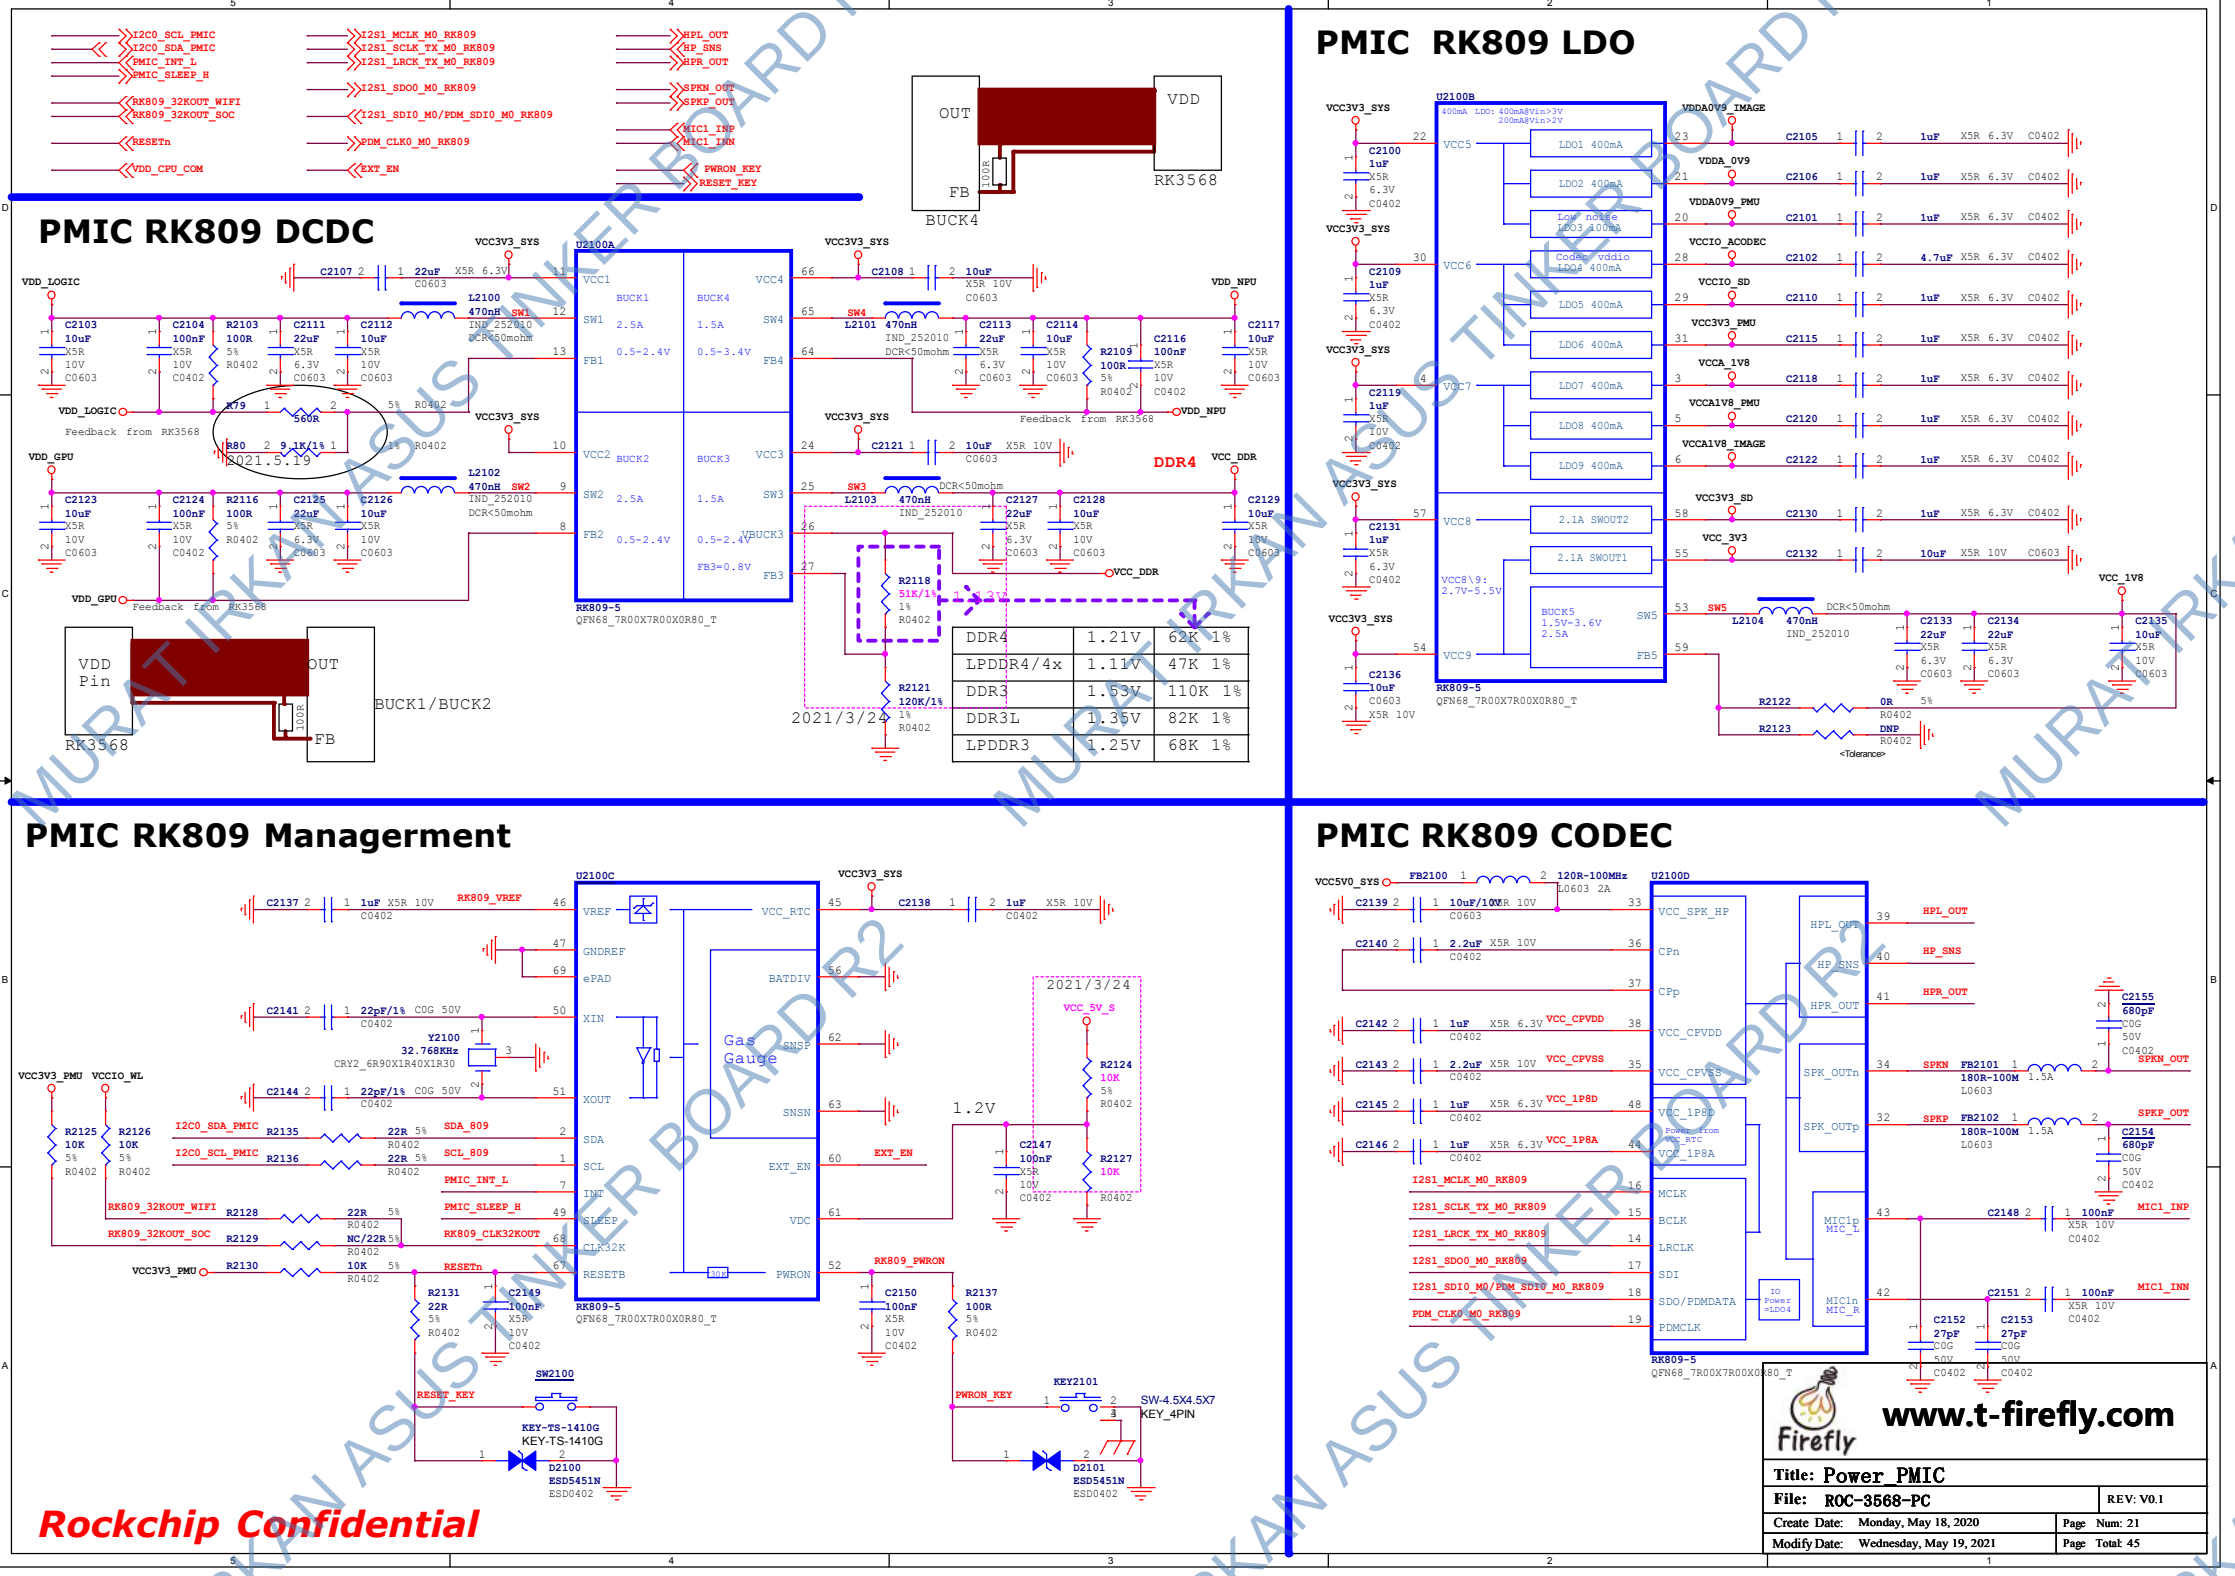
I2C0_SCL_PMIC
I2C0_SDA_PMIC
PMIC_INT_L
PMIC_SLEEP_H
RK809_32KOUT_WIFI
RK809_32KOUT_SOC
RESETn
VDD_CPU_COM
I2S1_MCLK_M0_RK809
I2S1_SCLK_TX_M0_RK809
I2S1_LRCK_TX_M0_RK809
I2S1_SDO0_M0_RK809
I2S1_SDI0_M0/PDM_SDI0_M0_RK809
PDM_CLK0_M0_RK809
EXT_EN
HPL_OUT
HP_SNS
HPR_OUT
SPKN_OUT
SPKP_OUT
MIC1_INP
MIC1_INN
PWRON_KEY
RESET_KEY
OUT
VDD
FB
100R
RK3568
BUCK4
PMIC RK809 DCDC
VCC3V3_SYS
U2100A
VDD_LOGIC
VDD_GPU
VDD_NPU
VCC_DDR
DDR4
BUCK1
BUCK2
BUCK3
BUCK4
2.5A
1.5A
0.5-2.4V
0.5-3.4V
0.5-2.4V
FB3=0.8V
RK809-5
QFN68_7R00X7R00X0R80_T
Feedback from RK3568
VDD Pin
OUT
FB
BUCK1/BUCK2
2021/3/24
DDR4 1.21V 62K 1%
LPDDR4/4x 1.11V 47K 1%
DDR3 1.53V 110K 1%
DDR3L 1.35V 82K 1%
LPDDR3 1.25V 68K 1%
PMIC RK809 LDO
U2100B
VCC3V3_SYS
VDDA0V9_IMAGE
VDDA_0V9
VDDA0V9_PMU
VCCIO_ACODEC
VCCIO_SD
VCC3V3_PMU
VCCA_1V8
VCCA1V8_PMU
VCCA1V8_IMAGE
VCC3V3_SD
VCC_3V3
VCC_1V8
LDO1 400mA
LDO2 400mA
Low noise LDO3 400mA
Codec vddio LDO4 400mA
LDO5 400mA
LDO6 400mA
LDO7 400mA
LDO8 400mA
LDO9 400mA
2.1A SWOUT2
2.1A SWOUT1
BUCK5 1.5V-3.6V 2.5A
VCC8\9: 2.7V-5.5V
RK809-5
QFN68_7R00X7R00X0R80_T
PMIC RK809 Management
U2100C
VCC3V3_PMU
VCCIO_WL
Gas Gauge
Y2100 32.768KHz
CRY2_6R90X1R40X1R30
RK809_PWRON
PWRON_KEY
RESET_KEY
SW2100
KEY-TS-1410G
KEY2101
SW-4.5X4.5X7
KEY_4PIN
D2100
D2101
ESD5451N
ESD0402
PMIC RK809 CODEC
VCC5V0_SYS
U2100D
VCC_SPK_HP
CPn
CPp
VCC_CPVDD
VCC_CPVSS
VCC_1P8D
VCC_1P8A
MCLK
BCLK
LRCLK
SDI
SDO/PDMDATA
PDMCLK
HPL_OUT
HP_SNS
HPR_OUT
SPK_OUTn
SPK_OUTp
MIC1p MIC_L
MIC1n MIC_R
RK809-5
QFN68_7R00X7R00X0R80_T
Rockchip Confidential
Firefly
www.t-firefly.com
Title: Power_PMIC
File: ROC-3568-PC
REV: V0.1
Create Date: Monday, May 18, 2020
Modify Date: Wednesday, May 19, 2021
Page Num: 21
Page Total: 45

PMIC_SLEEP_H
VDD_CPU_COM
PWRON_KEY
I2C0_SCL_PMIC
I2C0_SDA_PMIC
RTCIC_INT_L_GPIO0_D3
I2C5_SCL_M0
I2C5_SDA_M0

VDD_CPU

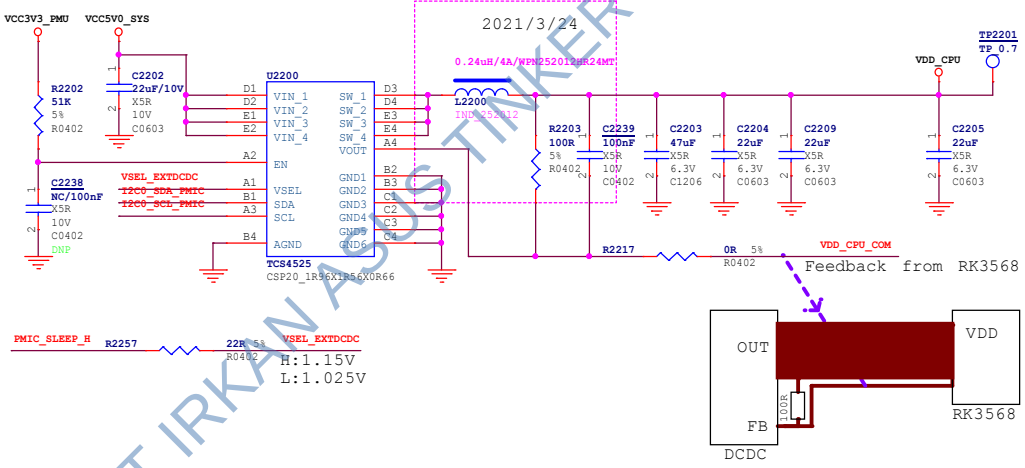

RTC IC

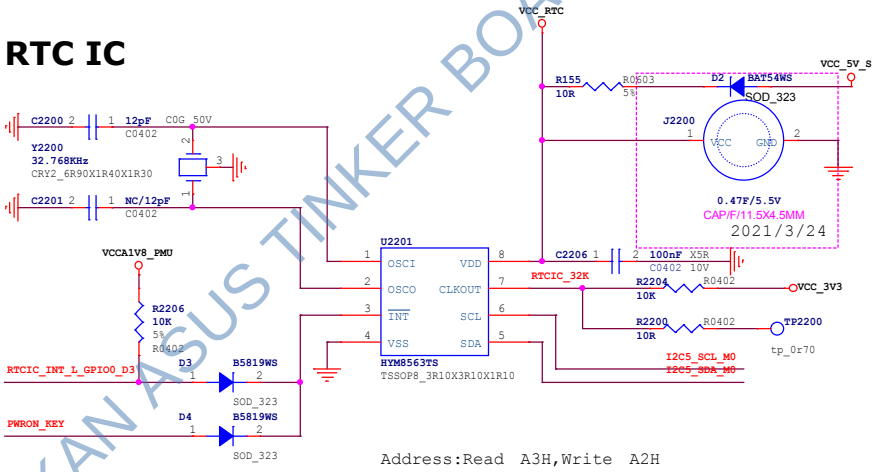

Address:Read A3H,Write A2H

Rockchip Confidential

Firefly www.t-firefly.com

Title: Power_other		
File: ROC-3568-PC		REV: V0.1
Create Date: Monday, May 18, 2020	Page Num: 22	
Modify Date: Wednesday, May 19, 2021	Page Total: 45	

FLASH_VOL_SEL

Flash Power Manage

	VCCIO2 domain voltage: Recommend voltage value (VCCIO_FLASH)	FLASH_VOL_SEL state decided to VCCIO2 domain IO driven by default
eMMC	1.8V	FLASH_VOL_SEL --> Logic=H
Nand flash	Default 3.3V, Adjust according to demand 1.8V	FLASH_VOL_SEL --> Logic=L(Default)
SPI flash	Default 3.3V, Adjust according to demand 1.8V	FLASH_VOL_SEL --> Logic=L(Default)

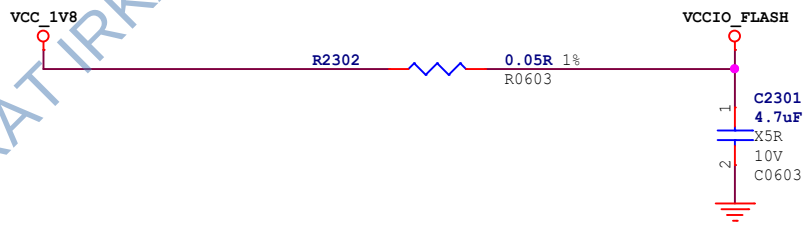



Note:
FLASH_VOL_SEL state decided
to VCCIO2 domain IO driven by default
Logic=L:3.3V IO driven
Logic=H:1.8V IO driven

Rockchip Confidential

www.t-firefly.com

Title: Power_Flash Power Manage	
File: ROC-3568-PC	REV: V0.1
Create Date: Tuesday, May 19, 2020	Page Num: 23
Modify Date: Wednesday, May 19, 2021	Page Total: 45

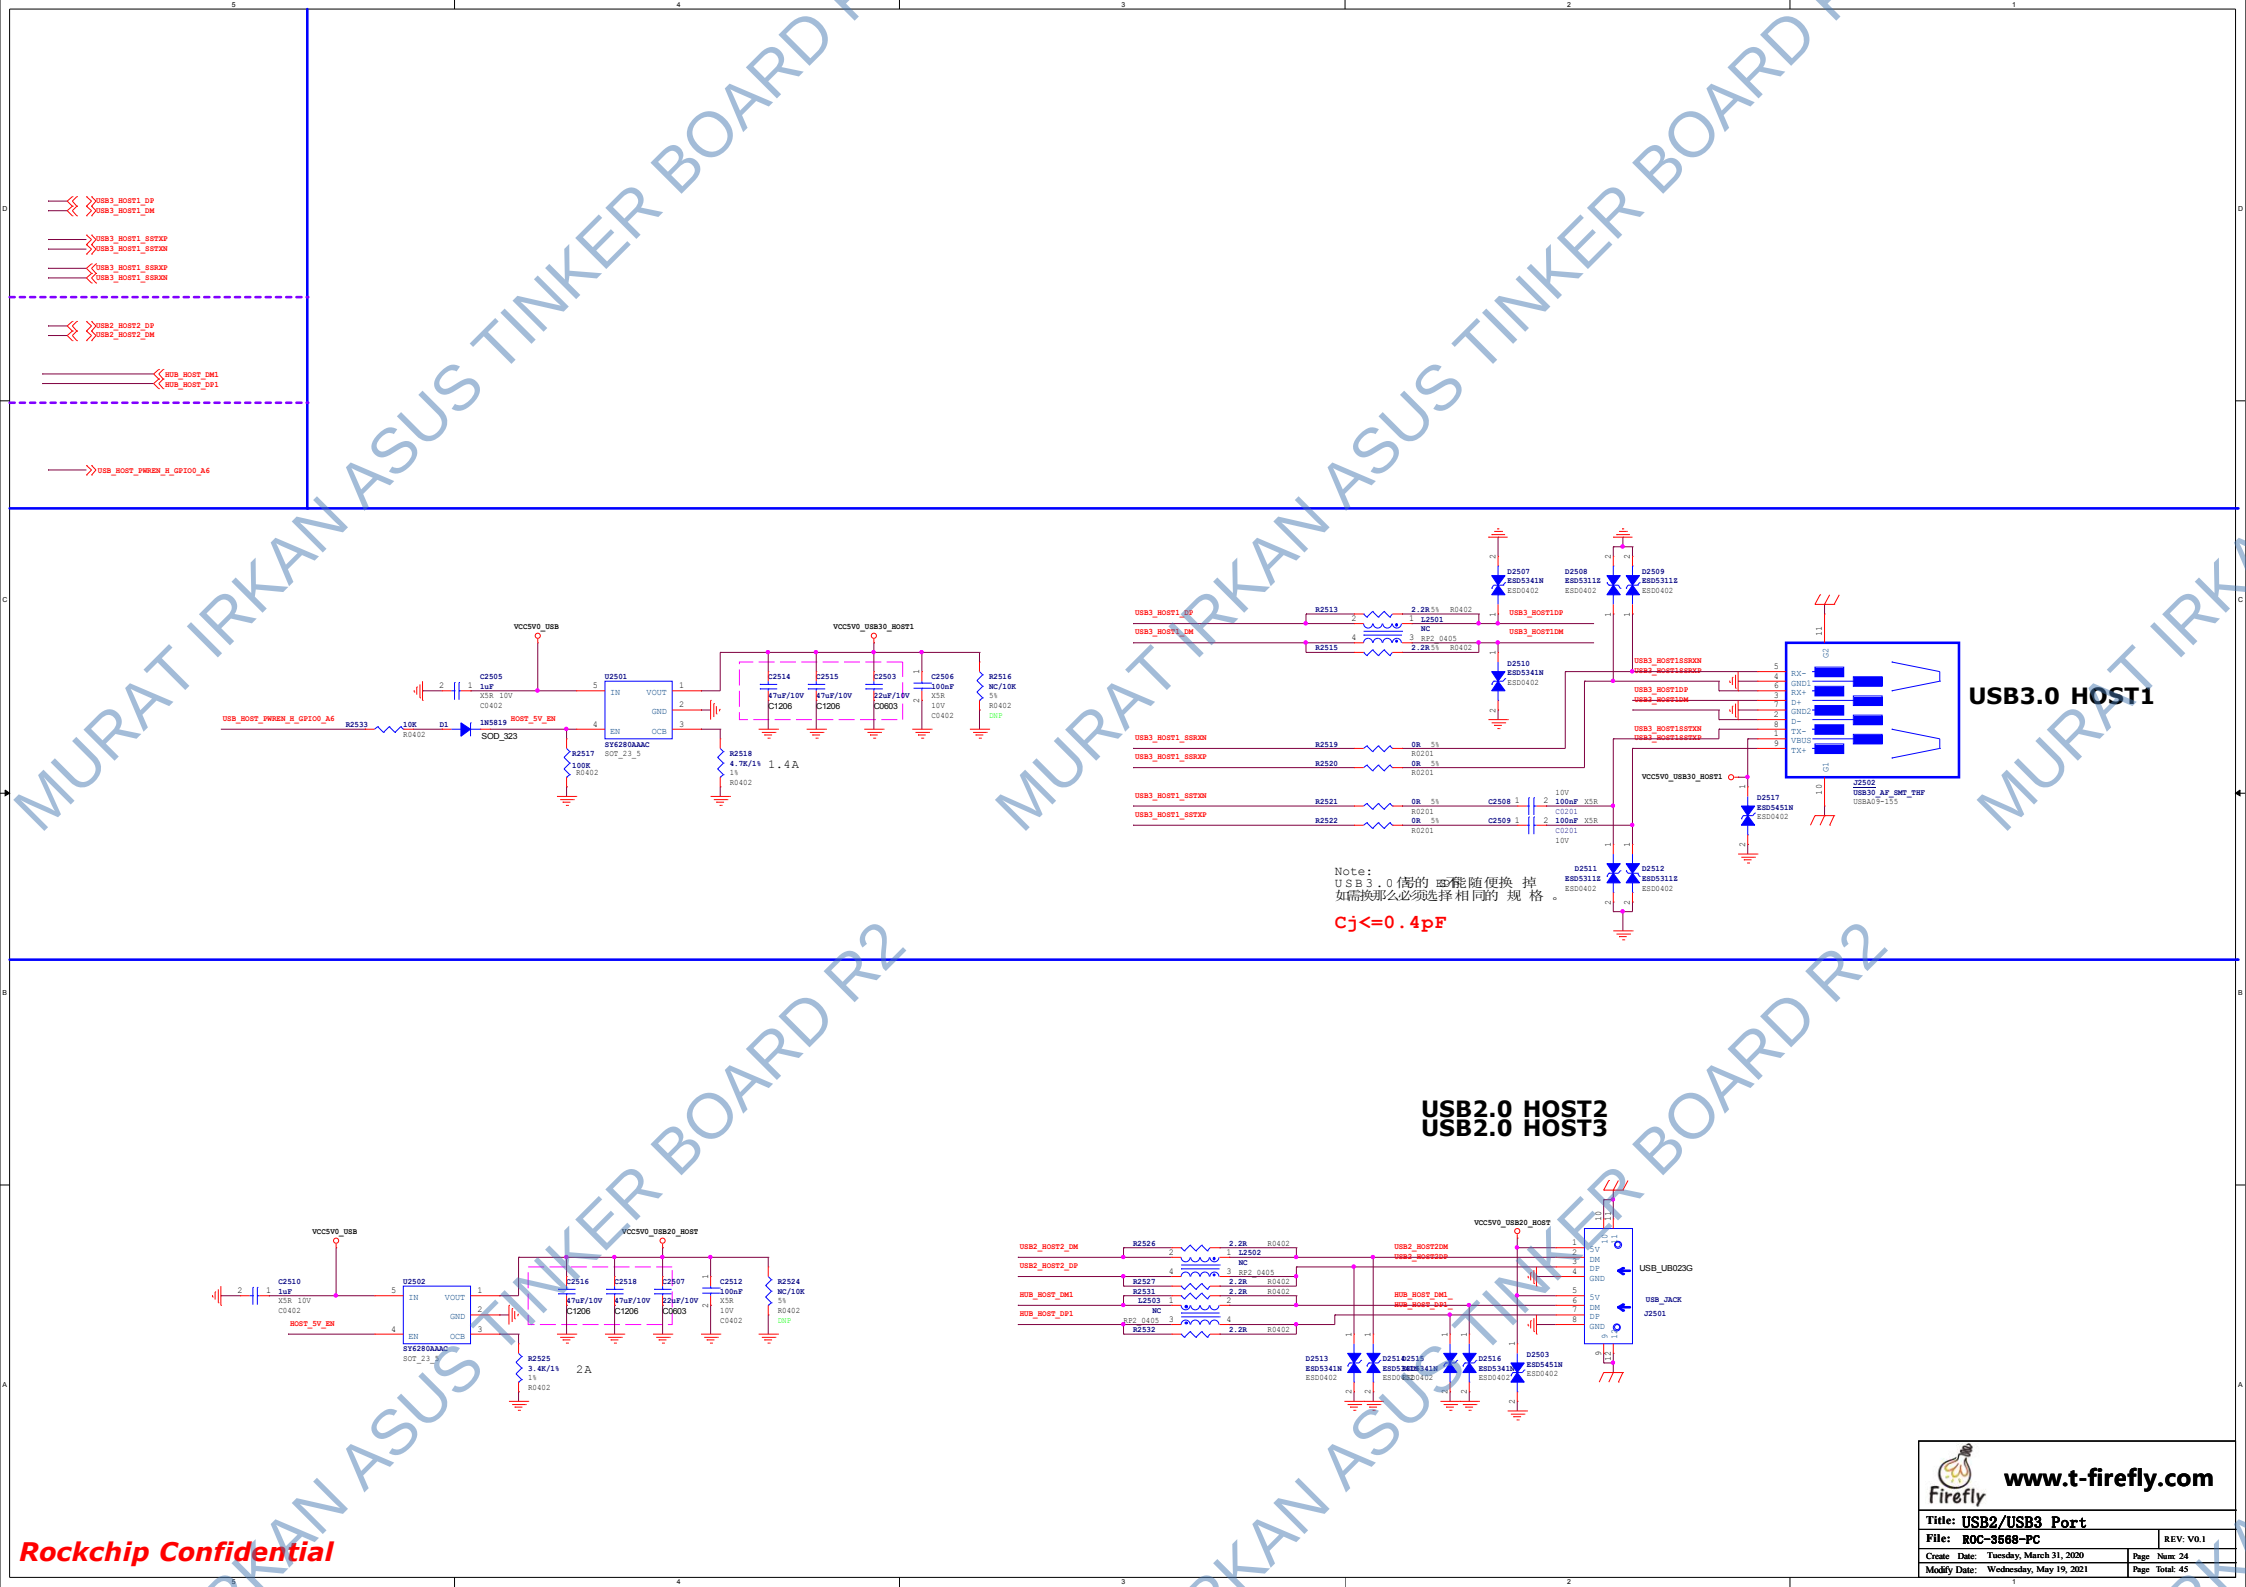

Rockchip Confidential

www.t-firefly.com

Title:	USB2/USB3 Port	
File:	ROC-3568-PC	REV: V0.1
Create Date:	Tuesday, March 31, 2020	Page Num: 24
Modify Date:	Wednesday, May 19, 2021	Page Total: 45

USB2.0 HUB

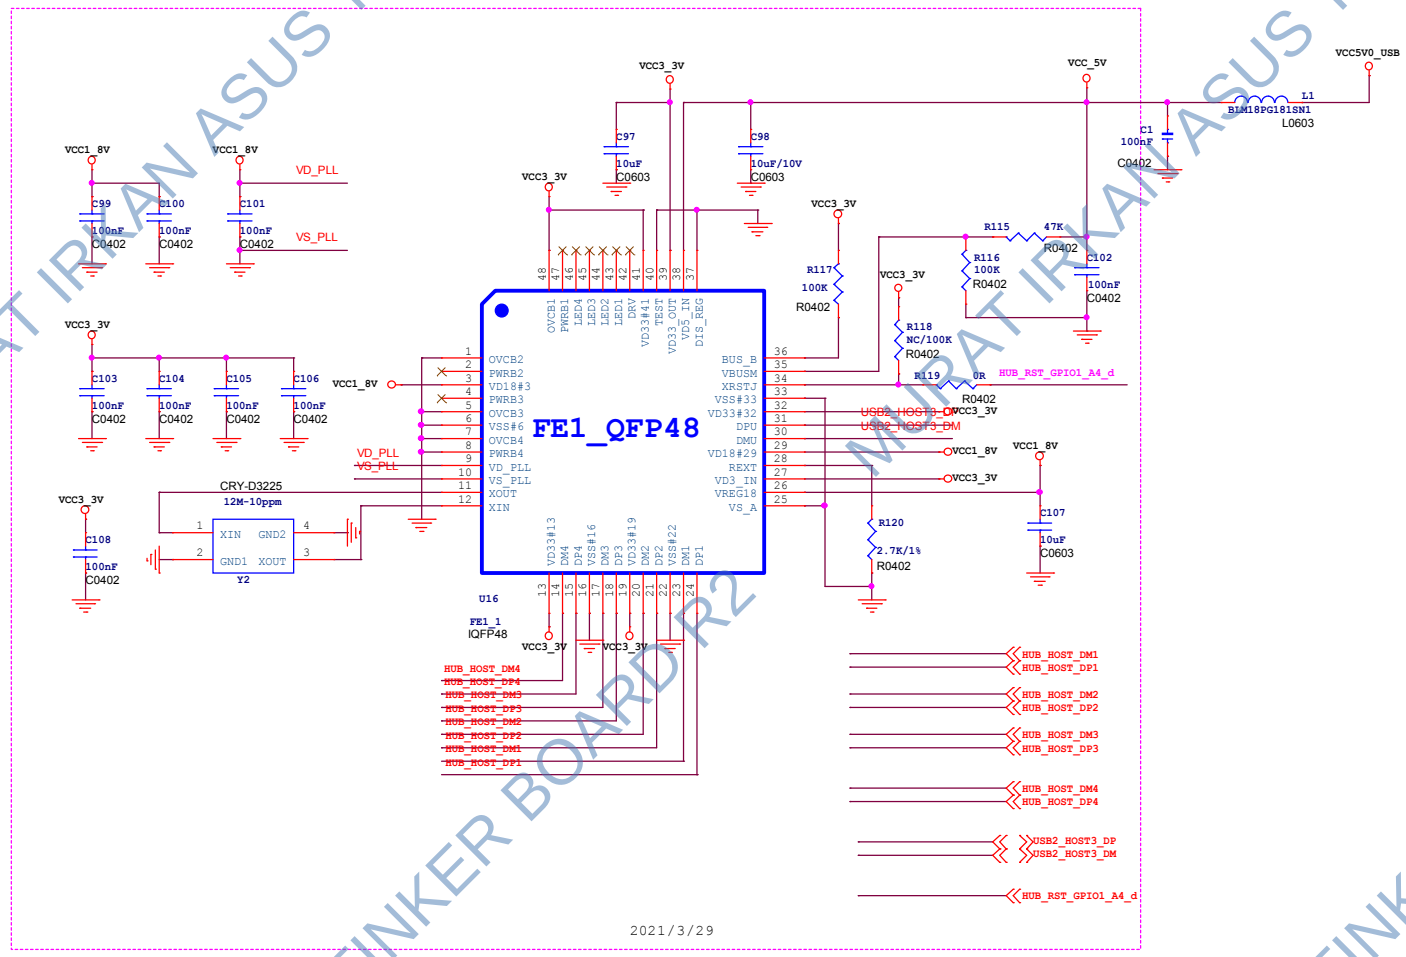

Firefly www.t-firefly.com

Title:	USB2.0 HUB GL850G
File:	ROC-3568-PC
REV:	V0.1
Create Date:	Wednesday, November 04, 2020
Page Num:	25
Modify Date:	Wednesday, May 19, 2021
Page Total:	45

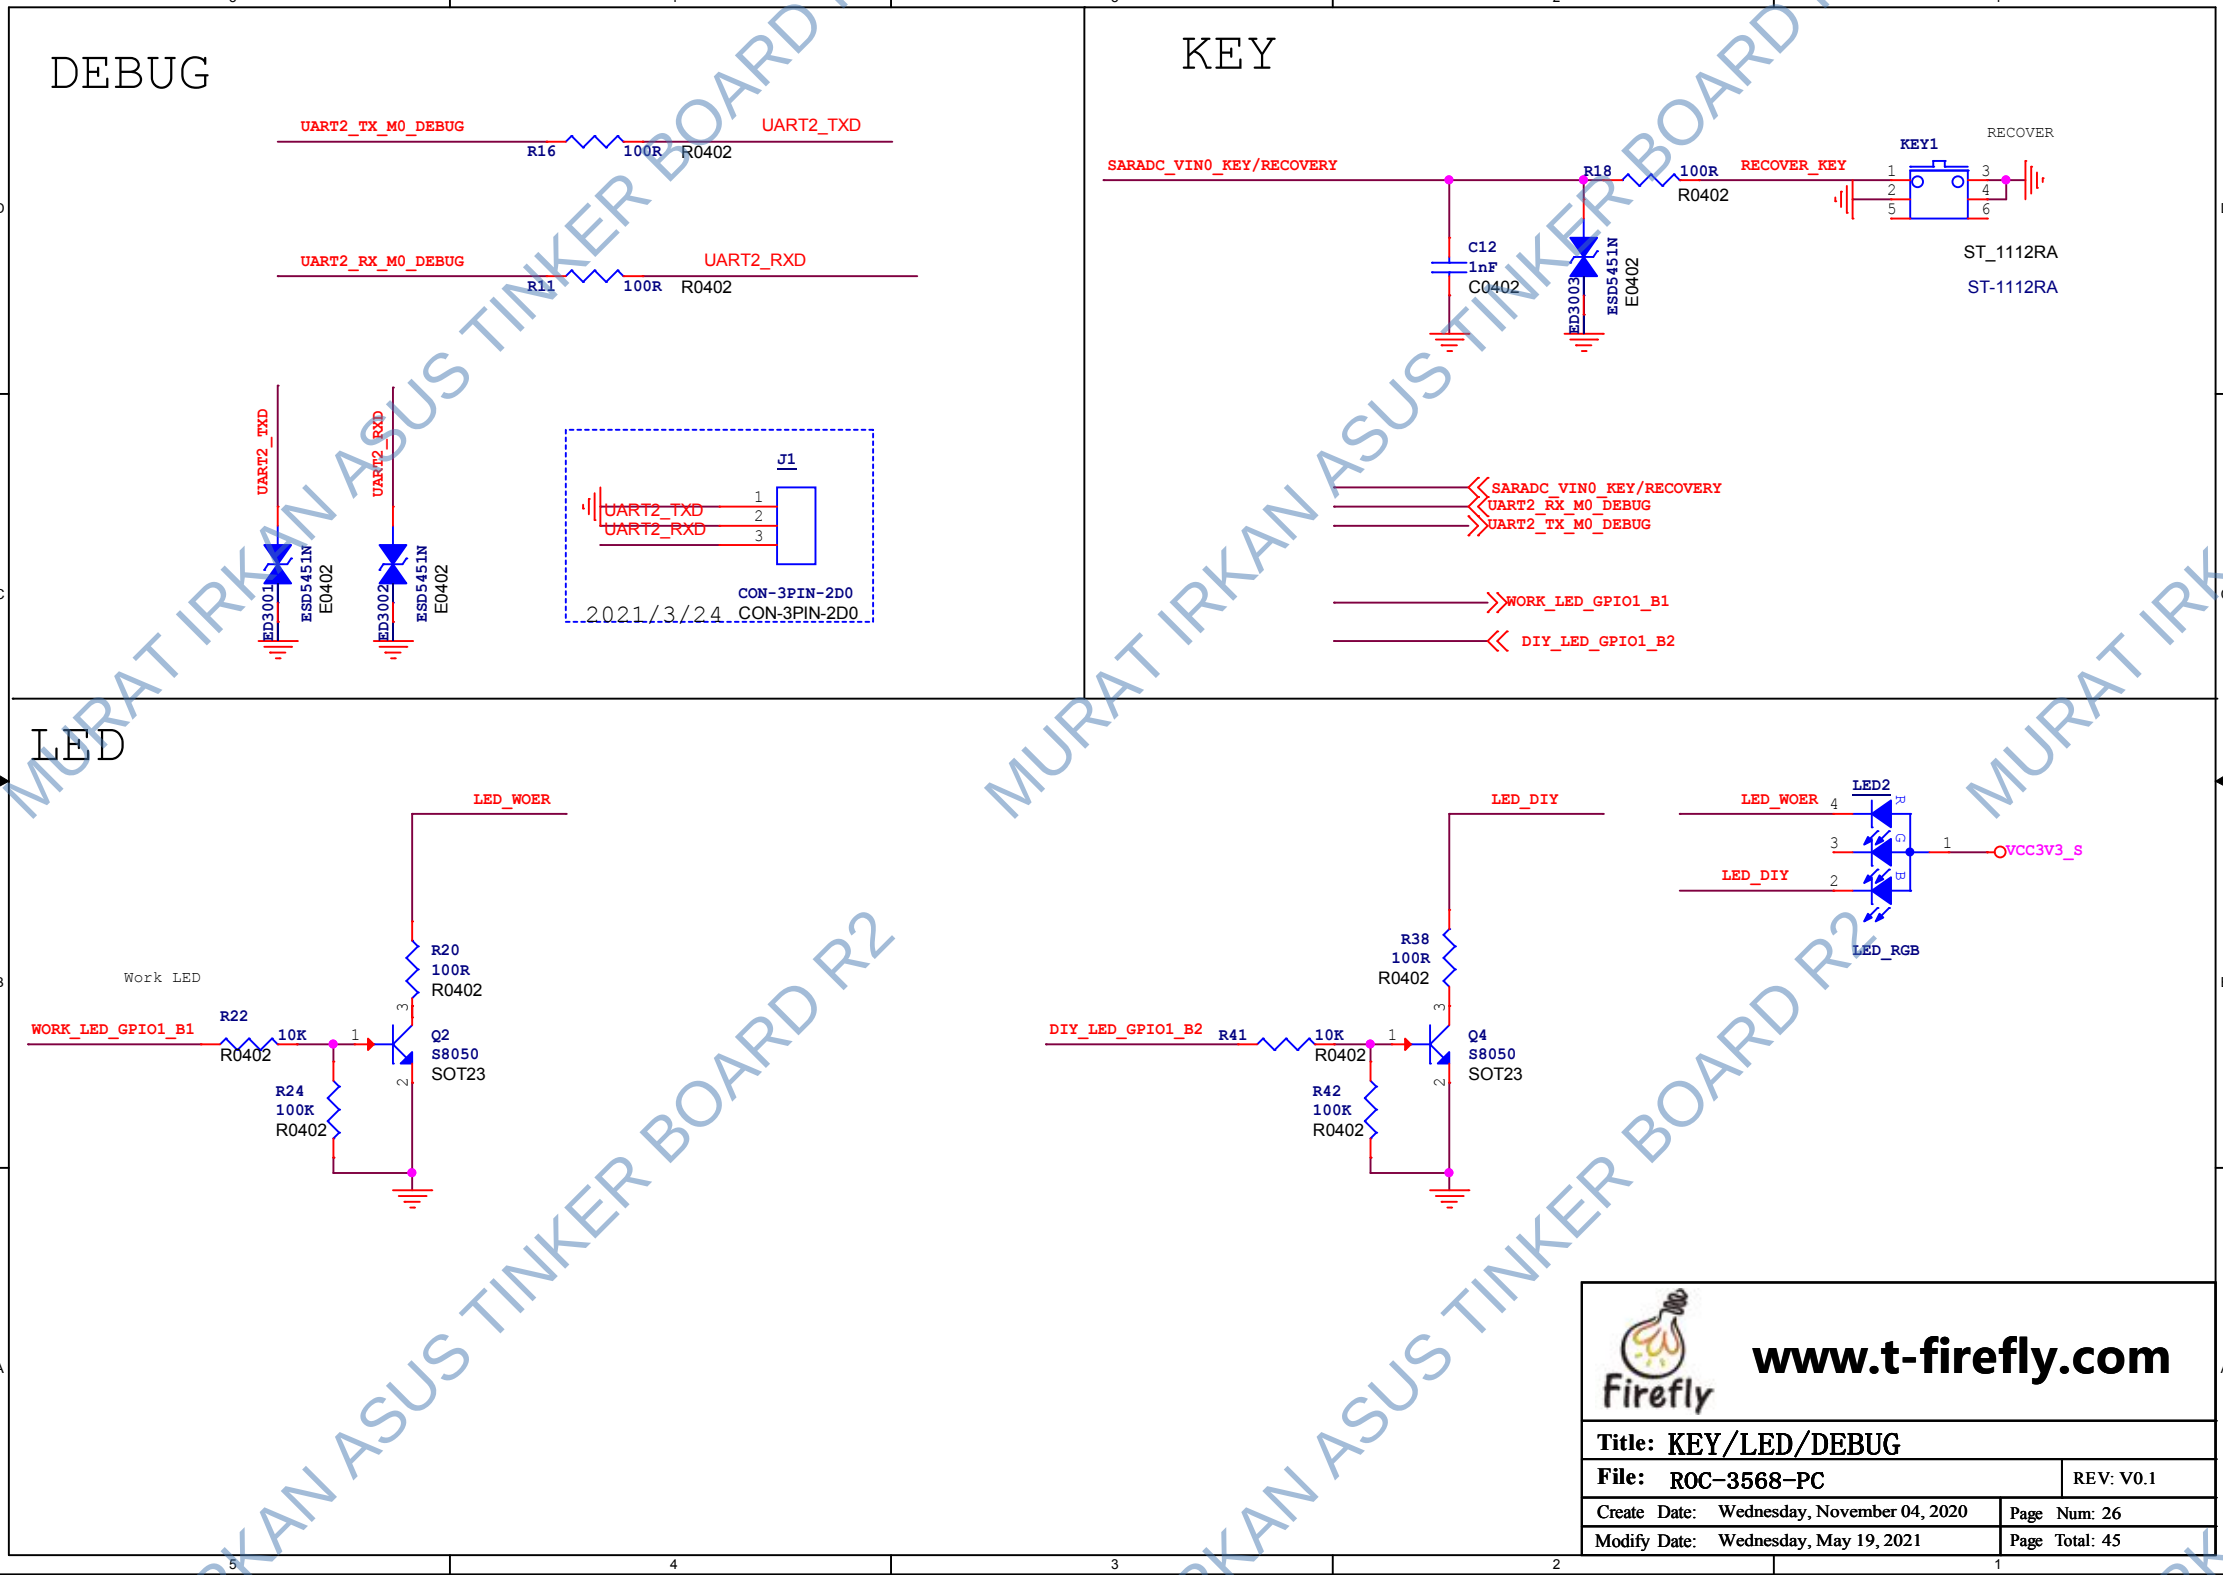

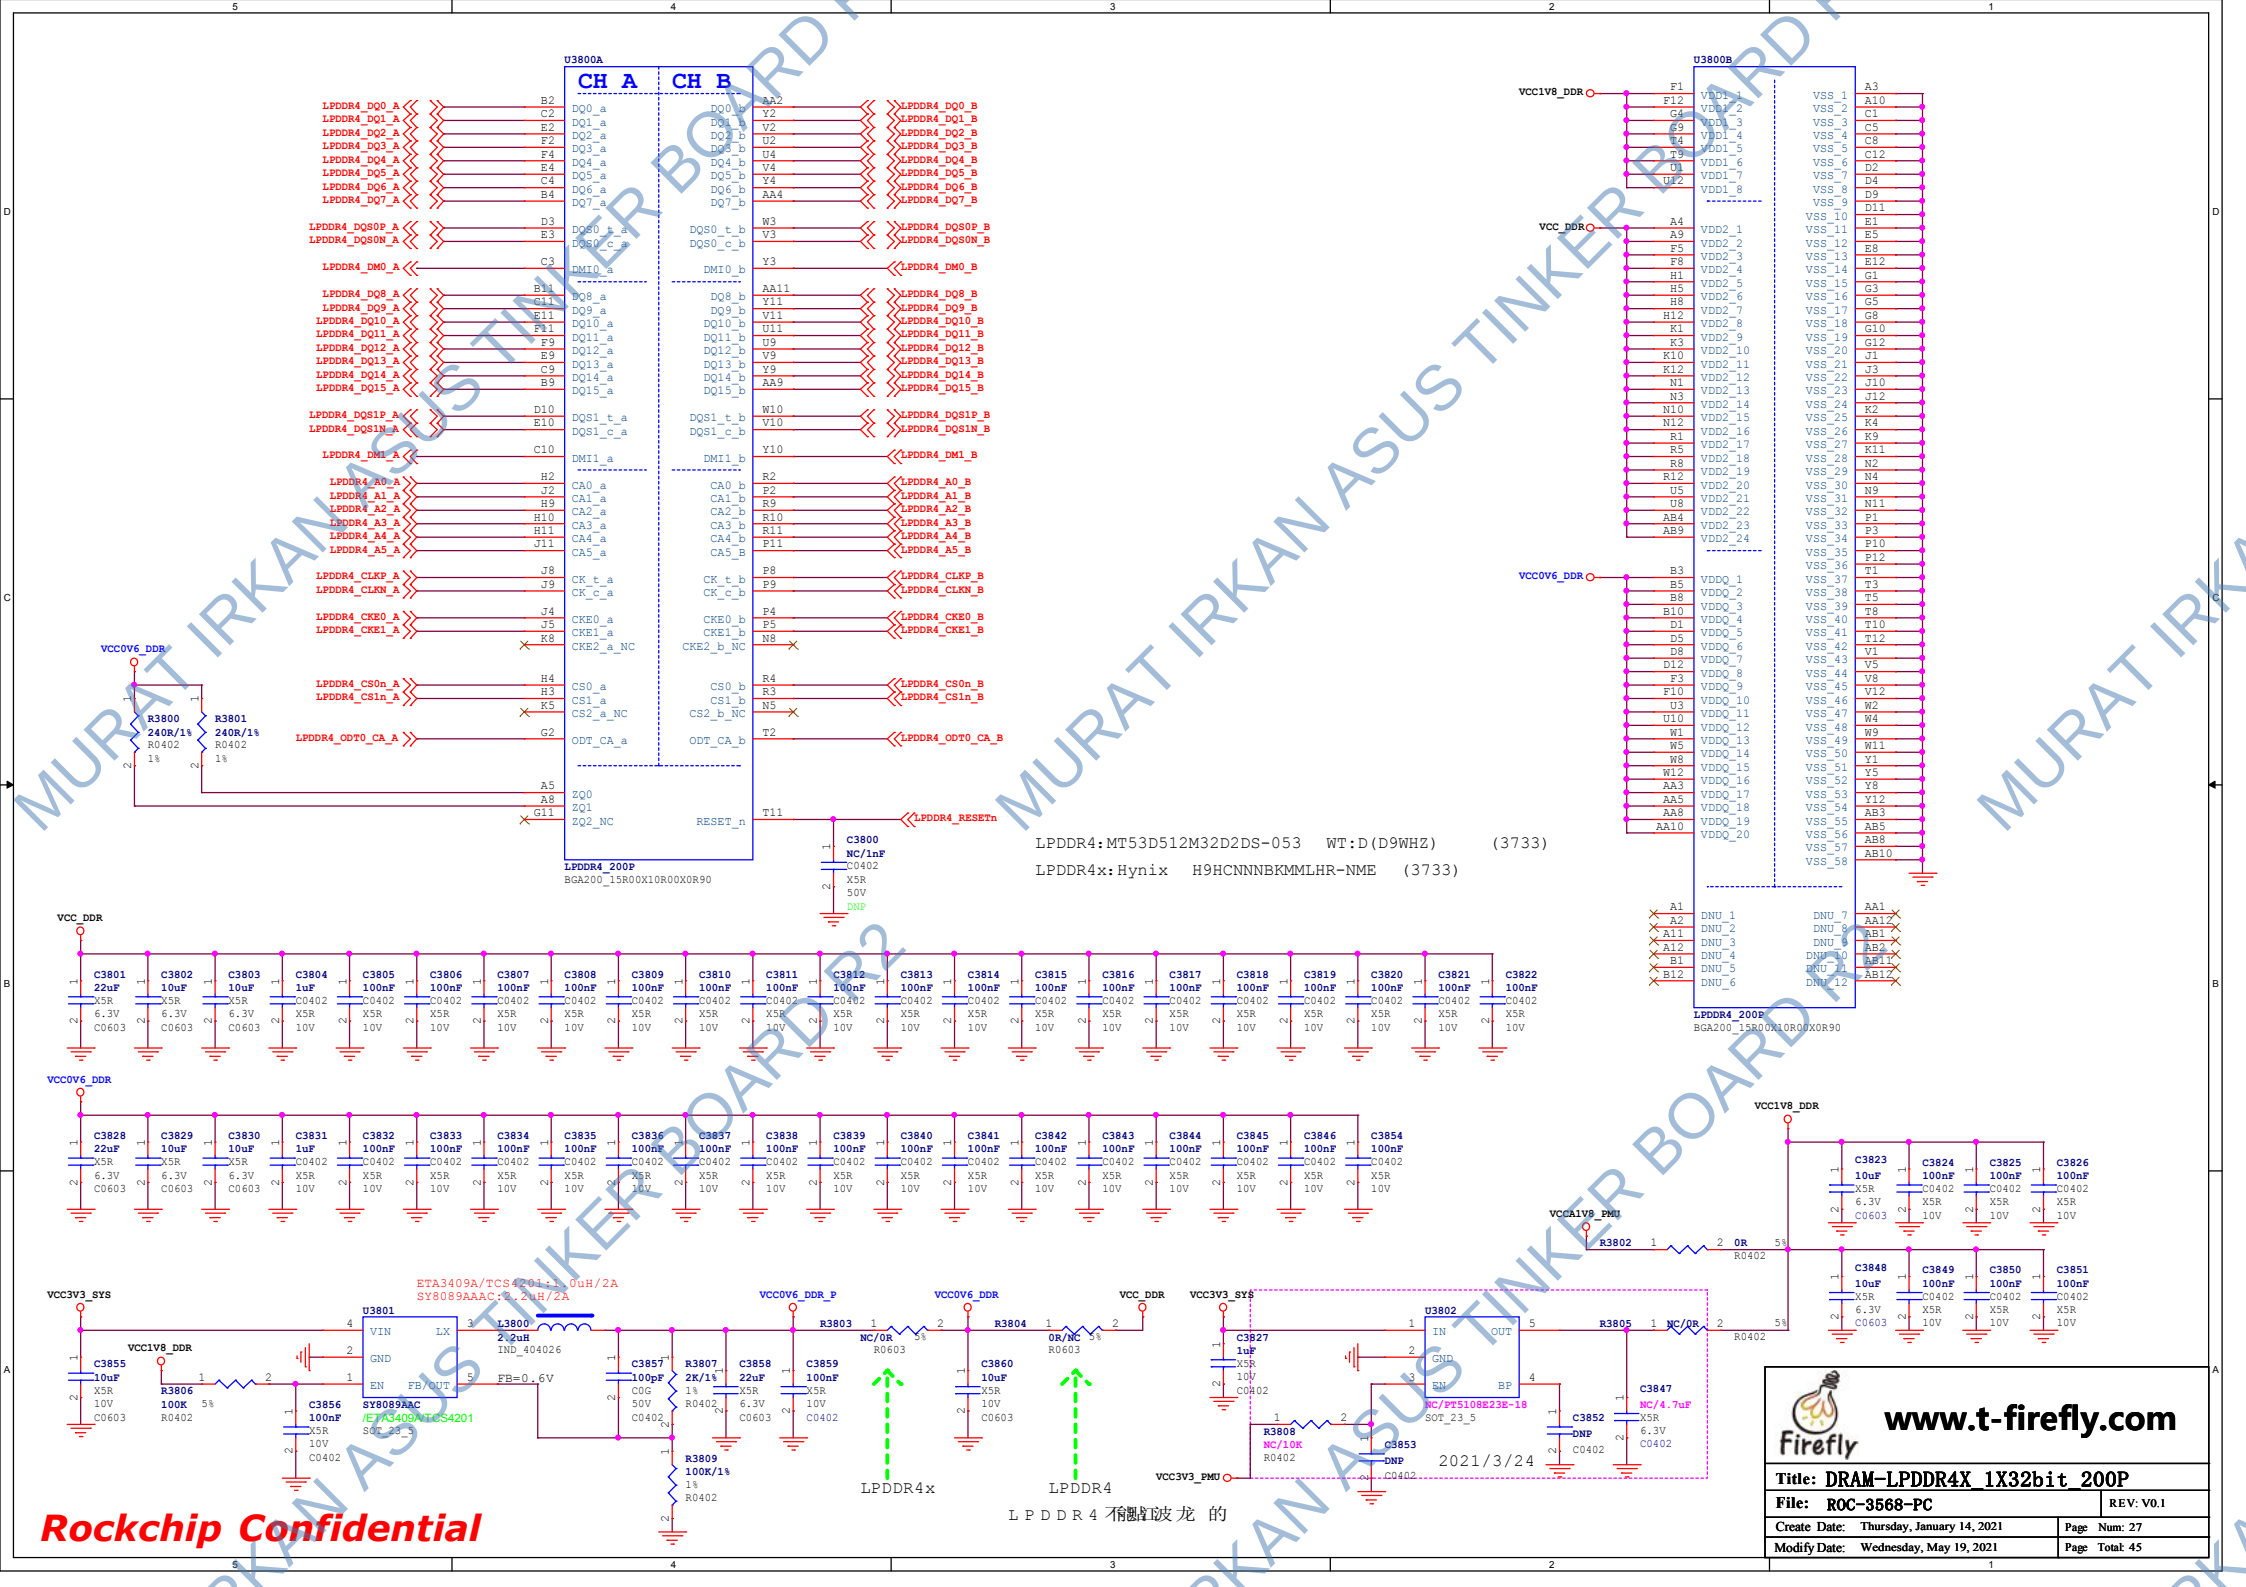

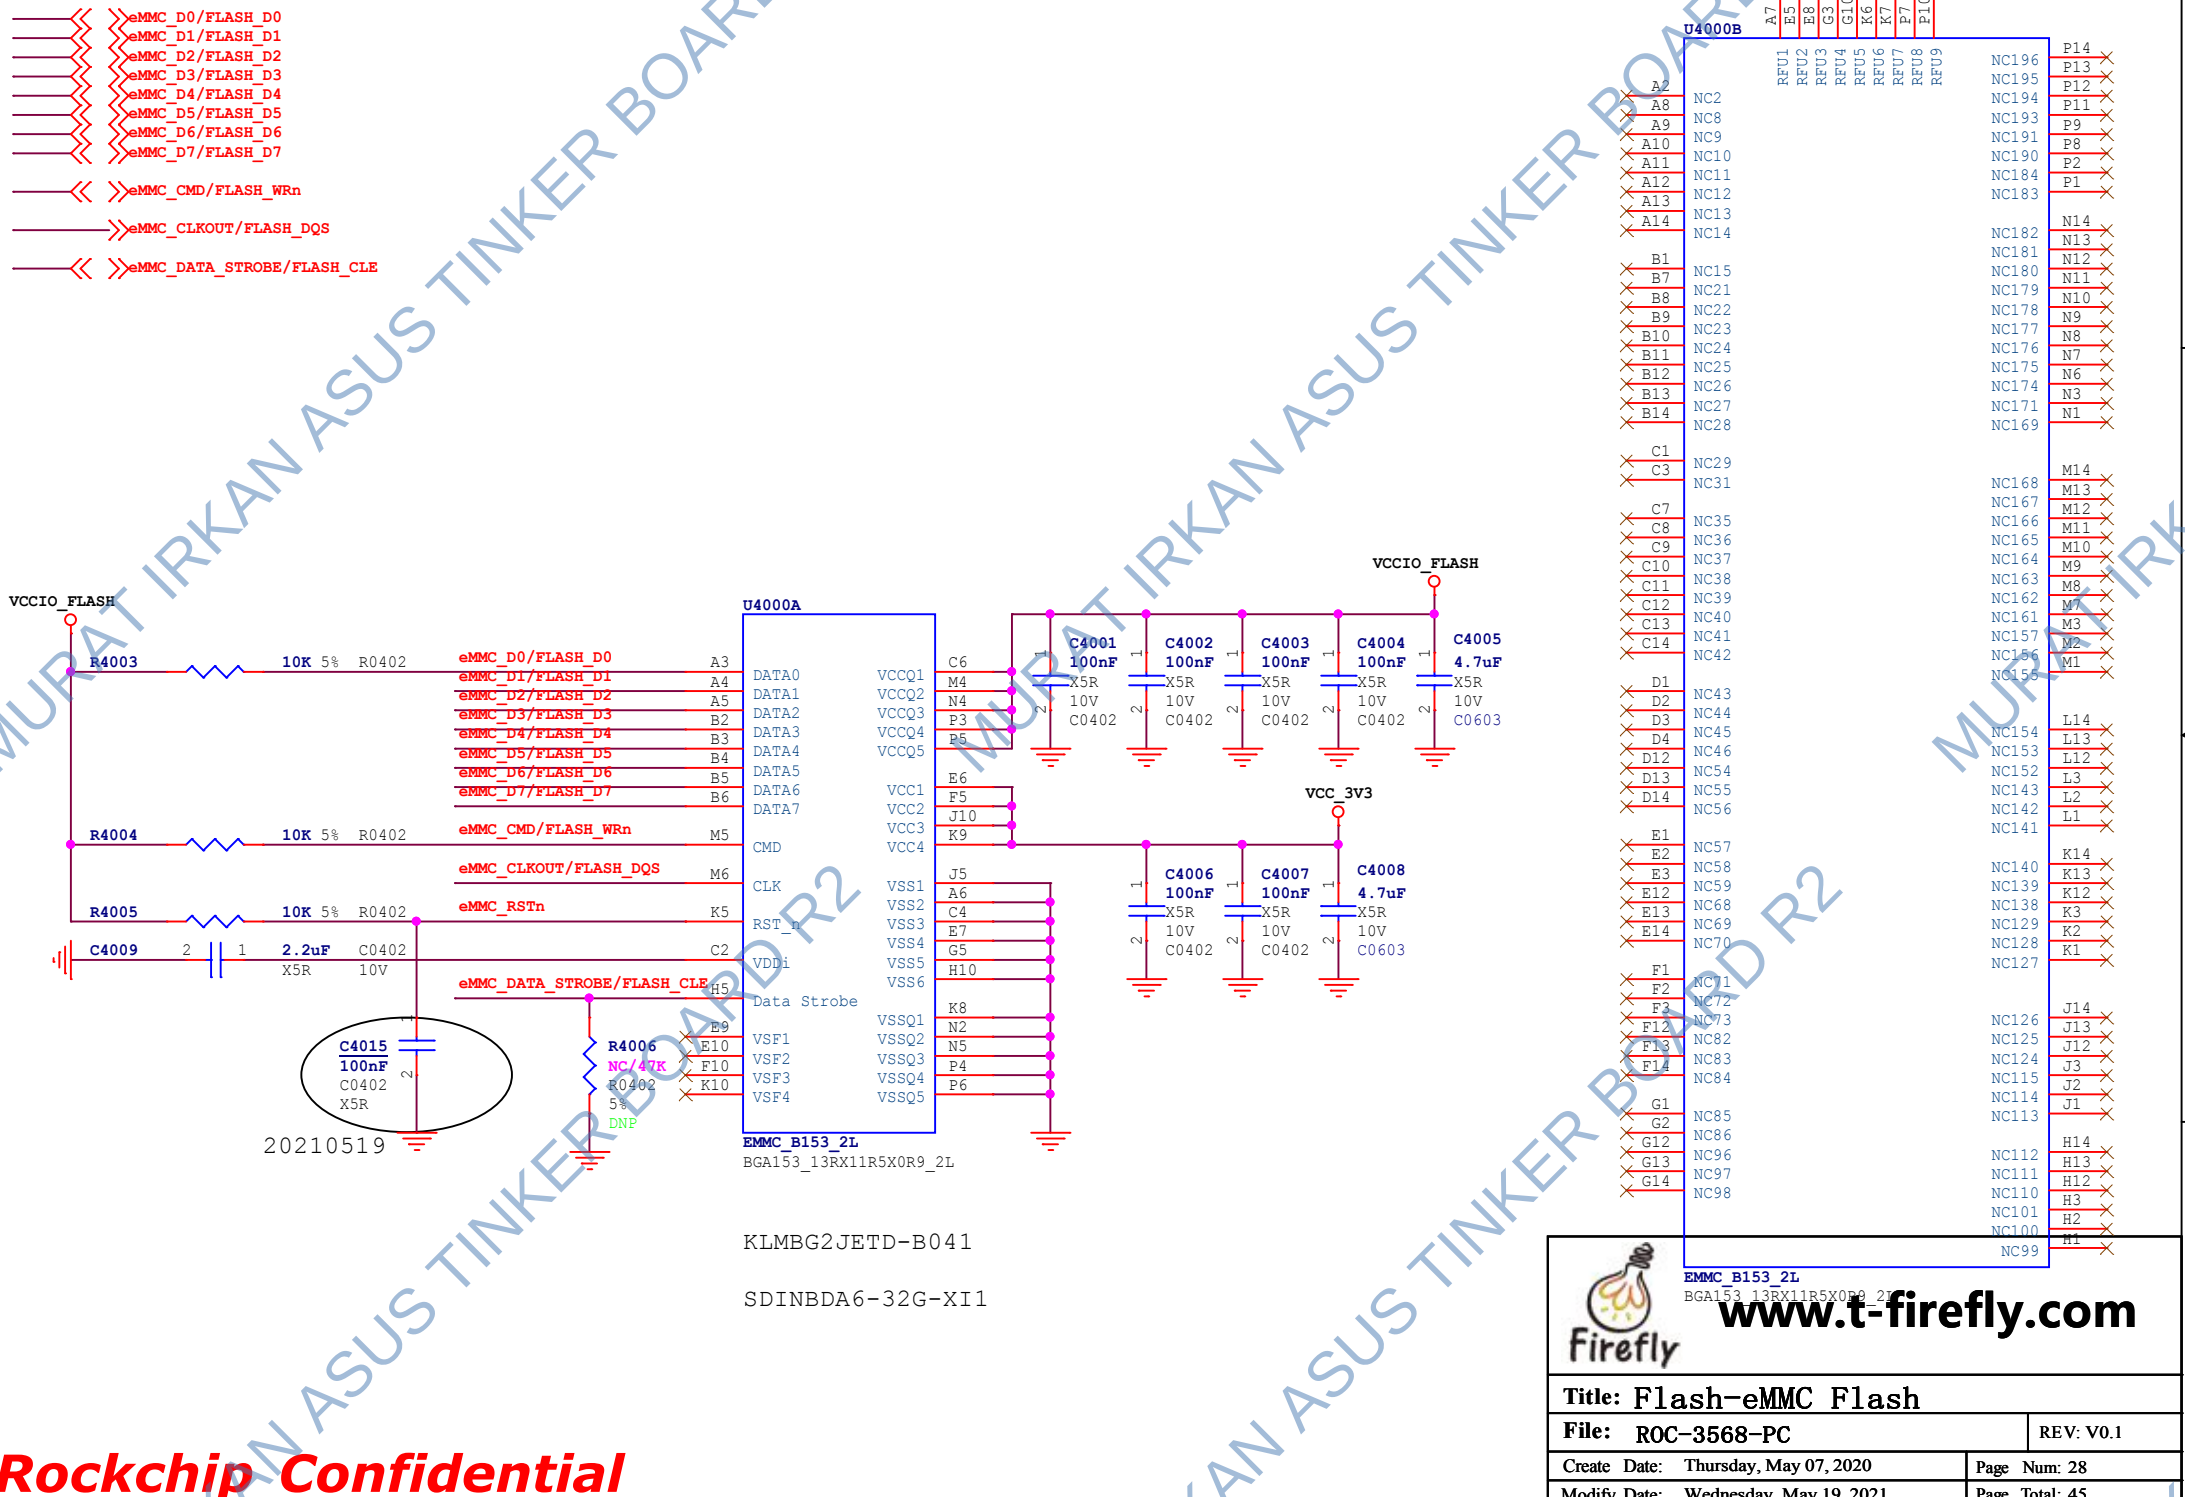
eMMC_D0/FLASH_D0
eMMC_D1/FLASH_D1
eMMC_D2/FLASH_D2
eMMC_D3/FLASH_D3
eMMC_D4/FLASH_D4
eMMC_D5/FLASH_D5
eMMC_D6/FLASH_D6
eMMC_D7/FLASH_D7
eMMC_CMD/FLASH_WRn
eMMC_CLKOUT/FLASH_DQS
eMMC_DATA_STROBE/FLASH_CLE
VCCIO_FLASH
R4003 10K 5% R0402
R4004 10K 5% R0402
R4005 10K 5% R0402
C4009 2.2uF X5R C0402 10V
C4015 100nF X5R C0402
R4006 NC/47K R0402 5% DNP
20210519
U4000A
DATA0 DATA1 DATA2 DATA3 DATA4 DATA5 DATA6 DATA7
CMD
CLK
RST_n
VDDi
Data Strobe
VSF1 VSF2 VSF3 VSF4
VCCQ1 VCCQ2 VCCQ3 VCCQ4 VCCQ5
VCC1 VCC2 VCC3 VCC4
VSS1 VSS2 VSS3 VSS4 VSS5 VSS6
VSSQ1 VSSQ2 VSSQ3 VSSQ4 VSSQ5
EMMC_B153_2L
BGA153_13RX11R5X0R9_2L
C4001 100nF X5R 10V C0402
C4002 100nF X5R 10V C0402
C4003 100nF X5R 10V C0402
C4004 100nF X5R 10V C0402
C4005 4.7uF X5R 10V C0603
VCC_3V3
C4006 100nF X5R 10V C0402
C4007 100nF X5R 10V C0402
C4008 4.7uF X5R 10V C0603
KLMBG2JETD-B041
SDINBDA6-32G-XI1
U4000B
RFU1 RFU2 RFU3 RFU4 RFU5 RFU6 RFU7 RFU8 RFU9
NC2 NC8 NC9 NC10 NC11 NC12 NC13 NC14 NC15 NC21 NC22 NC23 NC24 NC25 NC26 NC27 NC28 NC29 NC31 NC35 NC36 NC37 NC38 NC39 NC40 NC41 NC42 NC43 NC44 NC45 NC46 NC54 NC55 NC56 NC57 NC58 NC59 NC68 NC69 NC70 NC71 NC72 NC73 NC82 NC83 NC84 NC85 NC86 NC96 NC97 NC98
NC99 NC100 NC101 NC110 NC111 NC112 NC113 NC114 NC115 NC124 NC125 NC126 NC127 NC128 NC129 NC138 NC139 NC140 NC141 NC142 NC143 NC152 NC153 NC154 NC155 NC156 NC157 NC161 NC162 NC163 NC164 NC165 NC166 NC167 NC168 NC169 NC171 NC173 NC174 NC175 NC176 NC177 NC178 NC179 NC180 NC181 NC182 NC183 NC184 NC190 NC191 NC193 NC194 NC195 NC196
EMMC_B153_2L
BGA153_13RX11R5X0R9_2L
www.t-firefly.com
Title: Flash-eMMC Flash
File: ROC-3568-PC
REV: V0.1
Create Date: Thursday, May 07, 2020
Modify Date: Wednesday, May 19, 2021
Page Num: 28
Page Total: 45
Rockchip Confidential

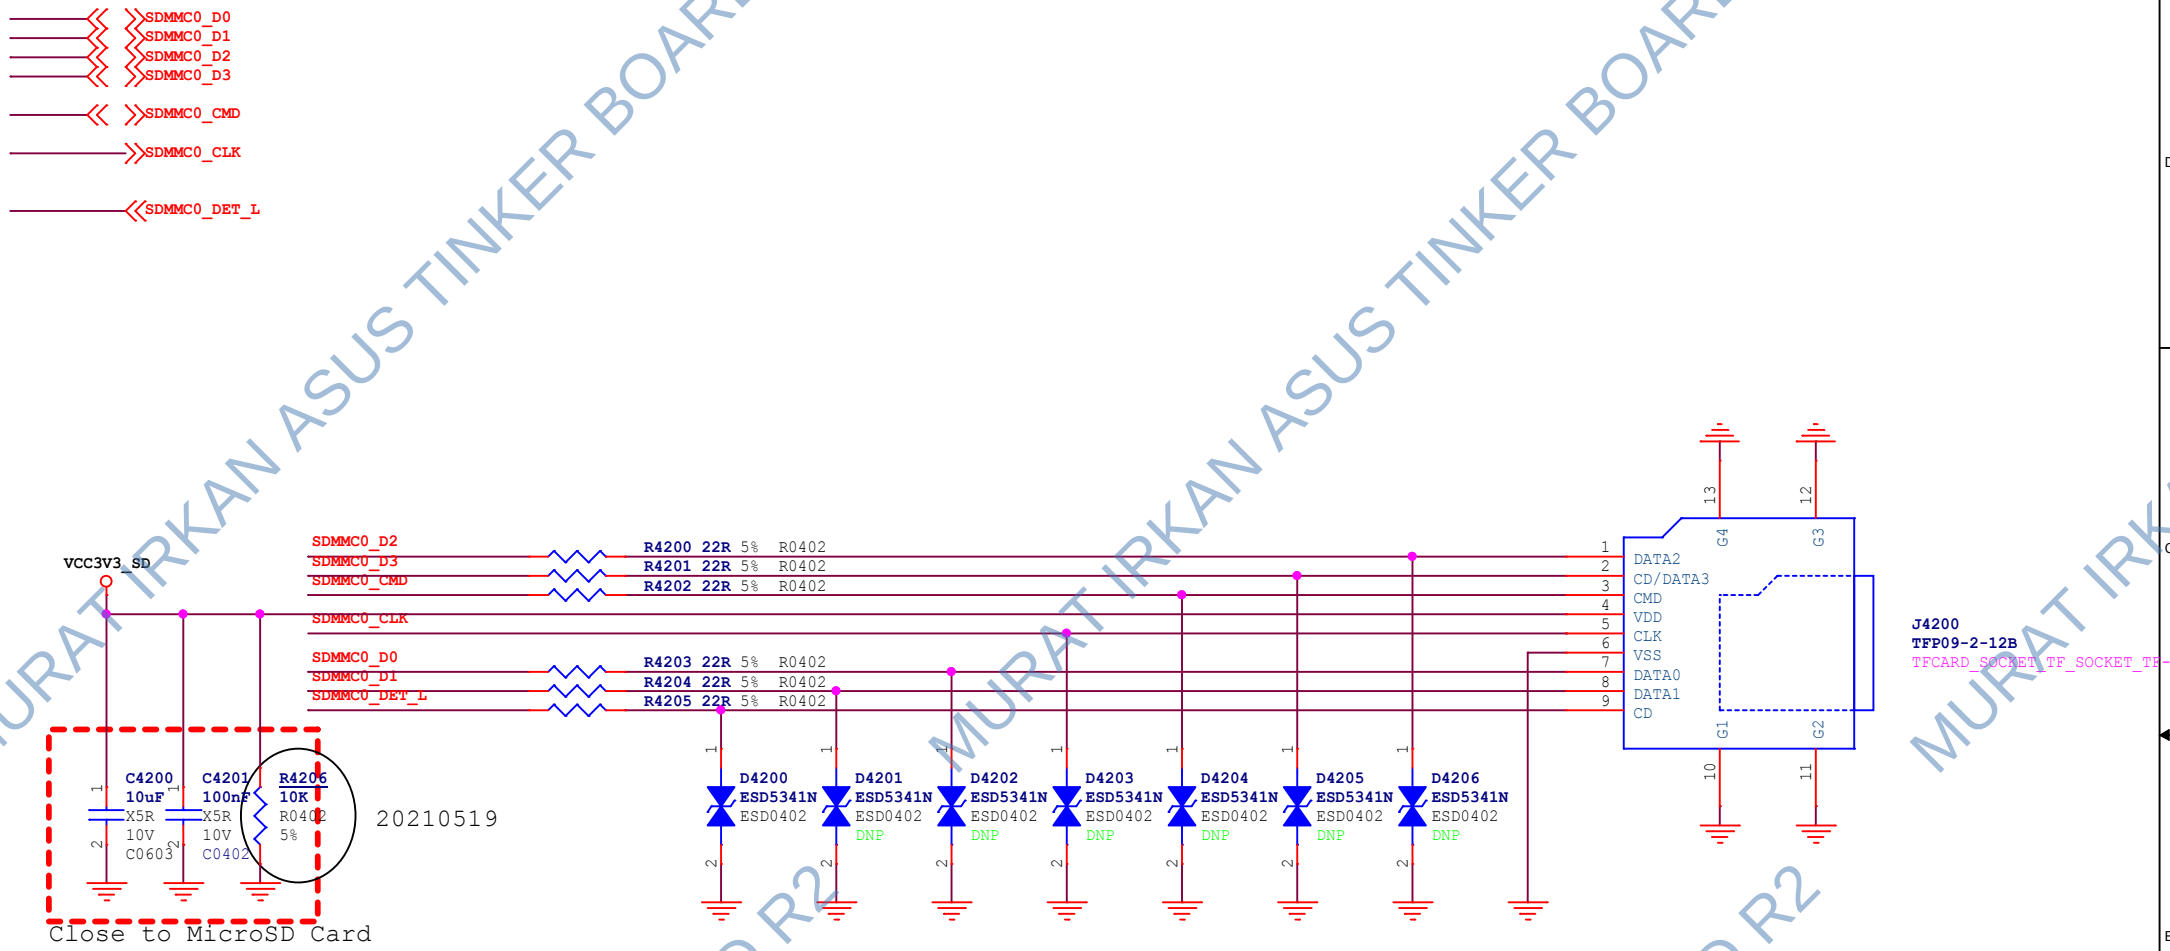

Rockchip Confidential

www.t-firefly.com

Title: Flash-MicroSD Card		
File: ROC-3568-PC		REV: V0.1
Create Date: Thursday, May 07, 2020	Page Num: 29	
Modify Date: Wednesday, May 19, 2021	Page Total: 45	

FSPI_CLK/FLASH_ALE

FSPI_D0/FLASH_RDY
FSPI_D1/FLASH_RDn
eMMC_RSTn/FSPI_D2/FLASH_WPn
FSPI_D3/FLASH_CS1n

FSPI_CS0n/FLASH_CS0n

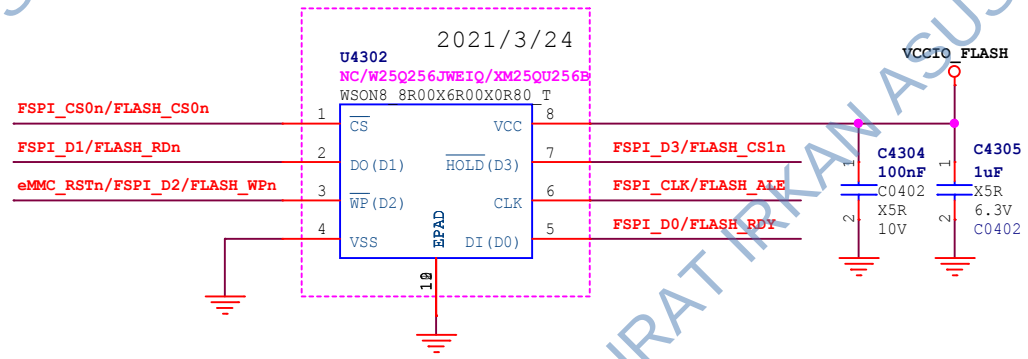

Default: 1.8V

SPI Nor: W25Q256JWEIQ 1.8V--DEFAULT

W25Q256FV,GD25Q256D 3.3V

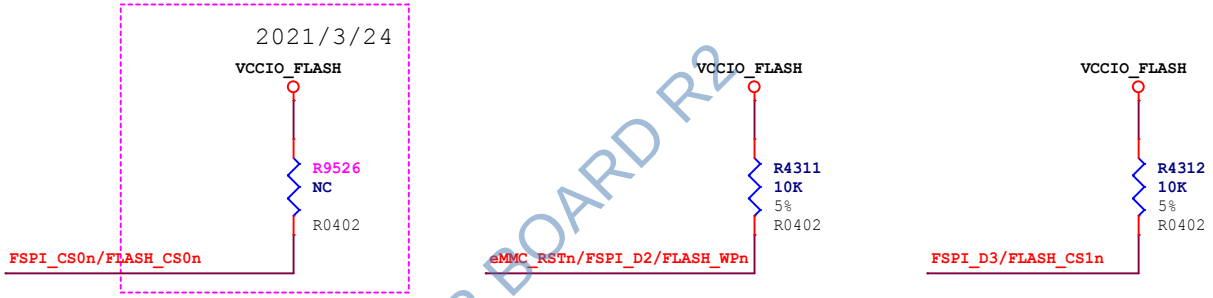

Rockchip Confidential

www.t-firefly.com

Title: Flash-SPI FLASH		
File: ROC-3568-PC		REV: V0.1
Create Date: Thursday, May 07, 2020	Page Num: 30	
Modify Date: Wednesday, May 19, 2021	Page Total: 45	

MIPI-CSI_RX_CON

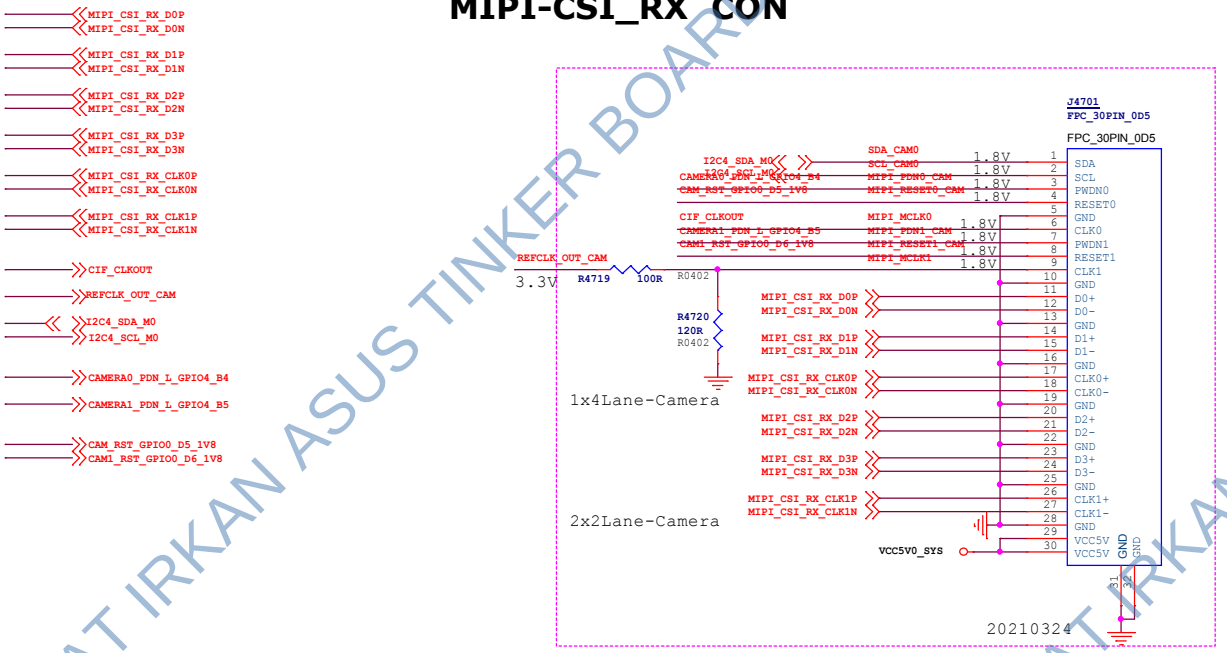

Firefly	www.t-firefly.com
Title: VI-Camera_MIPI-CSI	
File: ROC-3568-PC	REV: V0.1
Create Date: Thursday, May 07, 2020	Page Num: 31
Modify Date: Wednesday, May 19, 2021	Page Total: 45

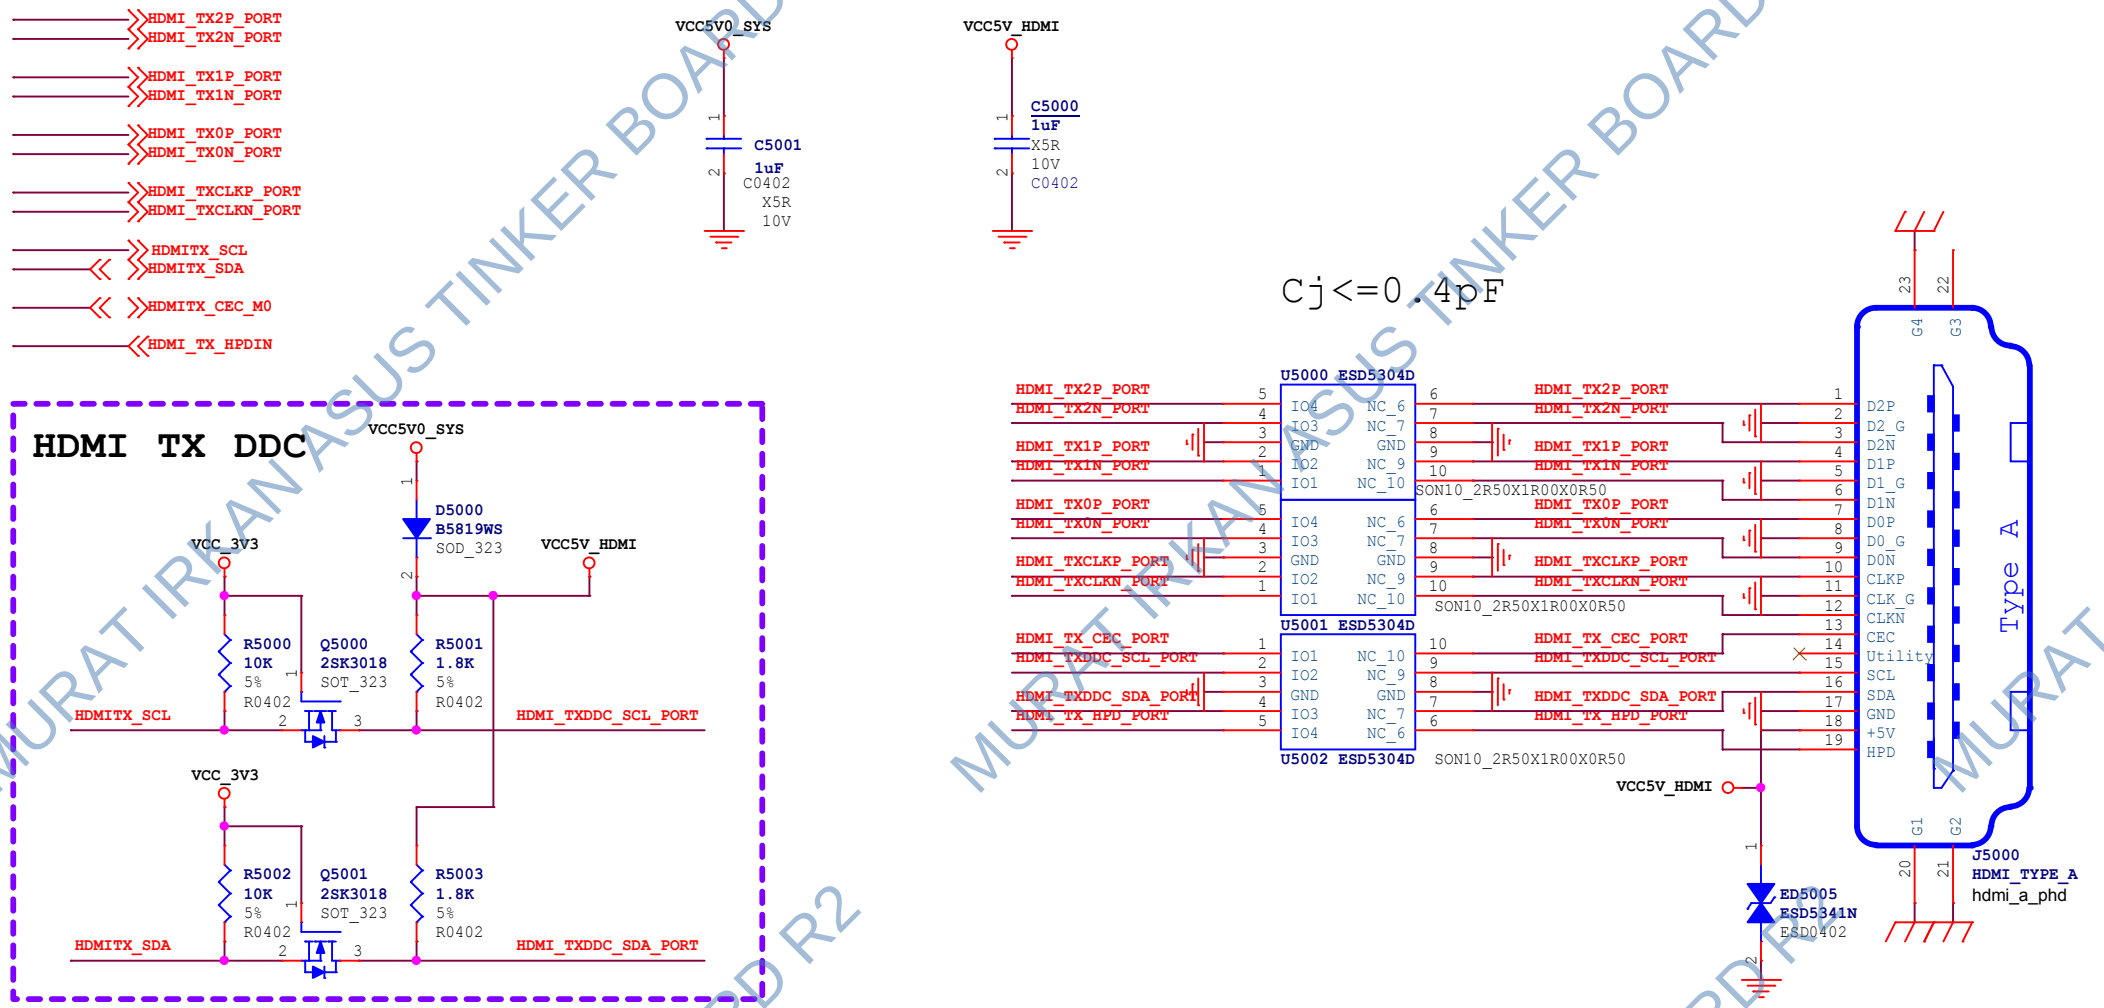

Rockchip Confidential

www.t-firefly.com

Title: VO-HDMI2.0 TX		
File: ROC-3568-PC		REV: V0.1
Create Date: Thursday, May 07, 2020	Page Num: 32	
Modify Date: Wednesday, May 19, 2021	Page Total: 45	

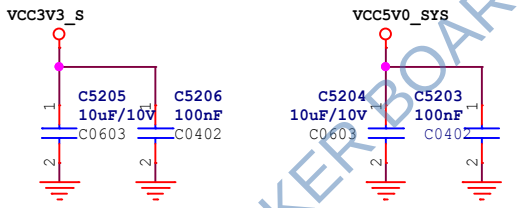

Rockchip Confidential

www.t-firefly.com

Title: VO-LCM_MIPI-DSI_TX0/LVDS_TX0		
File: ROC-3568-PC		REV: V0.1
Create Date: Tuesday, May 19, 2020	Page Num: 33	
Modify Date: Wednesday, May 19, 2021	Page Total: 45	

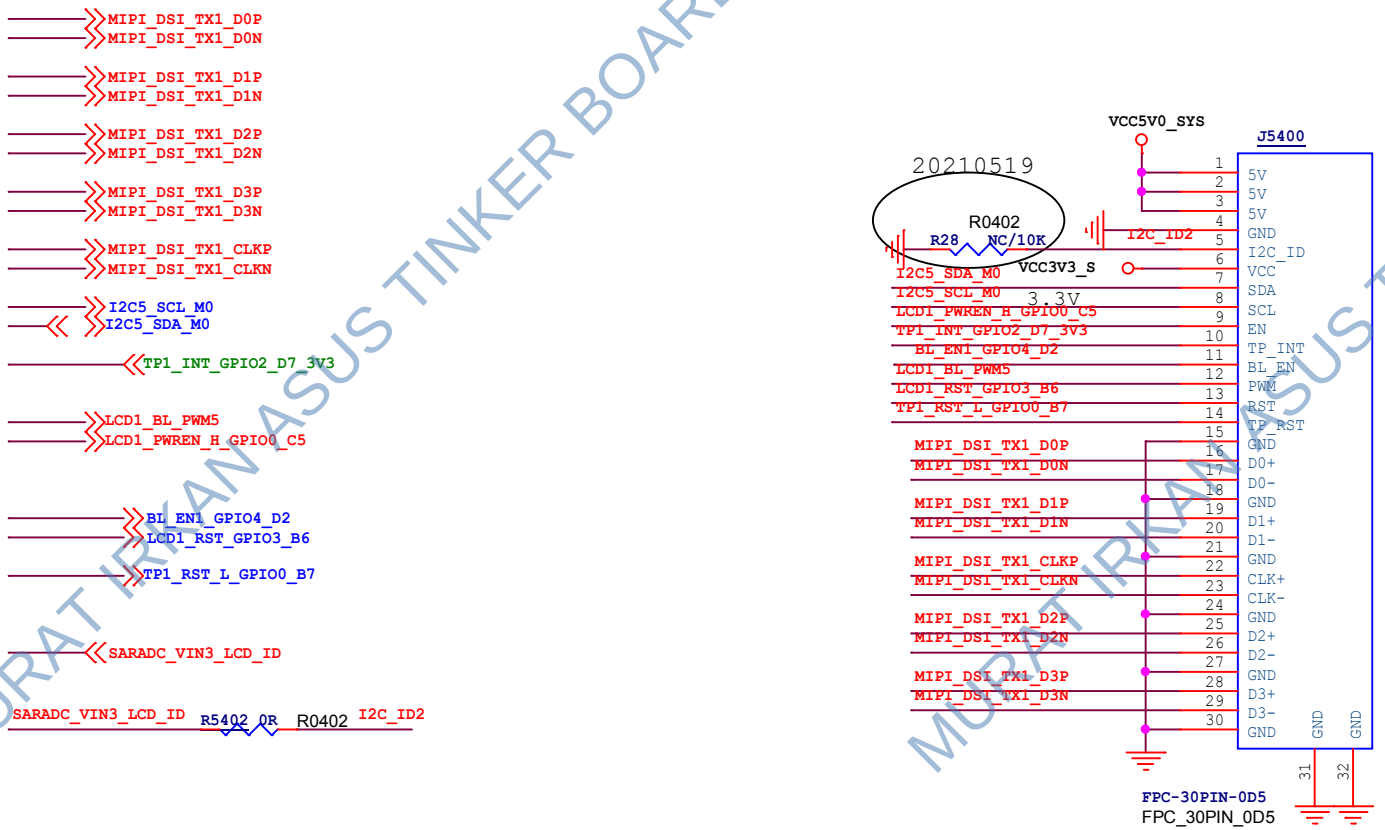

www.t-firefly.com

Title: VO-LCM_MIPI-DSI_TX1		
File: ROC-3568-PC		REV: V0.1
Create Date: Tuesday, May 19, 2020	Page Num: 34	
Modify Date: Wednesday, May 19, 2021	Page Total: 45	

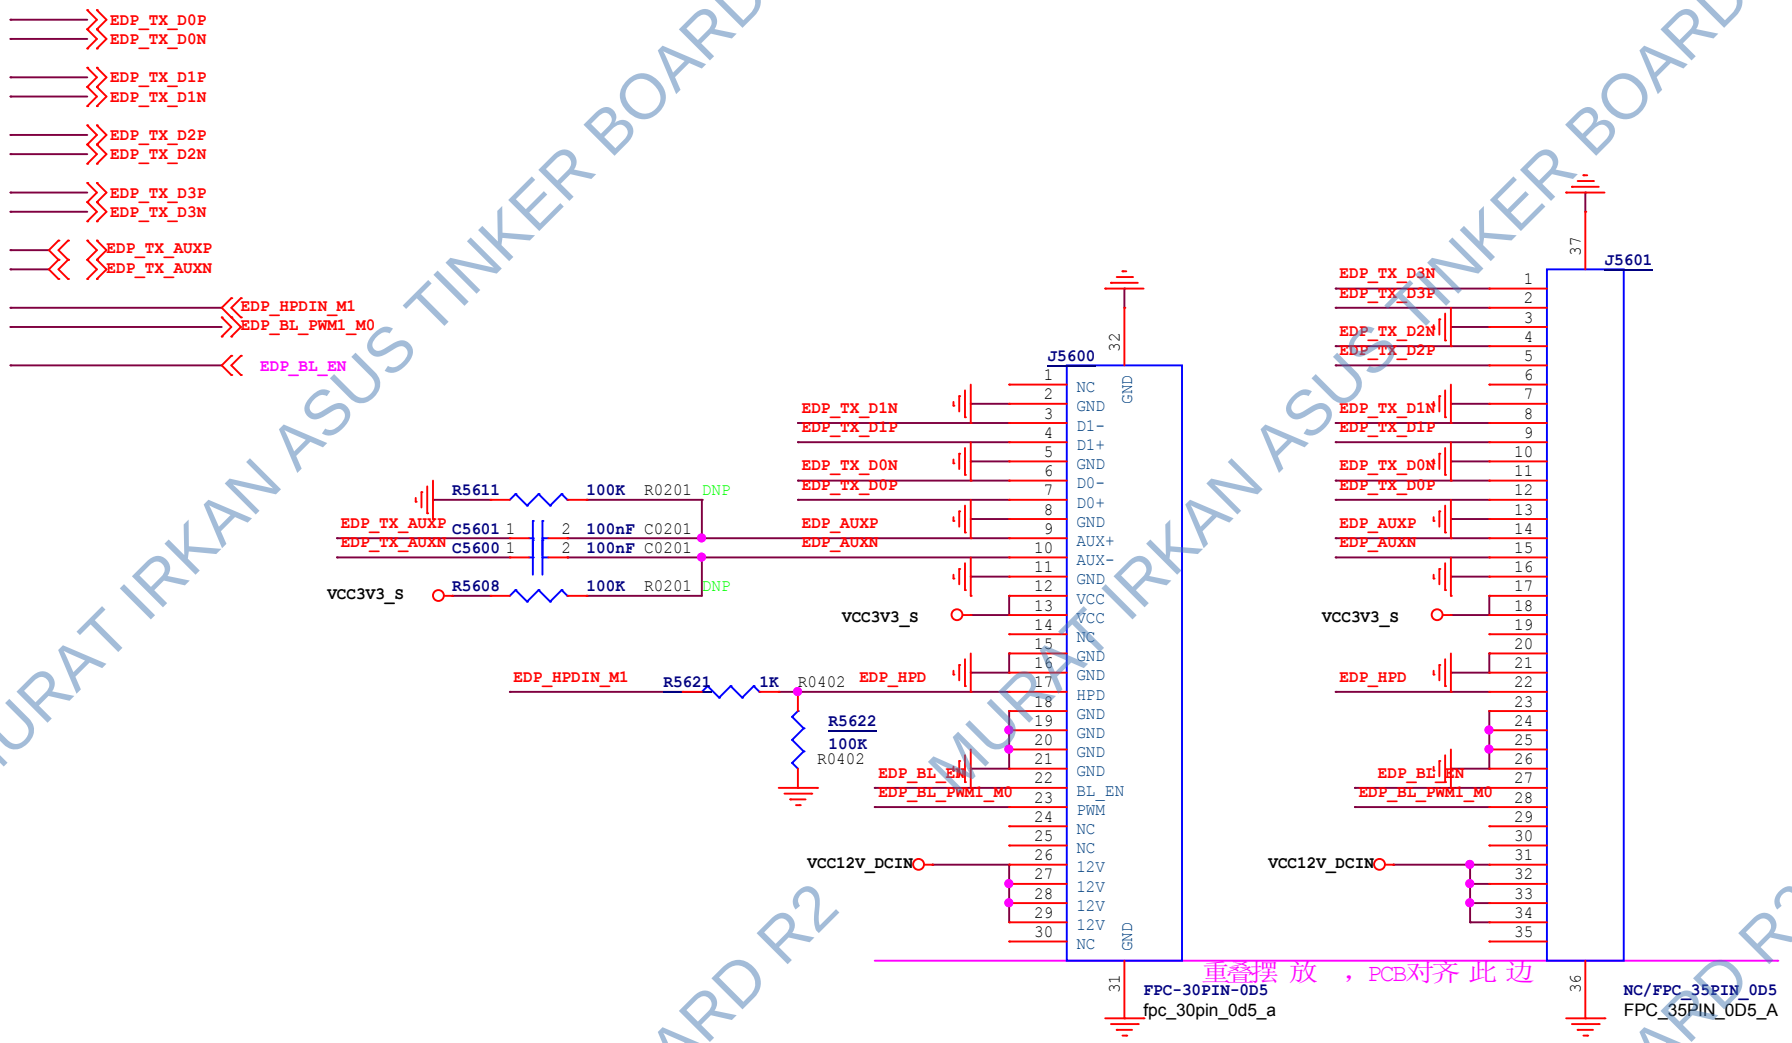

Default no place,Support 4K eDP Panel

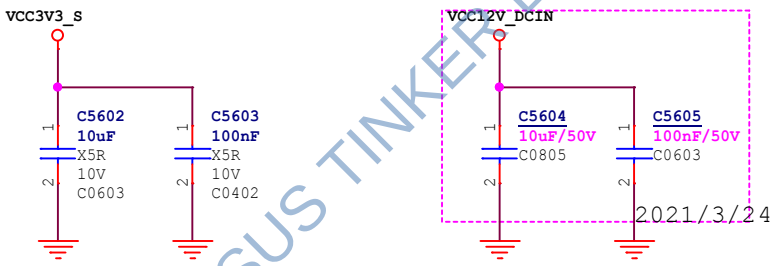

Rockchip Confidential

www.t-firefly.com

Title: VO-LCM_eDP		
File: ROC-3568-PC		REV: V0.1
Create Date: Saturday, July 18, 2020	Page Num: 35	
Modify Date: Wednesday, May 19, 2021	Page Total: 45	

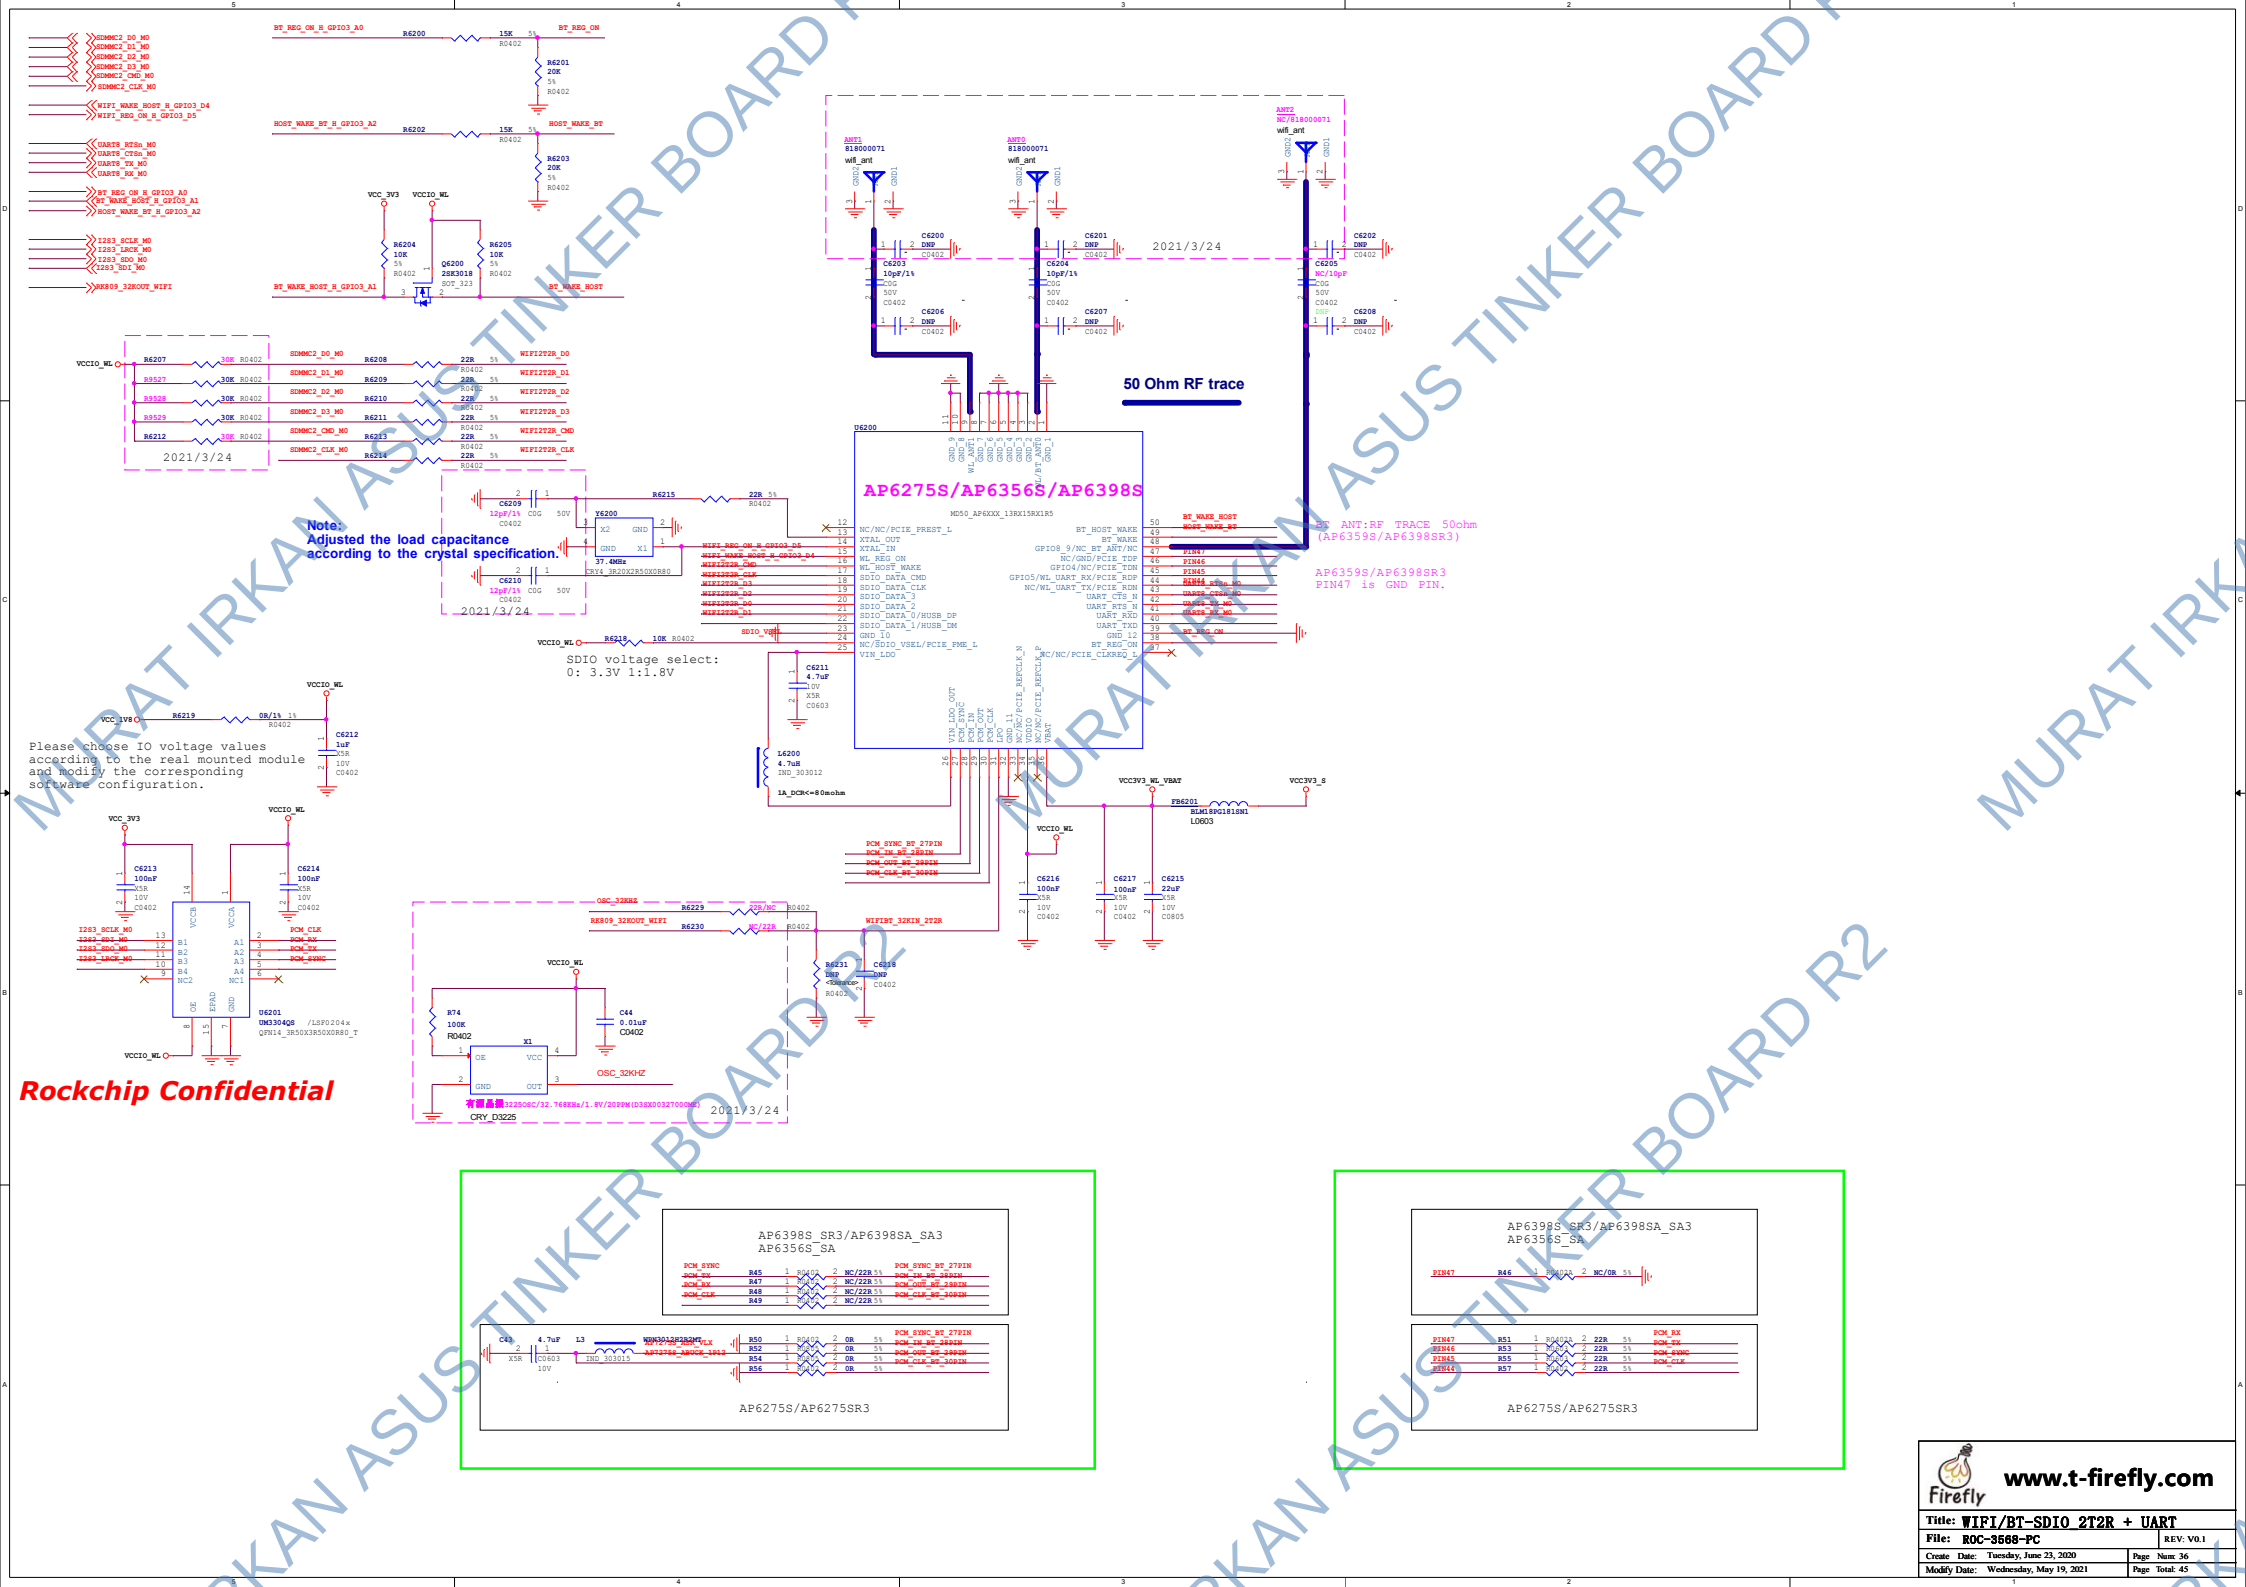
AP6275S/AP6356S/AP6398S
50 Ohm RF trace
Note:
Adjusted the load capacitance according to the crystal specification.
SDIO voltage select:
0: 3.3V 1:1.8V
Please choose IO voltage values according to the real mounted module and modify the corresponding software configuration.
BT ANT:RF TRACE 50ohm (AP6359S/AP6398SR3)
AP6359S/AP6398SR3 PIN47 is GND PIN.
AP6398S_SR3/AP6398SA_SA3
AP6356S_SA
AP6275S/AP6275SR3
2021/3/24
Rockchip Confidential
www.t-firefly.com
Title: WIFI/BT-SDIO 2T2R + UART
File: ROC-3568-PC
REV: V0.1
Create Date: Tuesday, June 23, 2020
Modify Date: Wednesday, May 19, 2021
Page Num: 36
Page Total: 45

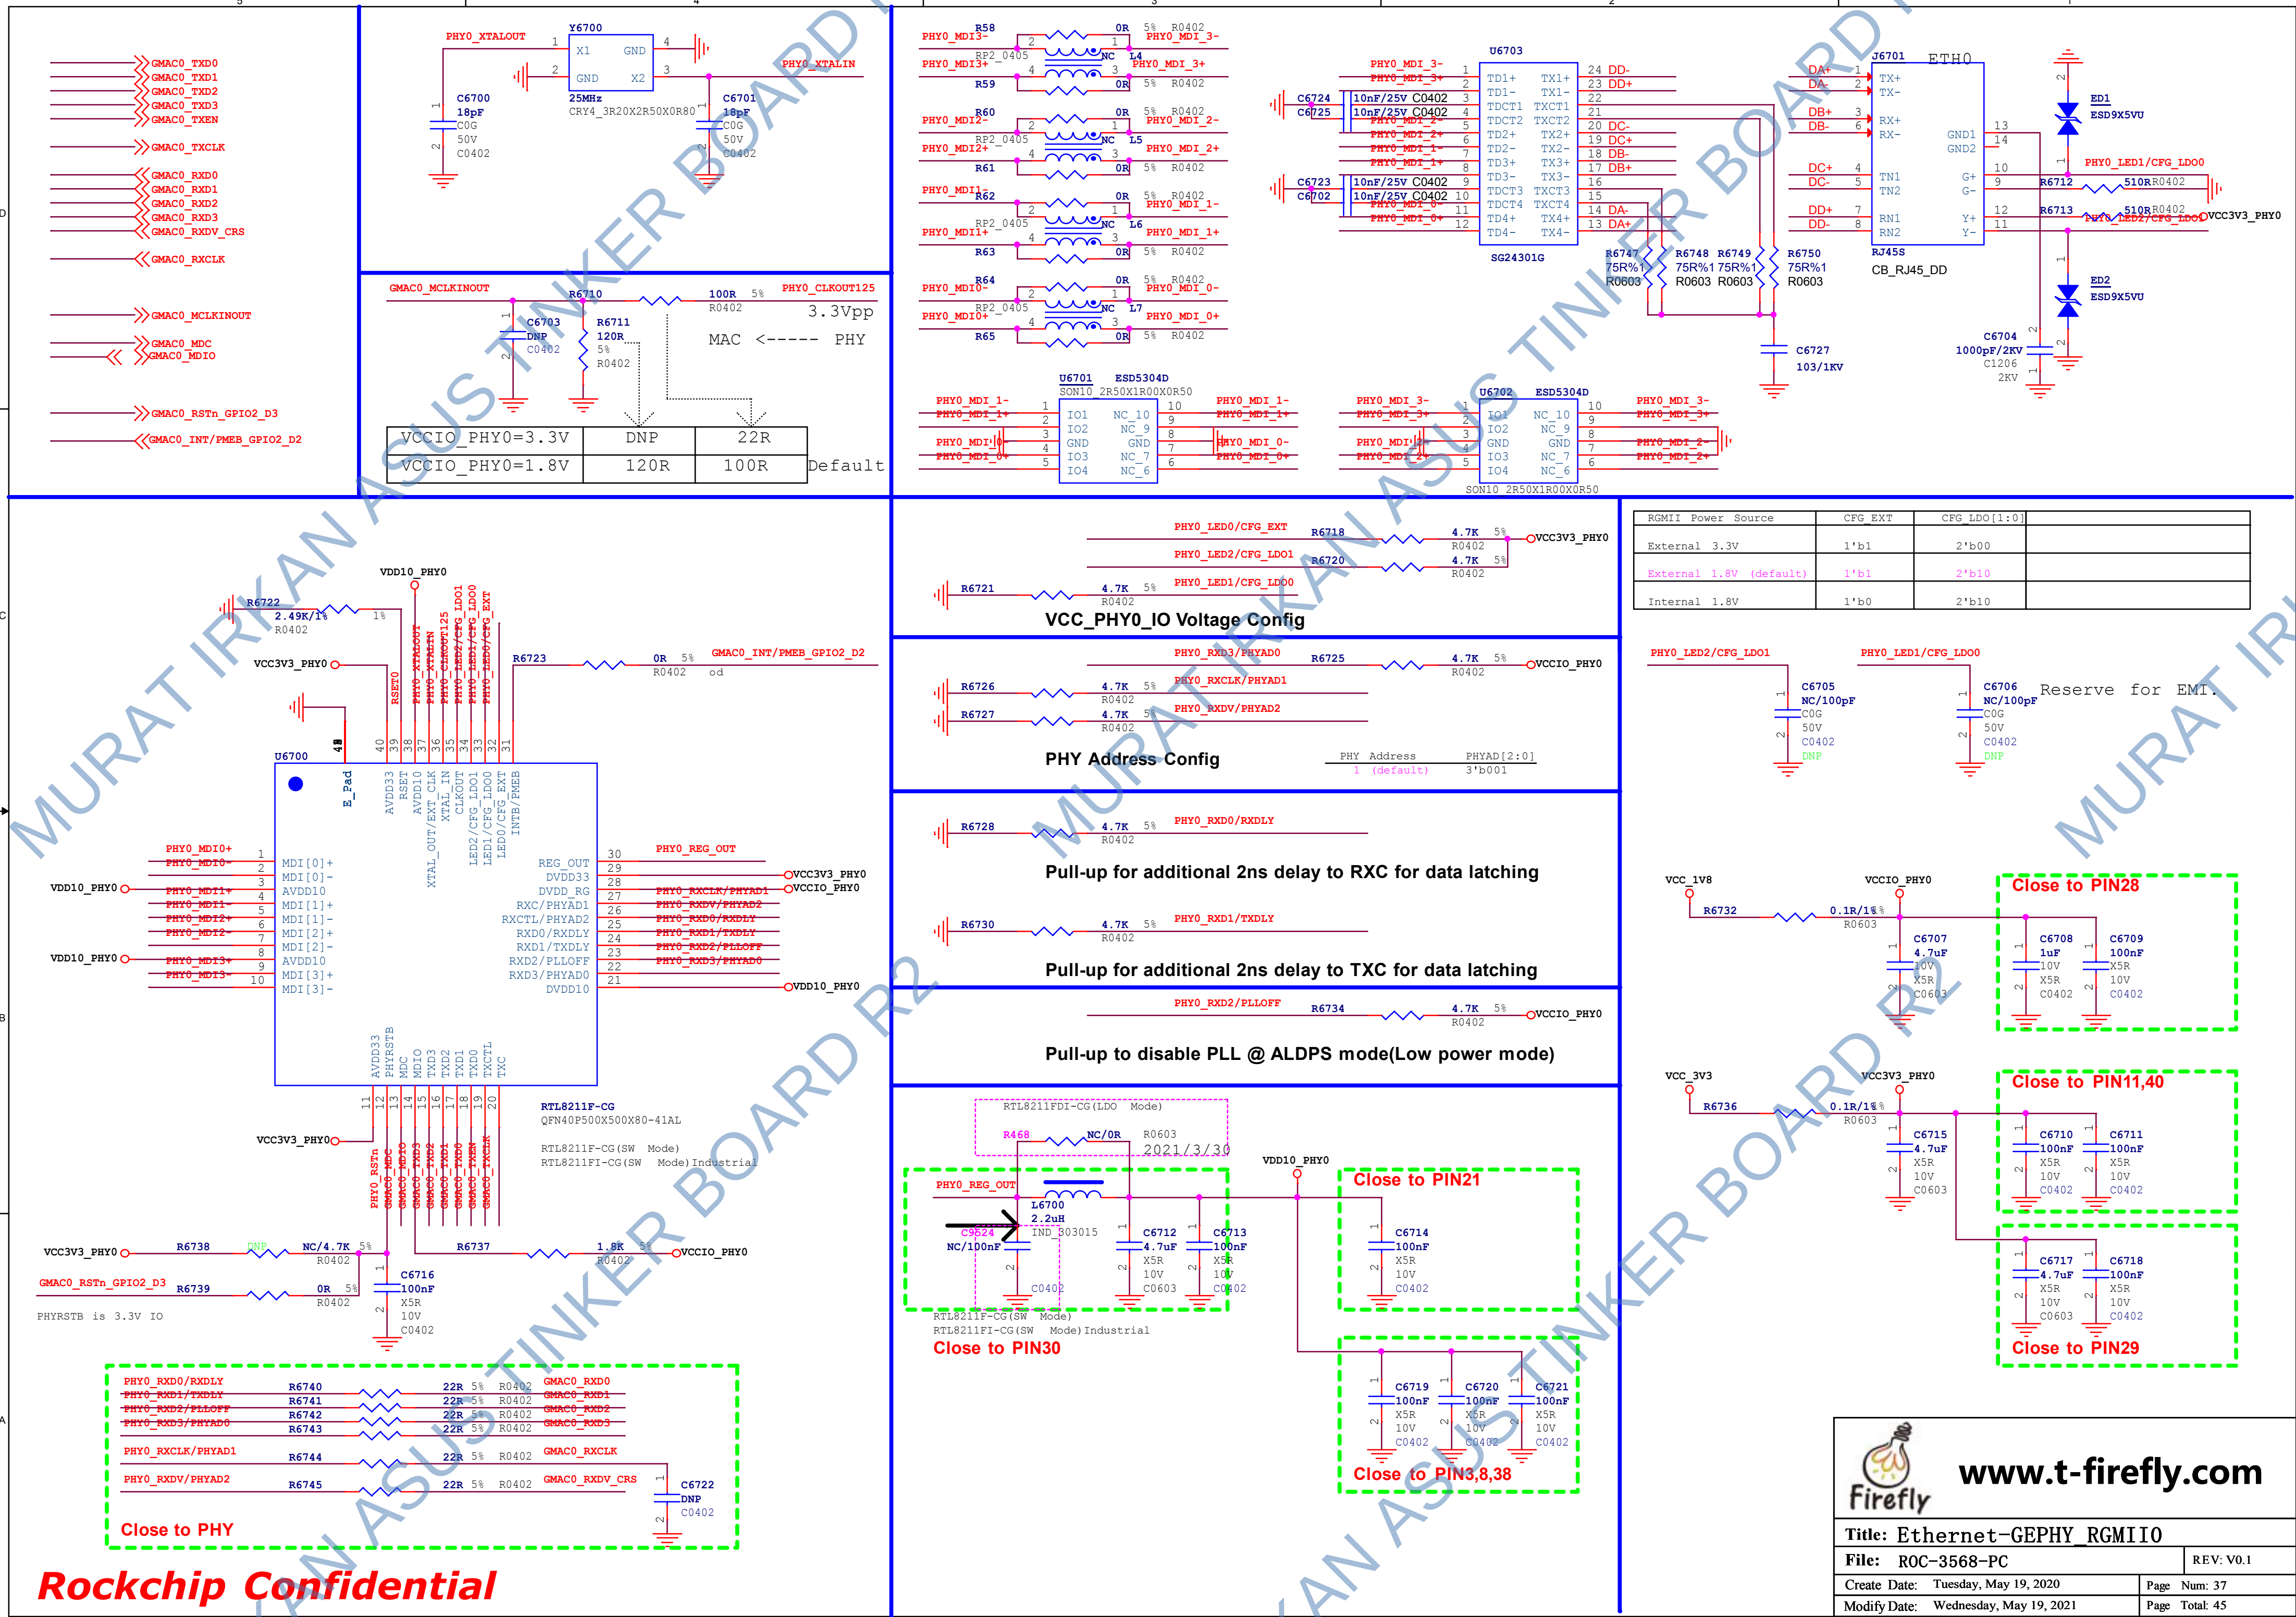

RGMII Power Source	CFG_EXT	CFG_LDO[1:0]
External 3.3V	1'b1	2'b00
External 1.8V (default)	1'b1	2'b10
Internal 1.8V	1'b0	2'b10

Rockchip Confidential

www.t-firefly.com

Title: Ethernet-GEPHY_RGMII0

File: ROC-3568-PC — REV: V0.1

Create Date: Tuesday, May 19, 2020 — Page Num: 37

Modify Date: Wednesday, May 19, 2021 — Page Total: 45

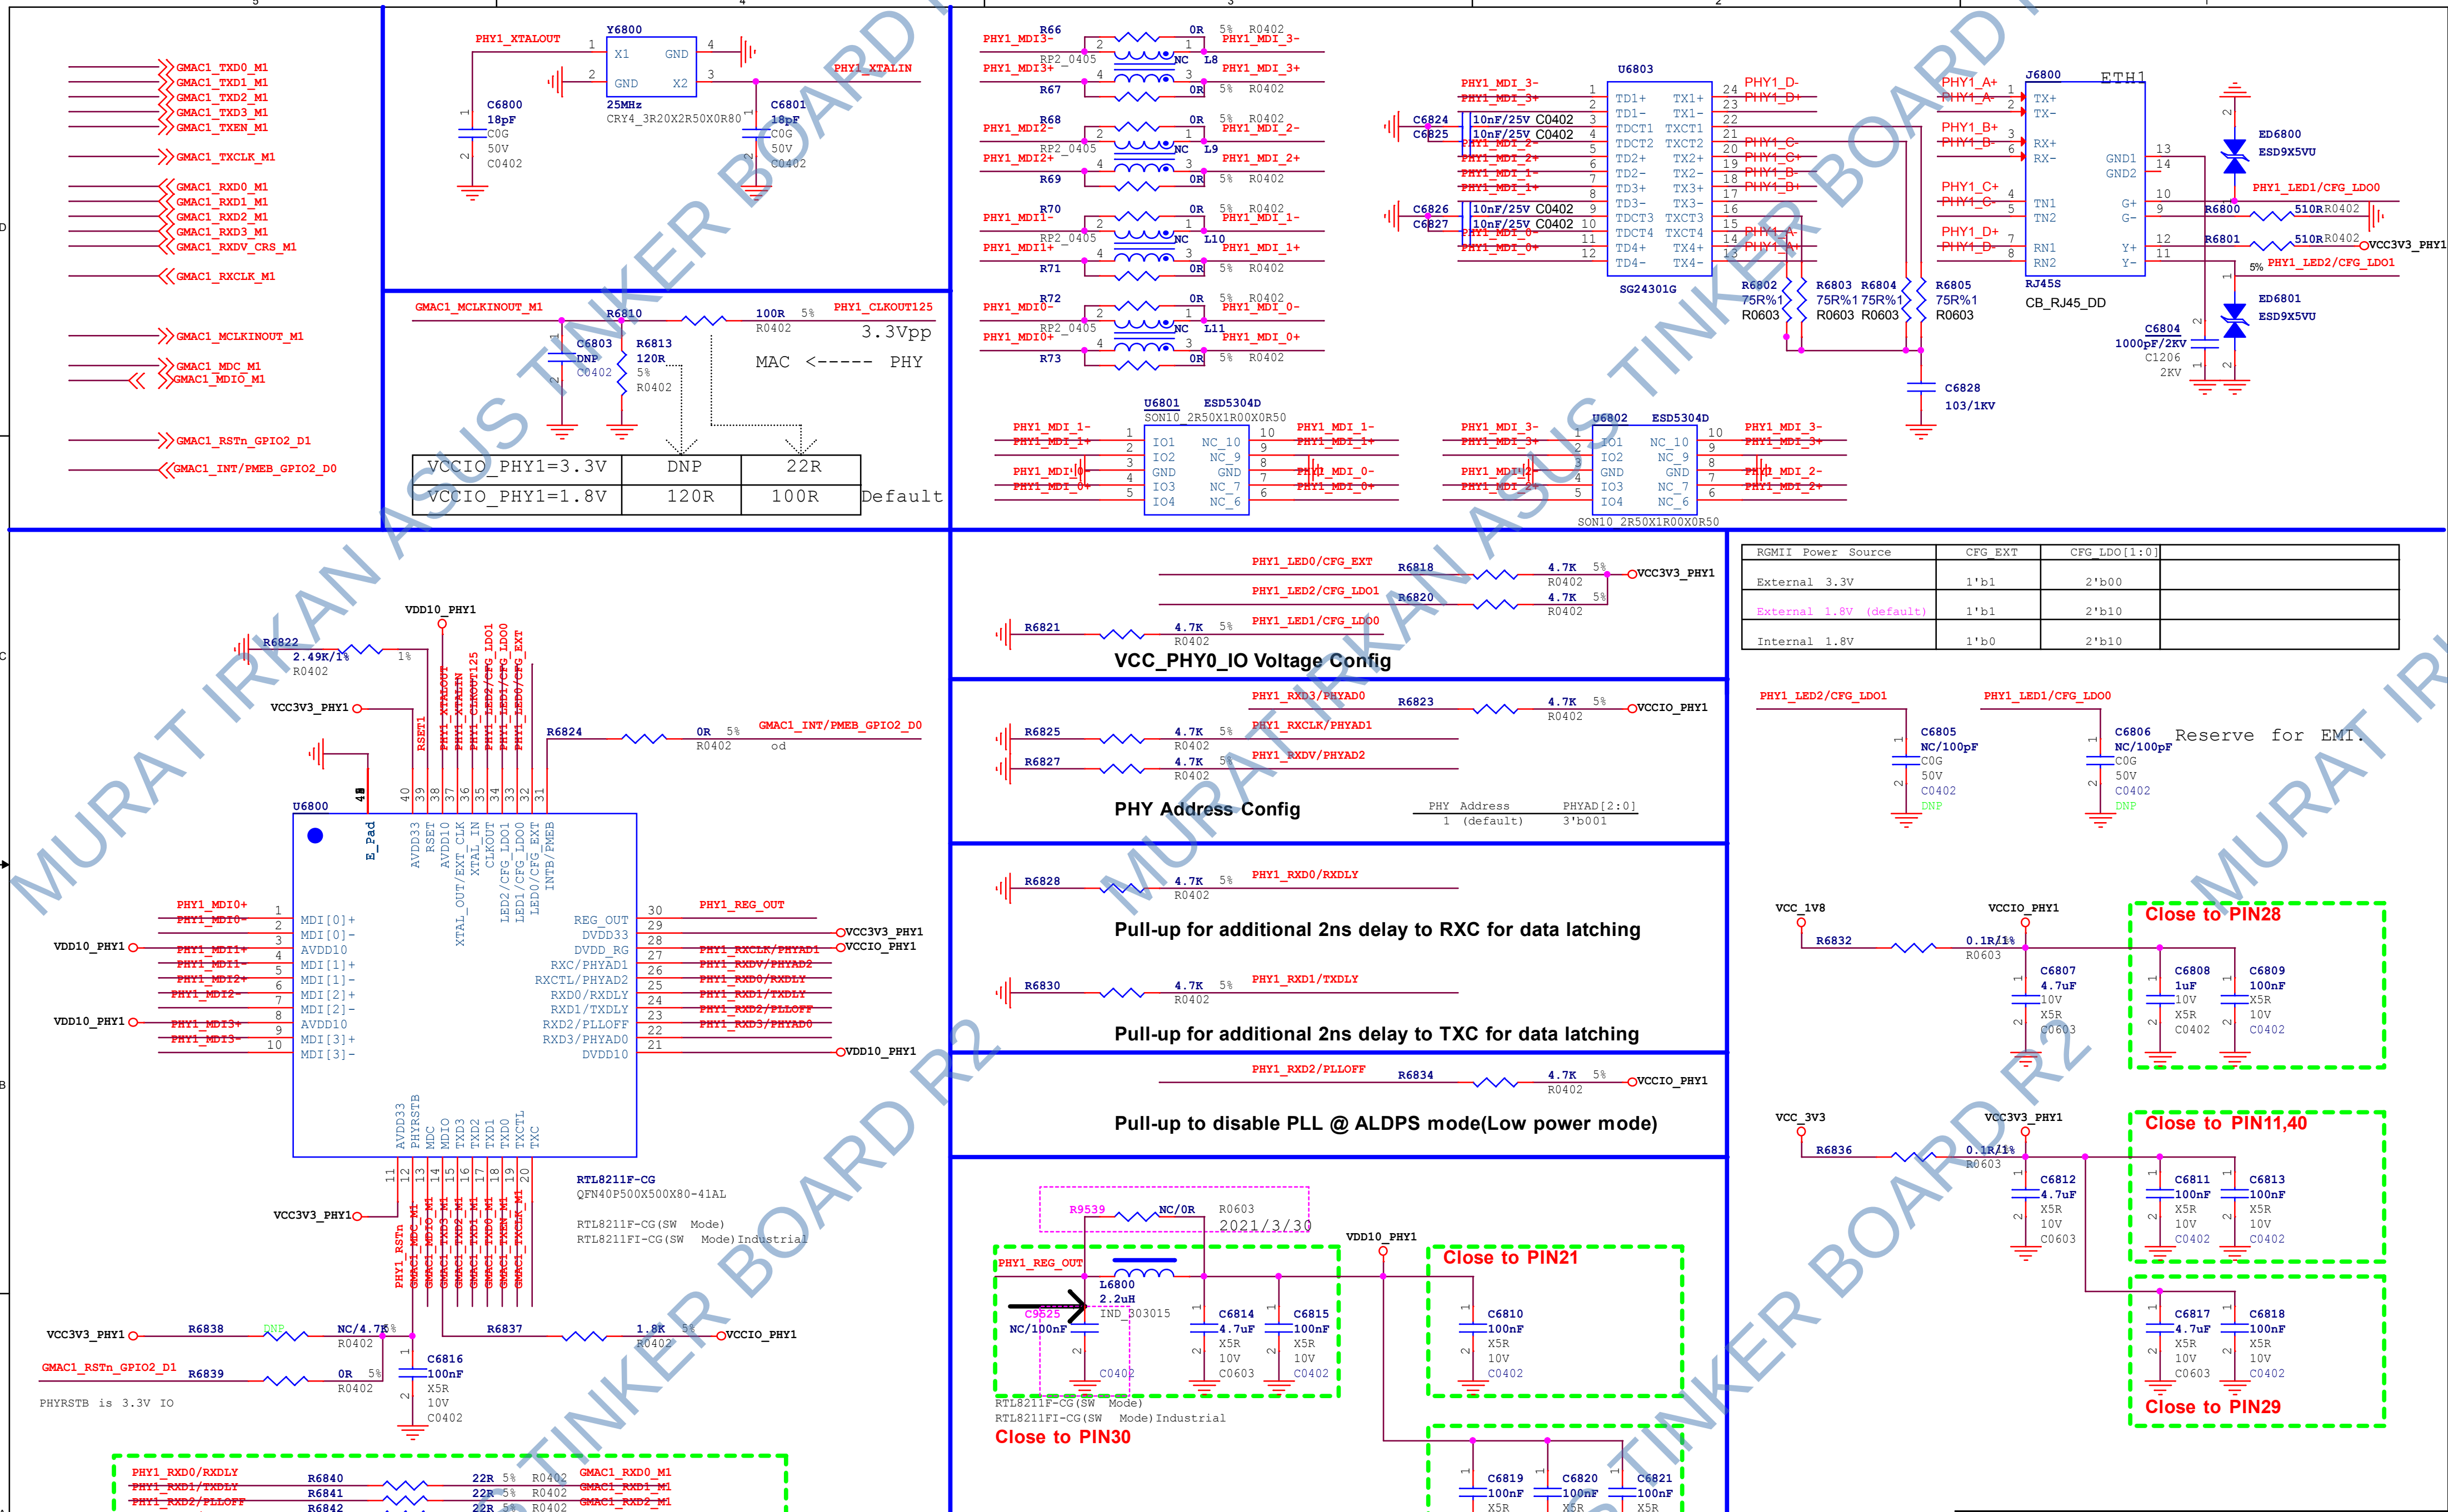

Rockchip Confidential

www.t-firefly.com

Title:	Ethernet-GEPHY_RGMII1		
File:	ROC-3568-PC		REV: V0.1
Create Date:	Tuesday, May 19, 2020	Page	Num: 38
Modify Date:	Wednesday, May 19, 2021	Page	Total: 45

Headphone

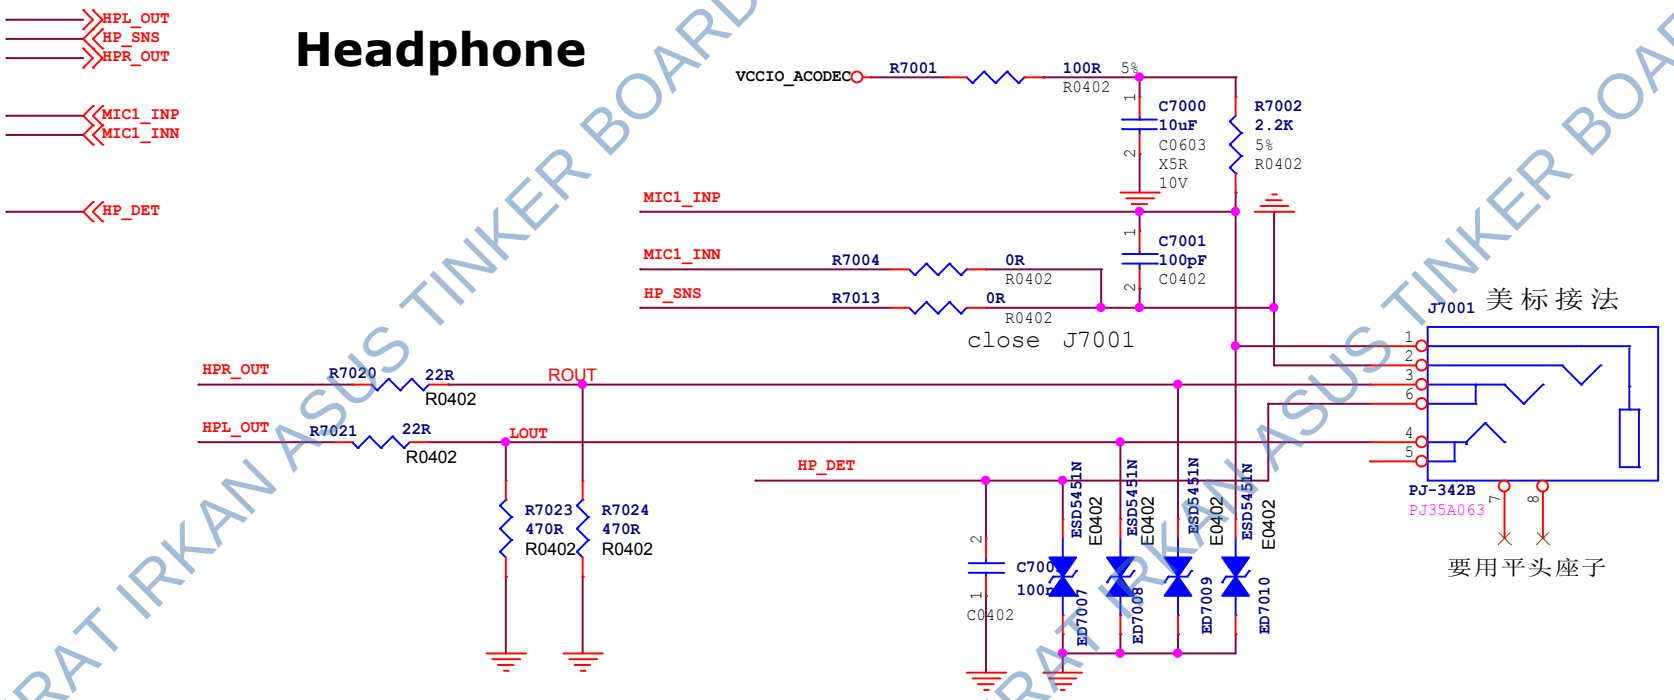

www.t-firefly.com

Title: Audio Port		
File: ROC-3568-PC		REV: V0.1
Create Date: Tuesday, May 19, 2020	Page Num: 39	
Modify Date: Wednesday, May 19, 2021	Page Total: 45	

PCIe3.0 x 2Lanes (X 4Slot)

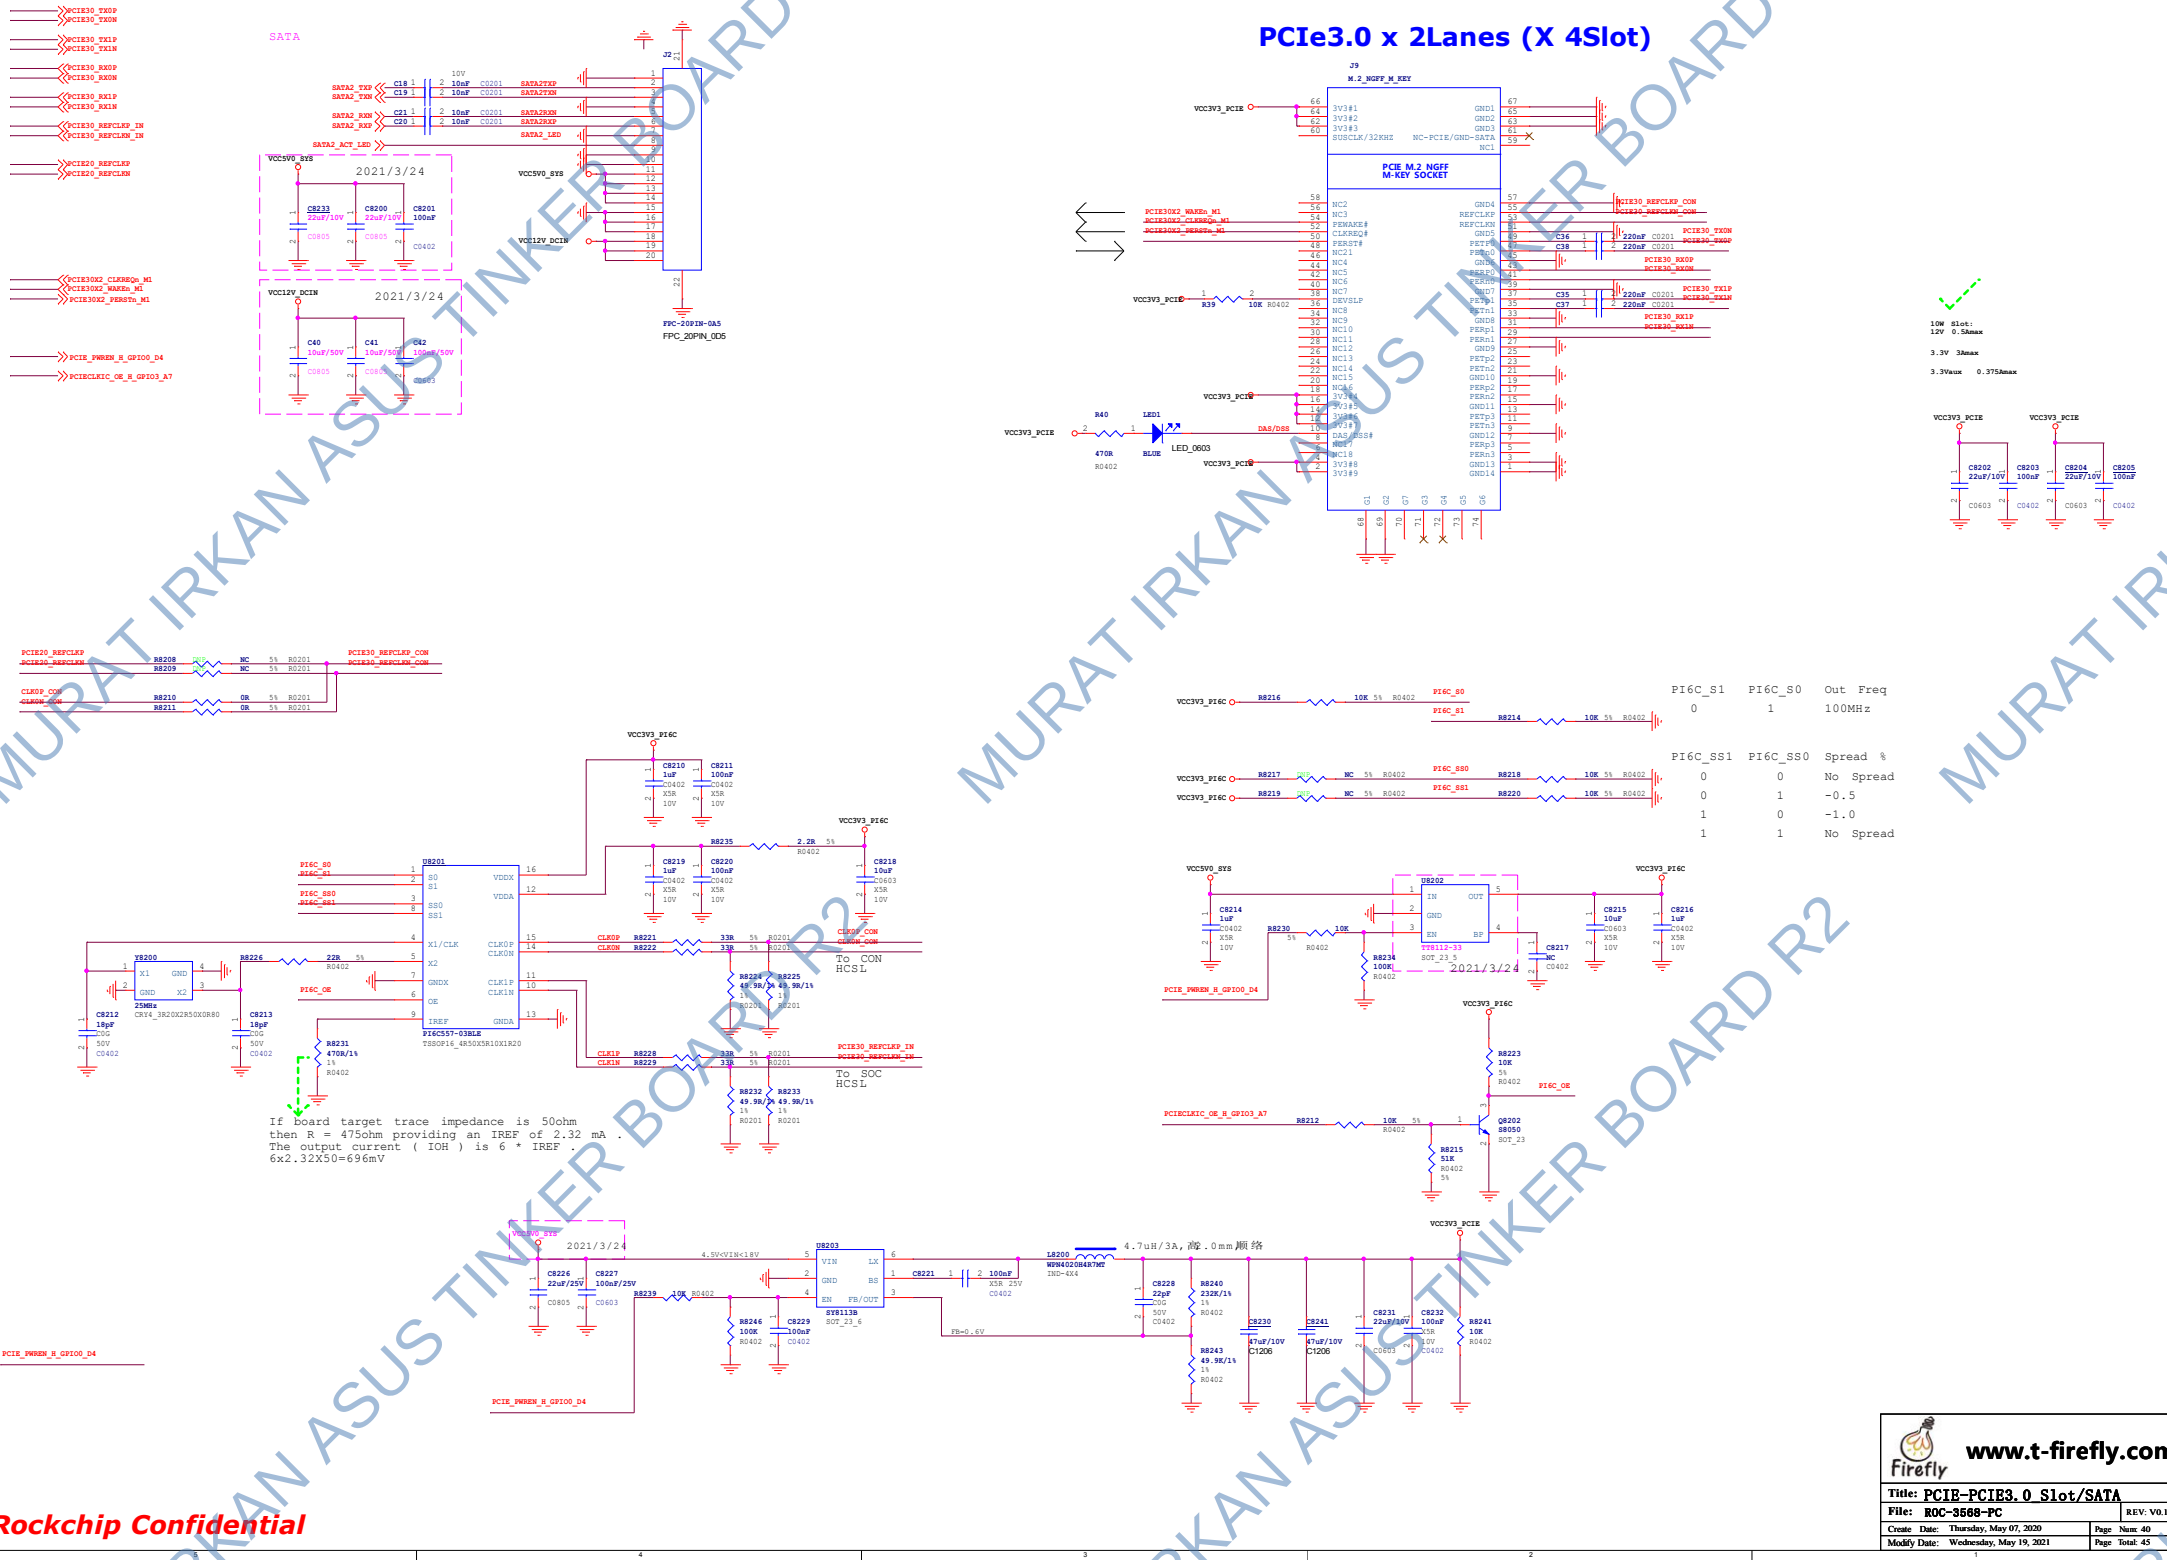

Rockchip Confidential

Title:	PCIE-PCIE3.0 Slot/SATA
File:	ROC-3568-PC
REV:	V0.1
Create Date:	Thursday, May 07, 2020
Page Num:	40
Modify Date:	Wednesday, May 19, 2021
Page Total:	45

www.t-firefly.com

I2C5_SCL_M0
I2C5_SDA_M0
GSENSOR_INT_L_GPIO3_C1

Gyroscope+G-sensor

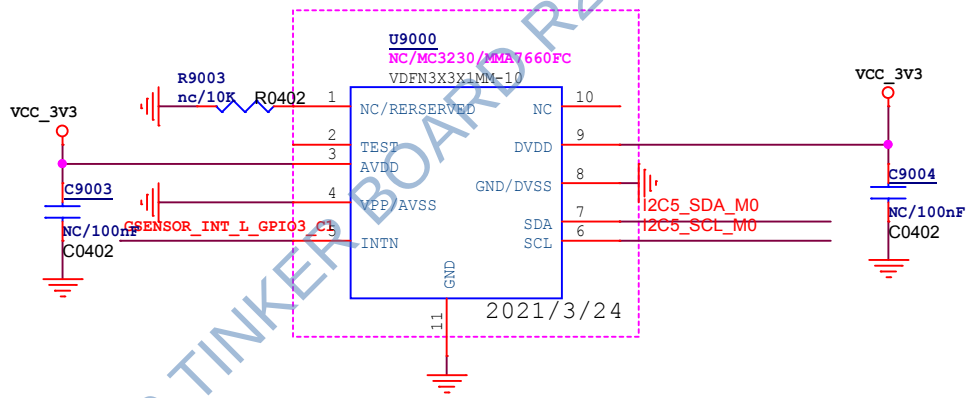

Rockchip Confidential

www.t-firefly.com

Title: Sensor		
File: ROC-3568-PC		REV: V0.1
Create Date: Tuesday, May 19, 2020	Page Num: 41	
Modify Date: Wednesday, May 19, 2021	Page Total: 45	

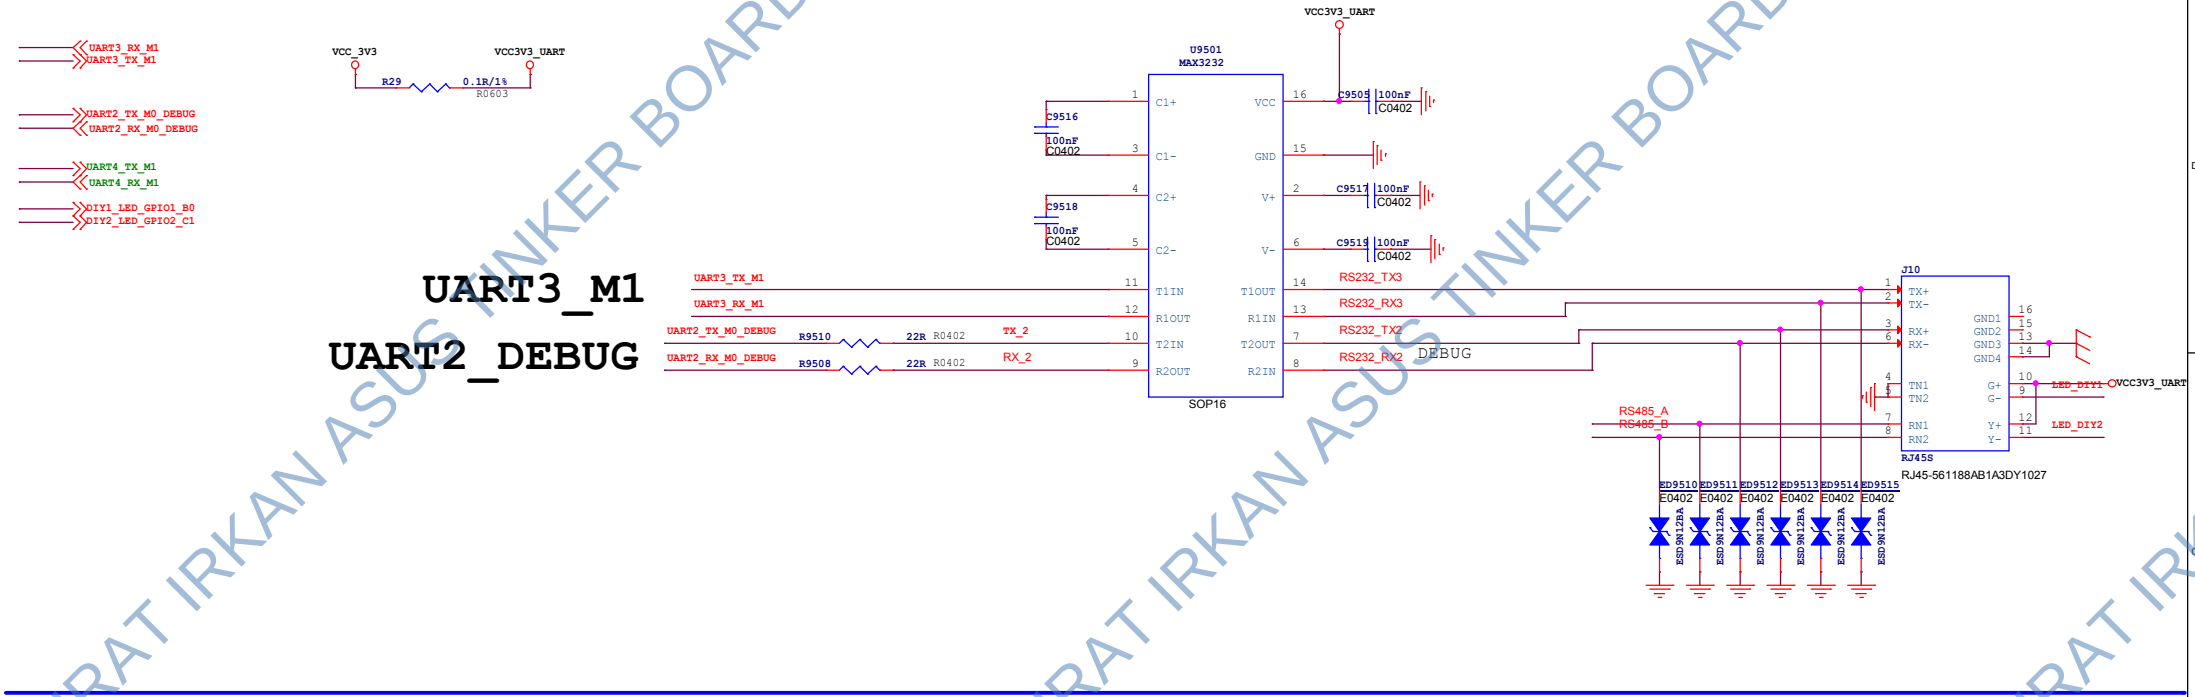

UART3_M1

UART2_DEBUG

RS485

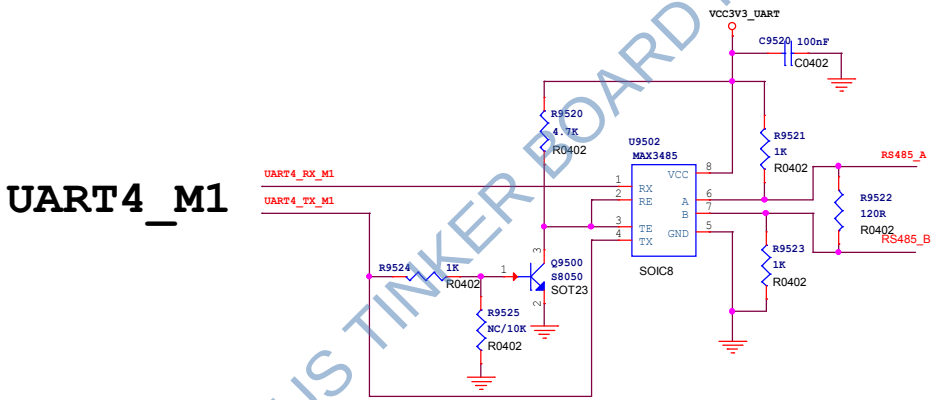

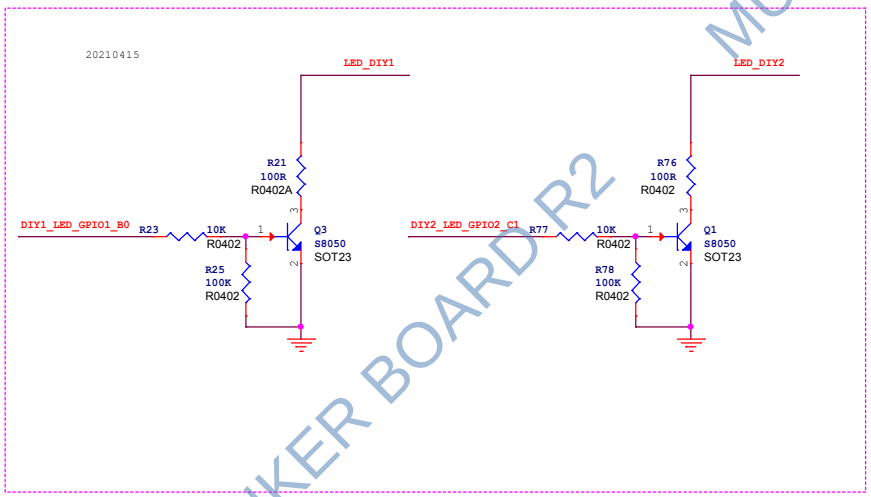

www.t-firefly.com

Title: RS232/RS485		
File: ROC-3568-PC		REV: V0.1
Create Date: Friday, July 10, 2020	Page:	Num: 42
Modify Date: Wednesday, May 19, 2021	Page:	Total: 45

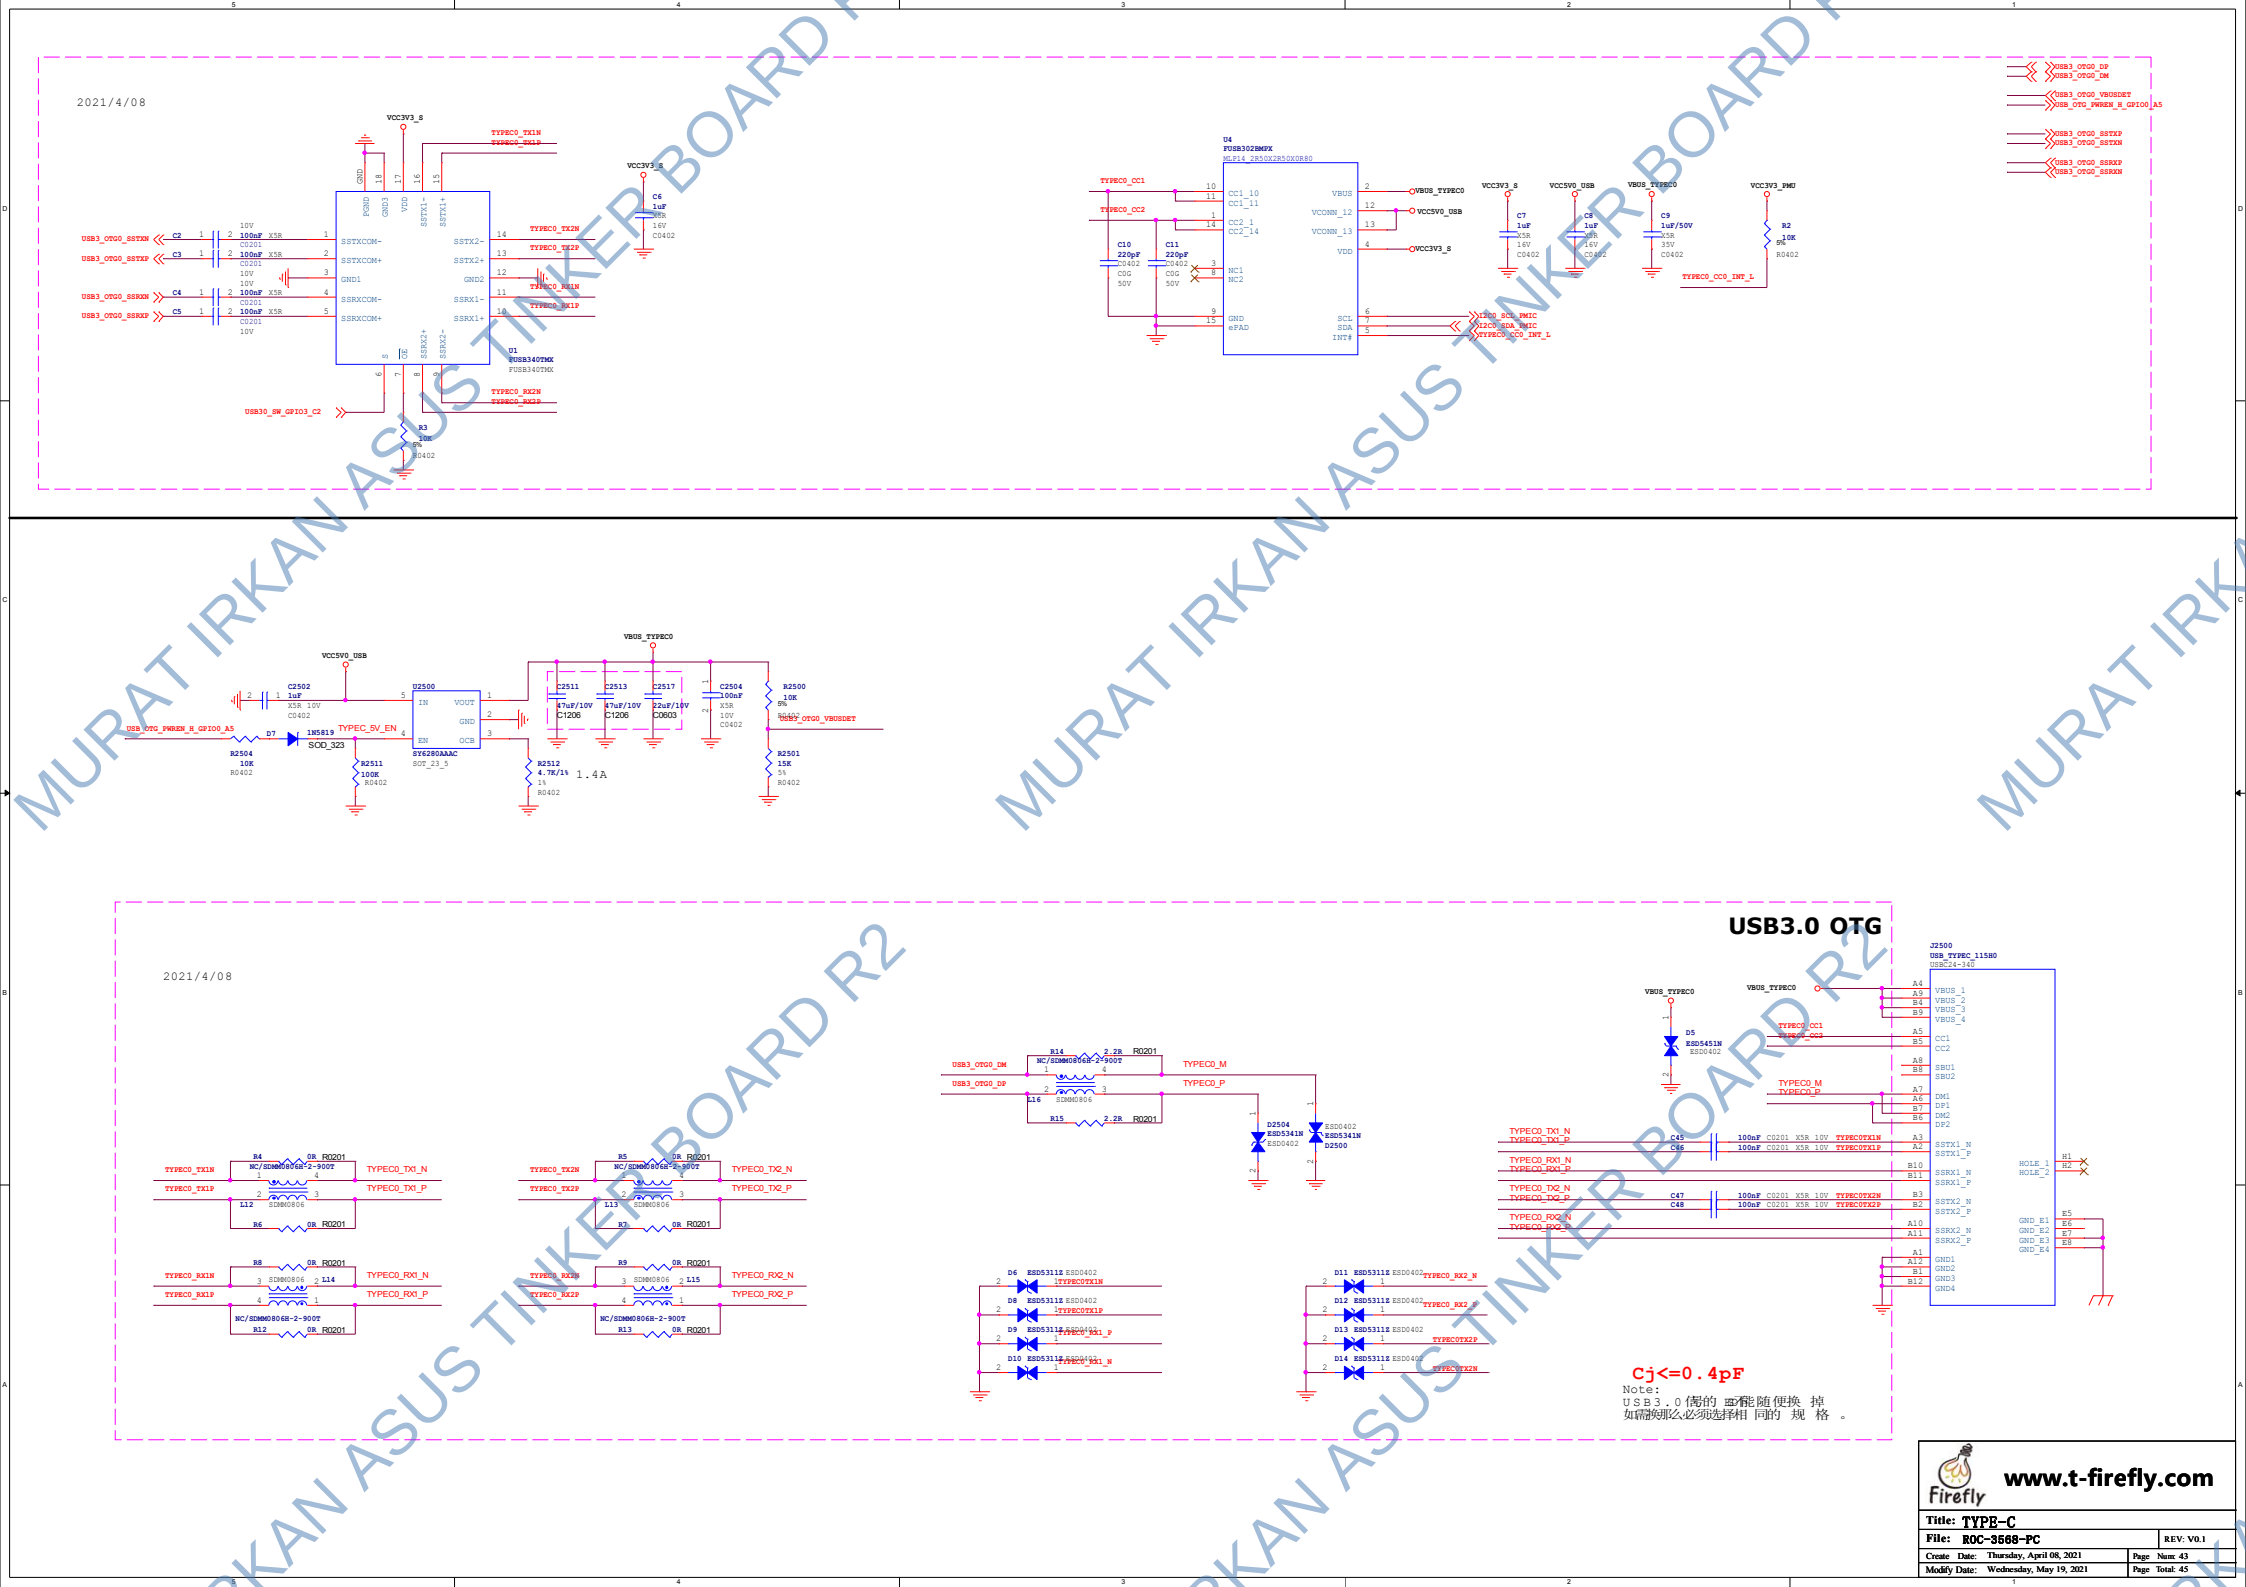
2021/4/08
VCC3V3_S
TYPEC0_TX1N
TYPEC0_TX1P
TYPEC0_TX2N
TYPEC0_TX2P
TYPEC0_RX1N
TYPEC0_RX1P
TYPEC0_RX2N
TYPEC0_RX2P
USB3_OTG0_SSTXN
USB3_OTG0_SSTXP
USB3_OTG0_SSRXN
USB3_OTG0_SSRXP
USB30_SW_GPIO3_C2
U1
FUSB340TMX
U4
FUSB302BMPX
TYPEC0_CC1
TYPEC0_CC2
VBUS_TYPEC0
VCC5V0_USB
VCC3V3_PMU
I2C0_SCL_PMIC
I2C0_SDA_PMIC
TYPEC0_CC0_INT_L
USB3_OTG0_DP
USB3_OTG0_DM
USB3_OTG0_VBUSDET
USB_OTG_PWREN_H_GPIO0_A5
TYPEC_5V_EN
U2500
SY6280AAAC
1.4A
USB3.0 OTG
J2500
USB_TYPEC_115H0
USB3_OTG0_DM
USB3_OTG0_DP
TYPEC0_M
TYPEC0_P
Cj<=0.4pF
Note:
USB3.0信号可能随便换一下
如需换那么必须选择相同的规格。
www.t-firefly.com
Title: TYPE-C
File: ROC-3568-PC
REV: V0.1
Create Date: Thursday, April 08, 2021
Modify Date: Wednesday, May 19, 2021
Page Num: 43
Page Total: 45

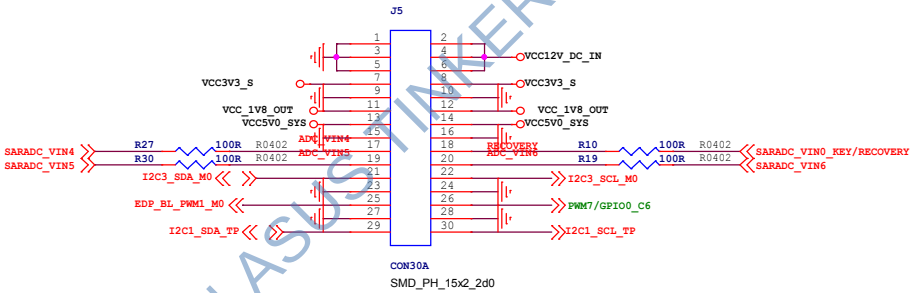

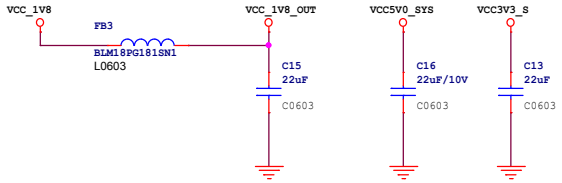

3.3V
3.3V

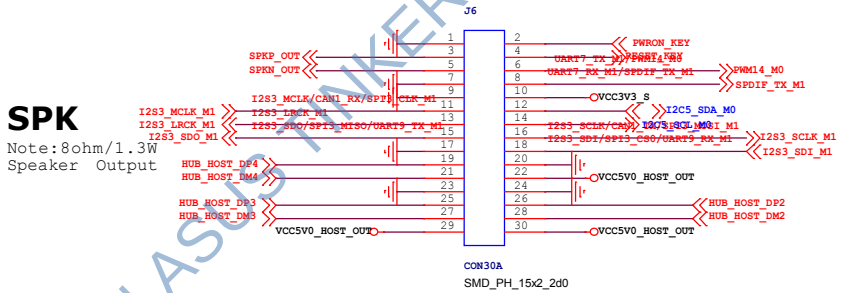

SPK

Note:8ohm/1.3W
Speaker Output

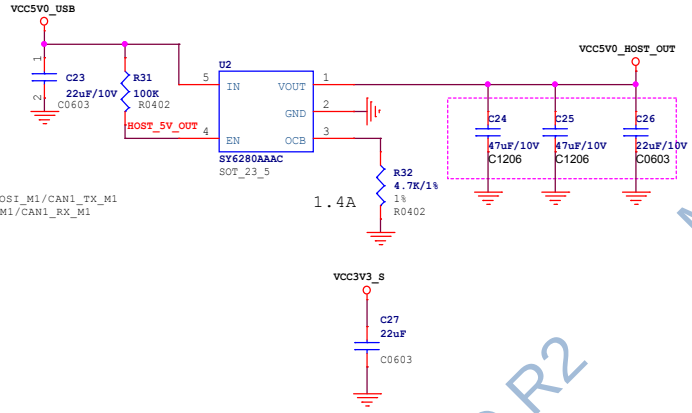

CAN1_M1

Firefly www.t-firefly.com

Title: Extension Interface		
File: ROC-3399-PC+		REV: V0.1
Create Date: Thursday, November 05, 2020	Page:	Num: 44
Modify Date: Wednesday, May 19, 2021	Page:	Total: 45

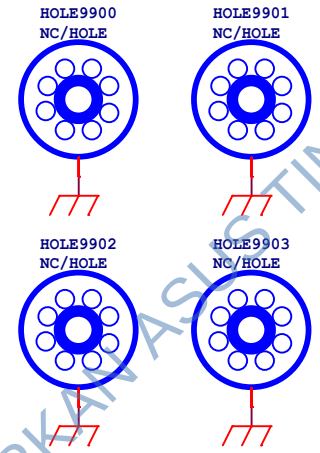

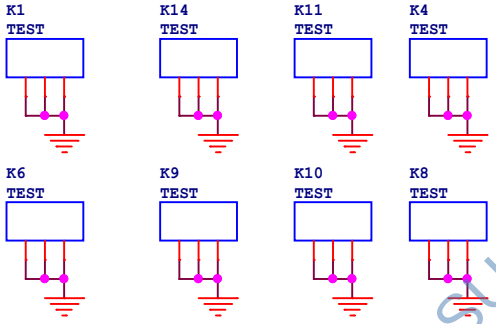

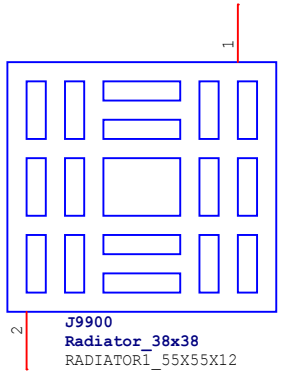



Rockchip Confidential

www.t-firefly.com

Title: Mark/Hole/Heatsink		
File: ROC-3568-PC		REV: V0.1
Create Date: Tuesday, May 19, 2020	Page Num: 45	
Modify Date: Wednesday, May 19, 2021	Page Total: 45	