

Scoreboard - Quick Reference

UVVM Verification IP

| Basic methods |
|---|
| config([instance], sb_config, [msg]) |
| config(sb_config_array, [msg]) |
| enable([instance], [msg]) |
| disable([instance], [msg]) |
| add_expected([instance], expected_element, [msg], [source_element]) |
| add_expected([instance], expected_element, tag_usage, tag, [msg], [source_element]) |
| check_actual([instance], actual_element, [msg]) |
| check_actual([instance], actual_element, tag_usage, tag, [msg]) |
| flush([instance], [msg]) |
| reset([instance], [msg]) |
| v_empty := is_empty([instance]) |
| v_entered_count := get_entered_count([instance]) |
| v_pending_count := get_pending_count([instance]) |
| v_match_count := get_match_count([instance]) |
| v_mismatch_count := get_mismatch_count([instance]) |
| v_drop_count := get_drop_count([instance]) |
| v_initial_garbage_count := get_initial_garbage_count ([instance]) |
| v_delete_count := get_delete_count([instance]) |
| set_scope(scope) |
| v_scope := get_scope(void) |
| enable_log_msg([instance], msg_id) |
| disable_log_msg([instance], msg_id) |
| report_counters([instance]) |

Scoreboard - Generics

| Generic element | Type | DEFAULT |
|------------------------------|--------------------|---------------------|
| expected_type | t_expected_element | std_logic_vector |
| actual_type | t_actual_element | std_logic_vector |
| match | function | = |
| expected_to_string | function | to_string |
| check_to_string | function | to_string |
| sb_config_default | t_sb_config | C_SB_CONFIG_DEFAULT |
| GC_QUEUE_COUNT_MAX | natural | 1000 |
| GC_QUEUE_COUNT_MAX_THRESHOLD | natural | 950 |

| Advanced methods |
|---|
| insert_expected([instance], identifier_option, identifier, expected_element, [msg], [source_element]) |
| insert_expected([instance], identifier_option, identifier, expected_element, tag_usage, tag, [msg], [source_element]) |
| delete_expected([instance], expected_element, [msg]) |
| delete_expected([instance], expected_element, tag_usage, tag, [msg]) |
| delete_expected([instance], tag_usage, tag, [msg]) |
| delete_expected([instance], identifier_option, identifier_min, identifier_max, [msg]) |
| delete_expected([instance], identifier_option, identifier, range_option, [msg]) |
| v_entry_num := find_expected_entry_num([instance], expected_element) |
| v_entry_num := find_expected_entry_num([instance], expected_element, tag_usage, tag) |
| v_entry_num := find_expected_entry_num([instance], tag_usage, tag) |
| v_position := find_expected_position([instance], expected_element) |
| v_position := find_expected_position([instance], expected_element, tag_usage, tag) |
| v_position := find_expected_position([instance], tag_usage, tag) |
| v_expected_element := peek_expected([instance]) |
| v_expected_element := peek_expected([instance], identifier_option, identifier) |
| v_source_element := peek_source([instance]) |
| v_source_element := peek_source([instance], identifier_option, identifier) |
| v_tag := peek_tag([instance]) |
| v_tag := peek_tag([instance], identifier_option, identifier) |
| v_expected_element := fetch_expected([instance], [msg]) |
| v_expected_element := fetch_expected([instance], identifier_option, identifier, [msg]) |
| v_source_element := fetch_source ([instance], [msg]) |
| v_source_element := fetch_source ([instance], identifier_option, identifier, [msg]) |
| v_tag := fetch_tag([instance], [msg]) |
| v_tag := fetch_tag ([instance], identifier_option, identifier, [msg]) |
| v_exists := exists([instance], expected_element, [tag_usage], [tag]) |
| v_exists := exists([instance], tag_usage, tag) |

Note 1: VOID is used as parameter in methods with no functional parameter. E.g. is_empty(VOID).

Note 2: optional parameters are in brackets, when there are multiple optional parameters all preceding parameters must also be listed. The exception for this is the instance parameter.

Copyright © 2018 by Bitvis AS. All rights reserved.



Scoreboard - Functional parameters

| Name | Type | Example(s) | Description |
|--|---------------------|--------------------------|--|
| sb_config | t_sb_config | | Configuration for the scoreboard. |
| sb_config_array | t_sb_config_arry | | Array of t_sb_config. |
| scope | String | "UART" | The scope for the scoreboard instance. |
| expected_element | t_expected_element | v_uart_data | The element that shall be pushed to the queue. |
| actual_element | t_actual_element | v_uart_data | The element that shall be checked in scoreboard. |
| source_element | t_source_element | v_source_data | The element that is the raw-input to the DUT, before DUT-processing. For debugging and logging only. |
| void | t_void | VOID | Unused, empty input parameter. |
| instance | integer | 1 | The instance number of the scoreboard. The scoreboard can have several instances, each instance acts as an individual scoreboard with its own queue and statistics. Can also be ALL_INSTANCES and ALL_ENABLED_INSTANCES. |
| tag_usage | t_tag_usage | TAG | Enumerated type used before every tag is entered. In the function syntax-descriptions this argument is given as 'TAG' as this is the only option. |
| tag | string | "byte1", "uart_ch3", "7" | Tag of the scoreboard-element. |
| identifier_option | t_identifier_option | POSITION, ENTRY_NUM | Option for type of identifier used. Can only be POSITION or ENTRY_NUM. |
| identifier identifier_min identifier_max | positive | 1 | Positive integer value. Describes the position or entry number, depending on identifier_option. |
| range_option | t_range_option | AND_HIGHER | Enumerated type used to describe the range. Possible options: AND_HIGHER, AND_LOWER, SINGLE. |
| alert_level | t_alert_level | ERROR | The alert-level. |

Scoreboard - Configuration

Scoreboard configuration record 't_sb_config'

| Record element | Type | C_SB_CONFIG_DEFAULT | Description |
|---------------------------|---------------|---------------------|---|
| mismatch_alert_level | t_alert_level | ERROR | The severity level of alert if mismatch between expected and actual. |
| allow_lossy | boolean | FALSE | If TRUE all entries are searched until a matching entry is found, all entries before the match are dropped. If no matching entry is found a mismatch is registered. |
| allow_out_of_order | boolean | FALSE | If TRUE all entries are searched until match. If no matching entry is found a mismatch is registered. |
| overdue_check_alert_level | t_alert_level | WARNING | The severity level of alert if the time between entry and check is more than limit. |
| overdue_check_time_limit | time | 0 ns | The time limit of which the entries should be in scoreboard. 0 ns indicates no time limit. |
| ignore_initial_garbage | boolean | FALSE | If TRUE all mismatches before first match are ignored and increment the initial drop count. Typically used if garbage-data is expected at start-up. |

The configuration cannot be set with true for both allow_lossy and allow_out_of_order. This will raise a TB_ERROR when running the config method.

Scoreboard - Quick Reference Version 1.0.x - Last update: 2019-05-03 support@bitvis.no www.bitvis.no 2 (13)



Example of simple usage

```
Scoreboard declaration:
```

```
use work.slv_sb_pkg.all;
shared variable slv_sb : t_generic_sb;
```

In sequencer:

```
library bitvis_vip_scoreboard;
use bitvis_vip_scoreboard.generic_sb_support_pkg.all;
...
slv_sb.config(C_SB_CONFIG_DEFAULT); -- initialize scoreboard
slv_sb.enable(VOID); -- enable scoreboard
slv_sb.set_scope("SLV SB"); -- set name of scoreboard
...
slv_sb.add_expected(v_expected, "Adding expected");
...
slv_sb.check_actual(v_output, "Checking DUT output");
...
check_value(slv_sb.is_empty(VOID), ERROR, "Check that scoreboard is empty");
...
slv_sb.report counters(VOID);
```

Scoreboard details

All Scoreboard functions and procedures commonly referred to as methods are defined in the UVVM Scoreboard package, generic sb pkg.vhd

The scoreboard can be used with a single instance or with multiple instances. An instance is a separate queue with its own statistics. When multiple instances are used the methods are called with the instance parameter. When only using a single scoreboard instance, the instance parameter may be omitted if that instance is instance 1. Multiple instances are typically used when multiple scoreboards with the same data types are needed.

All parameters in brackets are optional. No optional parameter can be used without using the preceding optional parameter, with the exception of the instance parameter.

Each entry in the scoreboard instance consists of an expected element, source element and tag. Each entry also has an entry number, which is specific for each entry. The entry number is used as an identifier for a specific entry in some of the advanced methods.

A message parameter can be used for print to transcript for all methods that affect the data or the functionality of the scoreboard.



1 Basic methods

| Method | Description |
|-----------|---|
| config() | config([instance], sb_config, [msg]) config(sb_config_array, [msg]) |
| | This method updates the scoreboard instance with the configuration input. The method with sb_config parameter can be called with an instance parameter, and the sb_config is then applied to the specified instance. If there is no instance parameter the config is applied to instance 1. If the parameter is an array, the config at index n is applied to instance n. |
| | msg_id: ID_CONFIG |
| | <pre>Example: uart_sb.config(uart_sb_config); uart_sb.config(2, uart_sb_config, "Initialize config on instance 2"); uart_sb.config(uart_sb_config_array, "Initialize config on instances 1-5");</pre> |
| enable() | enable ([instance], [msg]) |
| | Enables the specified instance and must be called before any other method is called, except config(). This method can be called with ALL_INSTANCES as parameter. If there is no instance parameter instance 1 is enabled. |
| | msg_id: ID_CONFIG |
| | <pre>Example: uart_sb.enable(VOID); uart_sb.enable(2); enable instance 2 uart_sb.enable(ALL_INSTANCES); enable all instances</pre> |
| disable() | disable ([instance], [msg]) |
| | Disables the specified instance. This method can be called with ALL_INSTANCES as parameter. If there is no instance parameter instance 1 is disabled. |
| | msg_id: ID_CONFIG |
| | <pre>Example: uart_sb.disable(VOID); uart_sb.disable(2); disable instance 2 uart_sb.disable(ALL_INSTANCES); disable all instances</pre> |



add expected()

```
add_expected ( [instance], expected_element, [msg], [source_element] )
add_expected ( [instance], expected_element, tag_usage*, tag, [msg], [source_element] )
```

*NOTE: tag_usage can only be TAG

Inserts expected element at the end of scoreboard.

```
msg id: ID DATA
```

Example:

```
uart_sb.add_expected(x"AA");
uart_sb.add_expected(1, x"AA", TAG, "byte1", "Insert byte 1", x"A");
uart_sb.add_expected(1, x"AA", "Insert byte 1", x"A");
```

check_actual()

```
check_actual ([instance], actual_element, [msg]) check_actual ([instance], actual_element, tag_usage*, tag, [msg])
```

*NOTE: tag_usage can only be TAG

Checks received data against oldest element in the scoreboard. If the element is found, it is removed from the scoreboard and the matched-counter is incremented. If the element is not found, an alert is triggered and the mismatch-counter is incremented. If out-of-order is allowed the scoreboard is searched from front to back. The mismatch-counter is incremented if no match is found. If lossy is allowed the scoreboard is searched from front to back. If a match occurs, the match counter is incremented and the preceding entries dropped. If no match occurs, the mismatch counter is incremented.

msg_id: ID_DATA

Example:

flush()

Scoreboard - Quick Reference

flush ([instance], [msg])

Deletes all entries in the specified instance. Can also be called with parameter ALL_INSTANCES.

msg_id: ID_DATA

Example:

```
uart_sb.flush(VOID);
uart_sb.flush(2);
uart_sb.flush(ALL_INSTANCES);
```



| reset() | reset ([instance], [msg]) |
|---------------------|---|
| | Deletes all entries and resets the statistics in the specified instance. Config is not affected. Can also be called with parameter ALL_INSTANCES. |
| | msg_id: ID_CONFIG |
| | <pre>Example: uart_sb.reset(VOID); NO uart_sb.reset(2); uart_sb.reset(ALL_INSTANCES);</pre> |
| is_empty() | is_empty([instance]) |
| | Returns true if the scoreboard is empty. Returns true if instance is empty when instance parameter is specified. |
| | <pre>Example: if uart_sb.is_empty(1) then</pre> |
| get_entered_count() | get_entered_count ([instance]) |
| | Returns total number of entries that have been added or inserted into the scoreboard. |
| | <pre>Example: v_entered_count := uart_sb.get_entered_count(1);</pre> |
| get_pending_count() | get_pending_count([instance]) |
| | Returns the number of remaining entries in scoreboard. |
| | <pre>Example: v_pending_count := uart_sb.get_pending_count(1);</pre> |
| get_match_count() | get_match_count ([instance]) |
| | Returns the number of checks with match in scoreboard. |
| | <pre>Example: v_match_count := uart_sb.get_match_count(1);</pre> |
| | |



| get_mismatch_count() | get_mismatch_count ([instance]) |
|-----------------------------|--|
| | Returns the number of checks without match in scoreboard. |
| | <pre>Example: v_mismatch_count := uart_sb.get_mismatch_count(1);</pre> |
| get_drop_count() | get_drop_count([instance]) |
| | Returns the number of dropped items during lossy mode. Initial drop count is not included. |
| | <pre>Example: v_drop_count := uart_sb.get_drop_count(1);</pre> |
| get_initial_garbage_count() | get_initial_garbage_count ([instance]) |
| | Returns the number of dropped items before first match when ignore_initial_mismatch in config is TRUE. |
| | <pre>Example: v_initial_garbage_count := uart_sb.get_initial_garbage_count(1);</pre> |
| get_delete_count() | get_delete_count ([instance]) |
| | Returns the number of explicitly deleted items by delete and flush methods. |
| | <pre>Example: v_delete_count := uart_sb.get_delete_count(1);</pre> |
| set_scope() | set_scope (scope) |
| | Sets the scope of the scoreboard. |
| | msg_id: ID_CONFIG |
| | <pre>Example: uart_sb.set_scope("UART");</pre> |
| get_scope() | get_scope (void) |
| | Returns the scope of the scoreboard instance. |
| | <pre>Example: v_scope := uart_sb.get_scope(VOID); v_scope := uart_sb.get_scope(2);</pre> |
| | |



```
enable_log_msg()
                                            enable_log_msg ( [instance], msg_id )
                                            Enables the message id for the specified instance.
                                            Example:
                                                uart sb.enable log msg(ID CONFIG);
                                                uart_sb.enable_log_msg(2, ID_DATA);
                                                uart sb.enable log msg(ALL INSTANCES, ID CONFIG);
disable_log_msg()
                                            disable_log_msg ([instance], msg_id)
                                            Disables the message id for the specified instance.
                                            Example:
                                                uart sb.disable log msg(ID CONFIG);
                                                uart_sb.disable_log_msg(2, ID_DATA);
                                                uart_sb.disable_log_msg(ALL_INSTANCES, ID_CONFIG);
report_counters()
                                            report_counters ([instance])
                                            Prints the scoreboard results. If no instance parameter is specified all enabled instances is reported.
                                            Example:
                                                uart_sb.report_counters(VOID);
                                                uart_sb.report_counters(4);
                                                uart_sb.report_counters(ALL_ENABLED_INSTANCES);
```



2 Advanced methods

| Method | Description | | | |
|--|---|--|--|--|
| insert_expected() | insert_expected ([instance], identifier_option, identifier, expected_element, [msg], [source_element]) *NOTE: tag_usage can only be TAG insert_expected ([instance], identifier_option, identifier, expected_element, tag_usage*, tag, [msg], [source_element]) | | | |
| | Inserts expected element into the scoreboard in the specified position or after the entry specified by entry number, depending on the parameter identifier is POSITION or ENTRY_NUM respectively. | | | |
| | msg_id: ID_DATA | | | |
| | Example: uart_sb.insert_expected(POSITION, 5, x"AA"); insert element with value x"AA" at position 5 uart_sb.insert_expected(2, ENTRY_NUM, 23, x"AA", TAG, "byte3", "Insert byte 4", x"A"); insert element with value x"AA", tag "byte3" and source element x"A" after element with entry number 23 | | | |
| delete_expected() | delete_expected ([instance], element, [msg]) | | | |
| | Deletes the foremost matching entry from the scoreboard queue. When both tag and element is parameters both have to match. If identifier parameter is used, the specified entry is deleted. Identifier can be used with range_option set as SINGLE, AND_HIGHER and AND_LOWER. A range between identifier_min and identifier_m can also be defined, entries between and including these values are deleted. A TB_ERROR alert is reported if identifier is not found. | | | |
| | msg_id: ID_DATA | | | |
| | Example: uart_sb.delete_expected (v_received_data); uart_sb.delete_expected (TAG, "byte1"); uart_sb.delete_expected (1, ENTRY_NUM, v_entry_num, v_entry_num); uart_sb.delete_expected (1, ENTRY_NUM, v_entry_num, v_entry_num); uart_sb.delete_expected (1, POSITION, v_position, AND_LOWER, "Delete entry in specified position and positions lower"); | | | |
| find_expected_position() find_expected_entry_num() | find_expected_position / find_expected_entry_num ([instance], element, [msg]) find_expected_position / find_expected_entry_num ([instance], element, tag_usage*, tag, [msg]) find_expected_position / find_expected_entry_num ([instance], tag_usage*, tag, [msg]) | | | |
| | Returns entry number or position to entry if found, else -1. The search parameter can be tag, element or both. | | | |
| | msg_id: ID_DATA | | | |
| | <pre>Example: v_entry_num := uart_sb.find_expected_entry_num(x"AA"); v_position := uart_sb.find_expected_position(TAG, "byte1"); v_position := uart_sb.find_expected_position(1, x"AA", TAG, "byte1", "Find byte 1");</pre> | | | |



peek_expected() peek_source() peek_tag()

peek_expected / peek_source / peek_tag ([instance])
peek_expected / peek_source / peek_tag ([instance], identifier_option, identifier)

Returns the expected_element/source_element/tag of specified entry in scoreboard without deleting entry. Returns front entry expected_element/source_element/tag in scoreboard queue if no identifier specified. If identifier is not found TB_ERROR alert is reported and undefined is returned.

Example:

```
v_expected_element := uart_sb.peek_expected(VOID);
v_source_element := uart_sb.peek_source(1, POSITION, v_position);
v tag := uart_sb.peek_tag(1, ENTRY_NUM, v_entry_num);
```

fetch_expected() fetch_source() fetch_tag()

fetch_expected / fetch_source / fetch_tag ([instance], [msg]) fetch_expected / fetch_source / fetch_tag ([instance], identifier_option, identifier, [msg])

Returns the expected_element/source_element/tag of specified entry in scoreboard and deletes the entry. Returns the front entry expected_element/source_element/tag in scoreboard queue if no identifier specified. If identifier is not found TB_ERROR alert is reported and undefined is returned.

The method deletes the entry. If all information from an entry shall be retrieved, peek must be used for the first two entry elements.

msg id: ID DATA

Example:

```
v_expected_element := uart_sb.fetch_expected(VOID);
v_source_element := uart_sb.fetch_source(1);
v_tag := uart_sb.fetch_tag(1, ENTRY_NUM, v_entry_num, "Fetch_tag");
v_expected_element := uart_sb.fetch_expected(1, POSITION, v_position, "Fetch_expected");
```

exists()

```
exists ([instance], expected_element, [tag_usage*], [tag]) exists ([instance], tag_usage*, tag)
```

*NOTE: tag_usage can only be TAG

Returns true if entry found, false if not. If element and tag parameter is entered, both must match.

Example:

```
if uart_sb.exists(1, x"AA", TAG, "byte1") then ... if uart sb.exists(1, TAG, "byte1") then ...
```



3 Additional documentation

Additional documentation about UVVM and its features can be found under "/uvvm_vvc_framework/doc/".

4 Compilation

The Generic Scoreboard must be compiled with VHDL 2008.

It is dependent on the following libraries

- UVVM Utility Library (UVVM-Util), version 2.5.0 and up
- UVVM VVC Framework, version 2.3.0 and up

Before compiling the SBI VVC, assure that uvvm vvc framework and uvvm util have been compiled.

Compile order for the Generic Scoreboard:

| Compile to library | File | Comment |
|-----------------------|----------------------------|--|
| bitvis_vip_scoreboard | generic_sb_support_pkg.vhd | Config declaration |
| bitvis_vip_scoreboard | generic_sb_pkg.vhd | Generic Scoreboard |
| bitvis_vip_scoreboard | predefined_sb.vhd | Predefined packages with SLV and integer |

5 Simulator compatibility and setup

This VVC has been compiled and tested with Modelsim version 10.5b and Riviera-PRO version 2016.02.81. For required simulator setup see UVVM-Util Quick reference.



Appendix

A verification scoreboard typically includes some way to store expected outputs generated by e.g. the sequencer or a reference model, compare the expected outputs to actual outputs, and to keep track of pass and failure rates identified in the comparison process. The advantage of using a scoreboard is that the checking/monitor side remains simple and has no need to know what the test/stimulus generation side is doing. Figure 1 shows the dataflow through the scoreboard and its main functions.

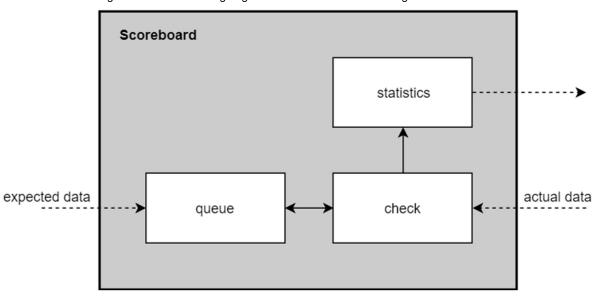


Figure 1: Basic scoreboard

The Scoreboard operate as a queue that holds generic elements. It is implemented as a protected type in a generic package, and a package declaration has to be made for each element type. The scoreboard offers advanced functionality for checking received data against expected data.

Out of order

Data can be checked out of order by enabling the allow out of order parameter in config.

Lossy

Lossy protocols, where data can be dropped during transfer, is supported by enabling allow lossy parameter in config.

Out of order and lossy cannot both be enabled at the same time; the scoreboard can't know if something is loss or out of order. In the case of both out of order and lossy, enable out of order. The number of remaining entries in the scoreboard at the end of the simulation is the number of dropped data elements.

Scoreboard - Quick Reference Version 1.0.x - Last update: 2019-05-03 support@bitvis.no www.bitvis.no 12 (13)



Use-cases

Scenarios where a scoreboard with out-of-order function is applicable:

- DUT with multiple execution paths:

 Data can take multiple paths inside DUT which affects the execution time. Modulating packet-order may be complex and all that is needed is a check that all data is getting through independent of order.
- Many-to-one interfaces:
 Data from multiple asynchronous interfaces into the DUT is being retransmitted in one interface out of the DUT.

Scenarios where a scoreboard with lossy function is applicable:

- Interfaces with packet-loss:
 Packet-loss is accepted and handled at a higher abstraction level. E.g. TCP.
- Non-monitored error-injection:

 Error is injected at a level that is not monitored into the DUT and the DUT stops all packets with wrong parity/CRC. Which packets that are lost is unpredictable.

PROPERTY

Disclaimer: This IP and any part thereof are provided "as is", without warranty of any kind, express or implied, including but not limited to the warranties of merchantability, fitness for a particular purpose and noninfringement. In no event shall the authors or copyright holders be liable for any claim, damages or other liability, whether in an action of contract, tort or otherwise, arising from, out of or in connection with this IP.