
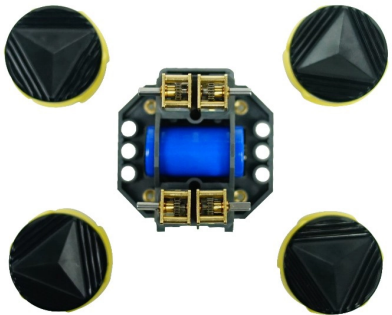


RoverC

SKU:K036



Description

RoverC is a programmable Mecanum wheel omnidirectional mobile robot base compatible with M5StickC. Simply insert the M5StickC to get started. The main control chip is STM32F030F4, with 4 N20 worm gear motors driven directly by motor drivers, enabling the Mecanum wheels to move omnidirectionally. Additionally, it provides 2 Grove-compatible I2C connectors for easy expansion with other modules. The base is compatible with LEGO holes, allowing for structural expansion. The back of the base is equipped with an 18350 (900mAh) battery, controlled by an independent switch, meeting the power and endurance needs of the car.

Features

- I2C Communication (0x38)
- Programmable Robot
- Remote Control
- Four Motor Drivers
- Omnidirectional Movement
- Equipped with 18350 Battery Base
- Flexible Movement

Includes

- 1 x RoverC


Applications

- Small Mobile Robots
- Remote Control
- Smart Toys

Specifications

Specification	Parameter
MCU	STM32F030F4P6
Communication Protocol	I2C:0x38
Net Weight	213g
Gross Weight	217g
Product Size	75 x 75 x 55mm
Package Size	115 x 85 x 65mm

Operating Instructions

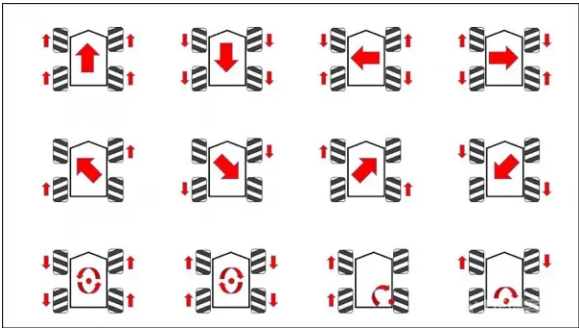

PinMap

M5StickC	G26	G0	5V	GND
RoverC HAT	SCL	SDA	5V	GND
I2C①	SCL	SDA	5V	GND
I2C②	SCL	SDA	5V	GND

Softwares

Arduino

1: This example uses RoverC and JoyC to achieve wireless control through UDP communication. Please choose the corresponding example program below according to your device.

- [RoverC-Pro & JoyC Remote Control - with M5StickC](#)
- [RoverC-Pro & JoyC Remote Control - with M5StickC-Plus](#)
- Note: After powering on, RoverC will display the hotspot name "M5AP+2-byte MAC address", and JoyC will scan for RoverC's MAC address name. Long press the Home button on JoyC's M5StickC for 3 seconds to start scanning for the car's hotspot, and pairing will be successful. Once paired, the link icon will be highlighted in the top left corner of the screen, and the joystick values will be displayed on the screen. The left joystick controls forward and backward movement, and left and right strafing, while the right joystick controls turning.

2: This example is a standalone control program for RoverC, controlled directly by the main controller. Please choose the corresponding example program below according to your device.

- [RoverC-Pro Example- with M5StickC](#)
- [RoverC-Pro Example- with M5StickC-Plus](#)

UiFlow1

- [RoverC-Pro UiFlow1 Docs](#)

Protocol

- Communication Type: I2C
- I2C Communication Address: **0x38**
- [RoverC-Pro I2C Protocol](#)

| Easyloader

Easyloader	Download Link	Note
RoverC-Pro Easyloader	download	/

| Video

[RoverC.mp4](#)

| Version Change

Release Date	Product Changes	Note
2019.11	Initial Release	/
2020.5	Battery model changed from 16340 (750mAh) to 18350 (900mAh)	/