

Ref. No.	Part No.	Value	Ref. No.	Part No.	Value	Ref. No.	Part No.	Value	Ref. No.	Part No.	Value
RESISTORS			RESISTORS			RESISTORS			CAPACITORS		
R1.2	ERD25FJ100	10	R238	ERD25TJ123	12K	R552	ERD25TJ392	3.9K	C27.28	ECCD1H223PF	0.022
R81	ERD25TJ222	2.2K	R239	ERD25TJ562	5.6K	R553	ERD25TJ153	15K	C29.30	ECCD1H223PF	0.022
R82.83	ERD25TJ472	4.7K	R240	ERD25TJ822	8.2K	R554	ERD25TJ824	82K	C81.82	ECCD1H103MD	0.01
R84	ERD25FJ100	1.5K	R241	ERD25TJ103	10K	R555	ERD25TJ333	33K	C83.84	ECEA1U102	1000
R84B	ERD25FJ100	5.6K	R242	ERD25TJ472	4.7K	R556	ERD25TJ392	3.9K	C85.86	ECEA50Z1	1
R85	ERD25TJ561	560	R243	ERD25TJ822	8.2K	R557	ERD25TJ104	100K	C87.88	ECEA1U101	100
R101	ERD25TJ103	10K	R244	ERD25TJ473	4.7K	R558	ERD25TJ154	150K	C89	ECEA1U470	47
R102	ERD25TJ562	560				R559	ERD25TJ104	100K	C90.91	ECEA1U470	47
R103	ERD25TJ472	4.7K	R245	ERD25TJ101	10K	R560	ERD25TJ104	100K	C92.93	ECCD1H104ZF	0.1
R104	ERD25TJ103	10K	R246	ERD25TJ102	10K	R561	ERD25TJ104	100K	C103	ECCD1H473ZF	0.047
R105	ERD25TJ102	1K	R247	ERD25TJ104	100K	R562	ERD25TJ102	10K	C103	ECEA1U101	100
			R248	ERD25TJ103	10K	R563	ERD25TJ332	3.3K	C111	ECCD1H561K	680P
R106	ERD25TJ220	22	R249.250	ERD25TJ103	27K	R564	ERD25TJ332	3.3K	C112	ECCD1H331K	330P
R107	ERD25TJ474	470K	R251	ERD25TJ823	82K	R565	ERD25TJ332	3.3K			
R108	ERD25TJ220	22	R252	ERD25TJ822	8.2K	R566	ERD25TJ103	10K			
R109.110	ERD25TJ473	47K	R253	ERD25TJ154	150K	R569	ERD25TJ334	330K	C113.114	ECEA1H2K2R	2.2
R111	ERD25TJ271	270	R254	ERD25TJ103	10K	R570	ERD25TJ394	390K	C115	ECEA1CN100S	10
R112	ERD25TJ101	100	R255	ERD25FJ2R2	2.2	R571	ERD25TJ153	15K	C116	ECCD1H103ZF	0.01
R113	ERD25TJ104	100K				R572	ERD25TJ124	120K	C117	ECEA50Z3R3	3.3
R114	ERD25TJ562	560	R256	ERD25TJ124	120K	R573	ERD25TJ561	560	C118	ECCD1H102KB	0.001
R115.116	ERD25TJ471	47K	R257	ERD25TJ473	47K	R574	ERD25TJ332	3.3K	C119	ECCD1H472KB	0.0047
R117	ERD25TJ562	560	R258.259	ERD25TJ333	33K	R575	ERD25TJ333	33K	C120	ECEA1H223PF	0.022
			R260	ERD25TJ103	10K	R576	ERD25TJ101	10K	C121.124	ECCD1H102KB	0.001
R118	ERD25TJ473	47K	R261	ERD25TJ333	33K	R577	ERD25TJ563	560K	C125	ECCD1H101KB	100P
R119	ERD25TJ392	3.9K	R262	ERD25TJ103	10K	R578	ERD25TJ101	10K			
R120	ERD25TJ102	1K	R263	ERD25TJ473	47K	R579	ERD25TJ101	10K			
R121	ERD25TJ472	4.7K	R264	ERD25TJ472	4.7K	R580	ERD25TJ104	100K			
R122	ERD25TJ334	330K	R265	ERD25TJ124	120K	R581	ERD25TJ101	10K			
R123	ERD25TJ102	1K	R266	ERD25TJ473	47K	R582	ERD25FJ560	56			
R124.125	ERD25TJ183	18K	R267.268	ERD25TJ472	4.7K	R583	ERD25TJ122	1.2K			
R126	ERD25TJ822	8.2K	R269.270	ERD25TJ682	6.8K	R584	ERD25TJ122	1.2K			
R127	ERD25TJ562	5.6K	R271	ERD25TJ682	6.8K	R585	ERD25TKF3901	22K			
R128	ERD25TJ152	1.5K	R272	ERD25TJ224	220K	R586	ERD25TKF2201	2.2K			
			R291	ERD25TJ562	5.6K						
R129	ERD25TJ101	10K	R301	ERD25TJ223	22K	R587	ERD25TJ684	680K			
R130.131	ERD25TJ102	1K	R302	ERD25TJ153	15K	R589	ERD25TJ103	10K			
R132.133	ERD25TJ392	3.9K	R303.304	ERD25TJ472	4.7K	R601	ERD25TJ473	47K			
R134	ERD25TJ183	18K	R305	ERD25TJ222	2.2K	R602	ERD25TJ103	10K			
R135	ERD25TJ152	1.5K	R306	ERD25TJ392	3.9K	R609.610	ERD25TJ333	33K			
R136	ERD25TJ183	18K	R307	ERD25TJ823	82K	R611	ERD25TJ222	2.2K			
R137	ERD25TJ822	8.2K	R308	ERD25TJ123	12K						
R138.139	ERD25TJ102	1K	R309	ERD25TJ472	4.7K	R612	ERD25TJ102	1K			
R140	ERD25TJ472	4.7K	R310.311	ERD25TJ103	10K	R613	ERD25FJ392	3.3K			
R141.142	ERD25TJ102	1K	R312	ERD25TJ104	100K	R614	ERD25TJ333	33K			
R143	ERD25TJ562	5.6K	R313	ERD25TJ332	3.3K	R615	ERD25TJ223	22K			
			R314	ERD25TJ332	3.3K	R616	ERD25TJ333	33K			
R201	ERD25TJ563	56K	R315.316	ERD25TJ472	4.7K	R619	ERD25TJ333	33K			
R202	ERD25TJ153	15K				R620	ERD25TJ103	10K			
R203	ERD25TJ334	330K	R317.318	ERD25TJ123	12K	R621	ERD25TJ392	3.9K			
R204	ERD25TJ183	18K	R319	ERD25TJ560	56	R622	ERD25TJ152	1.5K			
R205	ERD25TJ393	39K	R320	ERD25TJ103	10K	R623	ERD25FJ682	6.8K			
R206	ERD25TJ123	12K	R321	ERD25TJ222	2.2K	R624	ERD25FJ472	4.7K			
R207	ERD25TJ101	10K	R322	ERD25TJ123	12K	R625	ERD25FJ682	6.8K			
R208	ERD25TJ102	1K	R401	ERD25TJ103	10K	R626	ERD25FJ102	1K			
R209	ERD25TJ223	22K	R402	ERD25TJ392	3.9K	R627	ERD25FJ471	470			
R210	ERD25TJ680	68	R403	ERD25TJ333	33K	R628	ERD25FJ822	8.2K			
			R404	ERD25TJ102	1K	R629	ERD25TKG2401	2.4K			
R211	ERD25FJ160	16K	R405.406	ERD25TJ103	10K	R630	ERD25TKG4301	4.3K			
R212	ERD25TJ563	56K	R407	ERD25TJ103	10K	R631	ERD25TKG4301	4.3K			
R213	ERD25TJ153	15K				R632	ERD25TKG4301	4.3K			
R214	ERD25TJ334	330K	R408	ERD25TJ222	2.2K	R633	ERD25FJ682	6.8K			
R215	ERD25TJ183	18K	R409	ERD25TJ223	22K	R634	ERD25FJ472	4.7K			
R216	ERD25TJ393	39K	R410	ERD25TJ392	3.9K	R635	ERD25FJ682	6.8K			
R217	ERD25TJ123	12K	R411	ERD25FJ103	10K	R636	ERD25FJ822	8.2K			
R218	ERD25TJ101	1K	R412	ERD25FJ152	1.5K	R637	ERD25TKG2401	2.4K			
R219	ERD25TJ102	1K	R413	ERD25TJ273	27K	R638	ERD25FJ472	4.7K			
R220	ERD25TJ223	22K	R414	ERD25TJ473	47K	R639	ERD25FJ682	6.8K			
			R415	ERD25TJ123	12K	R640	ERD25FJ472	4.7K			
R221	ERD25TJ560	56	R416.417	ERD25TJ561	560	R641	ERD25TKG2401	2.4K			
R222	ERD25FJ180	18K	R418	ERD25FJ560	56	R642	ERD25TKG4301	4.3K			
R223	ERD25TJ222	2.2K	R419	ERD25TJ222	2.2K	R643	ERD25TKG4301	4.3K			
R224	ERD25TJ104	100K				R644	ERD25TKG4301	4.3K			
R225	ERD25TJ103	10K	R420	ERD25TJ564	560K						
R226	ERD25TJ473	47K	R421	ERD25TJ104	100K						
R227.228	ERD25TJ223	22K	R422	ERD25FJ102	1K						
R229	ERD25TJ223	22K	R423	ERD25FJ103	10K						
R230	ERD25TJ103	10K	R424	ERD25FJ561	560						
R231	ERD25TJ104	100K	R425	ERD25FJ682	6.8K						
R232	ERD25TJ103	10K	R426	ERD25FJ471	470						
			R427	ERD25FJ103	10K						
R233	ERD25TJ273	27K	R428	ERD25FJ221	220						
R234	ERD25TJ473	47K	R429	ERD25FJ103	10K						
R235	ERD25TJ823	82K	R430	ERD25FJ103	10K						
R236	ERD25TJ154	150K	R501	ERX1ANJ1R5	1.5						
R237	ERD25TJ103	10K	R502	ERD25TJ333	33K						
			R503.504	ERD25FJ330	33						
			R551	ERD25TJ153	15K						

Ref. No.	Part No.	Value	Ref. No.	Part No.	Value	Ref. No.	Part No.	Value	Ref. No.	Part No.	Value
CAPACITORS			CAPACITORS			CAPACITORS			CAPACITORS		
C412	ECCD1H220K	22P	C552	ECQM1H333KV	0.033	C671	ECCD1H151K	150P	C704	ECCD1H103MD	0.01
C413	ECCD1H100K	10P	C553	ECQM1H392KV	0.0039	C572.573	ECEA1H100	10	C705	ECEA1U470	47
C414	ECEA1U470	47	C554	ECKFH14732V	0.047	C574	ECQM1H224KV	0.22	C706	ECCD1H103MD	0.01
C415	ECCD1H223PF	0.022				C575	ECQM1H333KV	0.0033	C707	ECEA1U470	47
C416	ECEA1H100	100	C555	ECEA50M2R2R	2.2	C576	ECEA1H100	100	C708	ECCD1H103MD	0.01
C417	ECQM1H224KV	0.22	C556	ECQM1H124KV	0.12	C579	ECCD1H101KB	100P	C711.712	ECCD1H1000	10P
C418	ECQM1H104KV	0.1	C557	ECEA50Z1	1	C602	ECEA50Z1	1			
C419	ECQM1H392KV	0.0039	C558	ECEA1H152KV	0.0015	C603.604	ECCFH14732V	0.0047	C801	ECEA1U470	47
C420	ECQM1H333KV	0.033	C559	ECQM1H274KV	0.27	C605	ECCD1H102KB	0.001	C802	ECCD1H150K	15P
C501	ECEA1U101	100	C561	ECEA50M2R2R	2.2	C606	ECEA1U470	47	C803.804	ECCD1H471J	470P
C502	ECEA1HUR22	0.22	C562	ECQM1H392KV	0.0039	C608.609	ECEA1E470	47	C805.806	ECQP1103GZ	0.01
C503.504	ECEA1H25N47	4.7	C563.564	ECEA50M2R2R	2.2	C610	ECCD1H102KB	0.001	C807	ECEA1CN101S	100
			C566	ECEA1HNR47S	0.47				C809.810	ECQM1H332JZ	0.0033
C505	ECCD1H333ZF	0.033	C567	ECCD1H184KV	0.18				C861.862	ECCD1H102GZ	0.001
C506	ECUVE102JC	0.01							C871	ECQP1102GZ	0.001
C507	ECEA1U100	100	C569	ECQM1H103KV	0.01						
C551	ECCD1H331KB	330P	C570	ECEA1U220	22						

■ REPLACEMENT PARTS LIST (Electric Parts)

- Notes:
1. Part numbers are indicated on most mechanical parts. Please use this part number for parts orders.
 2. Important safety notice.
 3. Components identified by Δ mark have special characteristics important for safety.
 4. The $\otimes$ mark is service standard parts and may differ from production parts.
 5. The parenthesized numbers in the column of description stand for the quantity per set.
 6. Bracketed indications in Ref. No. columns specify the areas. Parts without these indications can be used for all areas.

Ref. No.	Part No.	Description	Ref. No.	Part No.	Description	Ref. No.	Part No.	Description
INTEGRATED CIRCUIT			INTEGRATED CIRCUIT			VARIABLE RESISTORS		
IC1	AN7805	Regulator	IC604	SV18A6209	Loading Motor Drive Inverter	VR102.104,106,107	EVN32CA00B14	10K Q(B)
IC2.5	AN78M15	Regulator	IC605	DN74LS204	CMOS Inverter	VR103.105	EVN32CA00B53	5K Q(B)
IC3	AN7915	Regulator	IC701	MN6614	EFM Demodulator	VR201	EVN38CA00B53	5k Q(B)
IC81	AN78N15	Regulator	IC702	MN2114-2	Random Access Memory	VR551.851	EVN38GA00B24	20K Q(B)
IC101	AN7677S	Head Amplifier (Focus)		MN6616	Error Correction	VARIABLE CAPACITOR		
IC102	AN7678S	Head Amplifier (Tracking)	IC704	MN4216-20	Random Access Memory	CT401	ECV12W25X53N	Trimmer
IC103	AN6556S	Focus and Tracking Error Amplifier	IC705	MN6615	CIRC Control	COIL		
IC104	AN1358S	Laser Power Control	IC801	AN6806	D/A Converter	L1	△UF1922C102Y	Filter
IC105	AN78L05	Regulator	IC802~804	SVILM833NA	I/V Converter and AF Amplifier	FUSES		
IC106	AN79N05	Regulator	IC805.806	SVIUPD4053BC	Analog Switch	F1	△XBA2C04TR0	250V T400mA
IC201.251	AN6554NS	Focus and Tracking Error Amplifier	IC861	SVILM833NA	Operational Amplifier	F2	△XBA2E02TR0	250V T200mA
IC202.402	AN6552S	Operational Amplifier	TRANSISTORS			CRYSTAL		
IC204.209	MN4011BS	NAND Gate	Q81.601.604	2SC828AR	Regulator and Switching	X701	SVQNR8643	8.643MHz
IC205.253	MN4053BS	Analog Switch	Q82.603	2SA722-S	Relay Drive and Switching	RELAY		
IC207	MN4001BS	NOR Gate	Q101	2SD0638	Laser Power Control	LY801	SFDYG5A237P	Muting
IC208.552	SVITL082CP	Operational Amplifier	Q201	2SD1266	Actuator Drive	LOW PASS FILTERS		
IC255	MN4030BS	Exclusive OR Gate	Q202	2SB941	Actuator Drive	LPF801.802	SVIAL012	Filter
IC301	AN6912S	Comparator	Q203	2SD1252	Actuator Drive	FLUORESCENT DISPLAY TUBE		
IC401	SVITC40H004P	Waveform Shaping	Q204	2SB929	Actuator Drive	FL601	SRD9-ST-10K1	Display
IC403	MN4053B	Analog Switch	Q205	2SD1266	Traverse Motor Drive	COMPONENT COMBINATIONS		
IC404.553	MN4066BS	Analog Switch	Q206	2SB941	Travers Motor Drive	R617	EXBP86104K	100K Q X 8
IC405	DN74LS123S	Monostable Multivibrator	Q207.302~306	2SC828AR	Switching and RF Amplifier	R618	EXBP86104K	100K Q X 6
IC406	SVITC40H386P	OR Gate	Q301	2SA722-S	Switching	R619	EXBP86223K	22K Q X 6
IC407	DN74LS107S	J K Flip Flop	Q401	2SC1047-C	Switching	C11.12	△EXRFS203ZS	0.01 μFX2
IC408	DN74LS74AS	D Flip Flop	Q551	2SC1047-C	Switching	C13.14	△EXRFS203ZS	0.01 μFX2
IC409	SVISN74LS62B	Voltage Controlled Oscillator	DIODES			C17.18	△EXRFS203ZS	0.01 μFX2
IC501	AN6637	Spindle Motor Drive	D1	△SVDS2VB20	Rectifier	HALL ELEMENTS		
IC502	AN78M15	Regulator	D2	SVDS1WB40	Rectifier	H501.502	OH-011	Spindle Motor Position Detecting
IC551	AN7679S	Spindle Motor Control	D81	MA4056	Rectifier	SWITCHES		
IC554	AN6912	Comparator	D82.84	MA4100	Zener 5.6V	S1	△ESB823V	Power
IC501	MN154PCH	System Control	D85	MA165	Zener 10V	S2	△SRDSHXW0251	Voltage Selector
IC602	MN140PCG	Display Drive	D83.101.201~205.			S101.102	SRDSBSW-180	Rest.End
IC603	SVIM53206P	Inverter	302.303.403~405			S103.104	SRDSBSW97-2	Close.Open
			551.601~608			S105	SRDSMLS-1	Close
			655~661			S655~662	EVQO5405K	Operation Keys
			D304.305.554.609	MA4056	Zener 5.6V	POWER TRANSFORMERS		
			D651	LN38GCPP	LED Play	T1	△SLT68PE6E	Power Source
			D652	LN48YCP	LED Pause			
			D653.654	LN28RCPP	LED			
					Repeat and			

• Terminal guide of transistors, and IC's

AN7805,AN78M15 AN7915 1. Vin 2. GND 3. Vout	<table><tr><td>AN7677S</td><td>28 Pin</td></tr><tr><td>AN7679S</td><td></td></tr><tr><td>AN7678S</td><td>22 Pin</td></tr><tr><td>AN6556S</td><td></td></tr><tr><td>AN6552S</td><td>8 Pin</td></tr><tr><td>AN1358S</td><td></td></tr><tr><td>AN6554NS</td><td></td></tr><tr><td>MN4030BS</td><td></td></tr><tr><td>AN6912S</td><td></td></tr><tr><td>MN4066BS</td><td>14 Pin</td></tr><tr><td>DN74LS107S</td><td></td></tr><tr><td>DN74LS74AS</td><td></td></tr><tr><td>MN4011BS</td><td></td></tr><tr><td>MN4053BS</td><td>16 Pin</td></tr><tr><td>DN74LS123S</td><td></td></tr></table>	AN7677S	28 Pin	AN7679S		AN7678S	22 Pin	AN6556S		AN6552S	8 Pin	AN1358S		AN6554NS		MN4030BS		AN6912S		MN4066BS	14 Pin	DN74LS107S		DN74LS74AS		MN4011BS		MN4053BS	16 Pin	DN74LS123S		<table><tr><td>DN74LS04</td><td></td></tr><tr><td>SVIM53206P</td><td>14 Pin</td></tr><tr><td>SVISN74LS628</td><td></td></tr><tr><td>SVITC40H004</td><td></td></tr><tr><td>SVITC40H386</td><td></td></tr><tr><td>SVITL082CP</td><td>8 Pin</td></tr><tr><td>SVILM833NA</td><td></td></tr><tr><td>AN6552</td><td></td></tr><tr><td>MN1544PCH</td><td>40 Pin</td></tr><tr><td>MN1430PCG</td><td></td></tr><tr><td>MN6614</td><td>42 Pin</td></tr><tr><td>MN6616</td><td></td></tr><tr><td>MN2114-2</td><td>18 Pin</td></tr><tr><td>MN4216-20</td><td>24 Pin</td></tr></table>	DN74LS04		SVIM53206P	14 Pin	SVISN74LS628		SVITC40H004		SVITC40H386		SVITL082CP	8 Pin	SVILM833NA		AN6552		MN1544PCH	40 Pin	MN1430PCG		MN6614	42 Pin	MN6616		MN2114-2	18 Pin	MN4216-20	24 Pin	<table><tr><td>SVIUPD4053BC</td><td>16 Pin</td></tr><tr><td>AN6806</td><td>28 Pin</td></tr><tr><td>MN6615</td><td>64 Pin</td></tr></table> NO.1	SVIUPD4053BC	16 Pin	AN6806	28 Pin	MN6615	64 Pin
AN7677S	28 Pin																																																																		
AN7679S																																																																			
AN7678S	22 Pin																																																																		
AN6556S																																																																			
AN6552S	8 Pin																																																																		
AN1358S																																																																			
AN6554NS																																																																			
MN4030BS																																																																			
AN6912S																																																																			
MN4066BS	14 Pin																																																																		
DN74LS107S																																																																			
DN74LS74AS																																																																			
MN4011BS																																																																			
MN4053BS	16 Pin																																																																		
DN74LS123S																																																																			
DN74LS04																																																																			
SVIM53206P	14 Pin																																																																		
SVISN74LS628																																																																			
SVITC40H004																																																																			
SVITC40H386																																																																			
SVITL082CP	8 Pin																																																																		
SVILM833NA																																																																			
AN6552																																																																			
MN1544PCH	40 Pin																																																																		
MN1430PCG																																																																			
MN6614	42 Pin																																																																		
MN6616																																																																			
MN2114-2	18 Pin																																																																		
MN4216-20	24 Pin																																																																		
SVIUPD4053BC	16 Pin																																																																		
AN6806	28 Pin																																																																		
MN6615	64 Pin																																																																		
AN78N15 AN79N15 AN79N05 1. Vin 2. GND 3. Vout																																																																			
AN78L05 3 2 1	AN6637 16 1	SV1BA6209 10 1	2SC828,2SA564 2SC1317,2SC1047 E C B	2SD1266, 2SB941 B C E	2SD1252,2SB929 B C E																																																														

■ REPLACEMENT PARTS LIST (Cabinet and Chassis Parts)

- Notes:**
- Part numbers are indicated on most mechanical parts. Please use this part number for parts orders.
 - Important safety notice:
Components identified by mark have special characteristics important for safety. When replacing any of these components, use only manufacturer's specified parts.
 - Bracketed indications in Ref. No. columns specify the area. Parts without these indications can be used for all areas.
 - The "⑤" mark is service standard parts and may differ from production parts.
 - Ⓚ-marked parts are used for black only, while ○-marked parts are for silver type only.
 - Parts other than Ⓚ- and ○-marked are used for both black and silver types.
 - The parenthesized numbers in the columns of description stand for the quantity per set.

Areas

- [E] is available in Switzerland and Scandinavia.
- [EK] is available in United Kingdom.
- [XL] is available in Australia.
- [EG] is available in F.R. Germany.
- [EB] is available in Belgium.
- [EH] is available in Holland.
- [EF] is available in France.
- [EI] is available in Italy.
- [XA] is available in Southeast Asia, Oceania, Africa, Middle Near East and Central South America.
- [PA] is available in far East PX.
- [PE] is available in European Military.
- [PC] is available in European Audio Club.


Black type model No. : SL-P7 (K)

Ref. No.	Part No.	Description	Ref. No.	Part No.	Description	Ref. No.	Part No.	Description
CABINET AND CHASSIS PARTS			CABINET AND CHASSIS PARTS			SCREW, NUT AND WASHERS		
1	SRUM007N10	Rod,Power Knob Joint (1)	14	SRDJN24A07PC	Flat Cable(7P) (1)	N1	○ SNE2095-2	Screw(Silver) (4)
2	○ SRAC007N01A	Panel,Front(Silver) (1)	15	SRDJN24A21PC	Flat Cable(21P) (1)	N1	Ⓚ SNE2095-3	Screw(Black) (4)
2	Ⓚ SRAC007N51A	Panel,Front(Black) (1)	16	SRDJN23A10PC	Flat Cable(10P) (1)	N2	Ⓚ XT03+6BPN	Screw,Ⓚ3X6 (6)
3	SFKTC06N04	Knob,Power (1)	17	SRDJ007N05	Jack,Output(Red) (1)	N3	Ⓚ XT03+6BPN	Screw,Ⓚ3X8 (1)
4	SRKK007N01	Ornament Plate (1)	18	SRDJ007N06	Jack,Output(White) (1)	N4	Ⓚ XWE3	Washer, #3 (1)
5	SRUP007N11	Guide,Front Panel (1)	19	SRDJ007N03	Jack,Shincho - rec (1)	N6	SFXGV05N03	Screw (1)
6	○ SRKK007N03	Ornament Plate,(Silver) (1)	20	SRDJ007N04	Jack,External Terminal (1)	N7	SRXG007N04	Screw (1)
6	Ⓚ SRKK007N51	Ornament Plate,(Black) (1)	21	SRUM007N11	Plate,Output Terminal (1)	N8	SRXG007N02	Screw (1)
7	SRKT007N03	Knob,Repeat (1)	22	SRUM007N14	Bracket,P.C.B (1)	N9	XTN3+6F	Screw (1)
8	SRKT007N02	Knob,Search (1)	23	SRUM007N16	Bracket,P.C.B (1)	N10	GTW-3	Washer (1)
9	SRUM007N13	Holder,Power Block (1)	24	○ SRUP007N02	Cabinet(Silver) (1)	N11	SRXG007N07	Screw (1)
10	SRUP007N01E	Panel,Rear (1)	24	Ⓚ SRUP007N51	Cabinet(Black) (1)	N12	SRXG007N06	Screw (1)
11 [E]	SRNN007S01	Name Plate (1)	25	SRKK007N02	Ornament Plate,Cabinet (1)	N13	Ⓚ XN26EBW	Nut, # 2.6 (4)
11 [EK,XL]	SRNN007G01	Name Plate (1)	25 [EK] △	SFDJHSC0498	AC Socket (1)	N14	Ⓚ XN2+6B	Screw,Ⓚ2X6 (2)
11 [XA,XM]	SRNN007X01	Name Plate (1)	25 [XL,XA] △	SFDJHSC0509	AC Socket (1)	N15	SRXW007N03	Washer (1)
11 [other areas]	SRNN007R01	Name Plate (1)	25 [XM,PA,PE,PC] △	SFDJHSC0505	AC Socket (1)	N16	XXE26D5FZ	Screw (1)
11 [PA,PE]	SRNN007P01	Name Plate (1)						
11 [PC]	SRNN007P02	Name Plate (1)						
12	SRGA007N01	Rubber Foot (4)						
13	SRUM007N21	Holder,L.E.D (4)						

EXPLODED VIEWS

- Cabinet and chassis parts

3BC	16 Pin
	28 Pin
	64 Pin



32.2S8929




navia.


i, Africa,
America.

escription

verl	(4)
ick)	(4)
IX6	(6)
IX6	(12)
3	(1)
	(1)
	(1)
	(1)
	(1)
	(1)
	(1)
	(1)
	(1)
IX6	(2)
	(1)
	(1)

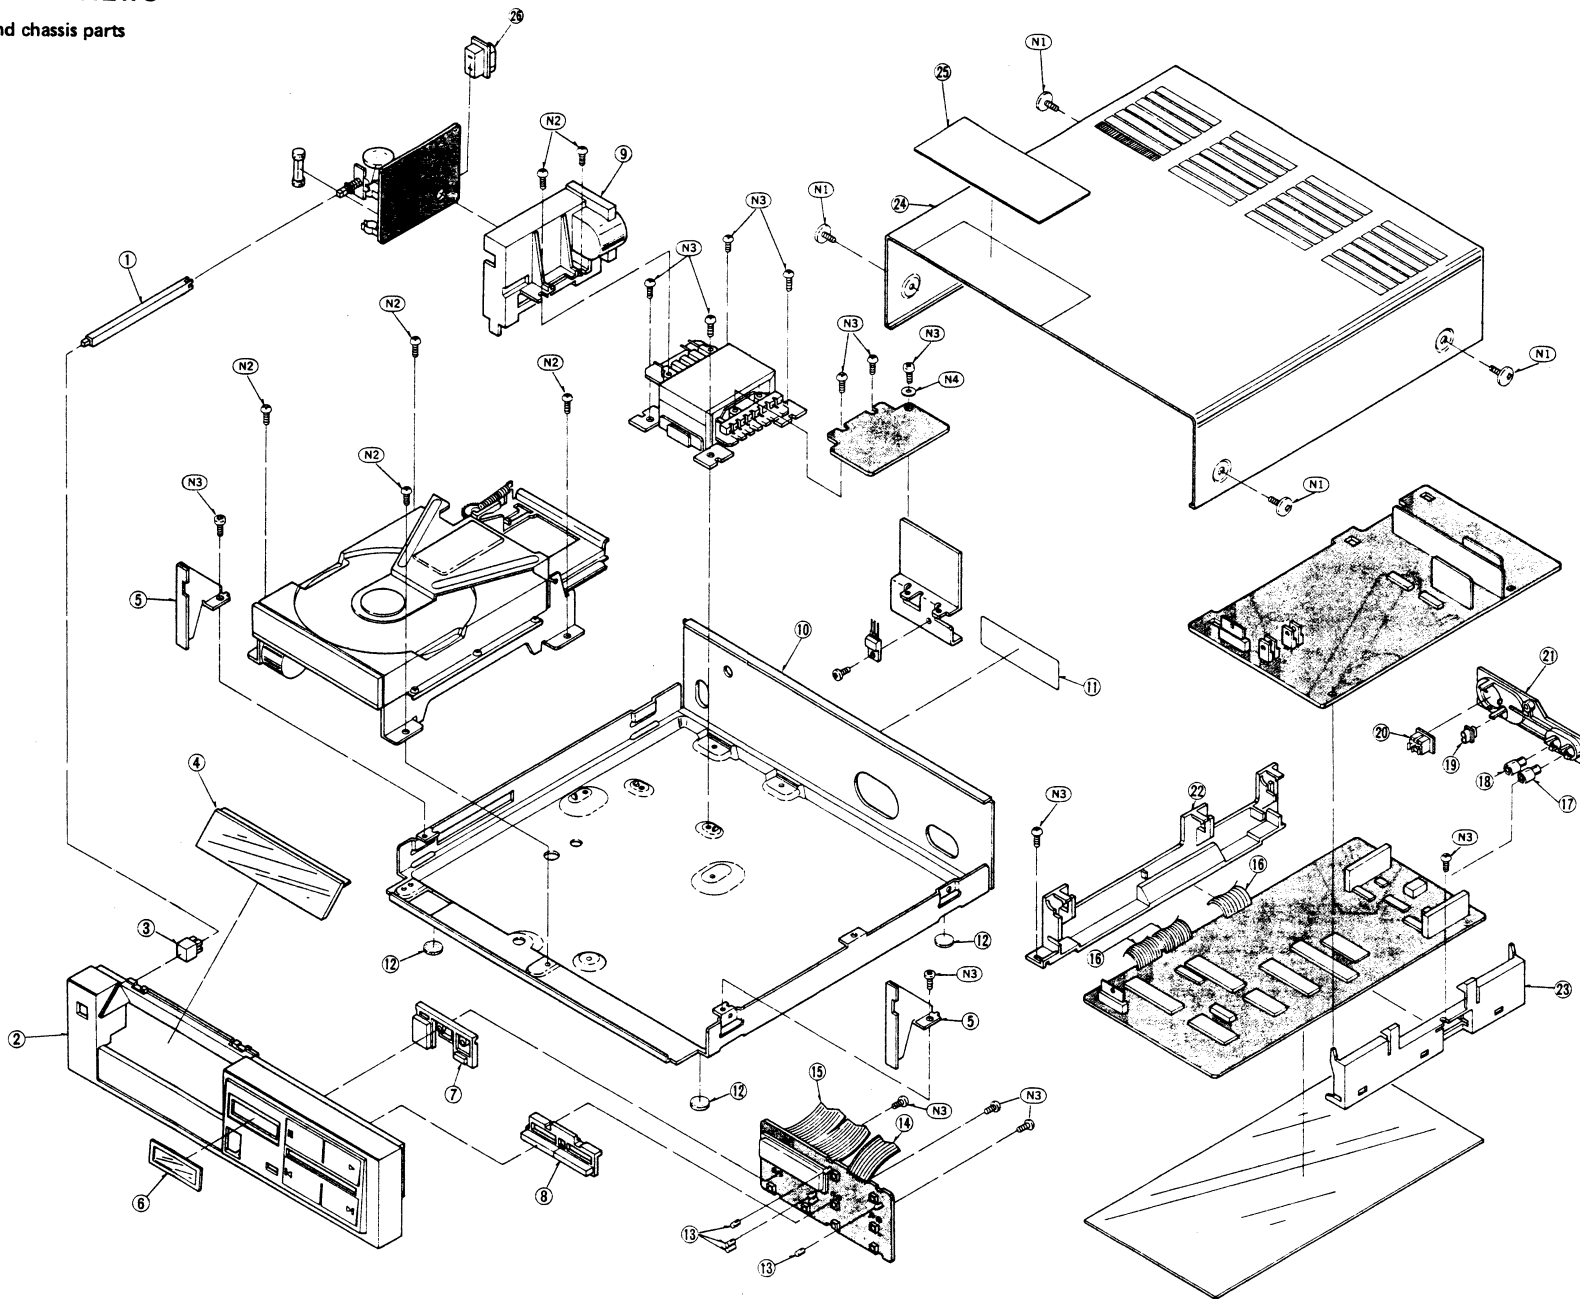

• Loading drive mechanism and optical deck unit parts

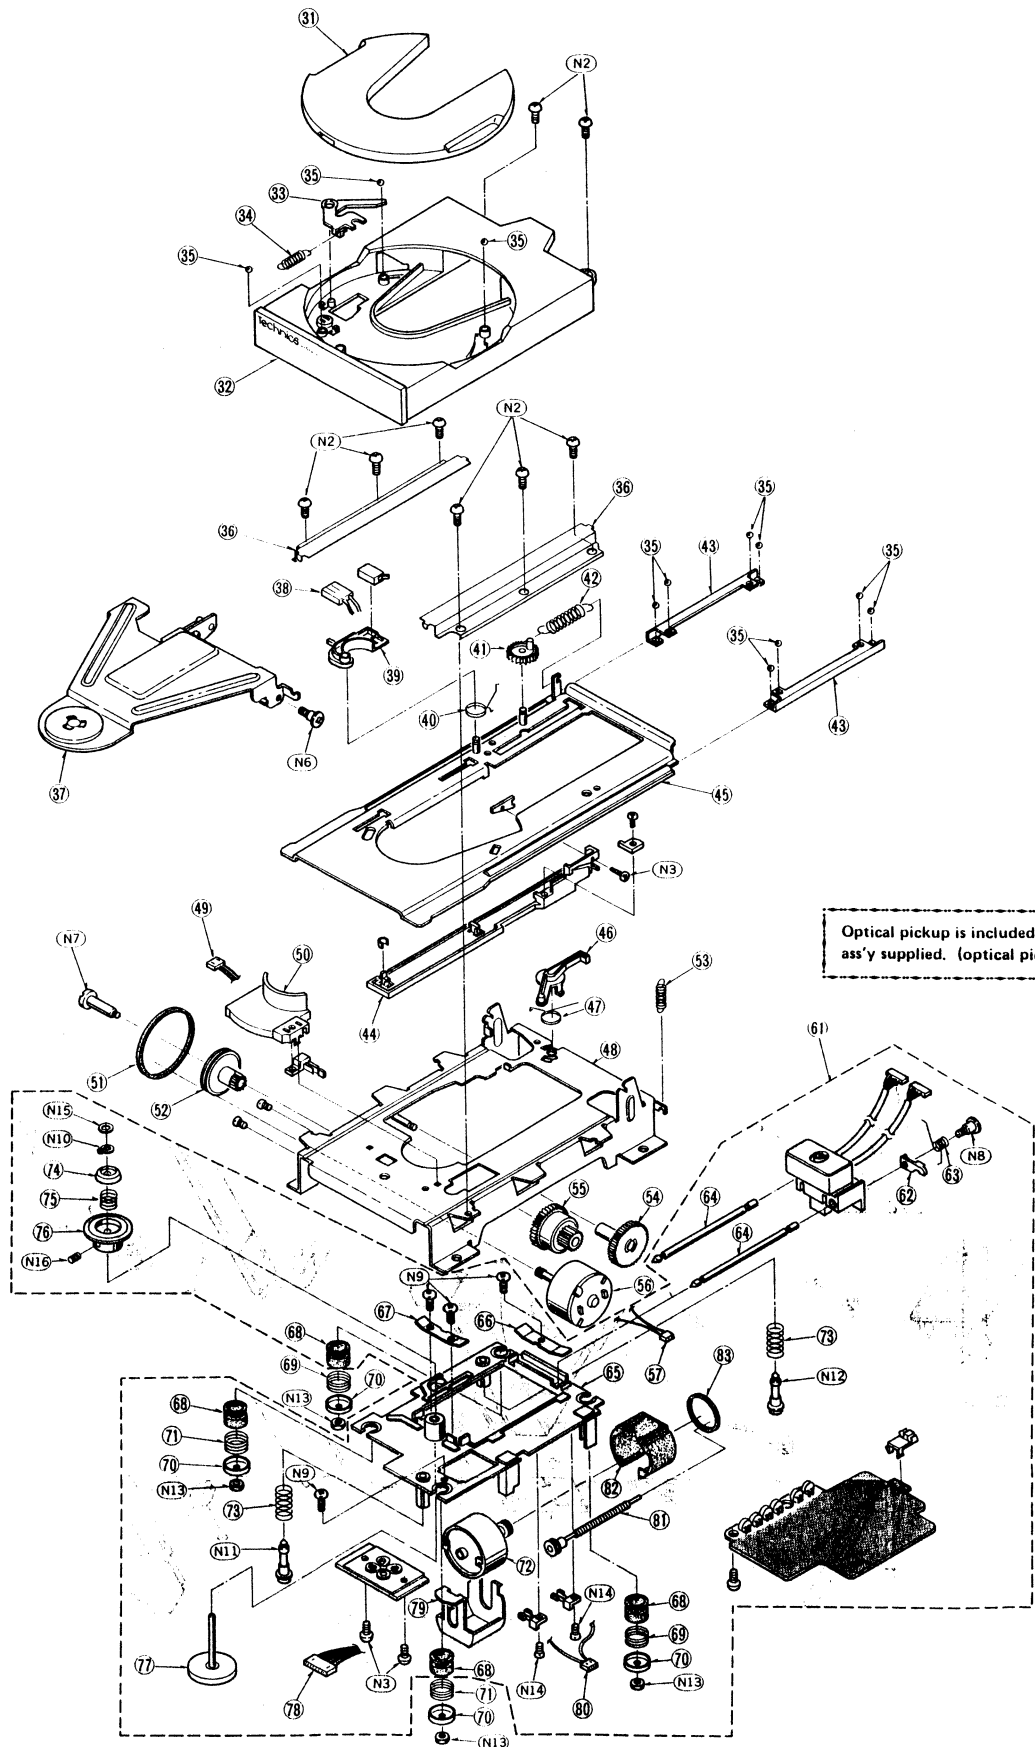

■ REPLACEMENT PARTS LIST

(Loading drive mechanism, optical deck unit parts)

- Notes:**
1. Part numbers are indicated on most mechanical parts.
Please use this part number for parts orders.
 2. Important safety notice:
Components identified by Δ mark have special characteristics important for safety.
When replacing any of these components, use only manufacturer's specified parts.
 3. Bracketed indications in Ref. No. columns specify the area.
Parts without these indications can be used for all areas.
 4. The " (S) " mark is service standard parts and may differ from production parts.
 5. (K) -marked parts are used for black only, while (O)-marked parts are for silver type only.
 6. Parts other than (K) and (O)-marked are used for both black and silver types.
 7. The parenthesized numbers in the columns of description stand for the quantity per set.

Areas


- * [E] is available in Switzerland and Scandinavia.
- * [EK] is available in United Kingdom.
- * [XL] is available in Australia.
- * [EG] is available in F.R. Germany.
- * [EB] is available in Belgium.
- * [EH] is available in Holland.
- * [EF] is available in France.
- * [Ei] is available in Italy.
- * [XA] is available in Southeast Asia, Oceania, Africa, Middle Near East and Central South America.
- * [PA] is available in far East PX.
- * [PE] is available in European Military.
- * [PC] is available in European Audio Club.

Black type model No. : SL-P7 (K)

Ref. No.	Part No.	Description	Ref. No.	Part No.	Description	Ref. No.	Part No.	Description
LOADING DRIVE MECHANISM AND			OPTICAL PICK-UP DECK UNIT PARTS			SCREW, NUT AND WASHERS		
OPTICAL PICK-UP DECK UNIT PARTS			61	SRUK007N02R	Optical Pick-up Ass'y (1)	N1	(O) SNE2095-2	Screw(Silver) (4)
31	SRUM007N05E	Disc Tray Assy (1)	62	SRUM007N22	Bracket,Optical Pick-up (1)	N1	(K) SNE2095-3	Screw(Black) (4)
32	(O) SRUM007N04R	Assy(Silver) (1)	63	SRQS007N01	Spring,Bracket (1)	N2	(S) XTV3+6BFN	Screw, $\pm 3 \times 6$ (6)
32	(K) SRUM007N51R	Disk Holder Assy(Black) (1)	64	SRXJ007N01	Shaft,Optical Pick-up (2)	N3	(S) XTV3+8BFN	Screw, $\pm 3 \times 8$ (13)
33	SRUM007N07	Cam,Disk Tray (1)	65	SRUK007N02E	Optical Deck Unit Base (1)	N4	(S) XWE3	Washer, $\phi 3$ (1)
34	SRQH007N02	Spring,Disk Tray (1)	66	SRUP007N09	Bracket, (1)	N6	SFXGV05N03	Screw (1)
35	SFYB-5-32	Still Ball (3)	67	SRXJ007N01	Bracket, (1)	N7	SRXG007N04	Screw (1)
36	SRUP007N07	Bracket (2)	68	SRGC007N02	Rubber Cushion (4)	N8	SRXG007N02	Screw (1)
37	SRUP007N05A	Disk Clamp Plate (1)	69	SRQA007N02	Spring,Insulator(A) (2)	N9	XTN3+6F	Screw (3)
38	SRDJ007N12E	Connector Ass'y 2P (1)	70	SRUP007N12	Holder, Spring (4)	N10	GTW-3	Washer (1)
39	SRUM007N18	Cover,Switch (1)	71	SRQA007N01	Spring,Insulator(B) (2)	N11	SRXG007N07	Screw (1)
40	SRQS007N02	Spring (1)	72	SRMH007N02A	Motor,Optical Pick-up (1)	N12	SRXG007N06	Screw (1)
41	SRUG007N04	Gear,Return (1)			Drive	N13	(S) XNG26EBW	Nut, $\phi 2.6$ (4)
42	SRQH007N01	Spring,Return (1)	73	SRQA007N03	Spring, (2)	N14	(S) XTN2+6B	Screw, $\pm 2 \times 6$ (2)
43	SRUM007N15	Guide (2)	74	SRTE007N02	Holder (1)	N15	SRXW007N03	Washer (1)
44	SRUM007N09	Rack,Drive (1)	75	SRQA010N04	Spring (1)	N16	XXE26D5FZ	Screw (1)
45	SRUP007N10E	Loading Guide Ass'y (1)	76	SRTE007N01	Turntable Platter (1)			
46	SRUM007N06	Lock Arm (1)	77	SRTM007N01A	Magnet Ass'y (1)			
47	SRQS007N03	Spring,Lock Arm (1)	78	SRDJ007N03E	Connector Ass'y 8P (1)			
48	SRUP007N03R	Loading Base Ass'y (1)	79	SRUM007N19	Holder,Motor (1)			
49	SRDJ007N13E	Connector Ass'y (1)	80	SRDJ007N14E	Connector Ass'y (1)			
50	SRUM007N17	Cover,Switch (1)	81	SRXG007N01E	Pully Screw (1)			
51	SRGB007N02	Belt,Loading Motor (1)	82	SRGC007N01	Rubber Cushion, Motor (1)			
52	SRUG007N01	Pully Gear, (1)	83	SRGB007N03	Belt (1)			
53	SRQH007N03	Spring,clamp plate (1)						
54	SRUG007N02	Gear,Center (1)						
55	SRUG007N03	Gear,Drive (1)						
56	SRMH007N01A	Motor,Loading Mechanism (1)						
57	SRDJ007N10E	Connector Ass'y (1)						

Note: Ref. No. 61 is supplied in the from of optical pickup ass'y.


■ PRINTED CIRCUIT BOARD AND WIRING CONNECTION DIAGRAM

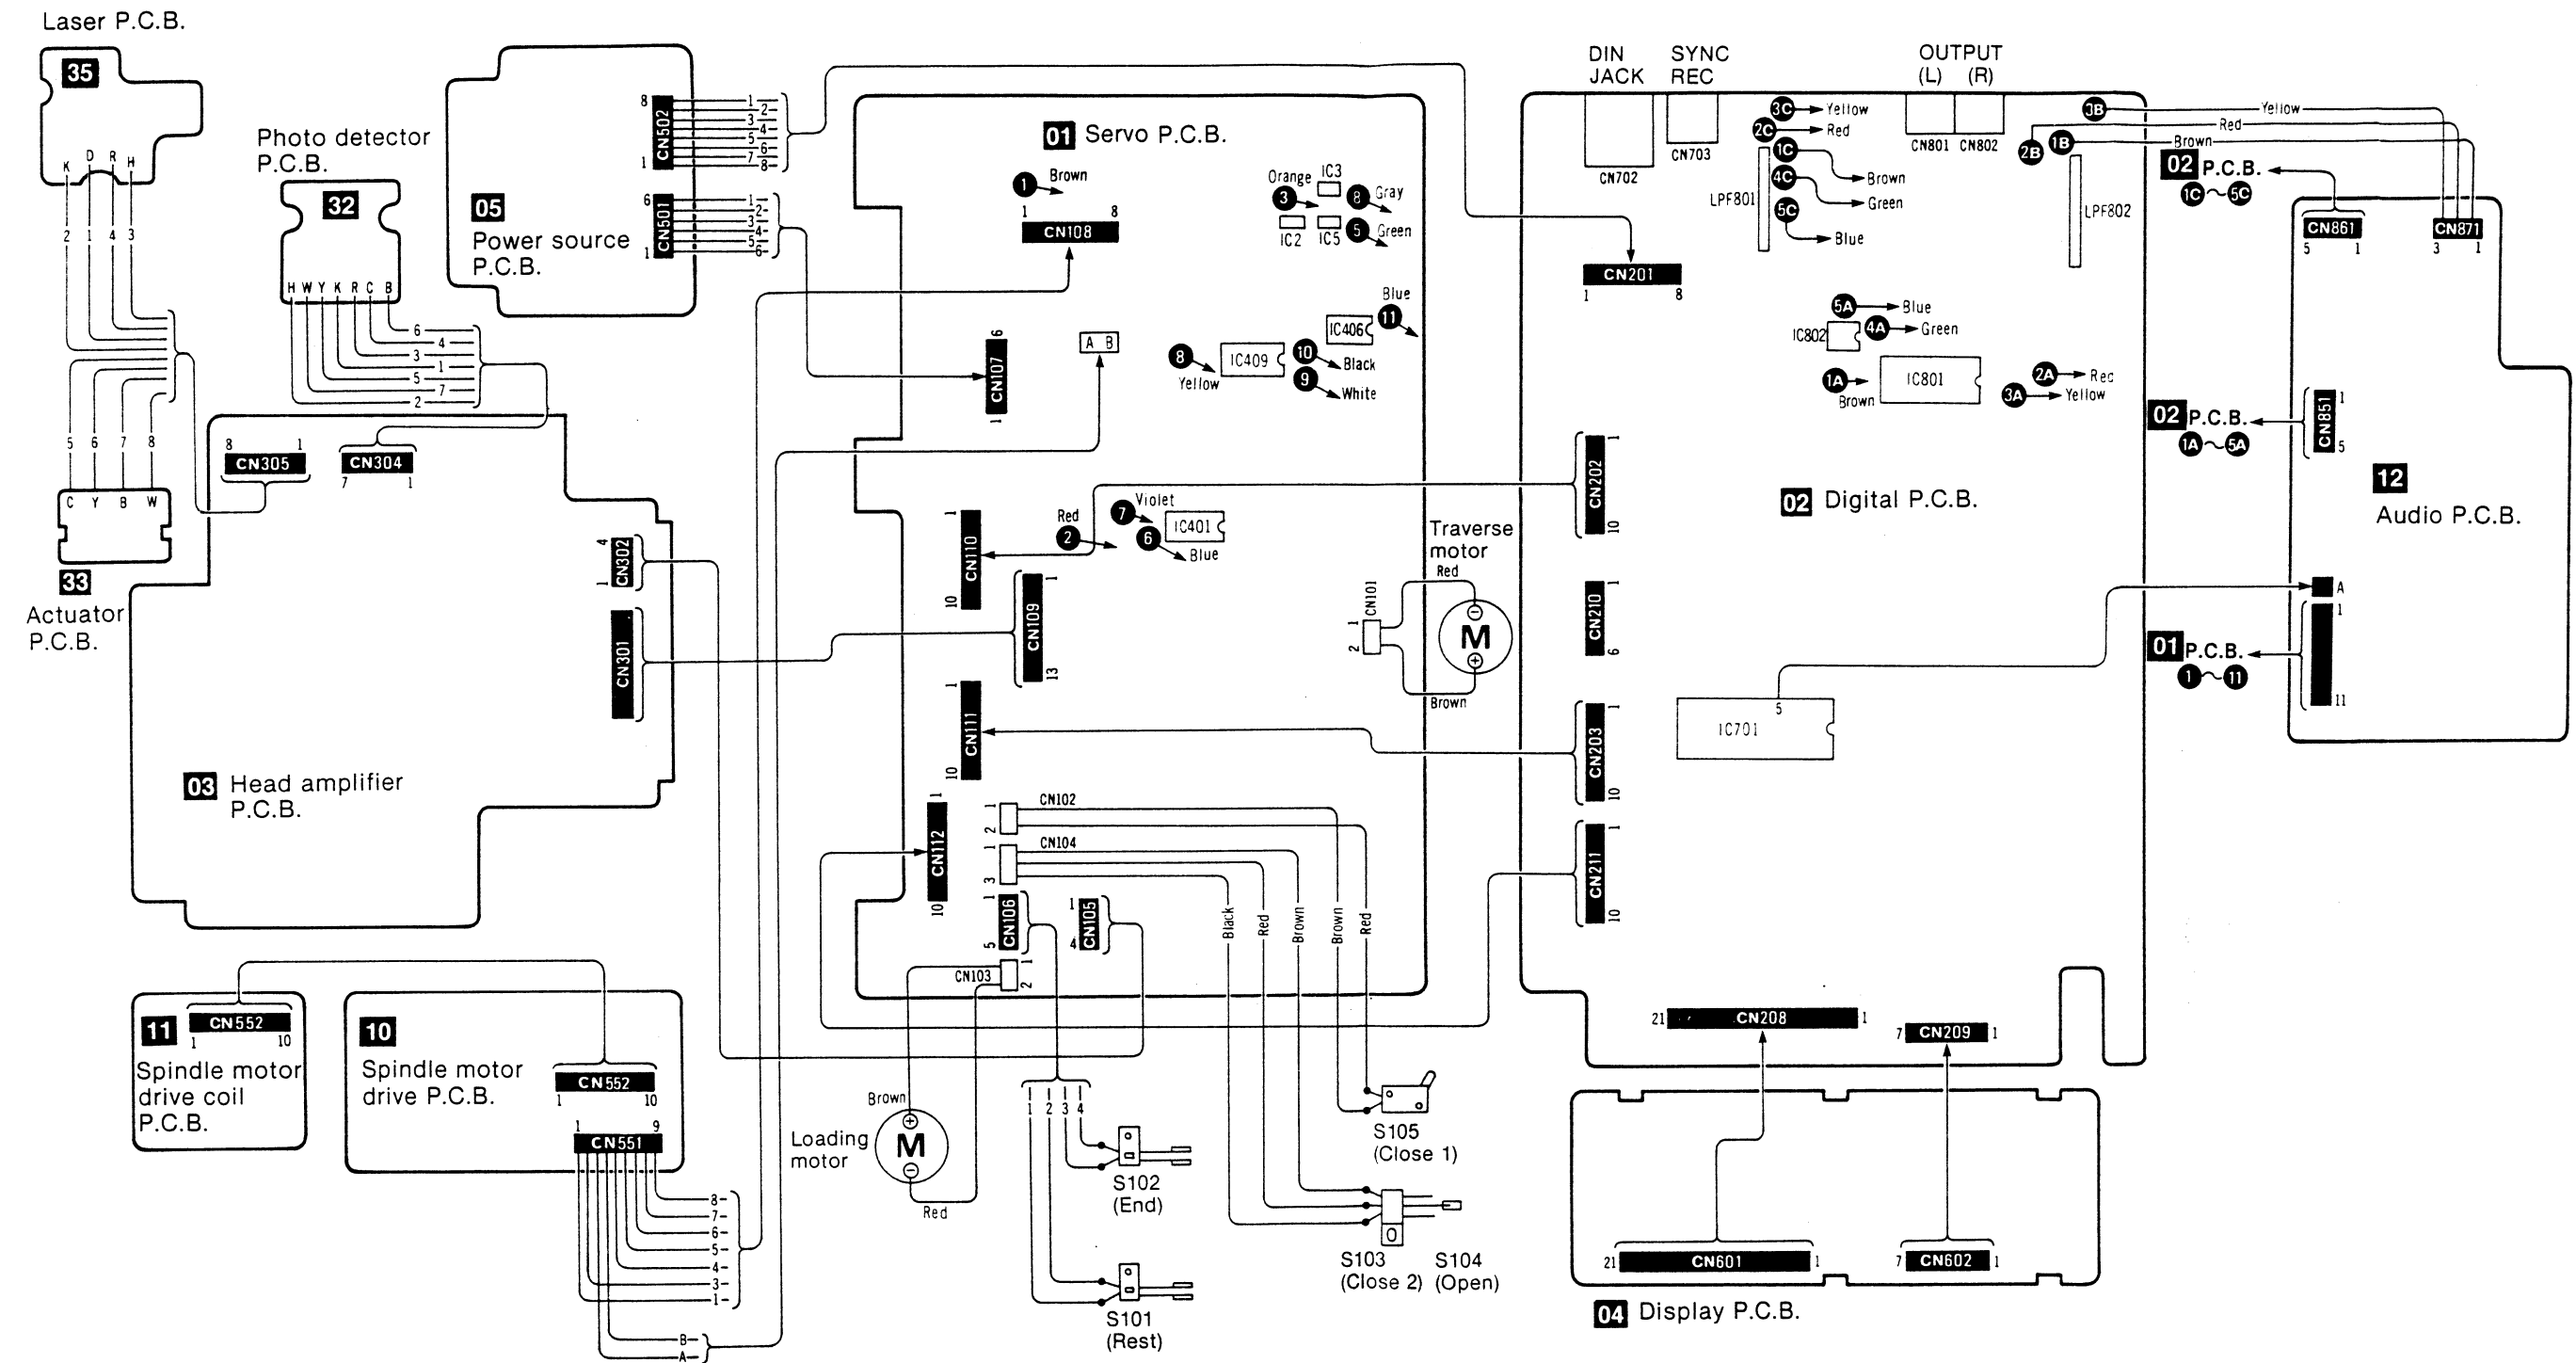


■ PRINTED CIRCUIT BOARDS

 Ground (Earth) lines


01 (Servo P.C.B.)

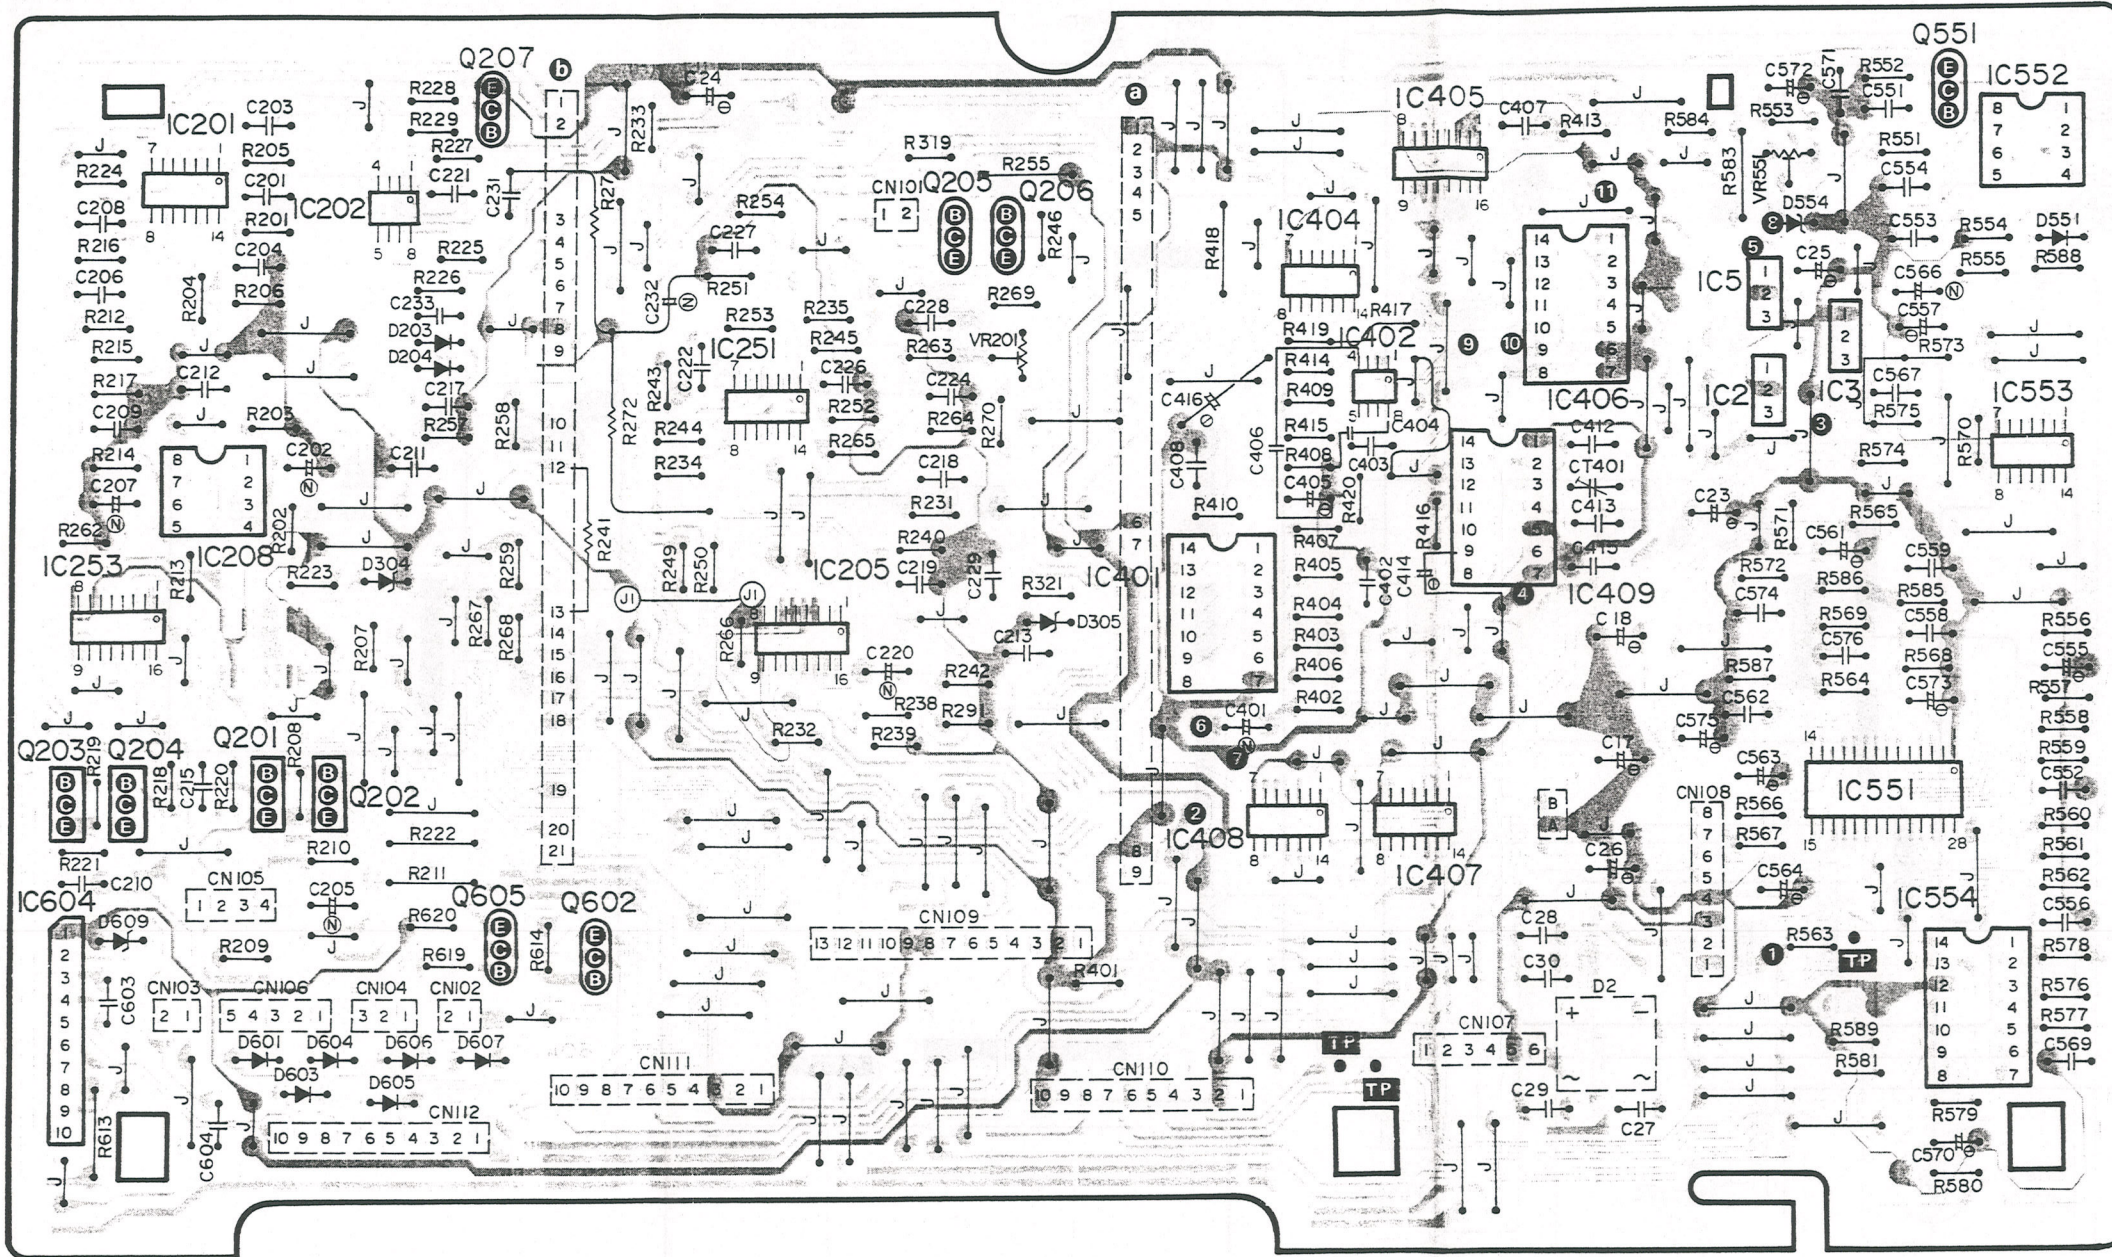


04 (Display P.C.B.)

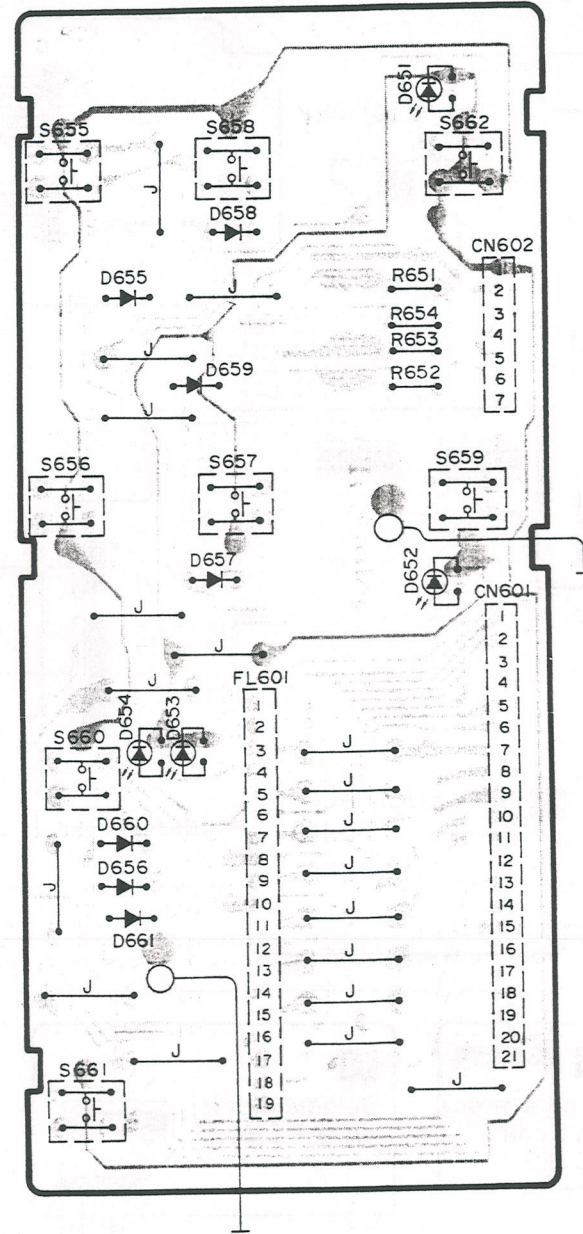


01 **a**

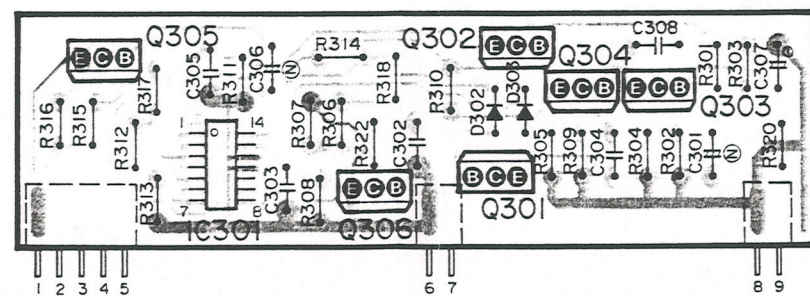

01 (b)

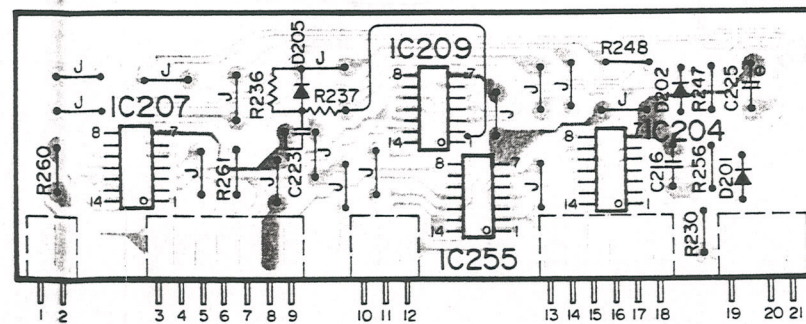


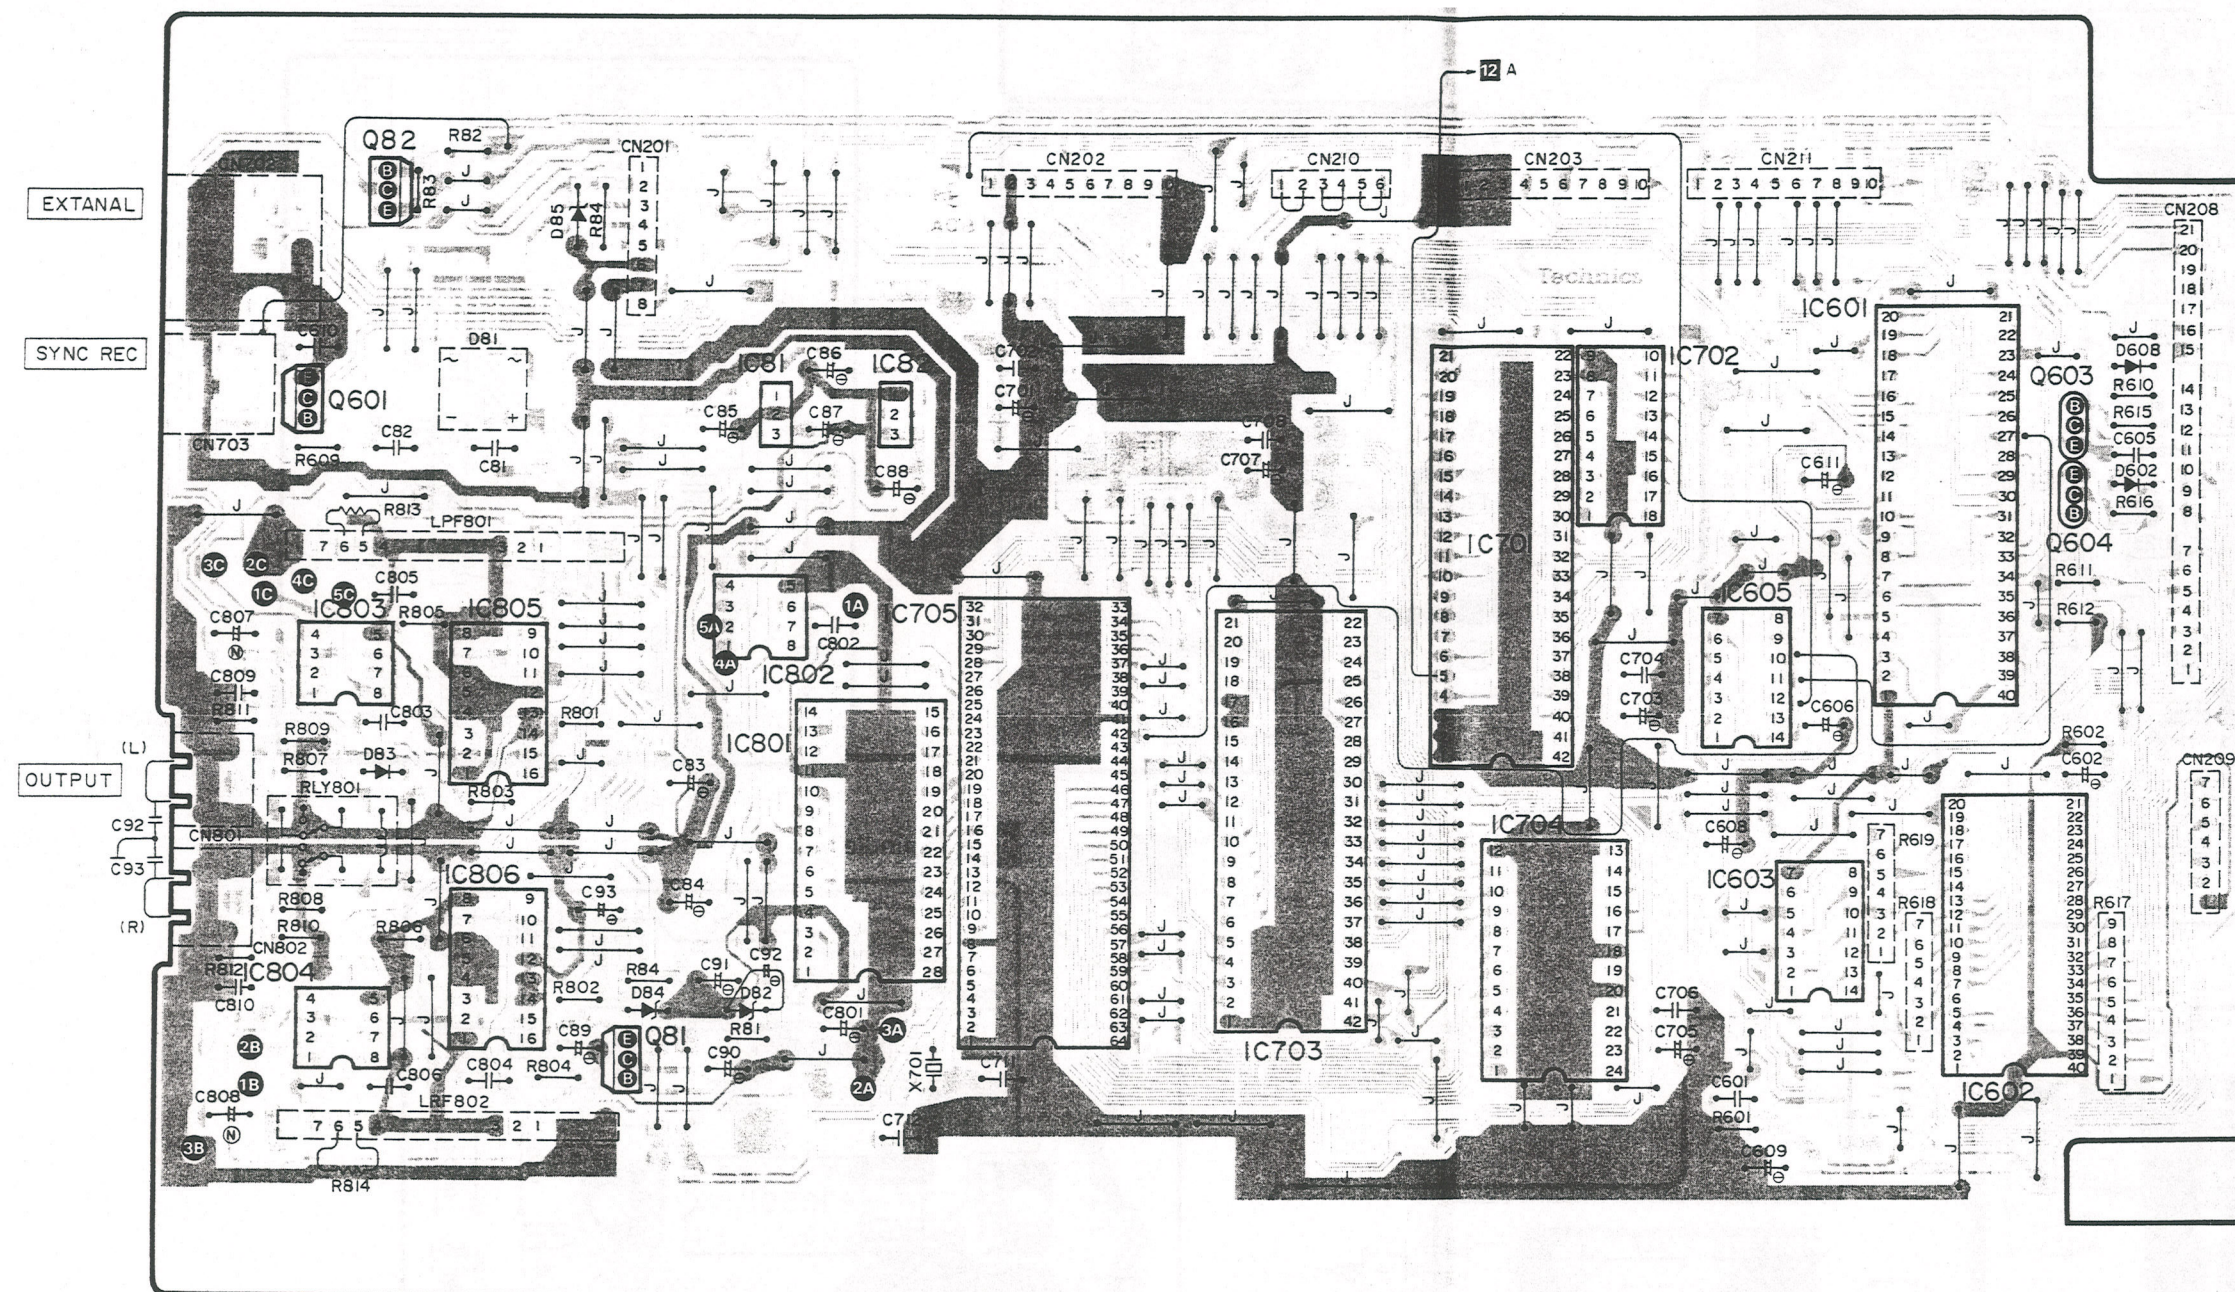


A diagram of a four-wire relay. It features a central circular core. To the left of the core is a vertical coil with two terminals at the ends, labeled 'W' at the bottom and 'B' at the top. To the right of the core is another vertical coil with two terminals at the ends, labeled 'Y' at the bottom and 'C' at the top. The word 'AUTUATOR' is printed above the central core.

03 (Head amplifier P.C.B.)


Ground (Earth) lines

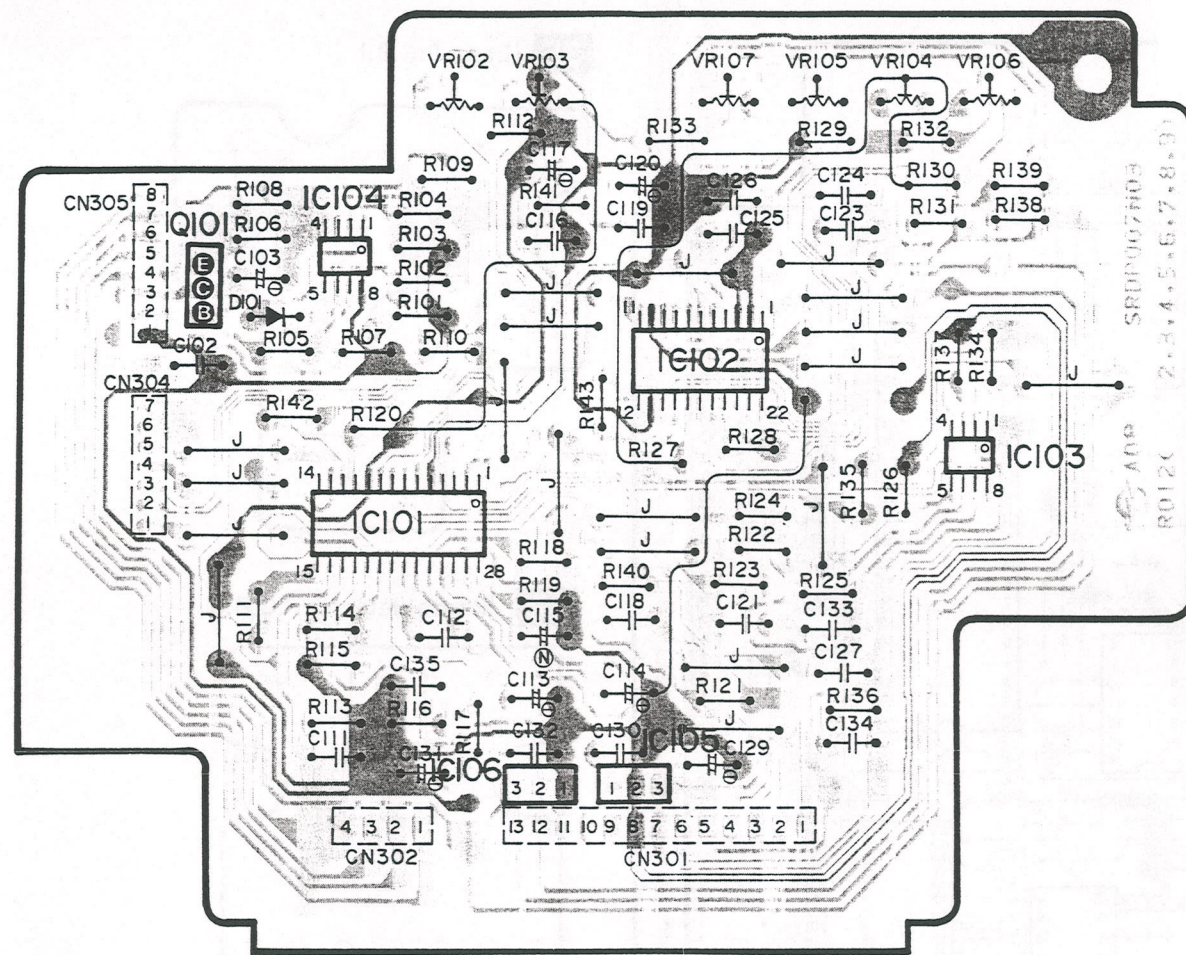


05 (Power supply P.C.B.)

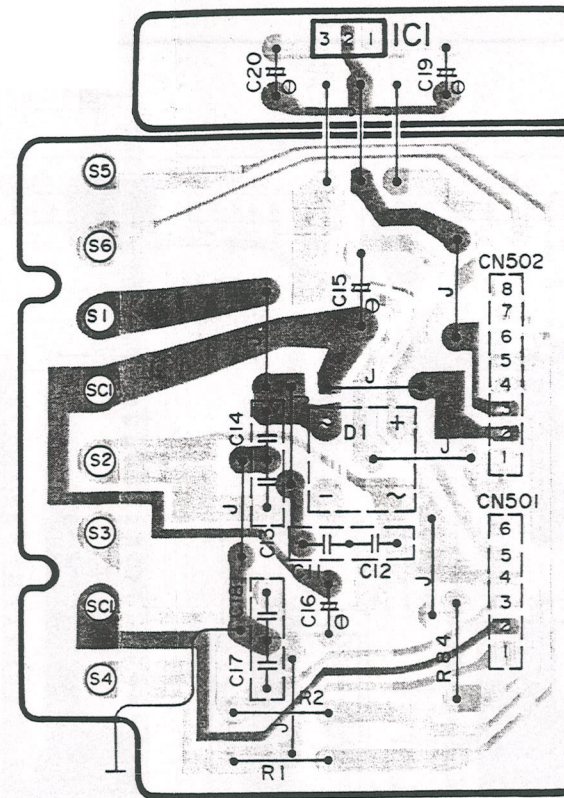


07 (Power fuse P.C.B.) circuit view on top of P.C.B.

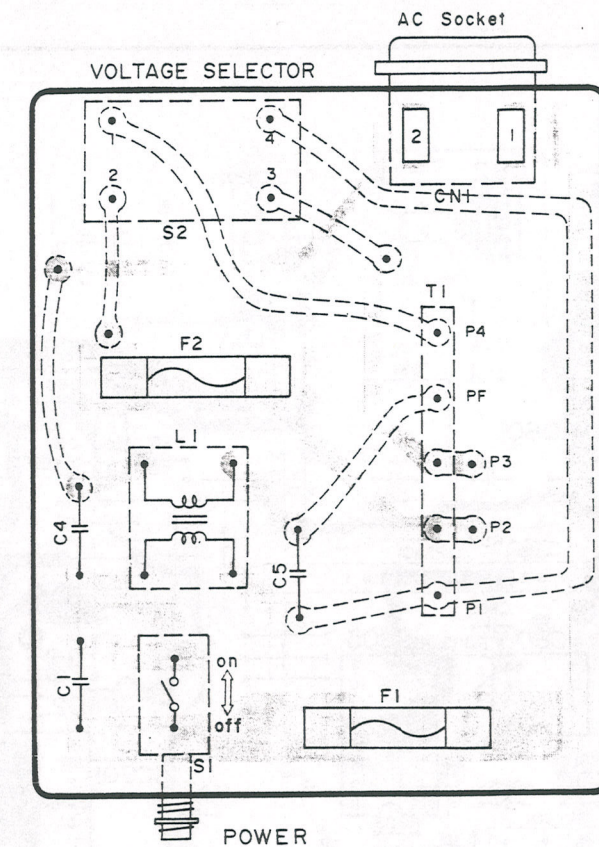


12 (Audio P.C.B.)

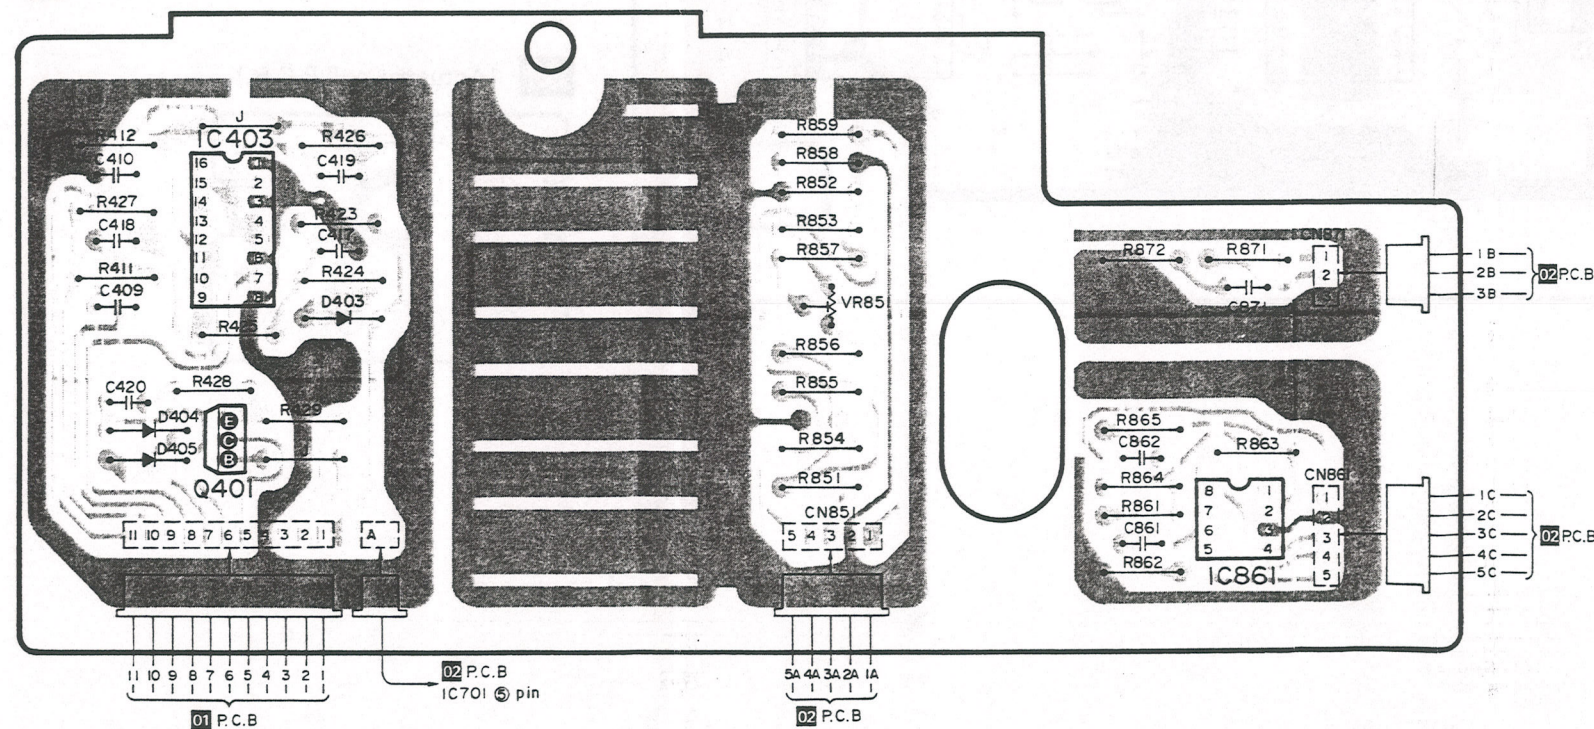

10 (Spindle motor drive P.C.B.)

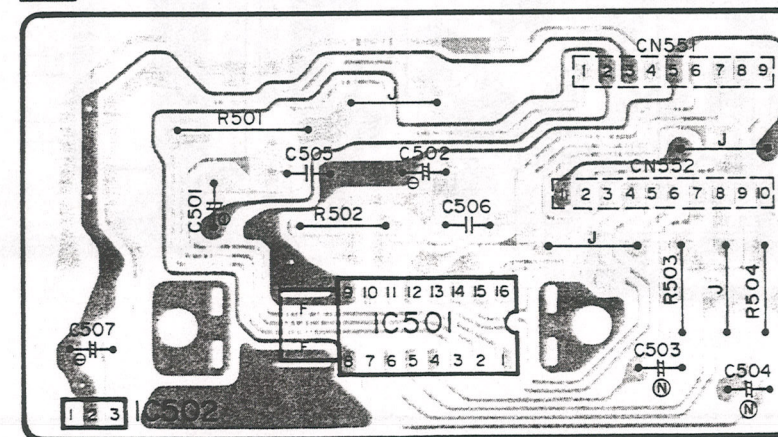

11 (Spindle motor drive coil P.C.B.)

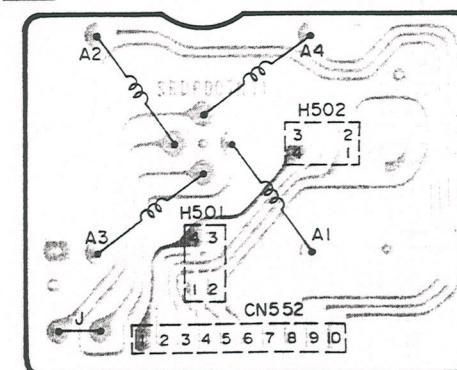

■



3


C

D


E

F


C

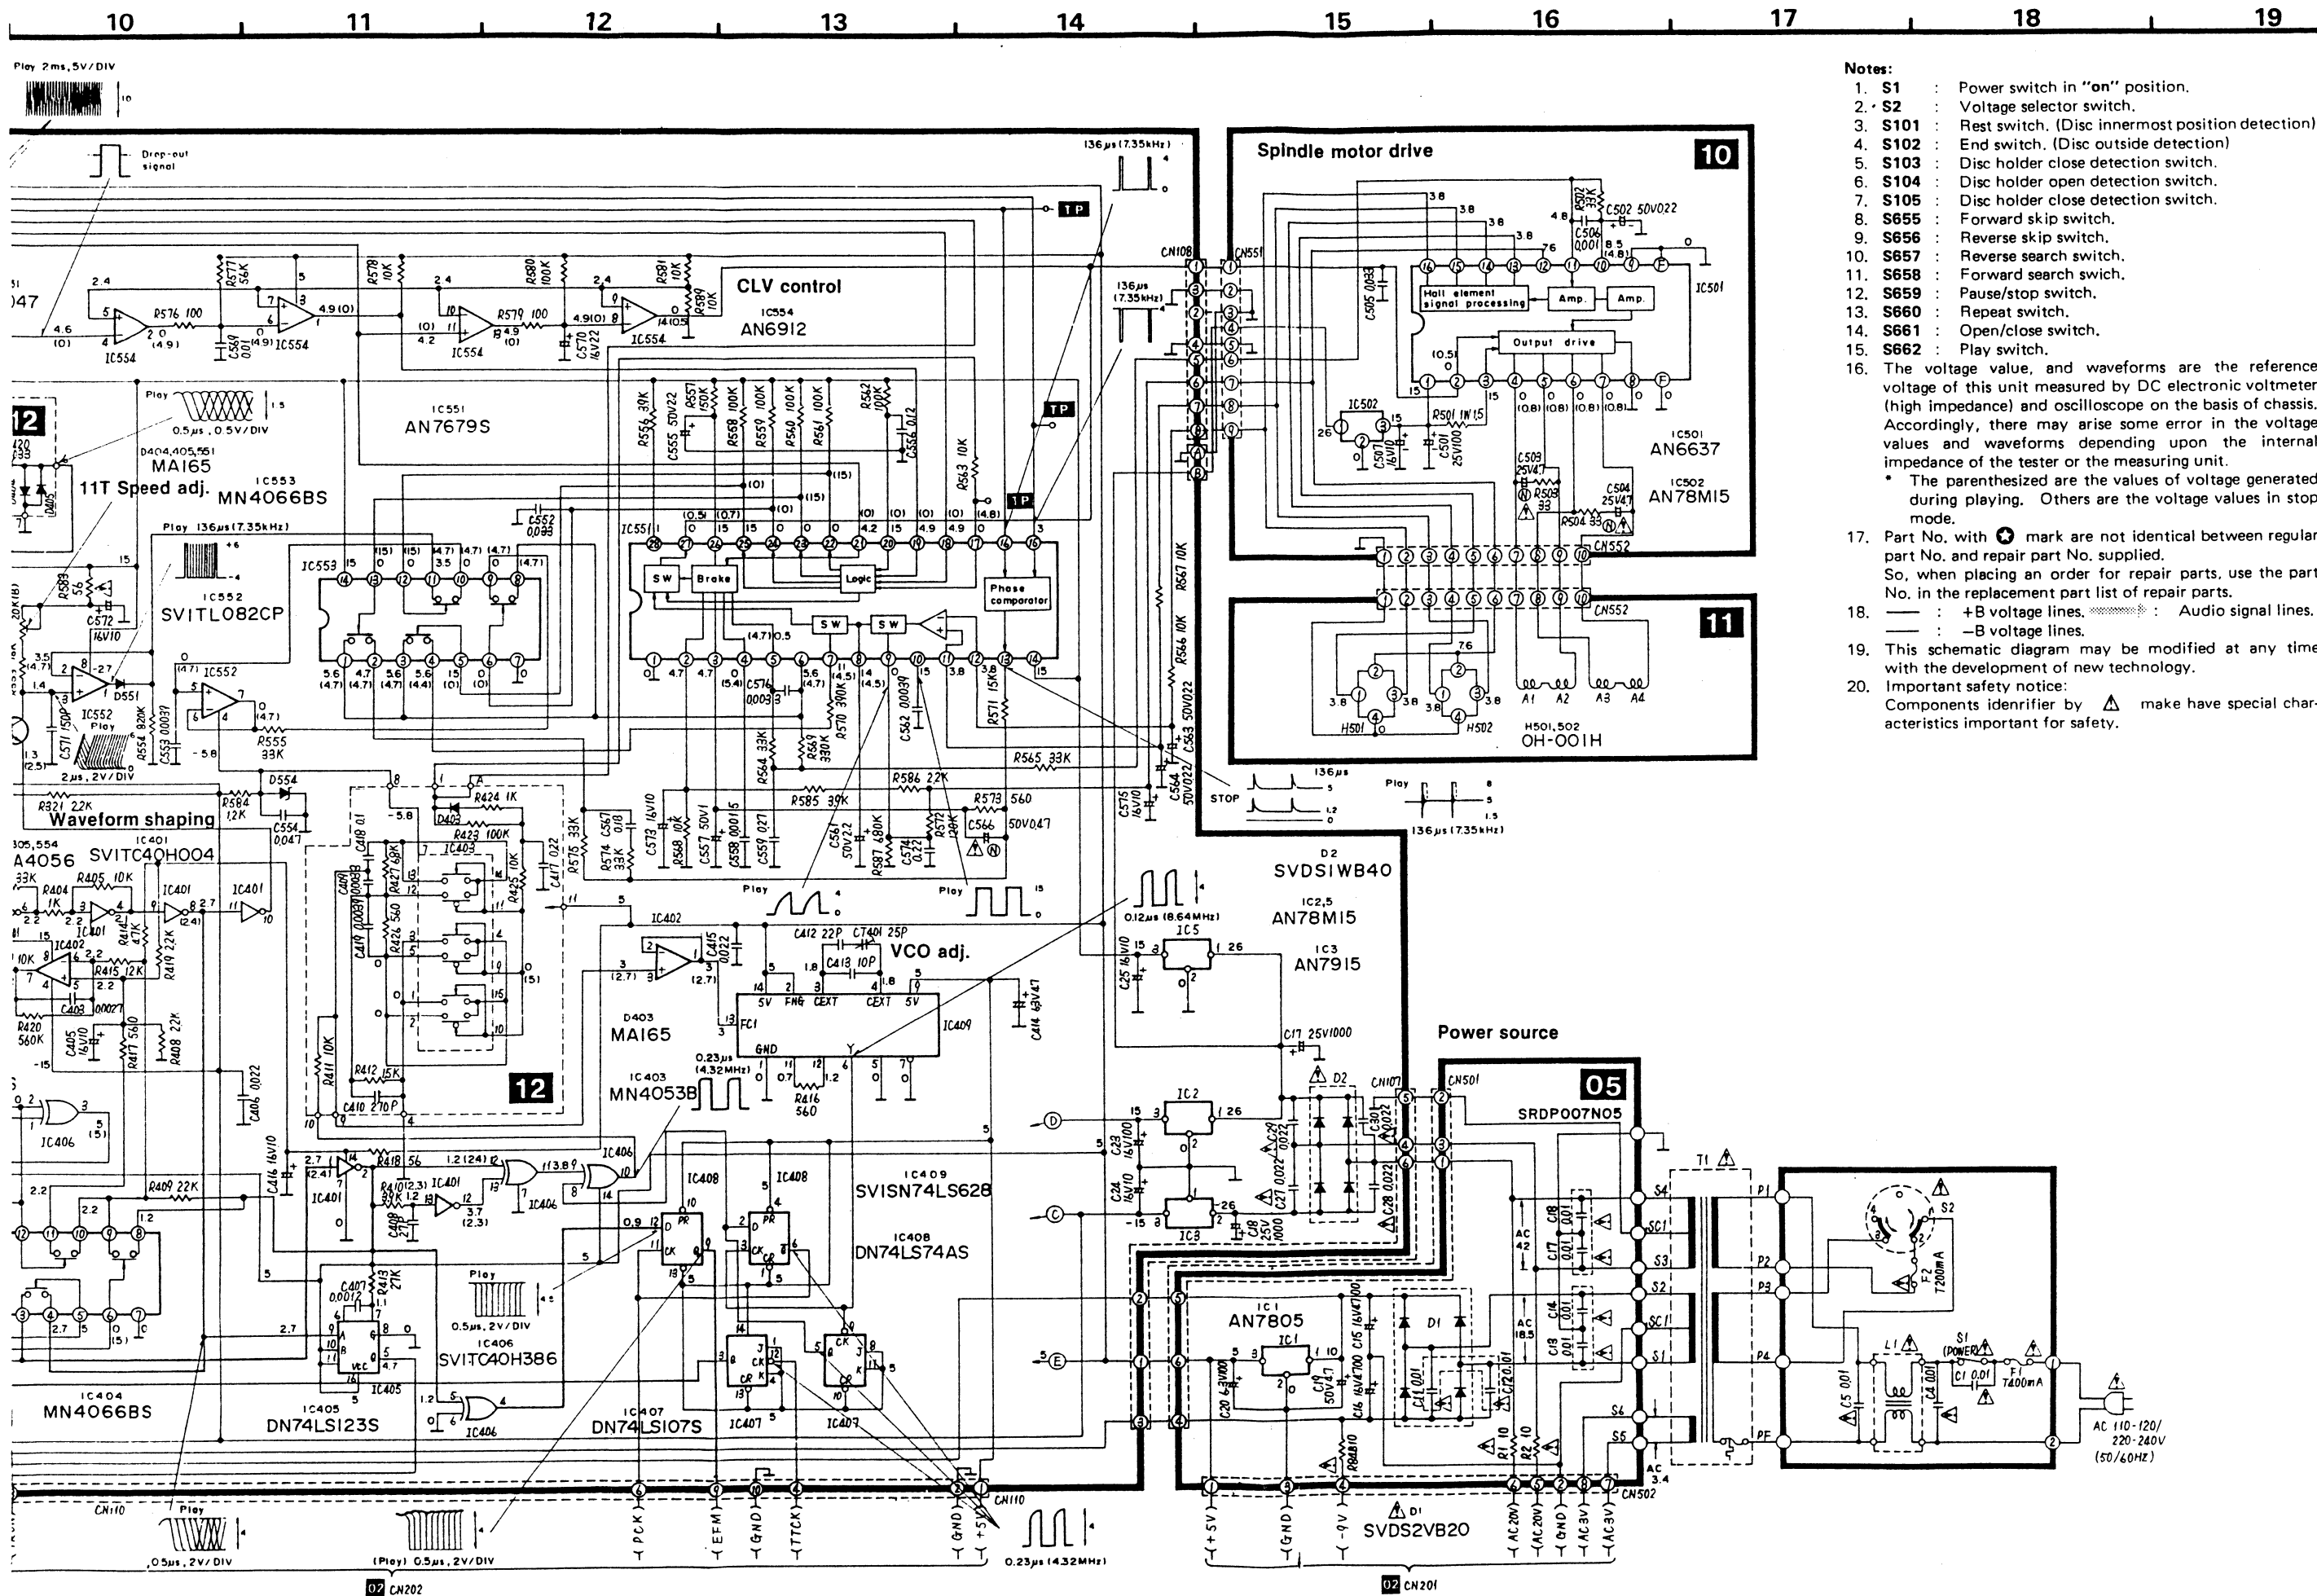


H
I
J
K
L
M

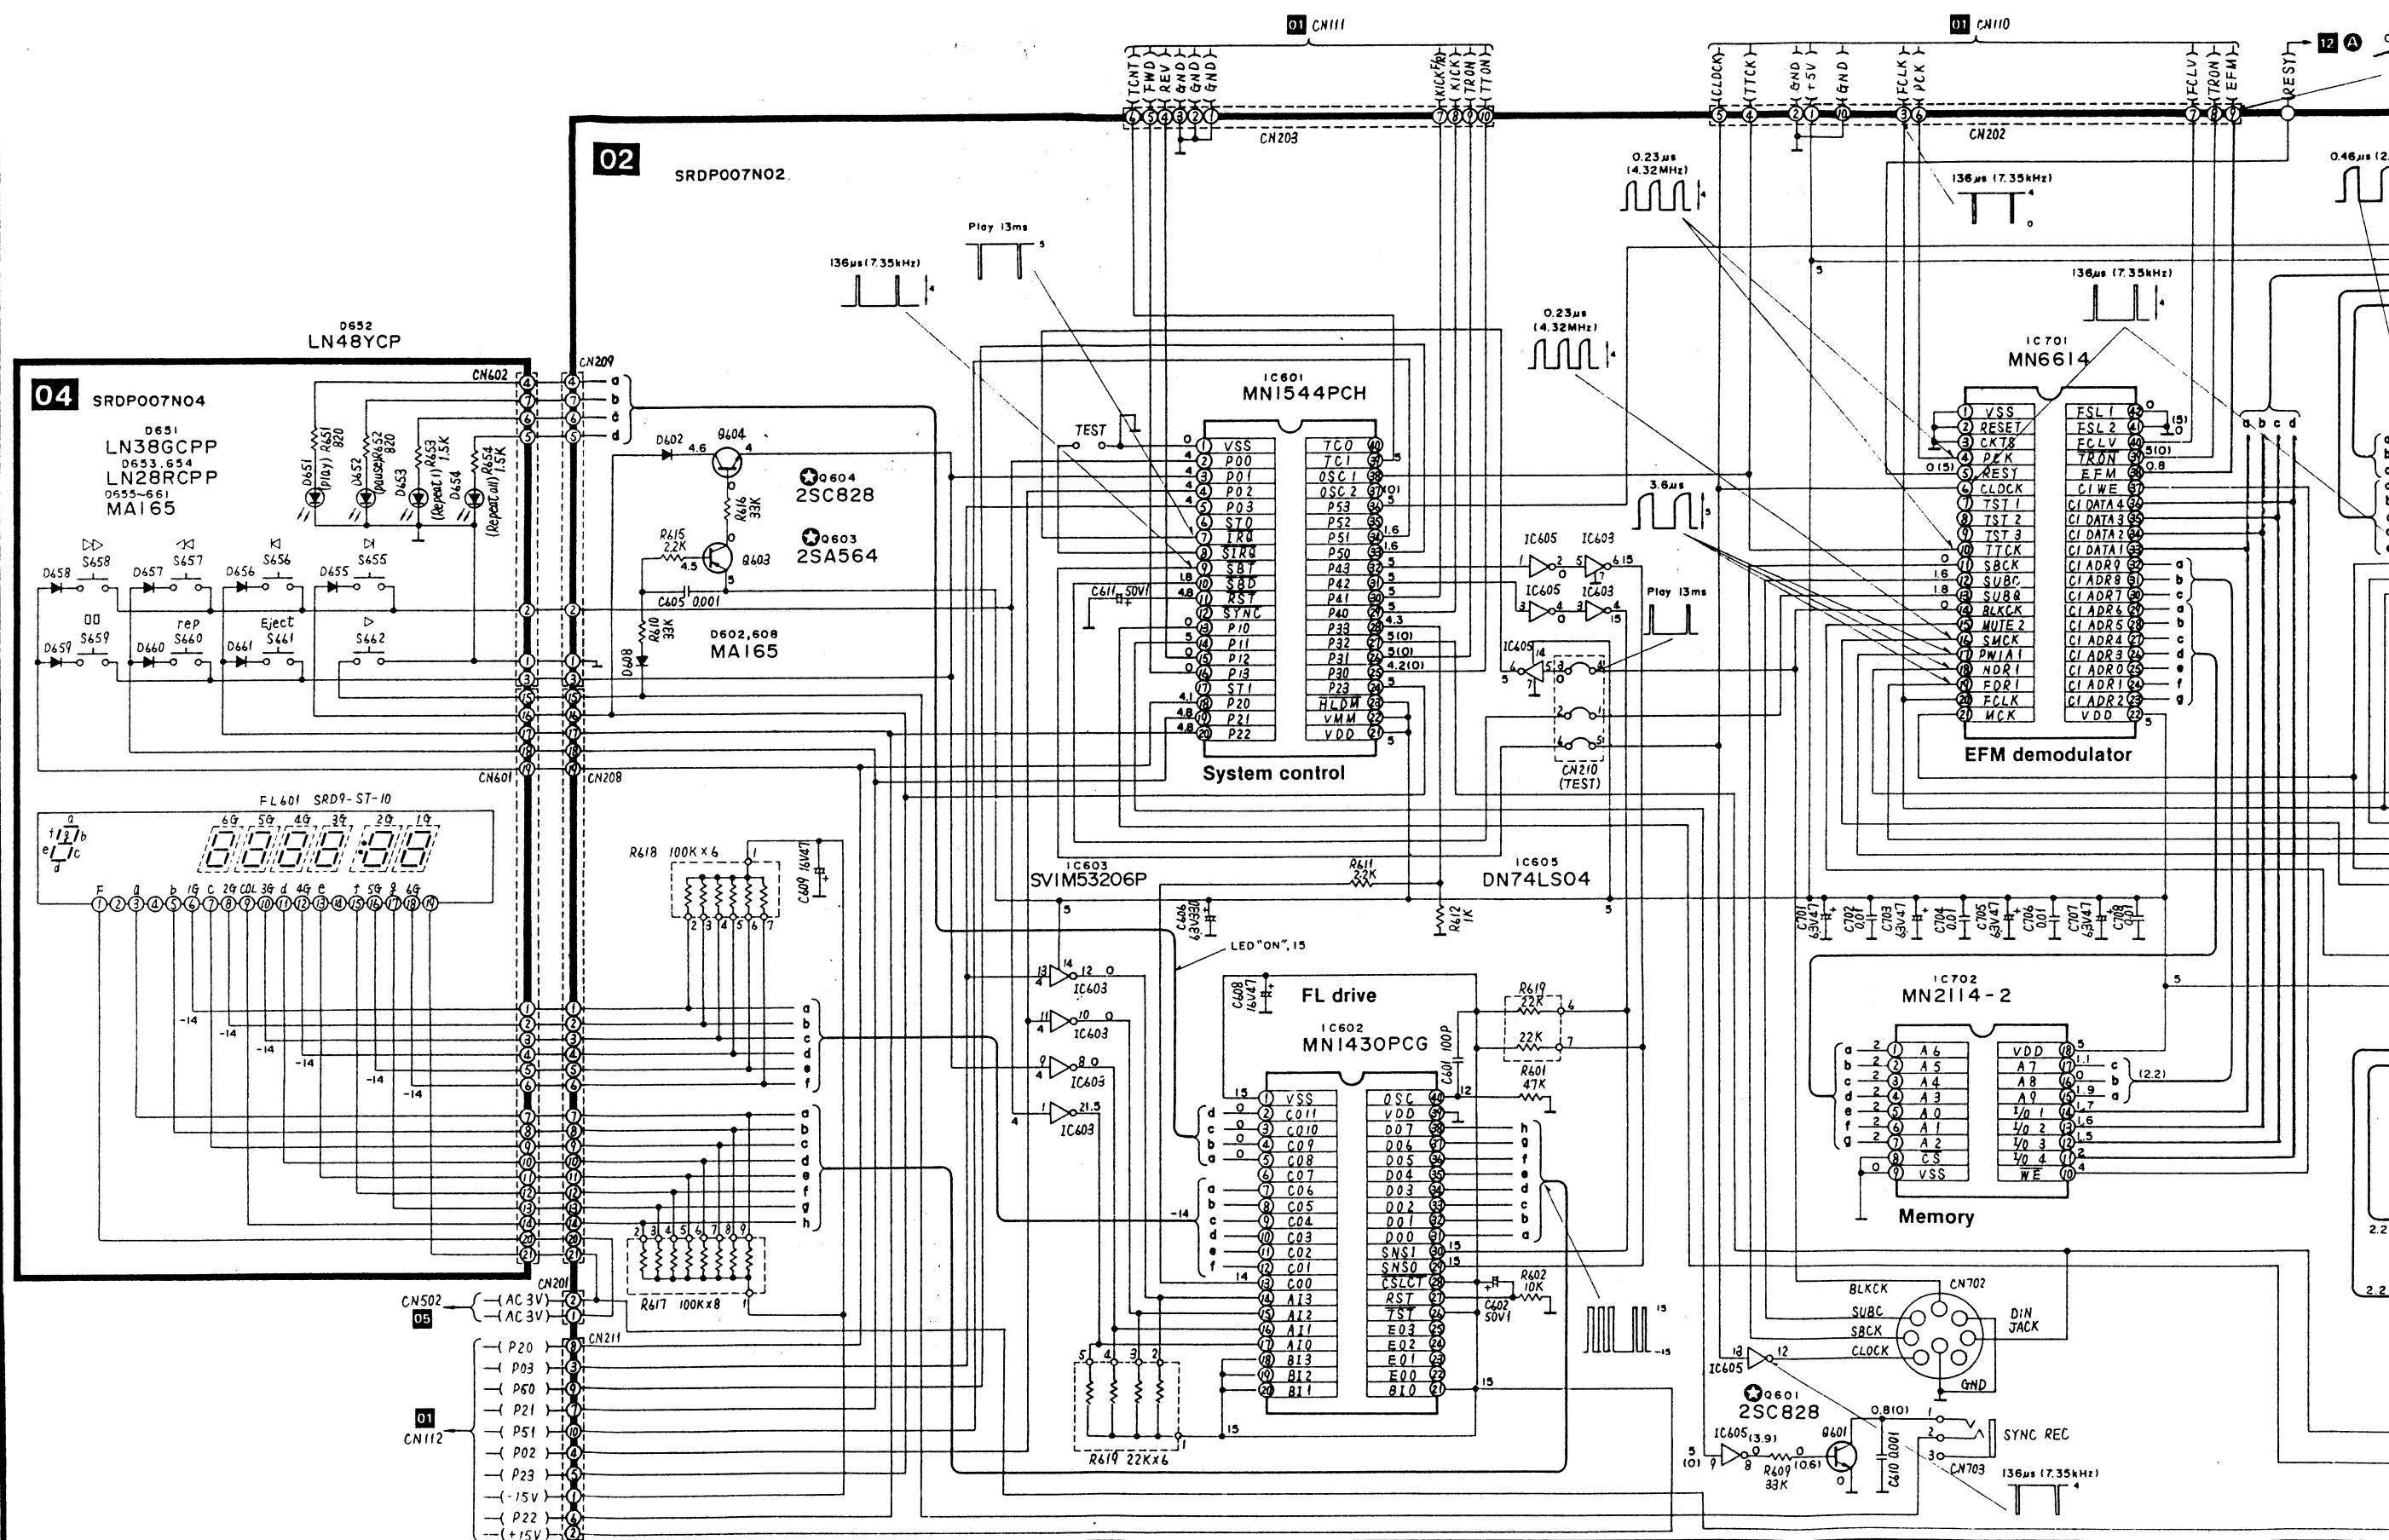

■ BLOCK DIAGRAM

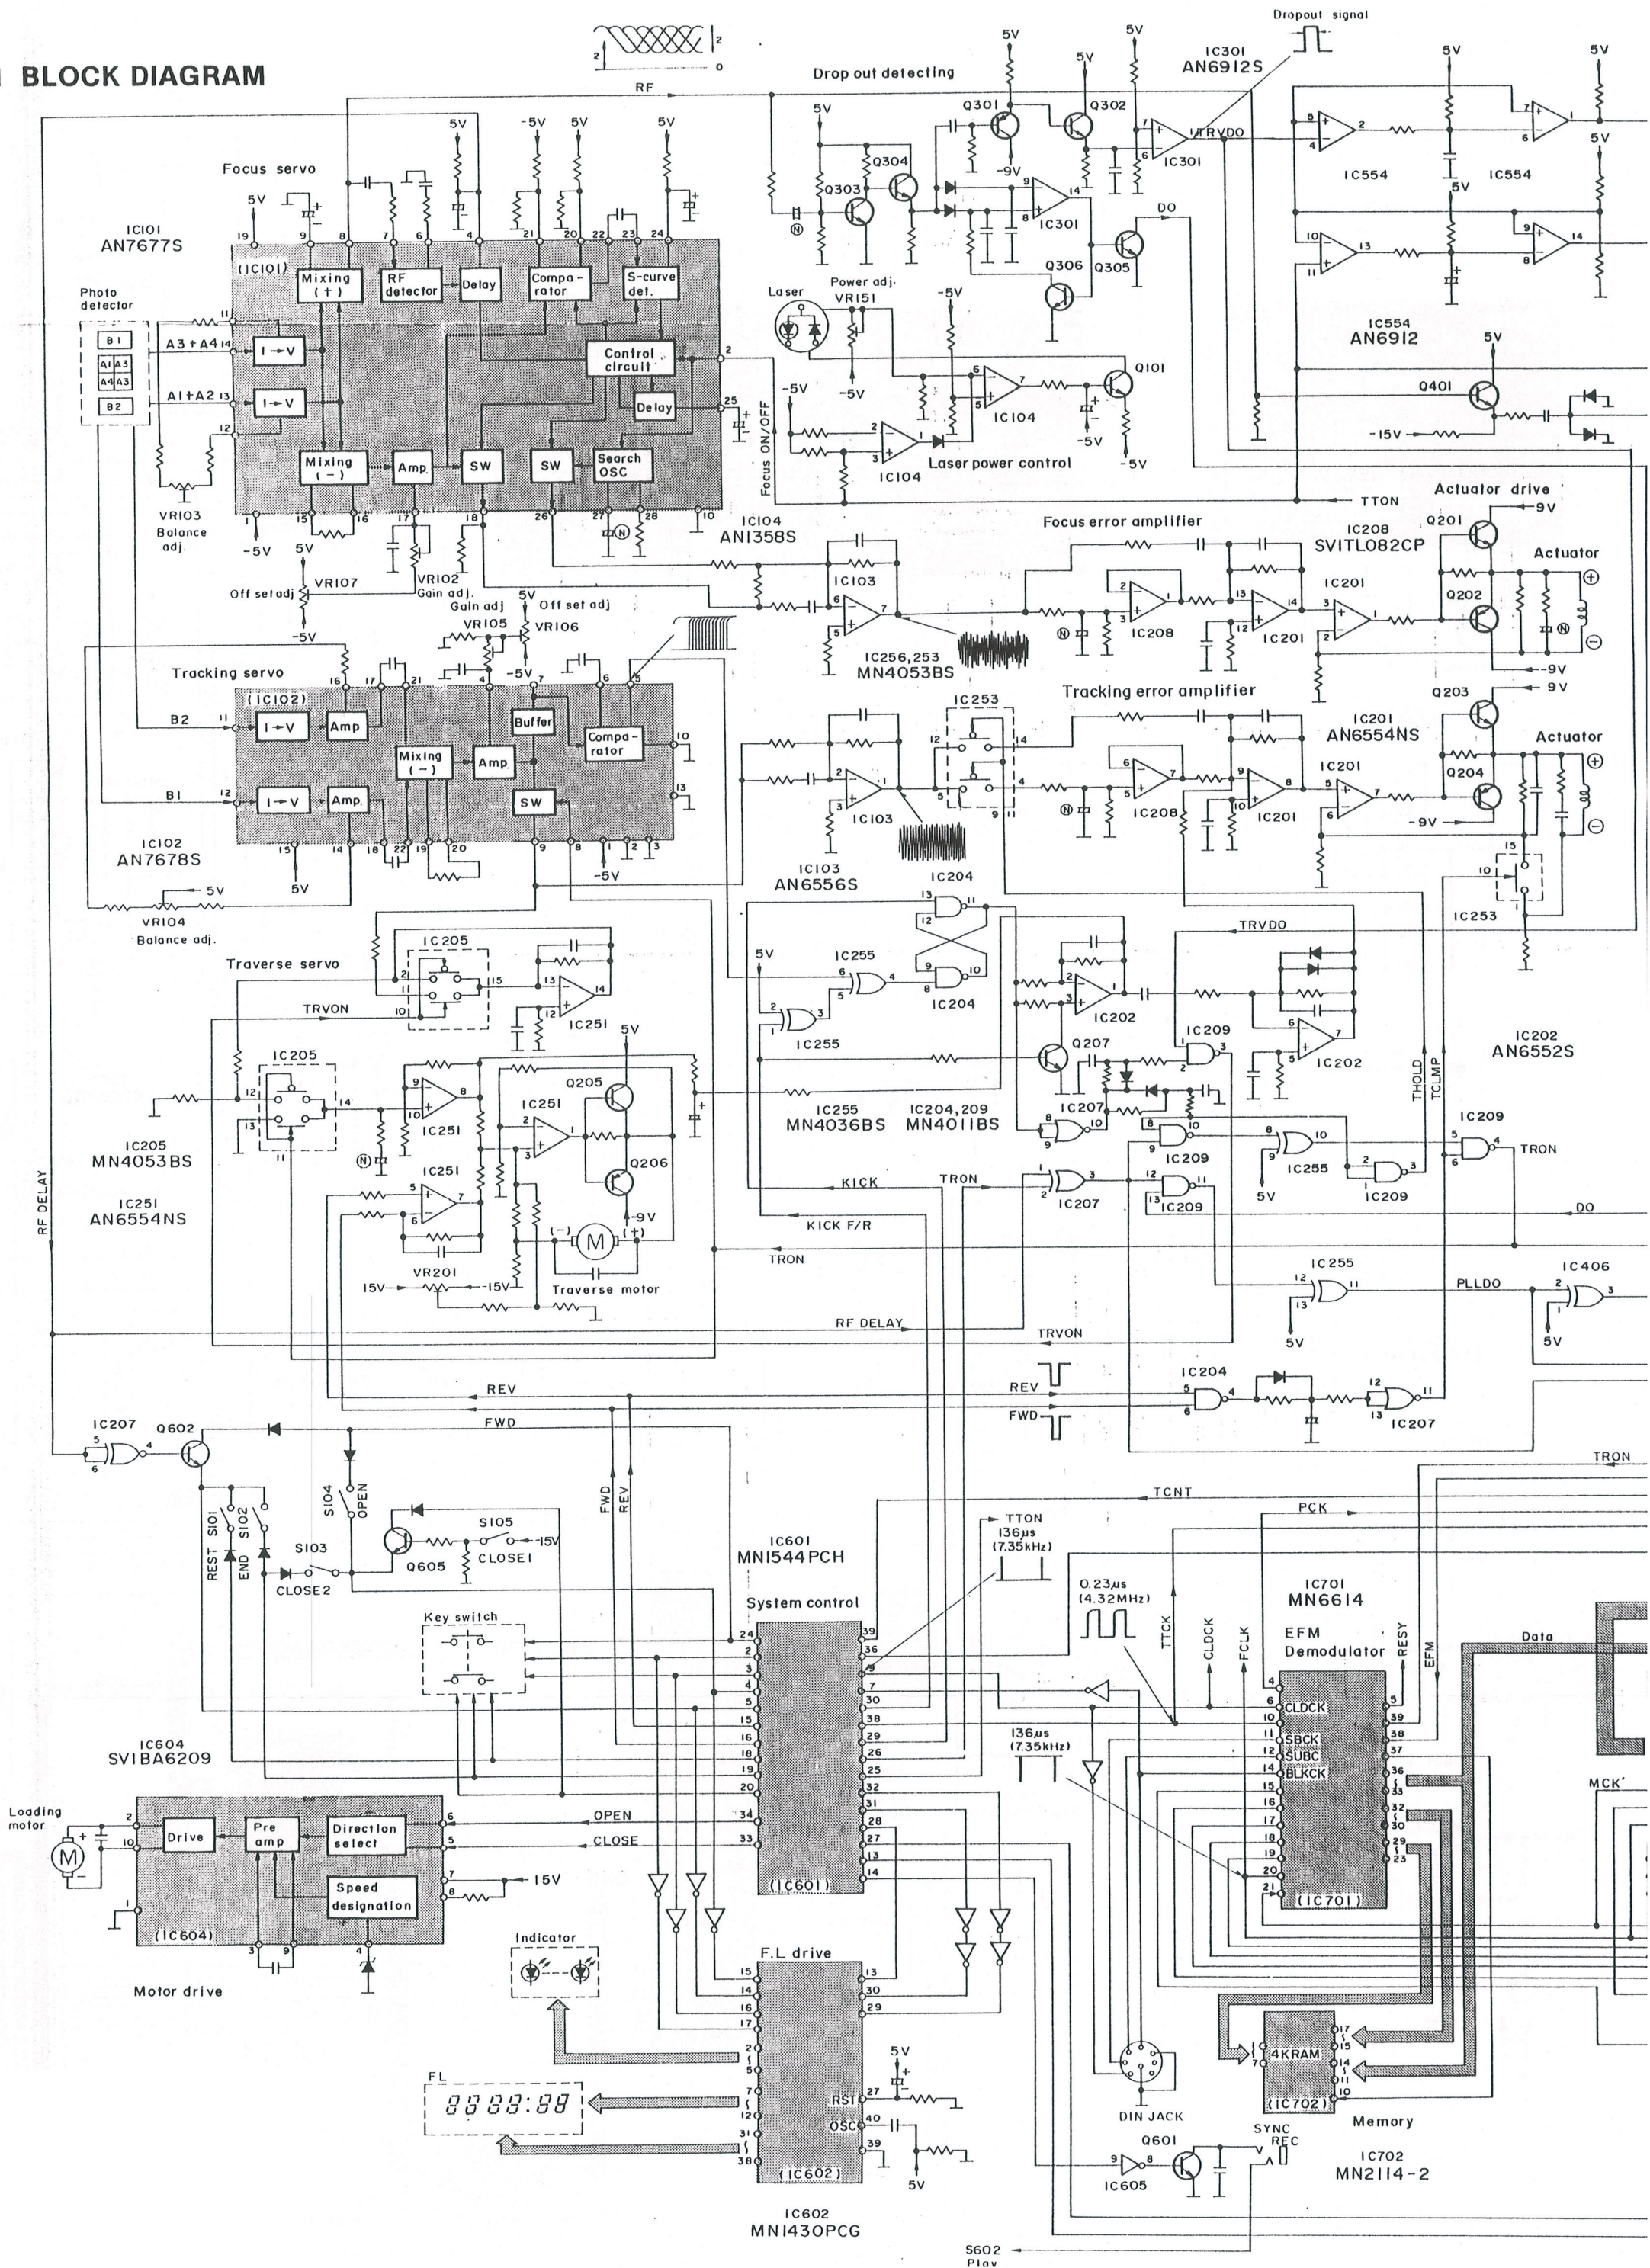

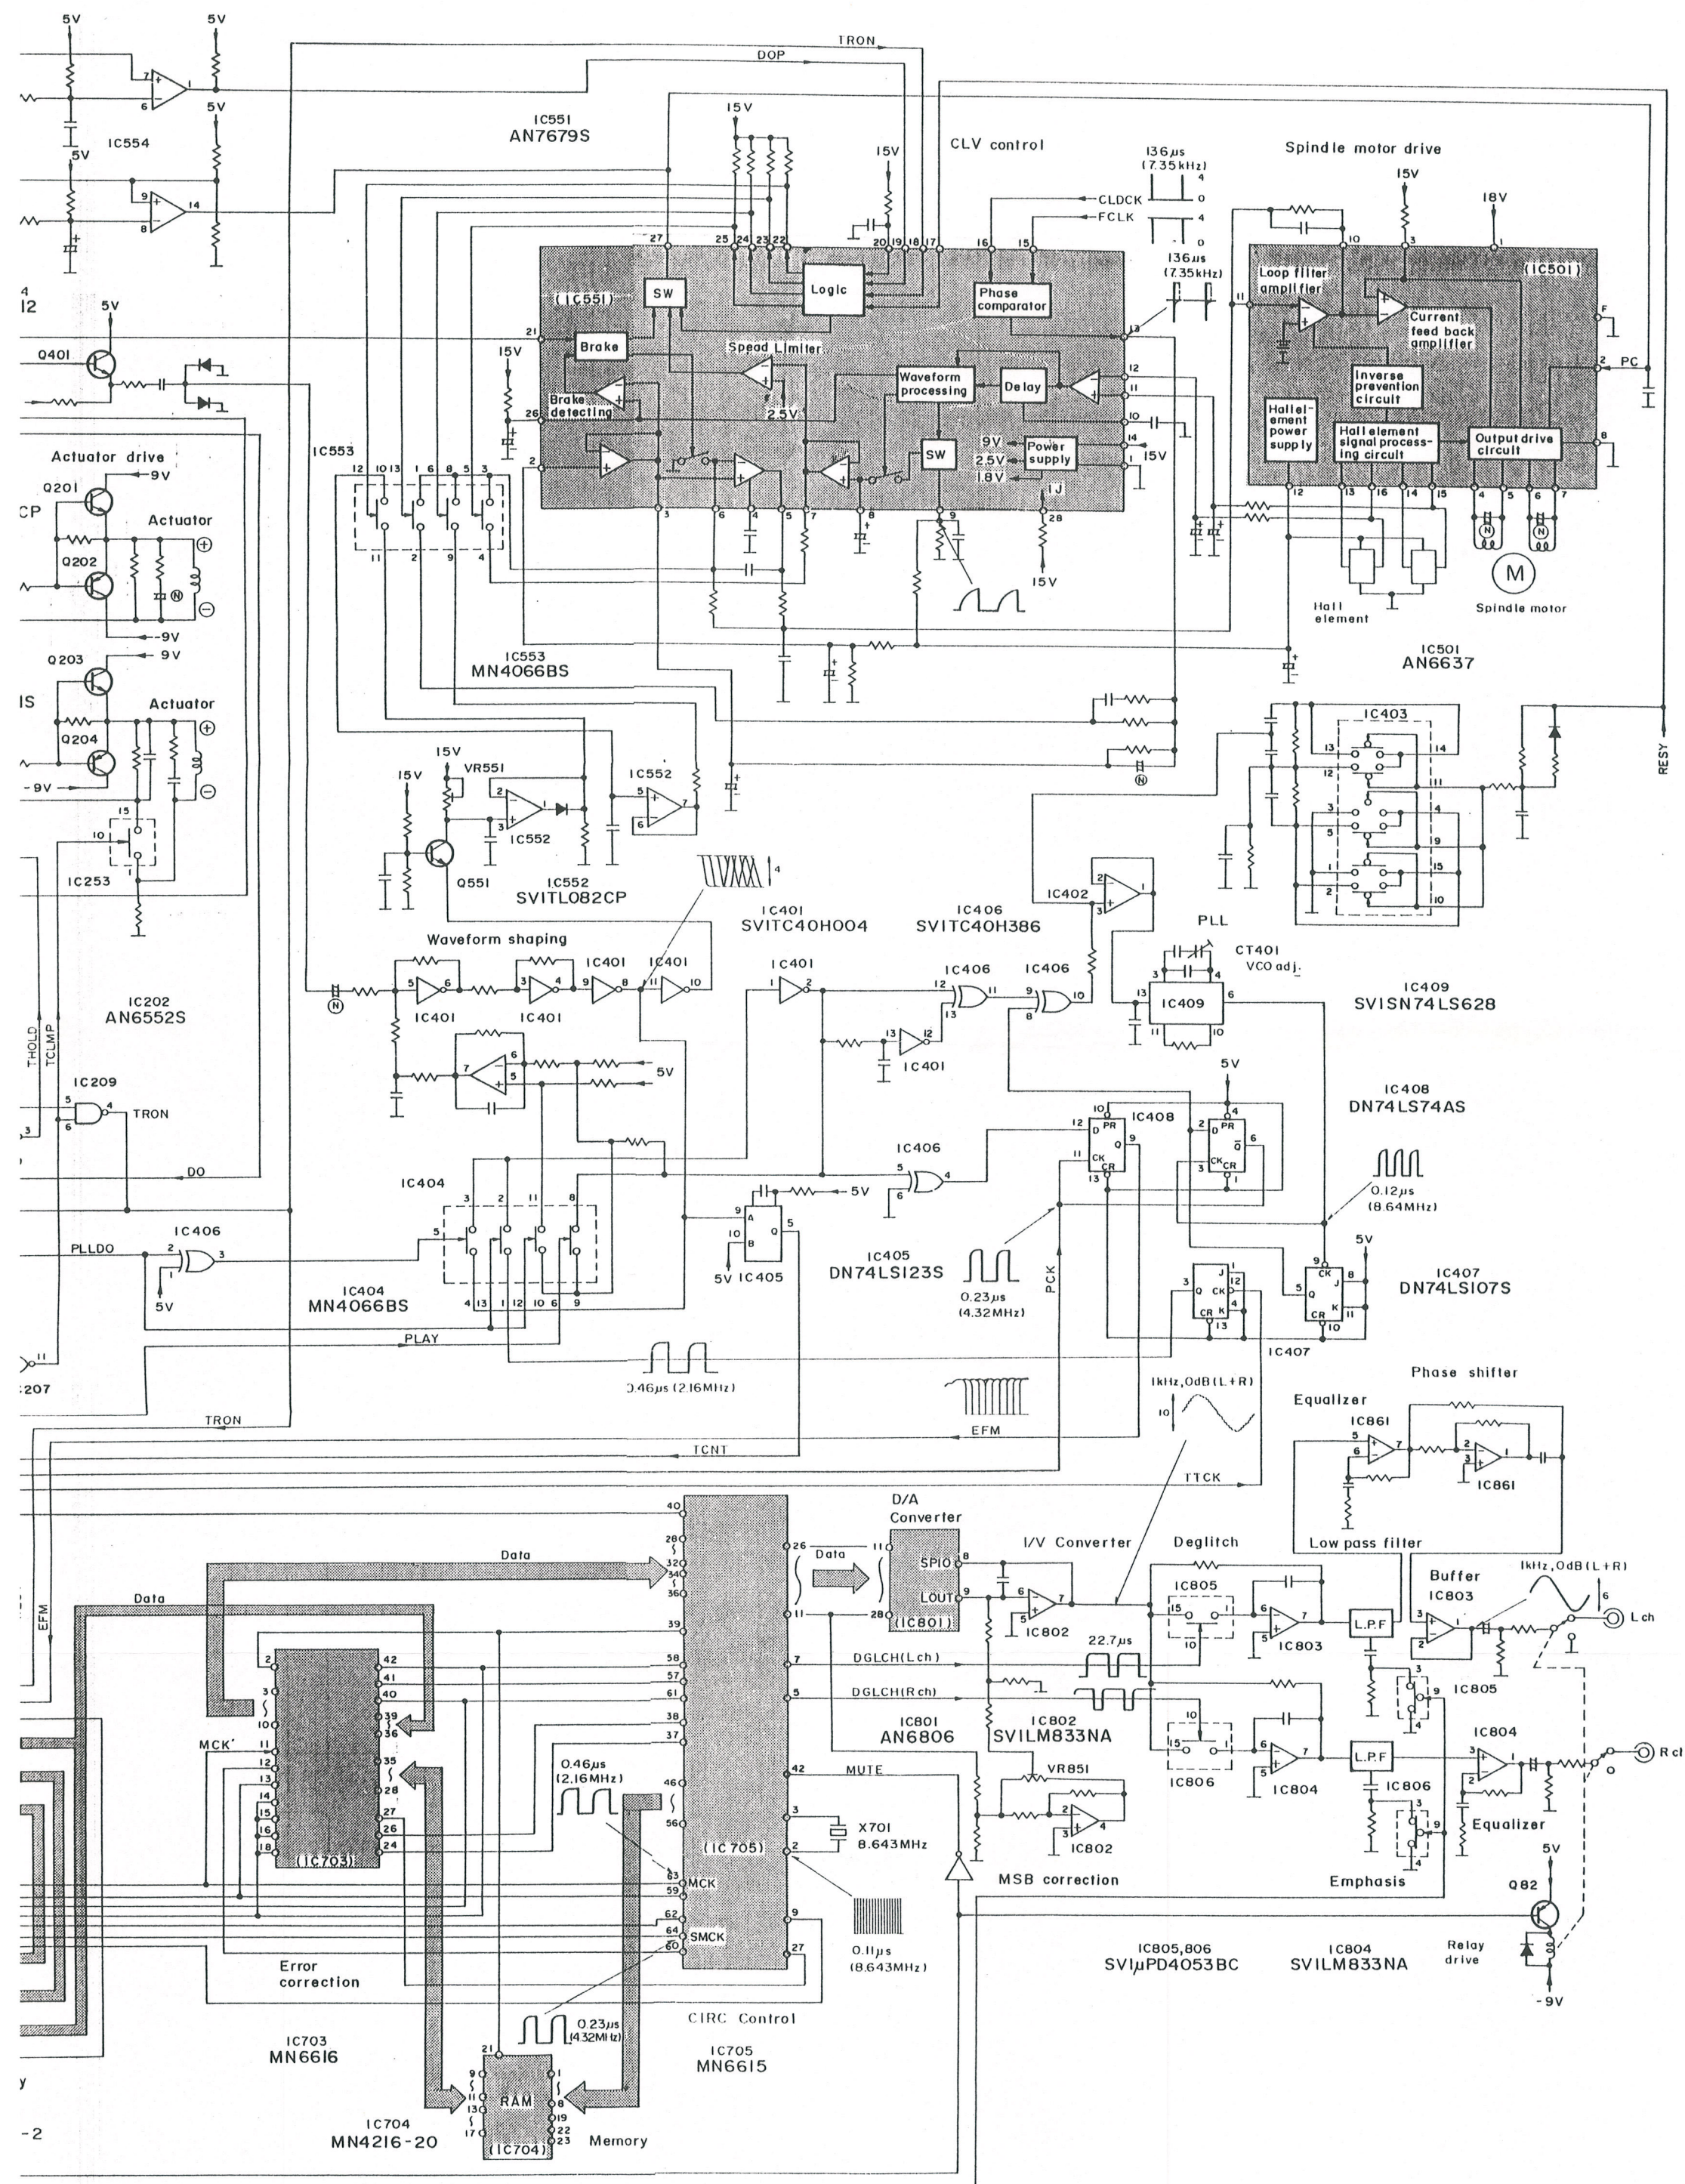



■ DESCRIPTION OF EACH TERMINALS

Mark	Description
CLDCK	CLV control signal
CLOSE	Loading motor close command signal
DGLCH	Digitch signal
DO	Drop-out signal
DOP	Drop-out signal
EFM	Eight to fourteen modulation signal
FCLK	Fram's clock signal
FCLV	CLV control signal
FE	Focus error signal
FWD	Forward signal
GND	Ground
KICK	Track jump control signal
KICK F/R	Track jump forward and reverse signal
OPEN	Loading motor open command signal
REV	Reverse signal
RF	RF signal (pick-up output signal)
RF DELAY	RF delay signal



Mark	Description
P02	Microcomputer (MN1544PCH) P port (keyboard and disc holder position detection signal)
P03	
P20	
P21	
P22	
P23	
P50	Microcomputer (MN1544PCH) P port (Loading motor close command signal)
P51	Microcomputer (MN1544PCH) P port (Loading motor open command signal)
PCK	PLL clock signal
TCNT	Traverse control signal
TE	Tracking error signal
TR ON	Tracking servo on command signal
TRV DO	Traverse servo on drop-out signal
TRV ON	Traverse servo on signal
TT ON	Turntable on signal (Spindle motor rotation)

PACKING

1. Put a soft cloth under the unit to protect it from scratches.
2. Turn the lock shaft 180° clockwise.
3. Turn the lock screws (about 5 to 6 times) clockwise.

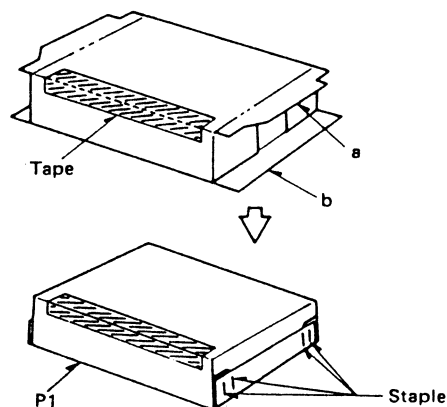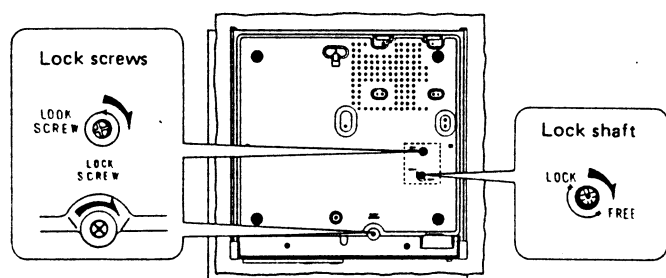

* Stapling positions are shown below.

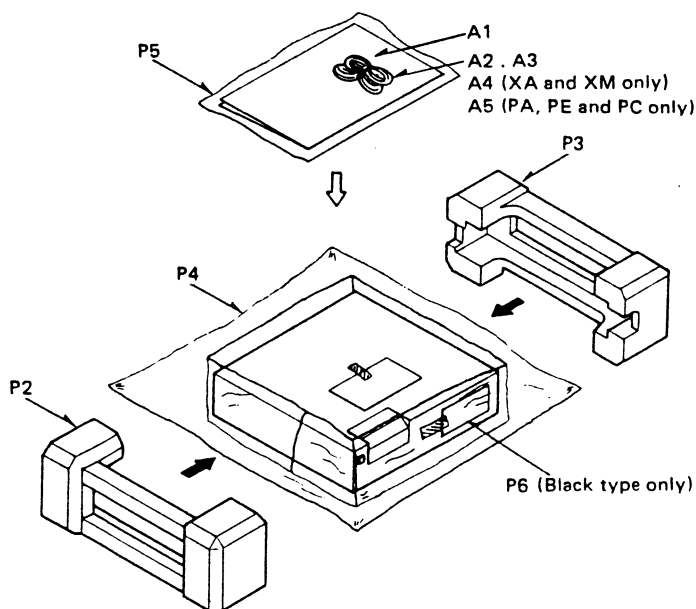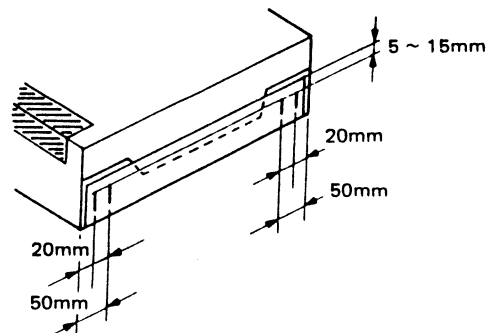

4. Place the unit (with cushions attached, as illustrated).
5. Fold the flaps according to the line marks.
6. Seal the top with adhesive tape.

* Use gum tape or adhesive cloth tape of 50mm wide at least.

7. For the edges, first fold the flap "a" and then flap "b", and staple. Remember to staple only flap "b". (Use 15 or 16mm staple)

Ref. No.	Part No.	Description
ACCESSORIES		
A1(EK)	SRNU007G01	Instruction Book (1)
A1(EI)	SRNU007I01	Instruction Book (1)
A1(EG,EF)	SRNU007X01	Instruction Book (1)
A1(XL,XA,XM)		
A1(E,EB)	SRNU007S01	Instruction Book (1)
A1(EH,EC)		
A1(PA,PE)	SRNU007P01	Instruction Book (1)
A1(PC)		
A2(EK)	SFDAC05G02	AC Cord (1)
A2(XL)	SFDAC05L01	AC Cord (1)
A2(XA,XM)	SFDAC05X01	AC Cord (1)
A2(PA,PE)	SFDAC05N01	AC Cord (1)
A2(PC)		
A2(other areas)	SFDAC05E02	AC Cord (1)
A3	SFDHC05N01	Pin Plug Cord (1)
A4(XA,XM)	SFDKI19118	2Pin Plug (1)
A5(PA,PE)	QJP0603S	Plug (1)
A5(PC)		
PACKING PARTS		
P1(EF)	SRHP007C01	Carton Box(Silver) (1)
P1(EF)	SRHP007C51	Carton Box(Black) (1)
P1(other areas)	SRHP007M01	Carton Box(Silver) (1)
P1(other areas)	SRHP007M51	Carton Box(Black) (1)
P2	SRHH007N01	Pad,Left (1)
P3	SRHH007N02	Pad,Right (1)
P4	SFYH45X50	Polyethlene Bag (1)
P5	SFYH17X16	Polyethlene Bag (1)
P6	SRHZ007N51	Pad (1)

Service Manual

Supplement-3

COMPACT
disc

DIGITAL

Compact Disc Player

SL-P7/(K)

Please use this manual together with the service manual for Model No. SL-P7.

- Notes:**
- ★ The replacement parts for optical pickup have been supplied as traverse unit ass'y (optical pick-up deck unit), but they are individually supplied as optical pick-up since May 21, 1984.
 - ★ This supplement includes the parts list and exploded view of loading drive mechanical and optical pick-up deck.
 - ★ This supplement should be filed with the service manual for Model No. SL-P7.

■ REPLACEMENT PARTS LIST

Ref. No.	Part No.	Part Name & Description		Ref. No.	Part No.	Part Name & Description	
LOADING MECHANICAL PARTS				OPTICAL PICK-UP DECK UNIT PARTS			
41	SRUM007N05E	Tray Ass'y, Disc	(1)	71	▲ SRLP007N01A	Optical Pick-up	(1)
42	SRKK007N04R	Disc Case Ass'y	(1)	72	SRUM007N22	Bracket, Optical Pick-up	(1)
42-1	SRKK007N04	Ornament Plate, Disc Case	(1)	73	SRQS007N01	Spring, Bracket	(1)
43	SRUM007N07	Cam, Disc Case	(1)	74	SRXJ007N01	Shaft, Optical Pick-up Guide	(2)
44	SRQH007N02	Spring	(1)	75	SRUK007N02E	Optical Deck Unit Base Ass'y	(1)
45	SFYB-5-32-P	Nylon Ball	(11)	76	SRUP007N09	Holder (A), Shaft	(2)
46	SRUP007N07	Holder	(2)	77	SRUP007N08	Holder (B), Shaft	(1)
47	SRUP007N05A	Holder, Disc Clamper	(1)	78	SRGC007N02	Cushion Rubber	(4)
48	SRDJ007N12E	Connector Ass'y	(1)	79	SRQA007N02	Spring(A), Cushion Rubber	(2)
49	SRUM007N18	Cover, Switch	(1)	80	SRUP007N12	Holder, Spring	(4)
50	SRQS007N02	Spring	(1)	81	SRQA007N01	Spring (B), Cushion Rubber	(2)
51	SRUG007N04	Gear, Return	(1)	82	SRMH007N02A	Motor, Optical Pick-up Drive	(1)
52	SRQH007N01	Spring, Return	(1)	83	SRQA007N03	Spring	(2)
53	SRUM007N15	Guide Plate	(2)	84	SRTE007N03	Holder, Turntable	(1)
54	SRUM007N09	Rack Gear, Loading	(1)	85	SRQA010N04	Spring	(1)
55	SRUP007N10E	Loading Guide Ass'y	(1)	86	SRTE007N11E	Turntable	(1)
56	SRUM007N06	Lock Arm	(1)	87	SRTM007N01A	Rotary Magnet Ass'y	(1)
57	SRQS007N03	Spring, Lock Arm	(1)	88	SRDJ007N20E	Connector Ass'y	(1)
58	SRUP007N03R	Loading Base Ass'y	(1)	89	SRUM007N19	Holder, Motor	(1)
59	SRDJ007N13E	Connector Ass'y	(1)	90	SRDJ007N10E	Connector Ass'y	(1)
60	SRUM007N17	Cover, Switch	(1)	91	SRXG007N01E	Worm Gear Ass'y	(1)
61	SRGB007N02	Belt, Loading Motor	(1)	92	SRGC007N01	Cushion Rubber	(1)
62	SRUG007N01	Pulley, Loading Motor	(1)	93	SRGB007N03	Belt	(1)
63	SRQH007N03	Spring, Disc Clamper	(1)	94	SRLH007N08	Clamper, Lead Wires	(1)
64	SRUG007N03	Gear, Loading	(1)	95	SRLC007N03	Cover, P.C. Board	(1)
65	SRUG007N02	Gear, Transmission	(1)				
66	SRMH007N01A	Motor, Loading	(1)				
67	SRDJ007N16E	Connector Ass'y	(1)				
68	SRUP007N15	Spacer	(1)				
69	SRUM007N24	Spacer, Disc Clamper	(1)				
70	SRGC007N07	Cushion Rubber, Disc Clamper	(1)				

Matsushita Electric Trading
Co., Ltd.
P.O. Box 288, Central Osaka
Japan

Matsushita Engineering and
Service Company
50 Meadowland Parkway
Secaucus, New Jersey 07094

Panasonic Hawaii, Inc.
91-238 Kauhū St., Ewa Beach
P.O. Box 774, Honolulu
Hawaii 96808-0074

Panasonic Sales Company
Division of Matsushita Electric
of Puerto Rico, Inc.
Ave. 65 de Infantería KM 9.7
Victoria Industrial Park
Carolina, Puerto Rico 00630


Panasonic Tokyo Matsushita
Electric Industrial Co., Ltd.
1-2, 1-chome, Shibakoen
Minato-ku, Tokyo 105 Japan

Matsushita Electric of
Canada Limited
5770 Ambler Drive
Mississauga, Ontario, L4W 2T3

Technics

EXPLODED VIEW


• Loading drive mechanism and optical deck unit parts

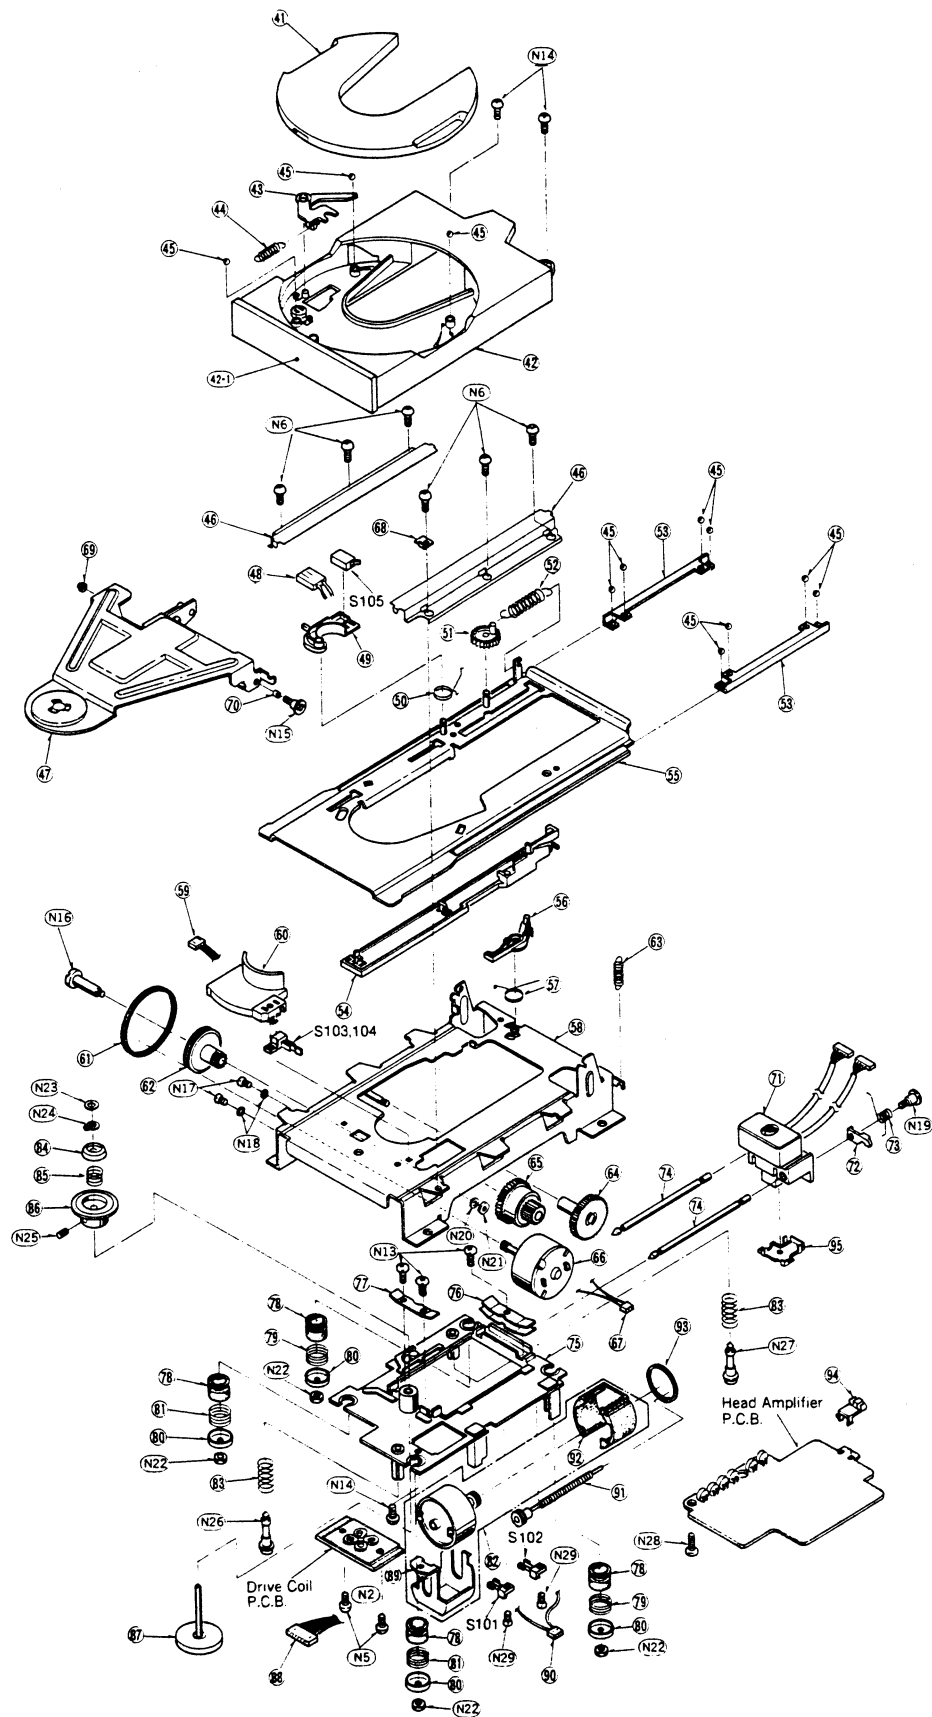


CHANGES

■ SCHEMATIC DIAGRAM

- Addition of P.C.B. (SRDP007N15)

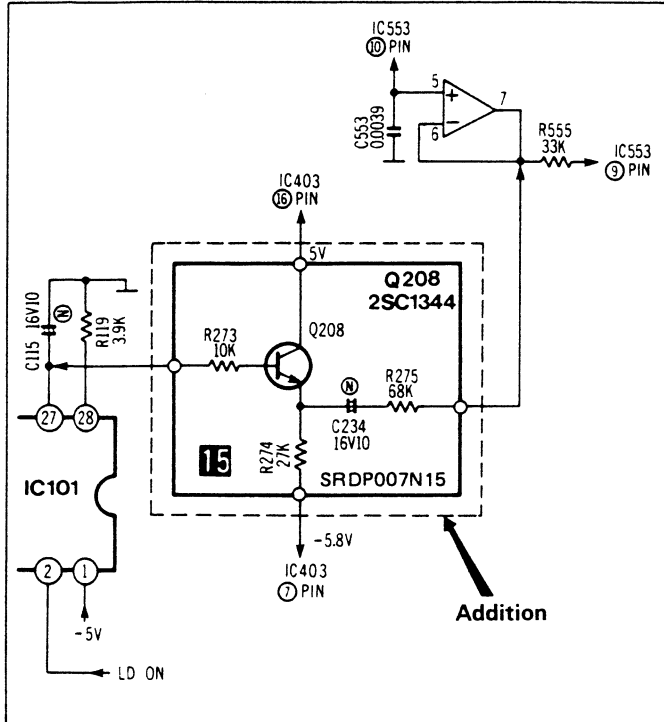

- Addition of diode and resistor

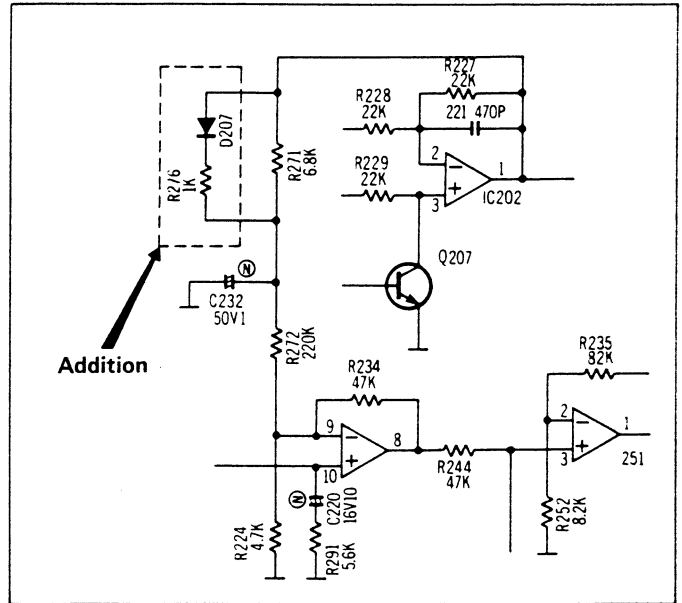

■ REPLACEMENT PARTS LIST

Ref. No.	Change of Part No.		Part Name & Description	Per Set (Pcs.)	Remarks
	OLD	NEW			
TRANSISTOR					
Q208	Addition	2SC1344	Transistor, CLV control	1	
DIODE					
D207	Addition	MA165	Diode, Traverse servo control	1	
RESISTORS					
R141	ERDS2TJ102	ERDS2TJ101	Carbon, 1/4W, 100Ω, ± 5%	1	
R273	Addition	ERD25FJ103	Carbon, 1/4W, 10kΩ, ± 5%	1	
R274	Addition	ERD25TJ273	Carbon, 1/4W, 27kΩ, ± 5%	1	
R275	Addition	ERD25TJ683	Carbon, 1/4W, 68kΩ, ± 5%	1	
R276	Addition	ERDS2TJ102	Carbon, 1/4W, 1kΩ, ± 5%	1	
CAPACITORS					
C119	ECKD1H472KB	ECFF1E104ZF	Ceramic, 25V, 0.1μF, +80% -20%	1	
C126	ECKD1H152KB	ECQM1H562KV	Polyester, 50V, 0.0056μF, ± 10%	1	
C234	Addition	ECEA1CN100S	Electrolytic, 16V, 10μF	1	