



Kabylake Intel(R) Firmware Support Package (FSP) Integration Guide

Wed Jul 19 2017 01:00:38

By using this document, in addition to any agreements you have with Intel, you accept the terms set forth below. You may not use or facilitate the use of this document in connection with any infringement or other legal analysis concerning Intel products described herein. You agree to grant Intel a non-exclusive, royalty-free license to any patent claim thereafter drafted which includes subject matter disclosed herein.

INFORMATION IN THIS DOCUMENT IS PROVIDED IN CONNECTION WITH INTEL PRODUCTS. NO LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE, TO ANY INTELLECTUAL PROPERTY RIGHTS IS GRANTED BY THIS DOCUMENT.

Intel may make changes to specifications and product descriptions at any time, without notice. Designers must not rely on the absence or characteristics of any features or instructions marked "reserved" or "undefined." Do not finalize a design with this information.

The products described in this document may contain design defects or errors known as errata which may cause the product to deviate from published specifications. Current characterized errata are available on request.

Contact your local Intel sales office or your distributor to obtain the latest specifications and before placing your product order.

Copies of documents which have an order number and are referenced in this document, or other Intel literature, may be obtained by calling 1-800-548-4725, or go to: <http://www.intel.com/design/literature.htm>

Any software source code reprinted in this document is furnished for informational purposes only and may only be used or copied and no license, express or implied, by estoppel or otherwise, to any of the reprinted source code is granted by this document.

[When the doc contains software source code for a special or limited purpose (such as informational purposes only), use the conditionalized Software Disclaimer tag. Otherwise, use the generic software source code disclaimer from the Legal page and include a copy of the software license or a hyperlink to its permanent location.]

This document contains information on products in the design phase of development. Intel processor numbers are not a measure of performance. Processor numbers differentiate features within each processor family, not across different processor families. Go to: http://www.intel.com/products/processor_number/

Code Names are only for use by Intel to identify products, platforms, programs, services, etc. ("products") in development by Intel that have not been made commercially available to the public, i.e., announced, launched or shipped. They are never to be used as "commercial" names for products. Also, they are not intended to function as trademarks.

Intel, Intel Atom, [include any Intel trademarks which are used in this document] and the Intel logo are trademarks of Intel Corporation in the U.S. and/or other countries.

*Other names and brands may be claimed as the property of others.

Copyright ©Intel Corporation. All rights reserved.

Contents

1	INTRODUCTION	1
2	FSP OVERVIEW	3
3	FSP INTEGRATION	5
4	FSP OUTPUT	11
5	FSP POSTCODE	15
6	Class Index	19
6.1	Class List	19
7	File Index	21
7.1	File List	21
8	Class Documentation	23
8.1	AUDIO_AZALIA_VERB_TABLE Struct Reference	23
8.1.1	Detailed Description	23
8.2	AZALIA_HEADER Struct Reference	24
8.2.1	Detailed Description	24
8.3	DIMM_INFO Struct Reference	24
8.3.1	Detailed Description	25
8.4	FSP_M_CONFIG Struct Reference	25
8.4.1	Detailed Description	35
8.4.2	Member Data Documentation	35
8.4.2.1	ActiveCoreCount	35
8.4.2.2	ApertureSize	35
8.4.2.3	Avx2RatioOffset	35
8.4.2.4	Avx3RatioOffset	36
8.4.2.5	BclkAdaptiveVoltage	36
8.4.2.6	BiosGuard	36
8.4.2.7	BistOnReset	36
8.4.2.8	BootFrequency	36

8.4.2.9	CleanMemory	36
8.4.2.10	CmdTriStateDis	36
8.4.2.11	CoreMaxOcRatio	37
8.4.2.12	CorePIIVoltageOffset	37
8.4.2.13	CoreVoltageAdaptive	37
8.4.2.14	CoreVoltageMode	37
8.4.2.15	CoreVoltageOverride	37
8.4.2.16	CpuRatio	37
8.4.2.17	CpuRatioOverride	37
8.4.2.18	DdrFreqLimit	38
8.4.2.19	DmiDeEmphasis	38
8.4.2.20	DmiGen3EndPointHint	38
8.4.2.21	DmiGen3EndPointPreset	38
8.4.2.22	DmiGen3ProgramStaticEq	38
8.4.2.23	DmiGen3RootPortPreset	38
8.4.2.24	EnableC6Dram	39
8.4.2.25	EnableSgx	39
8.4.2.26	EnableTraceHub	39
8.4.2.27	EvLoader	39
8.4.2.28	FClkFrequency	39
8.4.2.29	FlashWearOutProtection	39
8.4.2.30	GtPIIVoltageOffset	39
8.4.2.31	HeciTimeouts	39
8.4.2.32	IgdDvmt50PreAlloc	40
8.4.2.33	InitPcieAspmAfterOprom	40
8.4.2.34	InternalGfx	40
8.4.2.35	JtagC10PowerGateDisable	40
8.4.2.36	McPIIVoltageOffset	40
8.4.2.37	MmioSize	40
8.4.2.38	OcLock	40
8.4.2.39	PcdDebugInterfaceFlags	41
8.4.2.40	PcdIsaSerialUartBase	41
8.4.2.41	PcdSerialDebugBaudRate	41
8.4.2.42	PcdSerialDebugLevel	41
8.4.2.43	PcdSerialIoUartNumber	41
8.4.2.44	PchAcpiBase	41
8.4.2.45	PchHpetBase	41
8.4.2.46	PchHpetBdfValid	42
8.4.2.47	PchHpetBusNumber	42
8.4.2.48	PchHpetDeviceNumber	42

8.4.2.49	PchHpetEnable	42
8.4.2.50	PchHpetFunctionNumber	42
8.4.2.51	PchLpcEnhancePort8xhDecoding	42
8.4.2.52	PchNumRsvdSmbusAddresses	42
8.4.2.53	PchPmPciePIISsc	42
8.4.2.54	PchPort80Route	43
8.4.2.55	PcieRpEnableMask	43
8.4.2.56	PeciC10Reset	43
8.4.2.57	PeciSxReset	43
8.4.2.58	PegDataPtr	43
8.4.2.59	PegDisableSpreadSpectrumClocking	43
8.4.2.60	PrmrrSize	43
8.4.2.61	ProbelessTrace	44
8.4.2.62	Ratio	44
8.4.2.63	RealtimeMemoryTiming	44
8.4.2.64	RefClk	44
8.4.2.65	RingDownBin	44
8.4.2.66	RingMaxOcRatio	44
8.4.2.67	RingMinOcRatio	44
8.4.2.68	RingPIIVoltageOffset	45
8.4.2.69	RMT	45
8.4.2.70	SaGv	45
8.4.2.71	SaPIIVoltageOffset	45
8.4.2.72	SinitMemorySize	45
8.4.2.73	SmbusArpEnable	45
8.4.2.74	SmbusEnable	45
8.4.2.75	SpdProfileSelected	46
8.4.2.76	tRTP	46
8.4.2.77	TsegSize	46
8.4.2.78	Txt	46
8.4.2.79	TxtDprMemoryBase	46
8.4.2.80	TxtDprMemorySize	46
8.4.2.81	TxtHeapMemorySize	46
8.4.2.82	TxtImplemented	47
8.4.2.83	VddVoltage	47
8.4.2.84	VmxEnable	47
8.5	FSP_M_TEST_CONFIG Struct Reference	47
8.5.1	Detailed Description	50
8.5.2	Member Data Documentation	50
8.5.2.1	BdatEnable	50

8.5.2.2	BiosAcmBase	50
8.5.2.3	BiosAcmSize	50
8.5.2.4	BiosSize	51
8.5.2.5	BypassPhySyncReset	51
8.5.2.6	ChipsetInitMessage	51
8.5.2.7	DisableHeciRetry	51
8.5.2.8	DisableMessageCheck	51
8.5.2.9	DmiGen3EqPh2Enable	51
8.5.2.10	DmiGen3EqPh3Method	51
8.5.2.11	DmiVc1	52
8.5.2.12	DmiVcm	52
8.5.2.13	Gen3SwEqAlwaysAttempt	52
8.5.2.14	Gen3SwEqEnableVocTest	52
8.5.2.15	Gen3SwEqJitterDwellTime	52
8.5.2.16	Gen3SwEqJitterErrorTarget	52
8.5.2.17	Gen3SwEqNumberOfPresets	53
8.5.2.18	Gen3SwEqVocDwellTime	53
8.5.2.19	Gen3SwEqVocErrorTarget	53
8.5.2.20	HeciCommunication2	53
8.5.2.21	IderDeviceEnable	53
8.5.2.22	KtDeviceEnable	53
8.5.2.23	LockPTMregs	54
8.5.2.24	PanelPowerEnable	54
8.5.2.25	PchDciEn	54
8.5.2.26	Peg0Gen3EqPh2Enable	54
8.5.2.27	Peg0Gen3EqPh3Method	54
8.5.2.28	Peg1Gen3EqPh2Enable	54
8.5.2.29	Peg1Gen3EqPh3Method	54
8.5.2.30	Peg2Gen3EqPh2Enable	55
8.5.2.31	Peg2Gen3EqPh3Method	55
8.5.2.32	PegGen3EndPointHint	55
8.5.2.33	PegGen3EndPointPreset	55
8.5.2.34	PegGen3ProgramStaticEq	55
8.5.2.35	PegGen3RootPortPreset	55
8.5.2.36	PegGenerateBdatMarginTable	56
8.5.2.37	PegRxCemLoopbackLane	56
8.5.2.38	PegRxCemNonProtocolAwareness	56
8.5.2.39	ScanExtGfxForLegacyOpRom	56
8.5.2.40	SkipMbpHob	56
8.5.2.41	SmbusDynamicPowerGating	56

8.5.2.42	SmbusSpdWriteDisable	56
8.5.2.43	TgaSize	57
8.5.2.44	TotalFlashSize	57
8.5.2.45	TxtLcpPdBase	57
8.5.2.46	TxtLcpPdSize	57
8.5.2.47	WdtDisableAndLock	57
8.6	FSP_S_CONFIG Struct Reference	57
8.6.1	Detailed Description	73
8.6.2	Member Data Documentation	73
8.6.2.1	AcLoadline	73
8.6.2.2	AcousticNoiseMitigation	73
8.6.2.3	AmtEnabled	73
8.6.2.4	AmtSolEnabled	73
8.6.2.5	AsfEnabled	73
8.6.2.6	DcLoadline	74
8.6.2.7	DelayUsbPdoProgramming	74
8.6.2.8	DevIntConfigPtr	74
8.6.2.9	DmiSuggestedSetting	74
8.6.2.10	Early8254ClockGatingEnable	74
8.6.2.11	EcCmdLock	74
8.6.2.12	EcCmdProvisionEav	74
8.6.2.13	EnableTcoTimer	75
8.6.2.14	EsataSpeedLimit	75
8.6.2.15	FastPkgCRampDisableGt	75
8.6.2.16	FastPkgCRampDisableIa	75
8.6.2.17	FastPkgCRampDisableSa	75
8.6.2.18	FwProgress	75
8.6.2.19	GpioIrqRoute	75
8.6.2.20	Heci3Enabled	76
8.6.2.21	IccMax	76
8.6.2.22	ImonOffset	76
8.6.2.23	ImonSlope	76
8.6.2.24	ManageabilityMode	76
8.6.2.25	MeUnconfigsValid	76
8.6.2.26	MicrocodePatchAddress	76
8.6.2.27	NumOfDevIntConfig	77
8.6.2.28	PchCio2Enable	77
8.6.2.29	PchCrid	77
8.6.2.30	PchDisableComplianceMode	77
8.6.2.31	PchDmiAspm	77

8.6.2.32	PchDmiTsawEn	77
8.6.2.33	PchHdaDspEnable	77
8.6.2.34	PchHdaDspEndpointBluetooth	77
8.6.2.35	PchHdaDspEndpointI2s	78
8.6.2.36	PchHdaDspFeatureMask	78
8.6.2.37	PchHdaDspUaaCompliance	78
8.6.2.38	PchHdaEnable	78
8.6.2.39	PchHdaIDispCodecDisconnect	78
8.6.2.40	PchHdaIoBufferOwnership	78
8.6.2.41	PchHdaPme	79
8.6.2.42	PchIoApicBdfValid	79
8.6.2.43	PchIoApicBusNumber	79
8.6.2.44	PchIoApicDeviceNumber	79
8.6.2.45	PchIoApicEntry24_119	79
8.6.2.46	PchIoApicFunctionNumber	79
8.6.2.47	PchIoApicId	79
8.6.2.48	PchIoApicRangeSelect	79
8.6.2.49	PchIshEnable	80
8.6.2.50	PchIshGp0GpioAssign	80
8.6.2.51	PchIshGp1GpioAssign	80
8.6.2.52	PchIshGp2GpioAssign	80
8.6.2.53	PchIshGp3GpioAssign	80
8.6.2.54	PchIshGp4GpioAssign	80
8.6.2.55	PchIshGp5GpioAssign	80
8.6.2.56	PchIshGp6GpioAssign	81
8.6.2.57	PchIshGp7GpioAssign	81
8.6.2.58	PchIshI2c0GpioAssign	81
8.6.2.59	PchIshI2c1GpioAssign	81
8.6.2.60	PchIshI2c2GpioAssign	81
8.6.2.61	PchIshPdtUnlock	81
8.6.2.62	PchIshSpiGpioAssign	81
8.6.2.63	PchIshUart0GpioAssign	81
8.6.2.64	PchIshUart1GpioAssign	82
8.6.2.65	PchLanClkReqSupported	82
8.6.2.66	PchLanEnable	82
8.6.2.67	PchLanK1OffEnable	82
8.6.2.68	PchLanLtrEnable	82
8.6.2.69	PchLockDownBiosLock	82
8.6.2.70	PchLockDownSpiEiss	82
8.6.2.71	PchMemoryThrottlingEnable	83

8.6.2.72	PchPcieDeviceOverrideTablePtr	83
8.6.2.73	PchPmCapsuleResetType	83
8.6.2.74	PchPmDeepSxPol	83
8.6.2.75	PchPmDisableDsxAcpresentPulldown	83
8.6.2.76	PchPmDisableNativePowerButton	83
8.6.2.77	PchPmLanWakeFromDeepSx	83
8.6.2.78	PchPmLpcClockRun	84
8.6.2.79	PchPmMeWakeSts	84
8.6.2.80	PchPmPcieWakeFromDeepSx	84
8.6.2.81	PchPmPmeB0S5Dis	84
8.6.2.82	PchPmPwrBtnOverridePeriod	84
8.6.2.83	PchPmPwrCycDur	84
8.6.2.84	PchPmSlpAMinAssert	84
8.6.2.85	PchPmSlpLanLowDc	85
8.6.2.86	PchPmSlpS0Enable	85
8.6.2.87	PchPmSlpS0VmEnable	85
8.6.2.88	PchPmSlpS3MinAssert	85
8.6.2.89	PchPmSlpS4MinAssert	85
8.6.2.90	PchPmSlpStrchSusUp	85
8.6.2.91	PchPmSlpSusMinAssert	85
8.6.2.92	PchPmWolEnableOverride	86
8.6.2.93	PchPmWolOvrWkSts	86
8.6.2.94	PchPmWoWlanDeepSxEnable	86
8.6.2.95	PchPmWoWlanEnable	86
8.6.2.96	PchPort61hEnable	86
8.6.2.97	PchPwrOptEnable	86
8.6.2.98	PchScsEmmcHs400DIIDataValid	86
8.6.2.99	PchScsEmmcHs400TuningRequired	87
8.6.2.100	PchSirqEnable	87
8.6.2.101	PchSirqMode	87
8.6.2.102	PchSkyCamPortACtleEnable	87
8.6.2.103	PchSkyCamPortATermOvrEnable	87
8.6.2.104	PchSkyCamPortATrimEnable	87
8.6.2.105	PchSkyCamPortBCtleEnable	87
8.6.2.106	PchSkyCamPortBTermOvrEnable	87
8.6.2.107	PchSkyCamPortBTrimEnable	88
8.6.2.108	PchSkyCamPortCDCtleEnable	88
8.6.2.109	PchSkyCamPortCTermOvrEnable	88
8.6.2.110	PchSkyCamPortCTrimEnable	88
8.6.2.111	PchSkyCamPortDTermOvrEnable	88

8.6.2.112 PchSkyCamPortDTrimEnable	88
8.6.2.113 PchSubSystemId	88
8.6.2.114 PchSubSystemVendorId	89
8.6.2.115 PchThermalDeviceEnable	89
8.6.2.116 PchTsmicLock	89
8.6.2.117 PchTTEnable	89
8.6.2.118 PchTTLock	89
8.6.2.119 PchTTState13Enable	89
8.6.2.120 PcieAllowNoLtrIccPIIShutdown	89
8.6.2.121 PcieComplianceTestMode	90
8.6.2.122 PcieDisableRootPortClockGating	90
8.6.2.123 PcieEnablePeerMemoryWrite	90
8.6.2.124 PcieEqPh3LaneParamCm	90
8.6.2.125 PcieEqPh3LaneParamCp	90
8.6.2.126 PcieRpAspm	90
8.6.2.127 PcieRpClkReqNumber	90
8.6.2.128 PcieRpClkReqSupport	91
8.6.2.129 PcieRpCompletionTimeout	91
8.6.2.130 PcieRpDeviceResetPad	91
8.6.2.131 PcieRpFunctionSwap	91
8.6.2.132 PcieRpGen3EqPh3Method	91
8.6.2.133 PcieRpL1Substates	91
8.6.2.134 PcieRpPcieSpeed	91
8.6.2.135 PcieRpPhysicalSlotNumber	92
8.6.2.136 PcieSwEqCoeffListCm	92
8.6.2.137 PcieSwEqCoeffListCp	92
8.6.2.138 PortUsb20Enable	92
8.6.2.139 PortUsb30Enable	92
8.6.2.140 Psi1Threshold	92
8.6.2.141 Psi2Threshold	92
8.6.2.142 Psi3Enable	93
8.6.2.143 Psi3Threshold	93
8.6.2.144 PsysOffset	93
8.6.2.145 PsysSlope	93
8.6.2.146 PxRcConfig	93
8.6.2.147 SataEnable	93
8.6.2.148 SataMode	93
8.6.2.149 SataP0TDispFinit	94
8.6.2.150 SataP1TDispFinit	94
8.6.2.151 SataPortsDevSlp	94

8.6.2.152	SataPortsDmVal	94
8.6.2.153	SataPortsEnable	94
8.6.2.154	SataPwrOptEnable	94
8.6.2.155	SataRstHddUnlock	94
8.6.2.156	SataRstIrrt	94
8.6.2.157	SataRstIrrtOnly	95
8.6.2.158	SataRstLedLocate	95
8.6.2.159	SataRstOromUiBanner	95
8.6.2.160	SataRstPcieDeviceResetDelay	95
8.6.2.161	SataRstRaid0	95
8.6.2.162	SataRstRaid1	95
8.6.2.163	SataRstRaid10	95
8.6.2.164	SataRstRaid5	96
8.6.2.165	SataRstRaidAlternateId	96
8.6.2.166	SataRstSmartStorage	96
8.6.2.167	SataSalpSupport	96
8.6.2.168	SataThermalSuggestedSetting	96
8.6.2.169	ScIirqSelect	96
8.6.2.170	ScsEmmcEnabled	96
8.6.2.171	ScsEmmcHs400Enabled	96
8.6.2.172	ScsSdCardEnabled	97
8.6.2.173	SendEcCmd	97
8.6.2.174	SendVrMbxCmd	97
8.6.2.175	SendVrMbxCmd1	97
8.6.2.176	SerialIoDebugUartNumber	97
8.6.2.177	SerialIoDevMode	97
8.6.2.178	SerialIoGpio	98
8.6.2.179	ShowSpiController	98
8.6.2.180	SlowSlewRateForGt	98
8.6.2.181	SlowSlewRateForIa	98
8.6.2.182	SlowSlewRateForSa	98
8.6.2.183	SsicPortEnable	98
8.6.2.184	TcolrqSelect	98
8.6.2.185	TdcPowerLimit	99
8.6.2.186	TdcTimeWindow	99
8.6.2.187	TTSuggestedSetting	99
8.6.2.188	TurboMode	99
8.6.2.189	Usb2AfePehalfbit	99
8.6.2.190	Usb2AfePetxiset	99
8.6.2.191	Usb2AfePredeemp	99

8.6.2.192	Usb2AfeTxiset	100
8.6.2.193	Usb3HsioTxDeEmph	100
8.6.2.194	Usb3HsioTxDeEmphEnable	100
8.6.2.195	Usb3HsioTxDownscaleAmp	100
8.6.2.196	Usb3HsioTxDownscaleAmpEnable	100
8.6.2.197	VrVoltageLimit	100
8.6.2.198	WatchDog	100
8.6.2.199	WatchDogTimerBios	101
8.6.2.200	WatchDogTimerOs	101
8.6.2.201	XdcEnable	101
8.7	FSP_S_TEST_CONFIG Struct Reference	101
8.7.1	Detailed Description	108
8.7.2	Member Data Documentation	109
8.7.2.1	ApHandoffManner	109
8.7.2.2	ApIdleManner	109
8.7.2.3	AutoThermalReporting	109
8.7.2.4	C1e	109
8.7.2.5	ConfigTdpBios	109
8.7.2.6	CstateLatencyControl0Irtl	109
8.7.2.7	CStatePreWake	109
8.7.2.8	CstCfgCtrl0MwaitRedirection	110
8.7.2.9	Custom1ConfigTdpControl	110
8.7.2.10	Custom1PowerLimit1	110
8.7.2.11	Custom1PowerLimit1Time	110
8.7.2.12	Custom1PowerLimit2	110
8.7.2.13	Custom1TurboActivationRatio	110
8.7.2.14	Custom2ConfigTdpControl	110
8.7.2.15	Custom2PowerLimit1	111
8.7.2.16	Custom2PowerLimit1Time	111
8.7.2.17	Custom2PowerLimit2	111
8.7.2.18	Custom2TurboActivationRatio	111
8.7.2.19	Custom3ConfigTdpControl	111
8.7.2.20	Custom3PowerLimit1	111
8.7.2.21	Custom3PowerLimit1Time	111
8.7.2.22	Custom3PowerLimit2	112
8.7.2.23	Custom3TurboActivationRatio	112
8.7.2.24	Cx	112
8.7.2.25	DebugInterfaceEnable	112
8.7.2.26	DebugInterfaceLockEnable	112
8.7.2.27	DisableProcHotOut	112

8.7.2.28	DisableVrThermalAlert	112
8.7.2.29	Eist	113
8.7.2.30	EndOfPostMessage	113
8.7.2.31	EnergyEfficientPState	113
8.7.2.32	EnergyEfficientTurbo	113
8.7.2.33	HdcControl	113
8.7.2.34	Hwp	113
8.7.2.35	MachineCheckEnable	113
8.7.2.36	MlcStreamerPrefetcher	114
8.7.2.37	MonitorMwaitEnable	114
8.7.2.38	NumberOfEntries	114
8.7.2.39	OneCoreRatioLimit	114
8.7.2.40	PchHdaResetWaitTimer	114
8.7.2.41	PchLockDownBiosInterface	114
8.7.2.42	PchLockDownGlobalSmi	114
8.7.2.43	PchLockDownRtcLock	115
8.7.2.44	PchPmDisableEnergyReport	115
8.7.2.45	PchPmPmcReadDisable	115
8.7.2.46	PchSbAccessUnlock	115
8.7.2.47	PchSbiUnlock	115
8.7.2.48	PcieEnablePort8xhDecode	115
8.7.2.49	PcieRpDptp	115
8.7.2.50	PcieRpSlotPowerLimitScale	116
8.7.2.51	PcieRpSlotPowerLimitValue	116
8.7.2.52	PcieRpUptp	116
8.7.2.53	PkgCStateDemotion	116
8.7.2.54	PkgCStateLimit	116
8.7.2.55	PkgCStateUnDemotion	116
8.7.2.56	PmgCstCfgCtrlLock	116
8.7.2.57	PowerLimit1	116
8.7.2.58	PowerLimit1Time	117
8.7.2.59	PowerLimit2	117
8.7.2.60	PowerLimit2Power	117
8.7.2.61	PowerLimit3	117
8.7.2.62	PowerLimit3Time	117
8.7.2.63	PowerLimit4	117
8.7.2.64	ProcHotResponse	117
8.7.2.65	ProcTraceEnable	118
8.7.2.66	ProcTraceOutputScheme	118
8.7.2.67	PsysPmax	118

8.7.2.68	PsysPowerLimit1	118
8.7.2.69	PsysPowerLimit1Power	118
8.7.2.70	PsysPowerLimit2	118
8.7.2.71	PsysPowerLimit2Power	118
8.7.2.72	RaceToHalt	119
8.7.2.73	SataTestMode	119
8.7.2.74	StateRatio	119
8.7.2.75	TccActivationOffset	119
8.7.2.76	TccOffsetClamp	119
8.7.2.77	TccOffsetLock	119
8.7.2.78	TccOffsetTimeWindowForRatl	119
8.7.2.79	ThreeStrikeCounterDisable	120
8.7.2.80	TimedMwait	120
8.7.2.81	TStates	120
8.8	FSP_T_CONFIG Struct Reference	120
8.8.1	Detailed Description	121
8.8.2	Member Data Documentation	121
8.8.2.1	PcdSerialUartDebugEnabled	121
8.8.2.2	PcdSerialUartNumber	121
8.9	FSPM_UPD Struct Reference	121
8.9.1	Detailed Description	122
8.10	FSPT_CORE_UPD Struct Reference	122
8.10.1	Detailed Description	123
8.11	FSPT_CORE_UPD Struct Reference	123
8.11.1	Detailed Description	123
8.12	FSPT_UPD Struct Reference	123
8.12.1	Detailed Description	124
8.13	GPIO_CONFIG Struct Reference	124
8.13.1	Detailed Description	125
8.13.2	Member Data Documentation	125
8.13.2.1	Direction	125
8.13.2.2	ElectricalConfig	125
8.13.2.3	HostSoftPadOwn	125
8.13.2.4	InterruptConfig	126
8.13.2.5	LockConfig	126
8.13.2.6	OutputState	126
8.13.2.7	PadMode	126
8.13.2.8	PowerConfig	126
8.14	MEMORY_PLATFORM_DATA Struct Reference	126
8.14.1	Detailed Description	126

8.15	SI_CHIPSET_INIT_INFO Struct Reference	127
8.15.1	Detailed Description	127
8.16	SI_PCH_DEVICE_INTERRUPT_CONFIG Struct Reference	127
8.16.1	Detailed Description	127
8.17	SMBIOS_CACHE_INFO Struct Reference	128
8.17.1	Detailed Description	128
8.18	SMBIOS_PROCESSOR_INFO Struct Reference	128
8.18.1	Detailed Description	129
9	File Documentation	131
9.1	CpuConfigFspData.h File Reference	131
9.1.1	Detailed Description	131
9.2	DoxygenFspIntegrationGuide.h File Reference	132
9.2.1	Detailed Description	132
9.3	FspmUpd.h File Reference	132
9.3.1	Detailed Description	133
9.4	FspUpd.h File Reference	134
9.4.1	Detailed Description	135
9.4.2	Enumeration Type Documentation	136
9.4.2.1	SI_PCH_INT_PIN	136
9.5	FsptUpd.h File Reference	136
9.5.1	Detailed Description	137
9.6	FspUpd.h File Reference	137
9.6.1	Detailed Description	138
9.7	GpioConfig.h File Reference	139
9.7.1	Detailed Description	140
9.7.2	Enumeration Type Documentation	140
9.7.2.1	GPIO_DIRECTION	140
9.7.2.2	GPIO_ELECTRICAL_CONFIG	141
9.7.2.3	GPIO_HARDWARE_DEFAULT	141
9.7.2.4	GPIO_HOSTSW_OWN	141
9.7.2.5	GPIO_INT_CONFIG	142
9.7.2.6	GPIO_LOCK_CONFIG	142
9.7.2.7	GPIO_OTHER_CONFIG	142
9.7.2.8	GPIO_OUTPUT_STATE	143
9.7.2.9	GPIO_PAD_MODE	143
9.7.2.10	GPIO_RESET_CONFIG	143
9.8	GpioSampleDef.h File Reference	144
9.8.1	Detailed Description	145
9.9	MemInfoHob.h File Reference	145

9.9.1 Detailed Description	146
9.10 SmbiosCacheInfoHob.h File Reference	146
9.10.1 Detailed Description	147
9.11 SmbiosProcessorInfoHob.h File Reference	147
9.11.1 Detailed Description	148
Index	149

Chapter 1

INTRODUCTION

1 Introduction

1.1 Purpose

The purpose of this document is to describe the steps required to integrate the Intel® Firmware Support Package (FSP) into a boot loader solution. It supports Kabylake platforms with Kabylake/Skylake processor and Sunrise point Platform Controller Hub (PCH).

1.2 Intended Audience

This document is targeted at all platform and system developers who need to consume FSP binaries in their boot loader solutions. This includes, but is not limited to: system BIOS developers, boot loader developers, system integrators, as well as end users.

1.3 Related Documents

- *Platform Initialization (PI) Specification v1.4* located at <http://www.uefi.org/specifications>
- *UEFI Specification v2.5* located at <http://www.uefi.org/specifications>
- *Intel® Firmware Support Package: External Architecture Specification (EAS) v2.0* located at <http://www.intel.com/content/dam/www/public/us/en/documents/technical-specifications/fsp.pdf>
- *Boot Setting File Specification (BSF) v1.0* https://firmware.intel.com/sites/default/files/BSF_1_0.pdf
- *Binary Configuration Tool for Intel® Firmware Support Package* available at <http://www.intel.com/fsp>

1.4 Acronyms and Terminology

Acronym	Definition
BCT	Binary Configuration Tool
BSF	Boot Setting File
BSP	Boot Strap Processor

BWG	BIOS Writer's Guide
CAR	Cache As Ram
CRB	Customer Reference Board
FIT	Firmware Interface Table
FSP	Firmware Support Package
FSP API	Firmware Support Package Interface
FW	Firmware
PCH	Platform Controller Hub
PMC	Power Management Controller
SBSP	System BSP
SMI	System Management Interrupt
SMM	System Management Mode
SPI	Serial Peripheral Interface
TSEG	Memory Reserved at the Top of Memory to be used as SMRAM
UPD	Updatable Product Data

Chapter 2

FSP OVERVIEW

FSP Overview

2.1 Technical Overview

The *Intel® Firmware Support Package (FSP)* provides chipset and processor initialization in a format that can easily be incorporated into many existing boot loaders.

The FSP will perform the necessary initialization steps as documented in the BWG including initialization of the CPU, memory controller, chipset and certain bus interfaces, if necessary.

FSP is not a stand-alone boot loader; therefore it needs to be integrated into a host boot loader to carry out other boot loader functions, such as: initializing non-Intel components, conducting bus enumeration, and discovering devices in the system and all industry standard initialization.

The FSP binary can be integrated easily into many different boot loaders, such as Coreboot, EDKII etc. and also into the embedded OS directly.

Below are some required steps for the integration:

- **Customizing** The static FSP configuration parameters are part of the FSP binary and can be customized by external tools that will be provided by Intel.
- **Rebasing** The FSP is not Position Independent Code (PIC) and the whole FSP has to be rebased if it is placed at a location which is different from the preferred address during build process.
- **Placing** Once the FSP binary is ready for integration, the boot loader build process needs to be modified to place this FSP binary at the specific rebasing location identified above.
- **Interfacing** The boot loader needs to add code to setup the operating environment for the FSP, call the FSP with correct parameters and parse the FSP output to retrieve the necessary information returned by the FSP.

2.2 FSP Distribution Package

- The FSP distribution package contains the following:
 - FSP Binary
 - FSP Integration Guide
 - BSF Configuration File
 - Data Structure Header File
- The FSP configuration utility called BCT is available as a separate package. It can be downloaded from link mentioned in Section 1.3.

2.2.1 Package Layout

- **Docs (Auto generated)**
 - Kabylake_FSP_Integration_Guide.pdf (this doc)
 - Kabylake_FSP_Integration_Guide.chm
 - **Include**
 - [FspUpd.h](#), [FspmUpd.h](#) and [FspUpd.h](#) (FSP UPD structure and related definitions)
 - [GpioSampleDef.h](#) (Sample enum definitions for Gpio table)
 - KabylakeFspBinPkg.dec (EDKII declaration file for package)
 - Fsp.bsf (BSF file for configuring the data using BCT tool)
 - Fsp.fd (FSP Binary)
-

Chapter 3

FSP INTEGRATION

3 FSP Integration

3.1 Assumptions Used in this Document

The FSP for the Kabylake platform is built with a preferred base address of 0xFFED0000 and so the reference code provided in the document assumes that the FSP is placed at this base address during the final boot loader build. Users may rebase the FSP binary at a different location with Intel's Binary Configuration Tool (BCT) before integrating to the boot loader.

For other assumptions and conventions, please refer section 8 in the FSP External Architecture Specification version 2.0.

3.2 Boot Flow

Please refer Chapter 7 in the FSP External Architecture Specification version 2.0 for Boot flow chart.

3.3 FSP INFO Header

The FSP has an Information Header that provides critical information that is required by the bootloader to successfully interface with the FSP. The structure of the FSP Information Header is documented in the FSP External Architecture Specification version 2.0 with a HeaderRevision of 3.

3.4 FSP Image ID and Revision

FSP information header contains an Image ID field and an Image Revision field that provide the identification and revision information of the FSP binary. It is important to verify these fields while integrating the FSP as AP \leftrightarrow I parameters could change over different FSP IDs and revisions. All the FSP FV segments(FSP-T, FSP-M and FSP-S) must have same FSP Image ID and revision number, using FV segments with different revision numbers in a single FSP image is not valid. The FSP API parameters documented in this integration guide are applicable for the Image ID and Revision specified as below.

The current FSP ImageId string in the FSP information header is **\$KBLFSP\$** and the ImageRevision field is **0x02060000.(2.6.0.0)**.

3.5 FSP Global Data

FSP uses some amount of TempRam area to store FSP global data which contains some critical data like pointers to FSP information headers and UPD configuration regions, FSP/Bootloader stack pointers required for stack switching

etc. HPET Timer register(2) 0xFED00148 is reserved to store address of this global data, and hence boot loader should not use this register for any other purpose. If TempRAM initialization is done by boot loader, then HPET has to be initialized to the base so that access to this register will work fine.

3.6 FSP APIs

This release of the Kabylake FSP supports the all APIs required by the FSP External Architecture Specification version 2.0. The FSP information header contains the address offset for these APIs. Register usage is described in the FSP External Architecture Specification version 2.0. Any usage not described by the specification is described in the individual sections below.

The below sections will highlight any changes that are specific to this FSP release.

3.6.1 TempRamInit API

Please refer Chapter 8.5 in the FSP External Architecture Specification version 2.0 for complete details including the prototype, parameters and return value details for this API.

TempRamInit does basic early initialization primarily setting up temporary RAM using cache. It returns ECX pointing to beginning of temporary memory and EDX pointing to end of temporary memory + 1. The total temporary ram currently available is from 0xFE0_0000 to 0xFEF4_0000 out of which 0xFE0_0000(ECX) to 0xFEF3_FF00(EDX) is usable area for both bootloader and FSP binary, remaining 0x100 bytes of space reserved by FSP for TempRamInit if temporary RAM initialization is done by FSP.

TempRamInit** also sets up the code caching of the region passed CodeCacheBase and CodeCacheLength, which are input parameters to TempRamInitApi. If 0 is passed in for CodeCacheBase, the base used will be 4 GB - 1 - length to be code cached instead of starting from CodeCacheBase.

Note

: when programming MTRR CodeCacheLength will be reduced, if SKU LLC size is smaller than the requested.

It is a requirement for Firmware to have Firmware Interface Table (FIT), which contains pointers to each microcode update. The microcode update is loaded for all logical processors before reset vector. If more than microcode update for the CPU is present, the microcode update with the latest revision is loaded.

FSPT_UPD.MicrocodeRegionBase** and **FSPT_UPD.MicrocodeRegionLength** are input parameters to TempRamInit API. If these values are 0, FSP will not attempt to update microcode. If a region is passed, then if a newer microcode update revision is in the region, it will be loaded by the FSP.

MTRRs are programmed to the default values to have the following memory map:

Memory range	Cache Attribute
0xFE000000 - 0x00040000	Write back
CodeCacheBase - CodeCacheLength	Write protect

3.6.2 FspMemoryInit API

Please refer to Chapter 8.6 in the FSP external Architecture Specification version 2.0 for the prototype, parameters and return value details for this API.

The **FspmUpdPtr** is pointer to **FSPM_UPD** structure which is described in header file [FspmUpd.h](#).

Boot Loader must pass valid CAR region for FSP stack use through **FSPM_UPD.FspmArchUpd.StackBase** and **FSPM_UPD.FspmArchUpd.StackSize** UPDs.

The minimum FSP stack size required for this revision of FSP is 160KB, stack base is 0xFEF17F00 by default.

The base address of HECI device (Bus 0, Device 22, Function 0) is required to be initialized prior to perform FspMemoryInit flow. The default address is programmed to 0xFED1A000.

Calculate memory map determining memory regions TSEG, IED, GTT, BDSM, ME stolen, Uncore PMRR, IOT, MOT, DPR, REMAP, TOLUD, TOUUD. Programming will be done at a different time.

3.6.3 TempRamExit API

Please refer to Chapter 8.7 in the FSP external Architecture Specification version 2.0 for the prototype, parameters and return value details for this API.

If Boot Loader initializes the Temporary RAM (CAR) and skip calling **TempRamInit API**, it is expected that boot-loader must skip calling this API and bootloader will tear down the temporary memory area setup in the cache and bring the cache to normal mode of operation.

This revision of FSP doesn't have any fields/structure to pass as parameter for this API. Pass Null for *TempRamExitParamPtr*.

At the end of *TempRamExit* the original code and data caching are disabled. FSP will reconfigure all MTRRs as described in the table below for performance optimization.

Memory range	Cache Attribute
0x00000000 - 0x0009FFFF	Write back
0x000C0000 - Top of Low Memory	Write back
0xFF800000 - 0xFFFFFFFF (Flash region)	Write protect
0x1000000000 - Top of High Memory	Write back

If the boot loader wish to reconfigure the MTRRs differently, it can be overridden immediately after this API call.

3.6.4 FspSiliconInit API

Please refer to Chapter 8.8 in the FSP external Architecture Specification version 2.0 for the prototype, parameters and return value details for this API.

The *FspUpdPtr* is pointer to **FSPS_UPD** structure which is described in header file [FspUpd.h](#).

It is expected that boot loader will program MTRRs for SBSP as needed after **TempRamExit** but before entering **FspSiliconInit**. If MTRRs are not programmed properly, the boot performance might be impacted.

The region of 0x5_8000 - 0x5_8FFF is used by FspSiliconInit for starting APs. If this data is important to bootloader, then bootloader needs to preserve it before calling FspSiliconInit.

It is a requirement for bootloader to have Firmware Interface Table (FIT), which contains pointers to each microcode. The microcode is loaded for all cores before reset vector. If more than one microcode update for the CPU is present, the latest revision is loaded.

MicrocodeRegionBase and MicrocodeRegionLength are both input parameters to TempRamInit and UPD for SiliconInit API. UPD has priority and will be searched for a later revision than TempRamInit. If MicrocodeRegionBase and MicrocodeRegionLength values are 0, FSP will not attempt to update the microcode. If a microcode region is passed, and if a later revision of microcode is present in this region, FSP will load it.

FSP initializes PCH audio including selecting HD Audio verb table and initializes Codec.

PCH required initialization is done for the following HECI, USB, HSIO, Integrated Sensor Hub, Display, Sky Cam, Camera, PCI Express, Vt-d, straps (cores, hyper-threading, BIST, ...)

FSP initializes CPU features: XD, VMX, AES, IED, HDC, x(2)Apic, Intel® Processor Trace, Three strike counter, Machine check, Cache pre-fetchers, Core PMRR, Power management.

Initializes HECI, DMI, Internal Graphics. Publish EFI_PEI_GRAPHICS_INFO_HOB during normal boot but this HOB will not be published during S3 resume as FSP will not launch the PEI Graphics PEIM during S3 resume.

Programs SA Bars: MchBar, DmiBar, EpBar, GdxcBar, EDRAM (if supported). Please refer to section 2.8 (MemoryMap) for the corresponding Bar values. GttMmadr (0xDF000000) and GmAdr(0xC0000000) are temporarily programmed and cleared after use in FSP.

On normal boot CPU S3 Resume Data HOB is produced in this phase. This CPU S3 Resume Data HOB is described in section 4.4. Unless UPD SkipMplnit is enabled, on S3 resume, this data (not the entire HOB) must be passed through UPD CpuS3ResumeData, and optionally final S3 boot MTRRs is passed through UPD CpuS3ResumeMtrrData. During S3 resume unless SkipMplnit is enabled, GDT base and length and IDT base and length on APs are programmed to that of the BSP.

3.6.5 NotifyPhase API

Please refer Chapter 8.9 in the FSP External Architecture Specification version 2.0 for the prototype, parameters and return value details for this API.

3.6.5.1 PostPciEnumeration Notification

This phase *EnumInitPhaseAfterPciEnumeration* is to be called after PCI enumeration but before execution of third party code such as option ROMs. Currently, nothing is done in this phase, but in the future updates, programming may be done in this phase.

3.6.5.2 ReadyToBoot Notification

This phase *EnumInitPhaseReadyToBoot* is to be called before giving control to boot. It includes some final initialization steps recommended by the BWG, including power management settings, Send ME Message EOP (End of Post).

3.6.5.3 EndOfFirmware Notification

This phase *EnumInitEndOfFirmware* is to be called before the firmware/preboot environment transfers management of all system resources to the OS or next level execution environment. It includes final locking of chipset registers

3.7 Memory Map

Below diagram represents the memory map allocated by FSP including the FSP specific regions.

3.8 Porting recommendation

Here listed some notes or recommendation when porting with FSP.

3.8.1 Locking PAM register

FSP 2.0 introduced EndOfFirmware Notify phase callback which is a recommended place for locking PAM registers so FSP by default implemented this way. If it is still too early to lock PAM registers then the PAM locking code inside FSP can be disabled by UPD -> [FSP_S_TEST_CONFIG](#) -> SkipPamLock or SA policy -> [_SI_PREMEM_POLICY_STRUCT](#) -> [SA_MISC_PEL_CONFIG](#) -> SkipPamLock, and platform or wrapper code should do the PAM locking right before booting OS (so do it outside FSP instead) by programming one PCI config space register as below.

This PAM locking step has to been applied in all boot paths including S3 resume.To lock PAM register:

```
MmioOr32 (B0: D0: F0: Register 0x80, BIT0)
```

3.8.2 Locking SMRAM register

Since SMRAM locking is recommended to be locked before any 3rd party OpROM execution and highly depending on platform code implementation, the FSP code by default will not lock it. The platform or FSP Wrapper code should lock SMRAM by below programming step before any 3rd party OpRom execution (and should be locked in S3 resume right before OS waking vector).

```
PciOr8 (B0: D0: F0: Register 0x88, BIT4); Note: it must be programmed by CF8/CFC Standard PCI access mechanism. (MMIO access will not work)
```

3.8.3 Locking SMI register

Global SMI bit is recommended to be locked before any 3rd party OpROM execution and highly depending on platform code implementation after SMM configuration. FSP by default will not lock it. Boot loader is responsible for

locking below registers after SMM configuration. Set AcpiBase + 0x30[0] to 1b to enable global SMI. Set PMC PCI offset A0h[4] = 1b to lock SMI.

3.8.4 Verify below settings are correct for your platforms

Settings	Values
PCIEXBAR_BASE_ADDRESS	0xE0000000 -> PciExBar
MCH_BASE_ADDRESS	0xFED10000 -> MchBar
DMI_BASE_ADDRESS	0xFED18000 -> DmiBar
EP_BASE_ADDRESS	0xFED19000 -> EpBar
EDRAM_BASE_ADDRESS	0xFED80000 -> EdramBar
DEFAULT_OPTION_ROM_TEMP_BAR	0x80000000 -> OpRomScanTempMmioBar
DEFAULT_OPTION_ROM_TEMP_MEM_LIMIT	0xC0000000 -> OpRomScanTempMmioLimit

Note

:

- It is recommended that you do not change these settings as it may require significant changes to the System Agent reference code.
- Those memory regions should be reserved from any memory service functions in platform code so it will not cause any conflict when other modules or drivers allocating memory resource.
- Boot Loader can use different value for PCIEXBAR_BASE_ADDRESS either by modifying the UPD (under FSP-T) or by overriding the PCIEXBAR (B0:D0:F0:R60h) before calling FspMemoryInit Api.
- Boot Loader should avoid using conflicting address when reprogramming PCIEXBAR_BASE_ADDRESS than the recommended one.

3.8.5 FSP_STATUS_RESET_REQUIRED

As per FSP External Architecture Specification version 2.0, Any reset required in the FSP flow will be reported as return status FSP_STATUS_RESET_REQUIREDx by the API. It is the bootloader responsibility to reset the system according to the reset type requested.

Below table specifies the return status returned by FSP API and the requested reset type.

FSP_STATUS_RESET_REQUIRED Code	Reset Type requested
0x40000001	Cold Reset
0x40000002	Warm Reset
0x40000003	Global Reset - Puts the system to Global reset through Heci or Full Reset through PCH
0x40000004	Reserved
0x40000005	Reserved
0x40000006	Reserved
0x40000007	Reserved
0x40000008	Reserved

Chapter 4

FSP OUTPUT

4 FSP Output

The FSP builds a series of data structures called the Hand-Off-Blocks (HOBs) as it progresses through initializing the silicon.

Please refer to the Platform Initialization (PI) Specification - Volume 3: Shared Architectural Elements specification for PI Architectural HOBs. Please refer Chapter 9 in the FSP External Architecture Specification version 2.0 for details about FSP Architectural HOBs.

Below section describe the HOBs not covered in the above two specifications.

4.1 SMRAM Resource Descriptor HOB

The FSP will report the system SMRAM T-SEG range through a generic resource HOB if T-SEG is enabled. The owner field of the HOB identifies the owner as T-SEG.

```
#define FSP_HOB_RESOURCE_OWNER_TSEG_GUID \
{ 0xd038747c, 0xd00c, 0x4980, { 0xb3, 0x19, 0x49, 0x01, 0x99, 0xa4, 0x7d, 0x55 } }
```

4.2 SMBIOS INFO HOB

The FSP will report the SMBIOS through a HOB with below GUID. This information can be consumed by the bootloader to produce the SMBIOS tables. These structures are included as part of [MemInfoHob.h](#) , [SmbiosCacheInfoHob.h](#) & [SmbiosProcessorInfoHob.h](#). Note: The Smbios Cache Info Hob & Smbios Processor Info Hob won't be published on S3 boot.

```
#define SI_MEMORY_INFO_DATA_HOB_GUID \
{ 0x9b2071d4, 0xb054, 0x4e0c, { 0x8d, 0x09, 0x11, 0xcf, 0x8b, 0x9f, 0x03, 0x23 } };

typedef struct {
    MrcDimmStatus Status;           ///< See MrcDimmStatus for the definition of this field.
    UINT8 DimmId;
    UINT32 DimmCapacity;           ///< DIMM size in MBytes.
    UINT16 MfgId;
    UINT8 ModulePartNum[20];       ///< Module part number for DDR3 is 18 bytes however for DDR4
    20 bytes as per JEDEC Spec, so reserving 20 bytes
    UINT8 RankInDimm;             ///< The number of ranks in this DIMM.
    UINT8 SpdDramDeviceType;       ///< Save SPD DramDeviceType information needed for SMBIOS
    structure creation.
    UINT8 SpdModuleType;           ///< Save SPD ModuleType information needed for SMBIOS
    structure creation.
    UINT8 SpdModuleMemoryBusWidth; ///< Save SPD ModuleMemoryBusWidth information needed for
    SMBIOS structure creation.
    UINT8 SpdSave[MAX_SPD_SAVE_DATA]; ///< Save SPD Manufacturing information needed for SMBIOS
    structure creation.
} DIMM_INFO;

typedef struct {
```

```

    UINT8      Status;                ///< Indicates whether this channel should be used.
    UINT8      ChannelId;
    UINT8      DimmCount;             ///< Number of valid DIMMs that exist in the channel.
    MRC_CH_TIMING Timing[MAX_PROFILE]; ///< The channel timing values.
    DIMM_INFO   Dimm[MAX_DIMM];       ///< Save the DIMM output characteristics.
} CHANNEL_INFO;

typedef struct {
    UINT8      Status;                ///< Indicates whether this controller should be used.
    UINT16     DeviceId;              ///< The PCI device id of this memory controller.
    UINT8      RevisionId;            ///< The PCI revision id of this memory controller.
    UINT8      ChannelCount;          ///< Number of valid channels that exist on the controller.
    CHANNEL_INFO Channel[MAX_CH];     ///< The following are channel level definitions.
} CONTROLLER_INFO;

typedef struct {
    EFI_HOB_GUID_TYPE EfiHobGuidType;
    UINT8      Revision;
    UINT16     DataWidth;
    ///< As defined in SMBIOS 3.0 spec
    ///< Section 7.18.2 and Table 75
    UINT8      DdrType;               ///< DDR type: DDR3, DDR4, or LPDDR3
    UINT32     Frequency;             ///< The system's common memory controller frequency in MT/s.
    ///< As defined in SMBIOS 3.0 spec
    ///< Section 7.17.3 and Table 72
    UINT8      ErrorCorrectionType;

    SiMrcVersion Version;
    UINT32     FreqMax;
    BOOLEAN    EccSupport;
    UINT8      MemoryProfile;
    UINT32     TotalPhysicalMemorySize;
    BOOLEAN    XmpProfileEnable;
    UINT8      Ratio;
    UINT8      RefClk;
    UINT32     VddVoltage[MAX_PROFILE];
    CONTROLLER_INFO Controller[MAX_NODE];
} MEMORY_INFO_DATA_HOB;

#define SI_MEMORY_PLATFORM_DATA_HOB \
    { 0x6210d62f, 0x418d, 0x4999, { 0xa2, 0x45, 0x22, 0x10, 0x0a, 0x5d, 0xea, 0x44 } }

typedef struct {
    UINT8      Revision;
    UINT8      Reserved[3];
    UINT32     BootMode;
    UINT32     TsegSize;
    UINT32     TsegBase;
    UINT32     PrmrrSize;
    UINT32     PrmrrBase;
    UINT32     GttBase;
    UINT32     MmioSize;
    UINT32     PciEBaseAddress;
} MEMORY_PLATFORM_DATA;

typedef struct {
    EFI_HOB_GUID_TYPE EfiHobGuidType;
    MEMORY_PLATFORM_DATA Data;
    UINT8      *Buffer;
} MEMORY_PLATFORM_DATA_HOB;

#define SMBIOS_CACHE_INFO_HOB_GUID \
    { 0xd805b74e, 0x1460, 0x4755, {0xbb, 0x36, 0x1e, 0x8c, 0x8a, 0xd6, 0x78, 0xd7} }

///<
///< SMBIOS Cache Info HOB Structure
///<
typedef struct {
    UINT16     ProcessorSocketNumber;
    UINT16     NumberOfCacheLevels;   ///< Based on Number of Cache Types L1/L2/L3
    UINT8      SocketDesignationStrIndex; ///< String Index in the string Buffer. Example "L1-CACHE"
    UINT16     CacheConfiguration;    ///< Format defined in SMBIOS Spec v3.0 Section 7.8 Table 36
    UINT16     MaxCacheSize;          ///< Format defined in SMBIOS Spec v3.0 Section 7.8.1
    UINT16     InstalledSize;         ///< Format defined in SMBIOS Spec v3.0 Section 7.8.1
    UINT16     SupportedSramType;     ///< Format defined in SMBIOS Spec v3.0 Section 7.8.2
    UINT16     CurrentSramType;       ///< Format defined in SMBIOS Spec v3.0 Section 7.8.2
    UINT8      CacheSpeed;            ///< Cache Speed in nanoseconds. 0 if speed is unknown.
    UINT8      ErrorCorrectionType;    ///< ENUM Format defined in SMBIOS Spec v3.0 Section 7.8.3
    UINT8      SystemCacheType;       ///< ENUM Format defined in SMBIOS Spec v3.0 Section 7.8.4
    UINT8      Associativity;         ///< ENUM Format defined in SMBIOS Spec v3.0 Section 7.8.5
    ///

```

```

/// SMBIOS Processor Info HOB Structure
///
typedef struct {
    UINT16    TotalNumberOfSockets;
    UINT16    CurrentSocketNumber;
    UINT8     ProcessorType;          ///< ENUM defined in SMBIOS Spec v3.0 Section 7.5.1
    ///This info is used for both ProcessorFamily and ProcessorFamily2 fields
    ///See ENUM defined in SMBIOS Spec v3.0 Section 7.5.2
    UINT16    ProcessorFamily;
    UINT8     ProcessorManufacturerStrIndex; ///< Index of the String in the String Buffer
    UINT64    ProcessorId;                ///< ENUM defined in SMBIOS Spec v3.0 Section 7.5.3
    UINT8     ProcessorVersionStrIndex;    ///< Index of the String in the String Buffer
    UINT8     Voltage;                    ///< Format defined in SMBIOS Spec v3.0 Section 7.5.4
    UINT16    ExternalClockInMHz;         ///< External Clock Frequency. Set to 0 if unknown.
    UINT16    CurrentSpeedInMHz;          ///< Snapshot of current processor speed during boot
    UINT8     Status;                     ///< Format defined in the SMBIOS Spec v3.0 Table 21
    UINT8     ProcessorUpgrade;           ///< ENUM defined in SMBIOS Spec v3.0 Section 7.5.5
    ///This info is used for both CoreCount & CoreCount2 fields
    /// See detailed description in SMBIOS Spec v3.0 Section 7.5.6
    UINT16    CoreCount;
    ///This info is used for both CoreEnabled & CoreEnabled2 fields
    ///See detailed description in SMBIOS Spec v3.0 Section 7.5.7
    UINT16    EnabledCoreCount;
    ///This info is used for both ThreadCount & ThreadCount2 fields
    /// See detailed description in SMBIOS Spec v3.0 Section 7.5.8
    UINT16    ThreadCount;
    UINT16    ProcessorCharacteristics;    ///< Format defined in SMBIOS Spec v3.0 Section 7.5.9
    /// String Buffer - each string terminated by NULL "0x00"
    /// String buffer terminated by double NULL "0x0000"
} SMBIOS_PROCESSOR_INFO;

```

4.3 CHIPSETINIT INFO HOB

The FSP will report the ChipsetInit CRC through a HOB with below GUID. This information can be consumed by the bootloader to check if ChipsetInit CRC is matched between BIOS and ME. These structures are included as part of [FspUpd.h](#)

```

#define CHIPSETINIT_INFO_HOB_GUID \
{ 0xc1392859, 0x1f65, 0x446e, { 0xb3, 0xf5, 0x84, 0x35, 0xfc, 0xc7, 0xd1, 0xc4 } }

///
/// The ChipsetInit Info structure provides the information of ME ChipsetInit CRC and BIOS ChipsetInit CRC.
///
typedef struct {
    UINT8     Revision;
    UINT8     Rsvd[3];
    UINT16    MeChipInitCrc;
    UINT16    BiosChipInitCrc;
} CHIPSET_INIT_INFO;

```

4.4 CPU S3 Resume Data HOB

The FSP will report the CPU S3 Resume Data through a GUIDED HOB with below GUID. This data (not the entire HOB) must be passed during S3 resume passed in UPD CpuS3ResumeData except if UPD SkipMplInit is enabled.

```

#define CPU_S3_RESUME_DATA_HOB_GUID \
{ 0x3972d4c1, 0xf206, 0x463f, { 0x80, 0xa4, 0xd9, 0x62, 0x79, 0x0a, 0xe5, 0x49 } }

```

Chapter 5

FSP POSTCODE


5 FSP PostCode

The FSP outputs 16 bit postcode to indicate which API and in which module the execution is happening.

Bit Range	Description
Bit15 - Bit12 (X)	used to indicate the phase/api under which the code is executing
Bit11 - Bit8 (Y)	used to indicate the module
Bit7 (ZZ bit 7)	reserved for error
Bit6 - Bit0 (ZZ)	individual codes

5.1 PostCode Info

Below diagram represents the 16 bit PostCode usage in FSP.

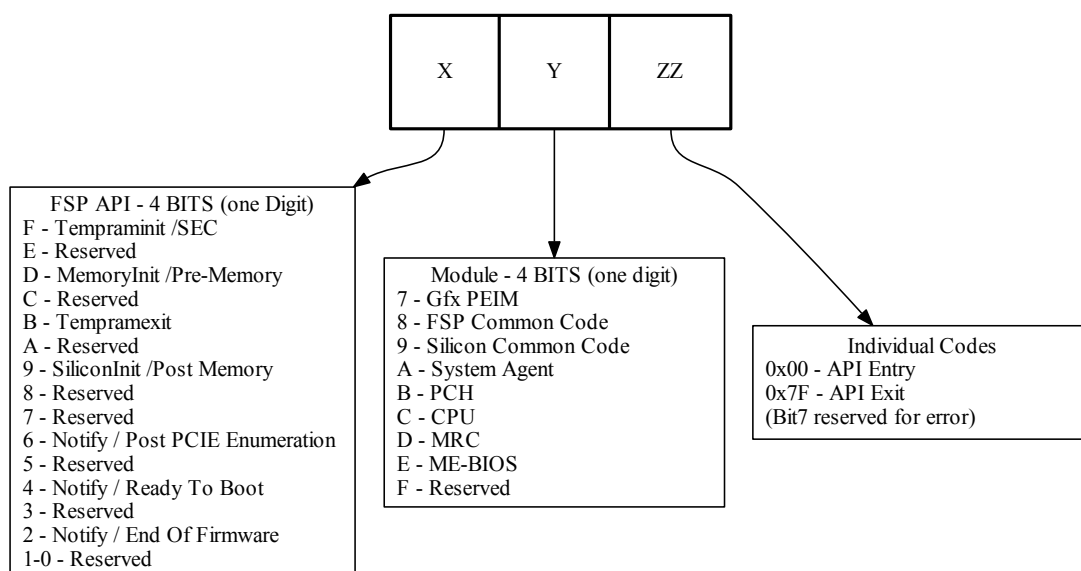

5.1.1 TempRamInit API Status Codes (0xFxxx)

PostCode	Module	Description
0x0000	FSP	TempRamInit API Entry (The change in upper byte is due to not enabling of the Port81 early in the boot)
0x007F	FSP	TempRamInit API Exit

5.1.2 FspMemoryInit API Status Codes (0xDxxx)

PostCode	Module	Description
0xD800	FSP	FspMemoryInit API Entry
0xD87F	FSP	FSpMemoryInit API Exit
0xDA00	SA	Pre-Mem Salnit Entry
0xDA01	SA	DeviceConfigurePreMem Start
0xDA02	SA	OverrideDev0Did Start
0xDA04	SA	OverrideDev2Did Start
0xDA06	SA	Programming SA Bars
0xDA08	SA	Install SA HOBs
0xDA0A	SA	Reporting SA PCIe code version
0xDA0C	SA	SaSvlnit Start
0xDA10	SA	Initializing DMI
0xDA1F	SA	Initializing DMI/OPI Max PayLoad Size
0xDA20	SA	Initializing SwitchableGraphics
0xDA30	SA	Initializing SA PCIe
0xDA3F	SA	Programming PEG credit values Start
0xDA40	SA	Initializing DMI Tc/Vc mapping
0xDA42	SA	CheckOffboardPcieVga
0xDA44	SA	CheckAndInitializePegVga
0xDA50	SA	Initializing Graphics
0xDA7F	SA	Pre-Mem Salnit Exit
0xDB00	PCH	PCH API Entry
0xDC00	CPU	Pre-Mem Entry
0xDC7F	CPU	Pre-Mem Exit

5.1.3 TempRamExit API Status Codes (0xBxxx)

PostCode	Module	Description
0xB800	FSP	TempRamExit API Entry
0xB87F	FSP	TempRamExit API Exit

5.1.3 FspSiliconInit API Status Codes (0x9xxx)

PostCode	Module	Description
0x9800	FSP	FspSiliconInit API Entry
0x987F	FSP	FspSiliconInit API Exit
0x9A00	SA	Post-Mem Salnit Entry
0x9A01	SA	DeviceConfigure Start
0x9A02	SA	UpdateSaHobPostMem Start
0x9A03	SA	Initializing Pei Display
0x9A04	SA	PeiGraphicsNotifyCallback Entry

0x9A05	SA	CallPpiAndFillFrameBuffer
0x9A06	SA	GraphicsPpiInit
0x9A07	SA	GraphicsPpiGetMode
0x9A08	SA	FillFrameBufferAndShowLogo
0x9A0F	SA	PeiGraphicsNotifyCallback Exit
0x9A10	SA	Initializing SA Overclocking
0x9A14	SA	Initializing SA SkyCam device
0x9A16	SA	Initializing SA GMM device
0x9A18	SA	Internal Device and Misc Configurations
0x9A1A	SA	SaProgramLlcWays Start
0x9A20	SA	Initializing PciExpressInitPostMem
0x9A30	SA	Initializing Vtd
0x9A32	SA	Initializing Pvp
0x9A34	SA	PeiInstallSmmAccessPpi Start
0x9A36	SA	EdramWa Start
0x9A4F	SA	Post-Mem Salnit Exit
0x9A50	SA	SaSecurityLock Start
0x9A5F	SA	SaSecurityLock End
0x9A60	SA	SaSResetComplete Entry
0x9A61	SA	Set BIOS_RESET_CPL to indicate all configurations complete
0x9A62	SA	SaSvlnit2 Start
0x9A63	SA	GraphicsPmInit Start
0x9A64	SA	SaPeiPolicyDump Start
0x9A6F	SA	SaSResetComplete Exit
0x9A70	SA	SaS3ResumeAtEndOfPei Callback Entry
0x9A7F	SA	SaS3ResumeAtEndOfPei Callback Exit
0x9B7F	PCH	Post-Mem Sclnit Entry
0x9B01	PCH	Post-Mem Program HSIO ModPHY settings
0x9B02	PCH	Post-Mem SMBus configuration
0x9B03	PCH	Post-Mem LPC configuration
0x9B04	PCH	Post-Mem SATA initialization
0x9B05	PCH	Post-Mem PCIe initialization
0x9B06	PCH	Post-Mem xHCI initialization
0x9B07	PCH	Post-Mem xDCI initialization
0x9B08	PCH	Post-Mem HD Audio initialization
0x9B09	PCH	Post-Mem GMM configuration
0x9B0A	PCH	Post-Mem LPSS initialization
0x9B0B	PCH	Post-Mem SCS initialization
0x9B0C	PCH	Post-Mem ISH initialization
0x9B0D	PCH	Post-Mem ITSS configuration
0x9B40	PCH	Post-Mem OnEndOfPEI Entry
0x9B4F	PCH	Post-Mem OnEndOfPEI Exit
0x9B7F	PCH	Post-Mem Sclnit Exit

0x9C00	CPU	Post-Mem Entry
0x9C7F	CPU	Post-Mem Exit

5.1.4 NotifyPhase API Status Codes (0x6xxx)

PostCode	Module	Description
0x6800	FSP	NotifyPhase API Entry
0x687F	FSP	NotifyPhase API Exit

Chapter 6

Class Index

6.1 Class List

Here are the classes, structs, unions and interfaces with brief descriptions:

AUDIO_AZALIA_VERB_TABLE	
Audio Azalia Verb Table structure	23
AZALIA_HEADER	
Azalia Header structure	24
DIMM_INFO	
Memory SMBIOS & OC Memory Data Hob	24
FSP_M_CONFIG	
Fsp M Configuration	25
FSP_M_TEST_CONFIG	
Fsp M Test Configuration	47
FSP_S_CONFIG	
Fsp S Configuration	57
FSP_S_TEST_CONFIG	
Fsp S Test Configuration	101
FSP_T_CONFIG	
Fsp T Configuration	120
FSPM_UPD	
Fsp M UPD Configuration	121
FSPTS_UPD	
Fsp S UPD Configuration	122
FSPT_CORE_UPD	
Fsp T Core UPD	123
FSPT_UPD	
Fsp T UPD Configuration	123
GPIO_CONFIG	
GPIO configuration structure used for pin programming	124
MEMORY_PLATFORM_DATA	
Memory Platform Data Hob	126
SI_CHIPSET_INIT_INFO	
The ChipsetInit Info structure provides the information of ME ChipsetInit CRC and BIO↔ S ChipsetInit CRC	127
SI_PCH_DEVICE_INTERRUPT_CONFIG	
The PCH_DEVICE_INTERRUPT_CONFIG block describes interrupt pin, IRQ and interrupt mode for PCH device	127
SMBIOS_CACHE_INFO	
SMBIOS Cache Info HOB Structure	128
SMBIOS_PROCESSOR_INFO	
SMBIOS Processor Info HOB Structure	128

Chapter 7

File Index

7.1 File List

Here is a list of all documented files with brief descriptions:

CpuConfigFspData.h	
FSP CPU Data Config Block	131
DoxygenFspIntegrationGuide.h	
This file contains doxygen KabylakeFspIntegration Guide	132
FspmUpd.h	
Copyright (c) 2017, Intel Corporation	132
FspUpd.h	
Copyright (c) 2017, Intel Corporation	134
FsptUpd.h	
Copyright (c) 2017, Intel Corporation	136
FspUpd.h	
Copyright (c) 2017, Intel Corporation	137
GpioConfig.h	
Header file for GpioConfig structure used by GPIO library	139
GpioSampleDef.h	
Copyright (c) 2015, Intel Corporation	144
MemInfoHob.h	
This file contains definitions required for creation of Memory S3 Save data, Memory Info data and Memory Platform data hobs	145
SmbiosCacheInfoHob.h	
Header file for SMBIOS Cache Info HOB	146
SmbiosProcessorInfoHob.h	
Header file for SMBIOS Processor Info HOB	147

Chapter 8


Class Documentation

8.1 AUDIO_AZALIA_VERB_TABLE Struct Reference

Audio Azalia Verb Table structure.

```
#include <FspsUpd.h>
```

Collaboration diagram for AUDIO_AZALIA_VERB_TABLE:

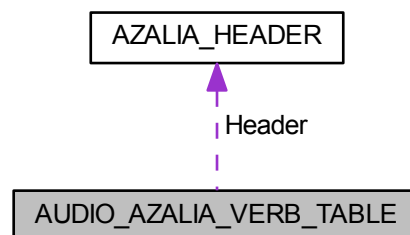

Public Attributes

- [AZALIA_HEADER](#) Header
AZALIA PCH header.
- `UINT32 *` [Data](#)
Pointer to the data buffer. Its length is specified in the header.

8.1.1 Detailed Description

Audio Azalia Verb Table structure.

Definition at line 57 of file FspsUpd.h.

The documentation for this struct was generated from the following file:

- [FspsUpd.h](#)

8.2 AZALIA_HEADER Struct Reference

Azalia Header structure.

```
#include <FspsUpd.h>
```

Public Attributes

- [UINT16 VendorId](#)
Codec Vendor ID.
- [UINT16 DeviceId](#)
Codec Device ID.
- [UINT8 RevisionId](#)
Revision ID of the codec. 0xFF matches any revision.
- [UINT8 SdiNum](#)
SDI number, 0xFF matches any SDI.
- [UINT16 DataDwords](#)
Number of data DWORDs pointed by the codec data buffer.
- [UINT32 Reserved](#)
Reserved for future use. Must be set to 0.

8.2.1 Detailed Description

Azalia Header structure.

Definition at line 45 of file FspsUpd.h.

The documentation for this struct was generated from the following file:

- [FspsUpd.h](#)

8.3 DIMM_INFO Struct Reference

Memory SMBIOS & OC Memory Data Hob.

```
#include <MemInfoHob.h>
```

Public Attributes

- [UINT8 Status](#)
See MrcDimmStatus for the definition of this field.
 - [UINT32 DimmCapacity](#)
DIMM size in MBytes.
 - [UINT8 ModulePartNum](#) [20]
Module part number for DDR3 is 18 bytes however for DRR4 20 bytes as per JEDEC Spec, so reserving 20 bytes.
 - [UINT8 RankInDimm](#)
The number of ranks in this DIMM.
 - [UINT8 SpdDramDeviceType](#)
Save SPD DramDeviceType information needed for SMBIOS structure creation.
 - [UINT8 SpdModuleType](#)
Save SPD ModuleType information needed for SMBIOS structure creation.
 - [UINT8 SpdModuleMemoryBusWidth](#)
-

Save SPD ModuleMemoryBusWidth information needed for SMBIOS structure creation.

- UINT8 [SpdSave](#) [[MAX_SPD_SAVE](#)]

Save SPD Manufacturing information needed for SMBIOS structure creation.

8.3.1 Detailed Description

Memory SMBIOS & OC Memory Data Hob.

Definition at line 181 of file MemInfoHob.h.

The documentation for this struct was generated from the following file:

- [MemInfoHob.h](#)

8.4 FSP_M_CONFIG Struct Reference

Fsp M Configuration.

```
#include <FspmUpd.h>
```

Public Attributes

- UINT64 [PlatformMemorySize](#)
Offset 0x0040 - Platform Reserved Memory Size The minimum platform memory size required to pass control into DXE.
- UINT32 [MemorySpdPtr00](#)
Offset 0x0048 - Memory SPD Pointer Channel 0 Dimm 0 Pointer to SPD data in Memory.
- UINT32 [MemorySpdPtr01](#)
Offset 0x004C - Memory SPD Pointer Channel 0 Dimm 1 Pointer to SPD data in Memory.
- UINT32 [MemorySpdPtr10](#)
Offset 0x0050 - Memory SPD Pointer Channel 1 Dimm 0 Pointer to SPD data in Memory.
- UINT32 [MemorySpdPtr11](#)
Offset 0x0054 - Memory SPD Pointer Channel 1 Dimm 1 Pointer to SPD data in Memory.
- UINT16 [MemorySpdDataLen](#)
Offset 0x0058 - SPD Data Length Length of SPD Data 0x100:256 Bytes, 0x200:512 Bytes.
- UINT8 [DqByteMapCh0](#) [12]
Offset 0x005A - Dq Byte Map CH0 Dq byte mapping between CPU and DRAM, Channel 0: board-dependent.
- UINT8 [DqByteMapCh1](#) [12]
Offset 0x0066 - Dq Byte Map CH1 Dq byte mapping between CPU and DRAM, Channel 1: board-dependent.
- UINT8 [DqsMapCpu2DramCh0](#) [8]
Offset 0x0072 - Dqs Map CPU to DRAM CH 0 Set Dqs mapping relationship between CPU and DRAM, Channel 0: board-dependent.
- UINT8 [DqsMapCpu2DramCh1](#) [8]
Offset 0x007A - Dqs Map CPU to DRAM CH 1 Set Dqs mapping relationship between CPU and DRAM, Channel 1: board-dependent.
- UINT16 [RcompResistor](#) [3]
Offset 0x0082 - RcompResister settings Indicates RcompReister settings: Board-dependent.
- UINT16 [RcompTarget](#) [5]
Offset 0x0088 - RcompTarget settings RcompTarget settings: board-dependent.
- UINT8 [DqPinsInterleaved](#)
Offset 0x0092 - Dqs Pins Interleaved Setting Indicates DqPinsInterleaved setting: board-dependent \$EN_DIS.
- UINT8 [CaVrefConfig](#)

- Offset 0x0093 - VREF_CA CA Vref routing: board-dependent 0:VREF_CA goes to both CH_A and CH_B, 1: VREF_CA to CH_A and VREF_DQ_A to CH_B, 2:VREF_CA to CH_A and VREF_DQ_B to CH_B.
- UINT8 [SmramMask](#)
Offset 0x0094 - Smram Mask The SMM Regions AB-SEG and/or H-SEG reserved 0: Neither, 1:AB-SEG, 2:H-SEG, 3: Both.
 - UINT8 [MrcFastBoot](#)
Offset 0x0095 - MRC Fast Boot Enables/Disable the MRC fast path thru the MRC \$EN_DIS.
 - UINT8 [UnusedUpdSpace0](#) [2]
Offset 0x0096.
 - UINT32 [IedSize](#)
Offset 0x0098 - Intel Enhanced Debug Intel Enhanced Debug (IED): 0=Disabled, 0x400000=Enabled and 4MB SDRAM occupied 0 : Disable, 0x400000 : Enable.
 - UINT32 [TsegSize](#)
Offset 0x009C - Tseg Size Size of SMRAM memory reserved.
 - UINT16 [MmioSize](#)
Offset 0x00A0 - MMIO Size Size of MMIO space reserved for devices.
 - UINT8 [ProbelessTrace](#)
Offset 0x00A2 - Probeless Trace Probeless Trace: 0=Disabled, 1=Enable.
 - UINT8 [UnusedUpdSpace1](#) [2]
Offset 0x00A3.
 - UINT8 [SmbusEnable](#)
Offset 0x00A5 - Enable SMBus Enable/disable SMBus controller.
 - UINT8 [EnableTraceHub](#)
Offset 0x00A6 - Enable Trace Hub Enable/disable Trace Hub function.
 - UINT8 [UnusedUpdSpace2](#) [60]
Offset 0x00A7.
 - UINT8 [IgdDvmt50PreAlloc](#)
Offset 0x00E3 - Internal Graphics Pre-allocated Memory Size of memory preallocated for internal graphics.
 - UINT8 [InternalGfx](#)
Offset 0x00E4 - Internal Graphics Enable/disable internal graphics.
 - UINT8 [ApertureSize](#)
Offset 0x00E5 - Aperture Size Select the Aperture Size.
 - UINT8 [SaGv](#)
Offset 0x00E6 - SA GV System Agent dynamic frequency support and when enabled memory will be training at two different frequencies.
 - UINT8 [RMT](#)
Offset 0x00E7 - Rank Margin Tool Enable/disable Rank Margin Tool.
 - UINT16 [DdrFreqLimit](#)
Offset 0x00E8 - DDR Frequency Limit Maximum Memory Frequency Selections in Mhz.
 - UINT8 [UserBd](#)
Offset 0x00EA - Board Type MrcBoardType, Options are 0=Mobile/Mobile Halo, 1=Desktop/DT Halo, 5=ULT/ULX/Mobile Halo, 7=UP Server 0:Mobile/Mobile Halo, 1:Desktop/DT Halo, 5:ULT/ULX/Mobile Halo, 7:UP Server.
 - UINT8 [UnusedUpdSpace3](#) [105]
Offset 0x00EB.
 - UINT32 [MmaTestContentPtr](#)
Offset 0x0154 - MMA Test Content Pointer Pointer to MMA Test Content in Memory.
 - UINT32 [MmaTestContentSize](#)
Offset 0x0158 - MMA Test Content Size Size of MMA Test Content in Memory.
 - UINT32 [MmaTestConfigPtr](#)
Offset 0x015C - MMA Test Config Pointer Pointer to MMA Test Config in Memory.
 - UINT32 [MmaTestConfigSize](#)
Offset 0x0160 - MMA Test Config Size Size of MMA Test Config in Memory.
-

- UINT8 [UnusedUpdSpace4](#) [19]
Offset 0x0164.
 - UINT8 [SpdProfileSelected](#)
Offset 0x0177 - SPD Profile Selected Select DIMM timing profile.
 - UINT16 [VddVoltage](#)
Offset 0x0178 - Memory Voltage Memory Voltage Override (Vddq).
 - UINT8 [RefClk](#)
Offset 0x017A - Memory Reference Clock Automatic, 100MHz, 133MHz.
 - UINT8 [Ratio](#)
Offset 0x017B - Memory Ratio Automatic or the frequency will equal ratio times reference clock.
 - UINT8 [OddRatioMode](#)
Offset 0x017C - QCLK Odd Ratio Adds 133 or 100 MHz to QCLK frequency, depending on RefClk \$EN_DIS.
 - UINT8 [tCL](#)
Offset 0x017D - tCL CAS Latency, 0: AUTO, max: 31.
 - UINT16 [tFAW](#)
Offset 0x017E - tFAW Min Four Activate Window Delay Time, 0: AUTO, max: 63.
 - UINT16 [tRAS](#)
Offset 0x0180 - tRAS RAS Active Time, 0: AUTO, max: 64.
 - UINT8 [tCWL](#)
Offset 0x0182 - tCWL Min CAS Write Latency Delay Time, 0: AUTO, max: 20.
 - UINT8 [tRCDtRP](#)
Offset 0x0183 - tRCD/tRP RAS to CAS delay time and Row Precharge delay time, 0: AUTO, max: 63.
 - UINT16 [tREFI](#)
Offset 0x0184 - tREFI Refresh Interval, 0: AUTO, max: 65535.
 - UINT16 [tRFC](#)
Offset 0x0186 - tRFC Min Refresh Recovery Delay Time, 0: AUTO, max: 1023.
 - UINT8 [tRRD](#)
Offset 0x0188 - tRRD Min Row Active to Row Active Delay Time, 0: AUTO, max: 15.
 - UINT8 [tRTP](#)
Offset 0x0189 - tRTP Min Internal Read to Precharge Command Delay Time, 0: AUTO, max: 15.
 - UINT8 [tWR](#)
Offset 0x018A - tWR Min Write Recovery Time, 0: AUTO, legal values: 5, 6, 7, 8, 10, 12, 14, 16, 18, 20, 24 0:Auto, 5:5, 6:6, 7:7, 8:8, 10:10, 12:12, 14:14, 16:16, 18:18, 20:20, 24:24.
 - UINT8 [tWTR](#)
Offset 0x018B - tWTR Min Internal Write to Read Command Delay Time, 0: AUTO, max: 28.
 - UINT8 [NModeSupport](#)
Offset 0x018C - NMode System command rate, range 0-2, 0 means auto, 1 = 1N, 2 = 2N.
 - UINT8 [DlIBwEn0](#)
Offset 0x018D - DlIBwEn[0] DlIBwEn[0], for 1067 (0..7)
 - UINT8 [DlIBwEn1](#)
Offset 0x018E - DlIBwEn[1] DlIBwEn[1], for 1333 (0..7)
 - UINT8 [DlIBwEn2](#)
Offset 0x018F - DlIBwEn[2] DlIBwEn[2], for 1600 (0..7)
 - UINT8 [DlIBwEn3](#)
Offset 0x0190 - DlIBwEn[3] DlIBwEn[3], for 1867 and up (0..7)
 - UINT8 [CmdTriStateDis](#)
*Offset 0x0191 - Command Tristate Support Enable/Disable Command Tristate; **0: Enable**; 1: Disable.*
 - UINT8 [UnusedUpdSpace5](#) [14]
Offset 0x0192.
 - UINT32 [Heci1BarAddress](#)
Offset 0x01A0 - HECI1 BAR address BAR address of HECI1.
-

- UINT32 [Heci2BarAddress](#)
Offset 0x01A4 - HECI2 BAR address BAR address of HECI2.
 - UINT32 [Heci3BarAddress](#)
Offset 0x01A8 - HECI3 BAR address BAR address of HECI3.
 - UINT8 [HeciTimeouts](#)
Offset 0x01AC - HECI Timeouts Enable/Disable.
 - UINT8 [UnusedUpdSpace6](#) [115]
Offset 0x01AD.
 - UINT16 [SgDelayAfterPwrEn](#)
Offset 0x0220 - SG dGPU Power Delay SG dGPU delay interval after power enabling: 0=Minimal, 1000=Maximum, default is 300=300 microseconds.
 - UINT16 [SgDelayAfterHoldReset](#)
Offset 0x0222 - SG dGPU Reset Delay SG dGPU delay interval for Reset complete: 0=Minimal, 1000=Maximum, default is 100=100 microseconds.
 - UINT16 [MmioSizeAdjustment](#)
Offset 0x0224 - MMIO size adjustment for AUTO mode Positive number means increasing MMIO size, Negative value means decreasing MMIO size: 0 (Default)=no change to AUTO mode MMIO size.
 - UINT8 [DmiGen3ProgramStaticEq](#)
Offset 0x0226 - Enable/Disable DMI GEN3 Static EQ Phase1 programming Program DMI Gen3 EQ Phase1 Static Presets.
 - UINT8 [Peg0Enable](#)
Offset 0x0227 - Enable/Disable PEG 0 Disabled(0x0): Disable PEG Port, Enabled(0x1): Enable PEG Port (If Silicon SKU permits it), Auto(0x2)(Default): If an endpoint is present, enable the PEG Port, Disable otherwise 0:Disable, 1:Enable, 2:AUTO.
 - UINT8 [Peg1Enable](#)
Offset 0x0228 - Enable/Disable PEG 1 Disabled(0x0): Disable PEG Port, Enabled(0x1): Enable PEG Port (If Silicon SKU permits it), Auto(0x2)(Default): If an endpoint is present, enable the PEG Port, Disable otherwise 0:Disable, 1:Enable, 2:AUTO.
 - UINT8 [Peg2Enable](#)
Offset 0x0229 - Enable/Disable PEG 2 Disabled(0x0): Disable PEG Port, Enabled(0x1): Enable PEG Port (If Silicon SKU permits it), Auto(0x2)(Default): If an endpoint is present, enable the PEG Port, Disable otherwise 0:Disable, 1:Enable, 2:AUTO.
 - UINT8 [Peg0MaxLinkSpeed](#)
Offset 0x022A - PEG 0 Max Link Speed Auto (Default)(0x0): Maximum possible link speed, Gen1(0x1): Limit Link to Gen1 Speed, Gen2(0x2): Limit Link to Gen2 Speed, Gen3(0x3):Limit Link to Gen3 Speed 0:Auto, 1:Gen1, 2:Gen2, 3:Gen3.
 - UINT8 [Peg1MaxLinkSpeed](#)
Offset 0x022B - PEG 1 Max Link Speed Auto (Default)(0x0): Maximum possible link speed, Gen1(0x1): Limit Link to Gen1 Speed, Gen2(0x2): Limit Link to Gen2 Speed, Gen3(0x3):Limit Link to Gen3 Speed 0:Auto, 1:Gen1, 2:Gen2, 3:Gen3.
 - UINT8 [Peg2MaxLinkSpeed](#)
Offset 0x022C - PEG 2 Max Link Speed Auto (Default)(0x0): Maximum possible link speed, Gen1(0x1): Limit Link to Gen1 Speed, Gen2(0x2): Limit Link to Gen2 Speed, Gen3(0x3):Limit Link to Gen3 Speed 0:Auto, 1:Gen1, 2:Gen2, 3:Gen3.
 - UINT8 [Peg0MaxLinkWidth](#)
Offset 0x022D - PEG 0 Max Link Width Auto (Default)(0x0): Maximum possible link width, (0x1): Limit Link to x1, (0x2): Limit Link to x2, (0x3):Limit Link to x4, (0x4): Limit Link to x8 0:Auto, 1:x1, 2:x2, 3:x4, 4:x8.
 - UINT8 [Peg1MaxLinkWidth](#)
Offset 0x022E - PEG 1 Max Link Width Auto (Default)(0x0): Maximum possible link width, (0x1): Limit Link to x1, (0x2): Limit Link to x2, (0x3):Limit Link to x4 0:Auto, 1:x1, 2:x2, 3:x4.
 - UINT8 [Peg2MaxLinkWidth](#)
Offset 0x022F - PEG 2 Max Link Width Auto (Default)(0x0): Maximum possible link width, (0x1): Limit Link to x1, (0x2): Limit Link to x2 0:Auto, 1:x1, 2:x2.
 - UINT8 [Peg0PowerDownUnusedLanes](#)
-

Offset 0x0230 - Power down unused lanes on PEG 0 (0x0): Do not power down any lane, (0x1): Bios will power down unused lanes based on the max possible link width 0:No power saving, 1:Auto.

- UINT8 [Peg1PowerDownUnusedLanes](#)

Offset 0x0231 - Power down unused lanes on PEG 1 (0x0): Do not power down any lane, (0x1): Bios will power down unused lanes based on the max possible link width 0:No power saving, 1:Auto.

- UINT8 [Peg2PowerDownUnusedLanes](#)

Offset 0x0232 - Power down unused lanes on PEG 2 (0x0): Do not power down any lane, (0x1): Bios will power down unused lanes based on the max possible link width 0:No power saving, 1:Auto.

- UINT8 [InitPcieAspmAfterOprom](#)

Offset 0x0233 - PCIe ASPM programming will happen in relation to the Oprom Select when PCIe ASPM programming will happen in relation to the Oprom.

- UINT8 [PegDisableSpreadSpectrumClocking](#)

Offset 0x0234 - PCIe Disable Spread Spectrum Clocking PCIe Disable Spread Spectrum Clocking.

- UINT8 [DmiGen3RootPortPreset](#) [4]

Offset 0x0235 - DMI Gen3 Root port preset values per lane Used for programming DMI Gen3 preset values per lane.

- UINT8 [DmiGen3EndPointPreset](#) [4]

Offset 0x0239 - DMI Gen3 End port preset values per lane Used for programming DMI Gen3 preset values per lane.

- UINT8 [DmiGen3EndPointHint](#) [4]

Offset 0x023D - DMI Gen3 End port Hint values per lane Used for programming DMI Gen3 Hint values per lane.

- UINT8 [DmiGen3RxCtlePeaking](#) [2]

Offset 0x0241 - DMI Gen3 RxCTLEp per-Bundle control Range: 0-15, 12 is default for each bundle, must be specified based upon platform design.

- UINT8 [DmiDeEmphasis](#)

Offset 0x0243 - DeEmphasis control for DMI DeEmphasis control for DMI.

- UINT8 [PegGen3RxCtlePeaking](#) [8]

Offset 0x0244 - PEG Gen3 RxCTLEp per-Bundle control Range: 0-15, 12 is default for each bundle, must be specified based upon platform design.

- UINT32 [PegDataPtr](#)

Offset 0x024C - Memory data pointer for saved preset search results The reference code will store the Gen3 Preset Search results in the SaDataHob's PegData structure (SA_PEG_DATA) and platform code can save/restore this data to skip preset search in the following boots.

- UINT8 [PegGpioData](#) [16]

Offset 0x0250 - PEG PERST# GPIO information The reference code will use the information in this structure in order to reset PCIe Gen3 devices during equalization, if necessary.

- UINT8 [UnusedUpdSpace7](#) [1]

Offset 0x0260.

- UINT8 [PegRootPortHPE](#) [3]

Offset 0x0261 - PCIe Hot Plug Enable/Disable per port 0(Default): Disable, 1: Enable.

- UINT32 [GttMmAdr](#)

Offset 0x0264 - Temporary MMIO address for GTTMADDR The reference code will use the information in this structure in order to reset PCIe Gen3 devices during equalization, if necessary.

- UINT16 [GttSize](#)

Offset 0x0268 - Selection of iGFX GTT Memory size 1=2MB, 2=4MB, 3=8MB, Default is 3 1:2MB, 2:4MB, 3:8MB.

- UINT8 [PrimaryDisplay](#)

Offset 0x026A - Selection of the primary display device 0=iGFX, 1=PEG, 2=PCIe Graphics on PCH, 3(Default)=A↔UTO, 4=Switchable Graphics 0:iGFX, 1:PEG, 2:PCIe Graphics on PCH, 3:AUTO, 4:Switchable Graphics.

- UINT8 [SaRtd3Pcie0Gpio](#) [24]

Offset 0x026B - Switchable Graphics GPIO information for PEG 0 Switchable Graphics GPIO information for PEG 0, for Reset, power and wake GPIOs.

- UINT8 [SaRtd3Pcie1Gpio](#) [24]

Offset 0x0283 - Switchable Graphics GPIO information for PEG 1 Switchable Graphics GPIO information for PEG 1, for Reset, power and wake GPIOs.

- UINT8 [SaRtd3Pcie2Gpio](#) [24]

Offset 0x029B - Switchable Graphics GPIO information for PEG 2 Switchable Graphics GPIO information for PEG 2, for Reset, power and wake GPIOs.

- UINT8 [RootPortDev](#)

Offset 0x02B3 - PEG root port Device number for Switchable Graphics dGPU Device number to indicate which PEG root port has dGPU.

- UINT8 [RootPortFun](#)

Offset 0x02B4 - PEG root port Function number for Switchable Graphics dGPU Function number to indicate which PEG root port has dGPU.

- UINT8 [TxtImplemented](#)

Offset 0x02B5 - Enable/Disable MRC TXT dependency When enabled MRC execution will wait for TXT initialization to be done first.

- UINT8 [SaOcSupport](#)

Offset 0x02B6 - Enable/Disable SA OcSupport Enable: Enable SA OcSupport, Disable(Default): Disable SA OcSupport \$EN_DIS.

- UINT8 [GtsVoltageMode](#)

Offset 0x02B7 - GT slice Voltage Mode 0(Default): Adaptive, 1: Override 0: Adaptive, 1: Override.

- UINT8 [GtusVoltageMode](#)

Offset 0x02B8 - GT unslice Voltage Mode 0(Default): Adaptive, 1: Override 0: Adaptive, 1: Override.

- UINT8 [GtsMaxOcRatio](#)

Offset 0x02B9 - Maximum GTs turbo ratio override 0(Default)=Minimal/Auto, 60=Maximum.

- UINT16 [GtsVoltageOffset](#)

Offset 0x02BA - The voltage offset applied to GT slice 0(Default)=Minimal, 1000=Maximum.

- UINT16 [GtsVoltageOverride](#)

Offset 0x02BC - The GT slice voltage override which is applied to the entire range of GT frequencies 0(Default)=Minimal, 2000=Maximum.

- UINT16 [GtsExtraTurboVoltage](#)

Offset 0x02BE - adaptive voltage applied during turbo frequencies 0(Default)=Minimal, 2000=Maximum.

- UINT16 [GtusVoltageOffset](#)

Offset 0x02C0 - voltage offset applied to GT unslice 0(Default)=Minimal, 2000=Maximum.

- UINT16 [GtusVoltageOverride](#)

Offset 0x02C2 - GT unslice voltage override which is applied to the entire range of GT frequencies 0(Default)=Minimal, 2000=Maximum.

- UINT16 [GtusExtraTurboVoltage](#)

Offset 0x02C4 - adaptive voltage applied during turbo frequencies 0(Default)=Minimal, 2000=Maximum.

- UINT16 [SaVoltageOffset](#)

Offset 0x02C6 - voltage offset applied to the SA 0(Default)=Minimal, 1000=Maximum.

- UINT8 [EdramRatio](#)

Offset 0x02C8 - EDDRAM ratio override EdramRatio is deprecated on Kabylake.

- UINT8 [GtusMaxOcRatio](#)

Offset 0x02C9 - Maximum GTus turbo ratio override 0(Default)=Minimal, 60=Maximum.

- UINT8 [BistOnReset](#)

Offset 0x02CA - BIST on Reset Enable or Disable BIST on Reset; **0: Disable**; 1: Enable.

- UINT8 [SkipStopPbet](#)

Offset 0x02CB - Skip Stop PBET Timer Enable/Disable Skip Stop PBET Timer; **0: Disable**; 1: Enable \$EN_DIS.

- UINT8 [EnableC6Dram](#)

Offset 0x02CC - C6DRAM power gating feature This feature is not supported.

- UINT8 [OcSupport](#)

Offset 0x02CD - Over clocking support Over clocking support; **0: Disable**; 1: Enable \$EN_DIS.

- UINT8 [OcLock](#)

Offset 0x02CE - Over clocking Lock Over clocking Lock Enable/Disable; **0: Disable**; 1: Enable.

- UINT8 [CoreMaxOcRatio](#)

Offset 0x02CF - Maximum Core Turbo Ratio Override Maximum core turbo ratio override allows to increase CPU core frequency beyond the fused max turbo ratio limit.

- UINTE8 CoreVoltageMode

Offset 0x02D0 - Core voltage mode Core voltage mode; **0: Adaptive**; 1: Override.

- UINTE8 RingMinOcRatio

Offset 0x02D1 - Minimum clr turbo ratio override Minimum clr turbo ratio override.

- UINTE8 RingMaxOcRatio

Offset 0x02D2 - Maximum clr turbo ratio override Maximum clr turbo ratio override allows to increase CPU clr frequency beyond the fused max turbo ratio limit.

- UINTE8 HyperThreading

Offset 0x02D3 - Hyper Threading Enable/Disable Enable or Disable Hyper Threading; 0: Disable; **1: Enable** \$EN←_DIS.

- UINTE8 CpuRatioOverride

Offset 0x02D4 - Enable or Disable CPU Ratio Override Enable or Disable CPU Ratio Override; **0: Disable**; 1: Enable.

- UINTE8 CpuRatio

Offset 0x02D5 - CPU ratio value CPU ratio value.

- UINTE8 BootFrequency

Offset 0x02D6 - Boot frequency Sets the boot frequency starting from reset vector.

- UINTE8 ActiveCoreCount

Offset 0x02D7 - Number of active cores Number of active cores(Depends on Number of cores).

- UINTE8 FClkFrequency

Offset 0x02D8 - Processor Early Power On Configuration FCLK setting **0: 800 MHz (ULT/ULX)**.

- UINTE8 JtagC10PowerGateDisable

Offset 0x02D9 - Power JTAG in C10 and deeper power states Power JTAG in C10 and deeper power states; **0: Disable**; 1: Enable.

- UINTE8 VmxEnable

Offset 0x02DA - Enable or Disable VMX Enable or Disable VMX; 0: Disable; **1: Enable**.

- UINTE8 Avx2RatioOffset

Offset 0x02DB - AVX2 Ratio Offset 0(Default)= No Offset.

- UINTE16 CoreVoltageOverride

Offset 0x02DC - core voltage override The core voltage override which is applied to the entire range of cpu core frequencies.

- UINTE16 CoreVoltageAdaptive

Offset 0x02DE - Core Turbo voltage Adaptive Extra Turbo voltage applied to the cpu core when the cpu is operating in turbo mode.

- UINTE16 CoreVoltageOffset

Offset 0x02E0 - Core Turbo voltage Offset The voltage offset applied to the core while operating in turbo mode. Valid Range 0 to 1000.

- UINTE8 CorePllVoltageOffset

Offset 0x02E2 - Core PLL voltage offset Core PLL voltage offset.

- UINTE8 RingDownBin

Offset 0x02E3 - Ring Downbin Ring Downbin enable/disable.

- UINTE8 BclkAdaptiveVoltage

Offset 0x02E4 - BCLK Adaptive Voltage Enable When enabled, the CPU V/F curves are aware of BCLK frequency when calculated.

- UINTE8 BiosGuard

Offset 0x02E5 - BiosGuard Enable/Disable.

- UINTE8 EnableSgx

Offset 0x02E6 - EnableSgx Enable/Disable.

- UINTE8 Txt

Offset 0x02E7 - Txt Enable/Disable.

- UINTE32 PrmrrSize

- Offset 0x02E8 - PrmrSize Enable/Disable.*
 - UINIT32 [SinitMemorySize](#)
 - Offset 0x02EC - SinitMemorySize Enable/Disable.*
 - UINIT64 [TxtDprMemoryBase](#)
 - Offset 0x02F0 - TxtDprMemoryBase Enable/Disable.*
 - UINIT32 [TxtDprMemorySize](#)
 - Offset 0x02F8 - TxtDprMemorySize Enable/Disable.*
 - UINIT32 [TxtHeapMemorySize](#)
 - Offset 0x02FC - TxtHeapMemorySize Enable/Disable.*
 - UINIT8 [FlashWearOutProtection](#)
 - Offset 0x0300 - FlashWearOutProtection Enable/Disable.*
 - UINIT8 [ReservedSecurityPreMem](#) [9]
 - Offset 0x0301 - ReservedSecurityPreMem Reserved for Security Pre-Mem \$EN_DIS.*
 - UINIT8 [PchHpetEnable](#)
 - Offset 0x030A - PCH HPET Enabled Enable/disable PCH HPET.*
 - UINIT8 [PchHpetBdfValid](#)
 - Offset 0x030B - PCH HPET BDF valid Whether the BDF value is valid.*
 - UINIT32 [PchHpetBase](#)
 - Offset 0x030C - The HPET Base Address The HPET base address.*
 - UINIT8 [PchHpetBusNumber](#)
 - Offset 0x0310 - PCH HPET Bus Number Bus Number HPETn used as Requestor / Completer ID.*
 - UINIT8 [PchHpetDeviceNumber](#)
 - Offset 0x0311 - PCH HPET Device Number Device Number HPETn used as Requestor / Completer ID.*
 - UINIT8 [PchHpetFunctionNumber](#)
 - Offset 0x0312 - PCH HPET Function Number Function Number HPETn used as Requestor / Completer ID.*
 - UINIT8 [PchPcieHsioRxSetCtleEnable](#) [24]
 - Offset 0x0313 - Enable PCH HSIO PCIE Rx Set Ctle Enable PCH PCIE Gen 3 Set CTLE Value.*
 - UINIT8 [PchPcieHsioRxSetCtle](#) [24]
 - Offset 0x032B - PCH HSIO PCIE Rx Set Ctle Value PCH PCIE Gen 3 Set CTLE Value.*
 - UINIT8 [PchPcieHsioTxGen1DownscaleAmpEnable](#) [24]
 - Offset 0x0343 - Enble PCH HSIO PCIE TX Gen 1 Downscale Amplitude Adjustment value override 0: Disable; 1: Enable.*
 - UINIT8 [PchPcieHsioTxGen1DownscaleAmp](#) [24]
 - Offset 0x035B - PCH HSIO PCIE Gen 2 TX Output Downscale Amplitude Adjustment value PCH PCIE Gen 2 TX Output Downscale Amplitude Adjustment value.*
 - UINIT8 [PchPcieHsioTxGen2DownscaleAmpEnable](#) [24]
 - Offset 0x0373 - Enable PCH HSIO PCIE TX Gen 2 Downscale Amplitude Adjustment value override 0: Disable; 1: Enable.*
 - UINIT8 [PchPcieHsioTxGen2DownscaleAmp](#) [24]
 - Offset 0x038B - PCH HSIO PCIE Gen 2 TX Output Downscale Amplitude Adjustment value PCH PCIE Gen 2 TX Output Downscale Amplitude Adjustment value.*
 - UINIT8 [PchPcieHsioTxGen3DownscaleAmpEnable](#) [24]
 - Offset 0x03A3 - Enable PCH HSIO PCIE TX Gen 3 Downscale Amplitude Adjustment value override 0: Disable; 1: Enable.*
 - UINIT8 [PchPcieHsioTxGen3DownscaleAmp](#) [24]
 - Offset 0x03BB - PCH HSIO PCIE Gen 3 TX Output Downscale Amplitude Adjustment value PCH PCIE Gen 3 TX Output Downscale Amplitude Adjustment value.*
 - UINIT8 [PchPcieHsioTxGen1DeEmphEnable](#) [24]
 - Offset 0x03D3 - Enable PCH HSIO PCIE Gen 1 TX Output De-Emphasis Adjustment Setting value override 0↔ : Disable; 1: Enable.*
 - UINIT8 [PchPcieHsioTxGen1DeEmph](#) [24]
-

Offset 0x03EB - PCH HSIO PCIE Gen 1 TX Output De-Emphasis Adjustment value PCH PCIe Gen 1 TX Output De-Emphasis Adjustment Setting.

- UINT8 [PchPcieHsioTxGen2DeEmph3p5Enable](#) [24]
Offset 0x0403 - Enable PCH HSIO PCIE Gen 2 TX Output -3.5dB De-Emphasis Adjustment Setting value override 0: Disable; 1: Enable.
- UINT8 [PchPcieHsioTxGen2DeEmph3p5](#) [24]
Offset 0x041B - PCH HSIO PCIE Gen 2 TX Output -3.5dB De-Emphasis Adjustment value PCH PCIe Gen 2 TX Output -3.5dB De-Emphasis Adjustment Setting.
- UINT8 [PchPcieHsioTxGen2DeEmph6p0Enable](#) [24]
Offset 0x0433 - Enable PCH HSIO PCIE Gen 2 TX Output -6.0dB De-Emphasis Adjustment Setting value override 0: Disable; 1: Enable.
- UINT8 [PchPcieHsioTxGen2DeEmph6p0](#) [24]
Offset 0x044B - PCH HSIO PCIE Gen 2 TX Output -6.0dB De-Emphasis Adjustment value PCH PCIe Gen 2 TX Output -6.0dB De-Emphasis Adjustment Setting.
- UINT8 [PchSataHsioRxGen1EqBoostMagEnable](#) [8]
Offset 0x0463 - Enable PCH HSIO SATA Receiver Equalization Boost Magnitude Adjustment Value override 0: Disable; 1: Enable.
- UINT8 [PchSataHsioRxGen1EqBoostMag](#) [8]
Offset 0x046B - PCH HSIO SATA 1.5 Gb/s Receiver Equalization Boost Magnitude Adjustment value PCH HSIO SATA 1.5 Gb/s Receiver Equalization Boost Magnitude Adjustment value.
- UINT8 [PchSataHsioRxGen2EqBoostMagEnable](#) [8]
Offset 0x0473 - Enable PCH HSIO SATA Receiver Equalization Boost Magnitude Adjustment Value override 0: Disable; 1: Enable.
- UINT8 [PchSataHsioRxGen2EqBoostMag](#) [8]
Offset 0x047B - PCH HSIO SATA 3.0 Gb/s Receiver Equalization Boost Magnitude Adjustment value PCH HSIO SATA 3.0 Gb/s Receiver Equalization Boost Magnitude Adjustment value.
- UINT8 [PchSataHsioRxGen3EqBoostMagEnable](#) [8]
Offset 0x0483 - Enable PCH HSIO SATA Receiver Equalization Boost Magnitude Adjustment Value override 0: Disable; 1: Enable.
- UINT8 [PchSataHsioRxGen3EqBoostMag](#) [8]
Offset 0x048B - PCH HSIO SATA 6.0 Gb/s Receiver Equalization Boost Magnitude Adjustment value PCH HSIO SATA 6.0 Gb/s Receiver Equalization Boost Magnitude Adjustment value.
- UINT8 [PchSataHsioTxGen1DownscaleAmpEnable](#) [8]
Offset 0x0493 - Enable PCH HSIO SATA 1.5 Gb/s TX Output Downscale Amplitude Adjustment value override 0: Disable; 1: Enable.
- UINT8 [PchSataHsioTxGen1DownscaleAmp](#) [8]
Offset 0x049B - PCH HSIO SATA 1.5 Gb/s TX Output Downscale Amplitude Adjustment value PCH HSIO SATA 1.5 Gb/s TX Output Downscale Amplitude Adjustment value.
- UINT8 [PchSataHsioTxGen2DownscaleAmpEnable](#) [8]
Offset 0x04A3 - Enable PCH HSIO SATA 3.0 Gb/s TX Output Downscale Amplitude Adjustment value override 0: Disable; 1: Enable.
- UINT8 [PchSataHsioTxGen2DownscaleAmp](#) [8]
Offset 0x04AB - PCH HSIO SATA 3.0 Gb/s TX Output Downscale Amplitude Adjustment value PCH HSIO SATA 3.0 Gb/s TX Output Downscale Amplitude Adjustment value.
- UINT8 [PchSataHsioTxGen3DownscaleAmpEnable](#) [8]
Offset 0x04B3 - Enable PCH HSIO SATA 6.0 Gb/s TX Output Downscale Amplitude Adjustment value override 0: Disable; 1: Enable.
- UINT8 [PchSataHsioTxGen3DownscaleAmp](#) [8]
Offset 0x04BB - PCH HSIO SATA 6.0 Gb/s TX Output Downscale Amplitude Adjustment value PCH HSIO SATA 6.0 Gb/s TX Output Downscale Amplitude Adjustment value.
- UINT8 [PchSataHsioTxGen1DeEmphEnable](#) [8]
Offset 0x04C3 - Enable PCH HSIO SATA 1.5 Gb/s TX Output De-Emphasis Adjustment Setting value override 0: Disable; 1: Enable.
- UINT8 [PchSataHsioTxGen1DeEmph](#) [8]

- Offset 0x04CB - PCH HSIO SATA 1.5 Gb/s TX Output De-Emphasis Adjustment Setting PCH HSIO SATA 1.5 Gb/s TX Output De-Emphasis Adjustment Setting.
- UINT8 [PchSataHsioTxGen2DeEmphEnable](#) [8]
Offset 0x04D3 - Enable PCH HSIO SATA 3.0 Gb/s TX Output De-Emphasis Adjustment Setting value override 0: Disable; 1: Enable.
 - UINT8 [PchSataHsioTxGen2DeEmph](#) [8]
Offset 0x04DB - PCH HSIO SATA 3.0 Gb/s TX Output De-Emphasis Adjustment Setting PCH HSIO SATA 3.0 Gb/s TX Output De-Emphasis Adjustment Setting.
 - UINT8 [PchSataHsioTxGen3DeEmphEnable](#) [8]
Offset 0x04E3 - Enable PCH HSIO SATA 6.0 Gb/s TX Output De-Emphasis Adjustment Setting value override 0: Disable; 1: Enable.
 - UINT8 [PchSataHsioTxGen3DeEmph](#) [8]
Offset 0x04EB - PCH HSIO SATA 6.0 Gb/s TX Output De-Emphasis Adjustment Setting PCH HSIO SATA 6.0 Gb/s TX Output De-Emphasis Adjustment Setting.
 - UINT8 [PchLpcEnhancePort8xhDecoding](#)
Offset 0x04F3 - PCH LPC Enhance the port 8xh decoding Original LPC only decodes one byte of port 80h.
 - UINT16 [PchAcpiBase](#)
Offset 0x04F4 - PCH Acpi Base Power management I/O base address.
 - UINT8 [PchPort80Route](#)
Offset 0x04F6 - PCH Port80 Route Control where the Port 80h cycles are sent, 0: LPC; 1: PCI.
 - UINT8 [SmbusArpEnable](#)
Offset 0x04F7 - Enable SMBus ARP support Enable SMBus ARP support.
 - UINT16 [PchSmbusIoBase](#)
Offset 0x04F8 - SMBUS Base Address SMBUS Base Address (IO space).
 - UINT8 [PchNumRsvdSmbusAddresses](#)
Offset 0x04FA - Number of RsvdSmbusAddressTable.
 - UINT8 [UnusedUpdSpace8](#)
Offset 0x04FB.
 - UINT32 [RsvdSmbusAddressTablePtr](#)
Offset 0x04FC - Point of RsvdSmbusAddressTable Array of addresses reserved for non-ARP-capable SMBus devices.
 - UINT32 [TraceHubMemReg0Size](#)
Offset 0x0500 - Trace Hub Memory Region 0 Trace Hub Memory Region 0.
 - UINT32 [TraceHubMemReg1Size](#)
Offset 0x0504 - Trace Hub Memory Region 1 Trace Hub Memory Region 1.
 - UINT32 [PcieRpEnableMask](#)
Offset 0x0508 - Enable PCIE RP Mask Enable/disable PCIE Root Ports.
 - UINT8 [PcdDebugInterfaceFlags](#)
Offset 0x050C - Debug Interfaces Debug Interfaces.
 - UINT8 [PcdSerialIoUartNumber](#)
Offset 0x050D - SerialIoUart Number Selection Select SerialIoUart Controller for debug.
 - UINT8 [PcdIsaSerialUartBase](#)
Offset 0x050E - ISA Serial Base selection Select ISA Serial Base address.
 - UINT8 [PchPmPciePIISsc](#)
Offset 0x050F - PCH Pm Pcie PII Ssc Specifies the Pcie PII Spread Spectrum Percentage.
 - UINT8 [PeciC10Reset](#)
Offset 0x0510 - Enable or Disable Peci C10 Reset command Enable or Disable Peci C10 Reset command; **0: Disable;** 1: Enable.
 - UINT8 [PeciSxReset](#)
Offset 0x0511 - Enable or Disable Peci Sx Reset command Enable or Disable Peci Sx Reset command; **0: Disable;** 1: Enable.
 - UINT8 [PcdSerialDebugBaudRate](#)
Offset 0x0512 - PcdSerialDebugBaudRate Baud Rate for Serial Debug Messages.
-

- UINT8 [PcdSerialDebugLevel](#)
Offset 0x0513 - PcdSerialDebugLevel Serial Debug Message Level.
- UINT8 [EvLoader](#)
*Offset 0x0514 - Enable or Disable EV Loader Enable or Disable EV Loader; **0: Disable**; 1: Enable.*
- UINT8 [GtPllVoltageOffset](#)
Offset 0x0515 - GT PLL voltage offset Core PLL voltage offset.
- UINT8 [RingPllVoltageOffset](#)
Offset 0x0516 - Ring PLL voltage offset Core PLL voltage offset.
- UINT8 [SaPllVoltageOffset](#)
Offset 0x0517 - System Agent PLL voltage offset Core PLL voltage offset.
- UINT8 [McPllVoltageOffset](#)
Offset 0x0518 - Memory Controller PLL voltage offset Core PLL voltage offset.
- UINT8 [RealtimeMemoryTiming](#)
Offset 0x0519 - Realtime Memory Timing 0(Default): Disabled, 1: Enabled.
- UINT8 [Avx3RatioOffset](#)
Offset 0x051A - AVX3 Ratio Offset 0(Default)= No Offset.
- UINT8 [CleanMemory](#)
*Offset 0x051B - Ask MRC to clear memory content Ask MRC to clear memory content **0: Do not Clear Memory**; 1: Clear Memory.*
- UINT8 [ReservedFspmUpd](#) [4]
Offset 0x051C.

8.4.1 Detailed Description

Fsp M Configuration.

Definition at line 56 of file FspmUpd.h.

8.4.2 Member Data Documentation

8.4.2.1 UINT8 FSP_M_CONFIG::ActiveCoreCount

Offset 0x02D7 - Number of active cores Number of active cores(Depends on Number of cores).

0: All; 1: 1; 2: 2; 3: 3 0:All, 1:1, 2:2, 3:3

Definition at line 796 of file FspmUpd.h.

8.4.2.2 UINT8 FSP_M_CONFIG::ApertureSize

Offset 0x00E5 - Aperture Size Select the Aperture Size.

0:128 MB, 1:256 MB, 2:512 MB

Definition at line 208 of file FspmUpd.h.

8.4.2.3 UINT8 FSP_M_CONFIG::Avx2RatioOffset

Offset 0x02DB - AVX2 Ratio Offset 0(Default)= No Offset.

Range 0 - 31. Specifies number of bins to decrease AVX ratio vs. Core Ratio. Uses Mailbox MSR 0x150, cmd 0x1B.

Definition at line 821 of file FspmUpd.h.

8.4.2.4 UINT8 FSP_M_CONFIG::Avx3RatioOffset

Offset 0x051A - AVX3 Ratio Offset 0(Default)= No Offset.

Range 0 - 31. Specifies number of bins to decrease AVX ratio vs. Core Ratio. Uses Mailbox MSR 0x150, cmd 0x1B.

Definition at line 1256 of file FspmUpd.h.

8.4.2.5 UINT8 FSP_M_CONFIG::BclkAdaptiveVoltage

Offset 0x02E4 - BCLK Adaptive Voltage Enable When enabled, the CPU V/F curves are aware of BCLK frequency when calculated.

0: Disable; **1: Enable \$EN_DIS**

Definition at line 857 of file FspmUpd.h.

8.4.2.6 UINT8 FSP_M_CONFIG::BiosGuard

Offset 0x02E5 - BiosGuard Enable/Disable.

0: Disable, Enable/Disable BIOS Guard feature, 1: enable \$EN_DIS

Definition at line 863 of file FspmUpd.h.

8.4.2.7 UINT8 FSP_M_CONFIG::BistOnReset

Offset 0x02CA - BIST on Reset Enable or Disable BIST on Reset; **0: Disable**; 1: Enable.

\$EN_DIS

Definition at line 716 of file FspmUpd.h.

8.4.2.8 UINT8 FSP_M_CONFIG::BootFrequency

Offset 0x02D6 - Boot frequency Sets the boot frequency starting from reset vector.

- 0: Maximum battery performance.- **1: Maximum non-turbo performance.**- 2: Turbo performance.

Note

If Turbo is selected BIOS will start in max non-turbo mode and switch to Turbo mode. 0:0, 1:1, 2:2

Definition at line 789 of file FspmUpd.h.

8.4.2.9 UINT8 FSP_M_CONFIG::CleanMemory

Offset 0x051B - Ask MRC to clear memory content Ask MRC to clear memory content **0: Do not Clear Memory**; 1: Clear Memory.

\$EN_DIS

Definition at line 1262 of file FspmUpd.h.

8.4.2.10 UINT8 FSP_M_CONFIG::CmdTriStateDis

Offset 0x0191 - Command Tristate Support Enable/Disable Command Tristate; **0: Enable**; 1: Disable.

\$EN_DIS

Definition at line 386 of file FspmUpd.h.

8.4.2.11 UINT8 FSP_M_CONFIG::CoreMaxOcRatio

Offset 0x02CF - Maximum Core Turbo Ratio Override Maximum core turbo ratio override allows to increase CPU core frequency beyond the fused max turbo ratio limit.

0: Hardware defaults. Range: 0-83

Definition at line 746 of file FspmUpd.h.

8.4.2.12 UINT8 FSP_M_CONFIG::CorePllVoltageOffset

Offset 0x02E2 - Core PLL voltage offset Core PLL voltage offset.

0: No offset. Range 0-63

Definition at line 843 of file FspmUpd.h.

8.4.2.13 UINT16 FSP_M_CONFIG::CoreVoltageAdaptive

Offset 0x02DE - Core Turbo voltage Adaptive Extra Turbo voltage applied to the cpu core when the cpu is operating in turbo mode.

Valid Range 0 to 2000

Definition at line 833 of file FspmUpd.h.

8.4.2.14 UINT8 FSP_M_CONFIG::CoreVoltageMode

Offset 0x02D0 - Core voltage mode Core voltage mode; **0: Adaptive**; 1: Override.

\$EN_DIS

Definition at line 752 of file FspmUpd.h.

8.4.2.15 UINT16 FSP_M_CONFIG::CoreVoltageOverride

Offset 0x02DC - core voltage override The core voltage override which is applied to the entire range of cpu core frequencies.

Valid Range 0 to 2000

Definition at line 827 of file FspmUpd.h.

8.4.2.16 UINT8 FSP_M_CONFIG::CpuRatio

Offset 0x02D5 - CPU ratio value CPU ratio value.

Valid Range 0 to 63

Definition at line 781 of file FspmUpd.h.

8.4.2.17 UINT8 FSP_M_CONFIG::CpuRatioOverride

Offset 0x02D4 - Enable or Disable CPU Ratio Override Enable or Disable CPU Ratio Override; **0: Disable**; 1: Enable.

Note

If disabled, BIOS will use the default max non-turbo ratio, and will not use any flex ratio setting. \$EN_DIS

Definition at line 776 of file FspmUpd.h.

8.4.2.18 UINT16 FSP_M_CONFIG::DdrFreqLimit

Offset 0x00E8 - DDR Frequency Limit Maximum Memory Frequency Selections in Mhz.

Options are 1067, 1333, 1600, 1867, 2133, 2400 and 0 for Auto. 1067:1067, 1333:1333, 1600:1600, 1867:1867, 2133:2133, 2400:2400, 0:Auto

Definition at line 229 of file FspmUpd.h.

8.4.2.19 UINT8 FSP_M_CONFIG::DmiDeEmphasis

Offset 0x0243 - DeEmphasis control for DMI DeEmphasis control for DMI.

0=-6dB, 1(Default)=-3.5 dB 0: -6dB, 1: -3.5dB

Definition at line 565 of file FspmUpd.h.

8.4.2.20 UINT8 FSP_M_CONFIG::DmiGen3EndPointHint[4]

Offset 0x023D - DMI Gen3 End port Hint values per lane Used for programming DMI Gen3 Hint values per lane.

Range: 0-6, 2 is default for each lane

Definition at line 554 of file FspmUpd.h.

8.4.2.21 UINT8 FSP_M_CONFIG::DmiGen3EndPointPreset[4]

Offset 0x0239 - DMI Gen3 End port preset values per lane Used for programming DMI Gen3 preset values per lane.

Range: 0-9, 7 is default for each lane

Definition at line 549 of file FspmUpd.h.

8.4.2.22 UINT8 FSP_M_CONFIG::DmiGen3ProgramStaticEq

Offset 0x0226 - Enable/Disable DMI GEN3 Static EQ Phase1 programming Program DMI Gen3 EQ Phase1 Static Presets.

Disabled(0x0): Disable EQ Phase1 Static Presets Programming, Enabled(0x1)(Default): Enable EQ Phase1 Static Presets Programming \$EN_DIS

Definition at line 440 of file FspmUpd.h.

8.4.2.23 UINT8 FSP_M_CONFIG::DmiGen3RootPortPreset[4]

Offset 0x0235 - DMI Gen3 Root port preset values per lane Used for programming DMI Gen3 preset values per lane.

Range: 0-9, 8 is default for each lane

Definition at line 544 of file FspmUpd.h.

8.4.2.24 UINT8 FSP_M_CONFIG::EnableC6Dram

Offset 0x02CC - C6DRAM power gating feature This feature is not supported.

BIOS is required to disable. **0: Disable** \$EN_DIS

Definition at line 728 of file FspmUpd.h.

8.4.2.25 UINT8 FSP_M_CONFIG::EnableSgx

Offset 0x02E6 - EnableSgx Enable/Disable.

0: Disable, Enable/Disable SGX feature, 1: enable \$EN_DIS

Definition at line 869 of file FspmUpd.h.

8.4.2.26 UINT8 FSP_M_CONFIG::EnableTraceHub

Offset 0x00A6 - Enable Trace Hub Enable/disable Trace Hub function.

\$EN_DIS

Definition at line 186 of file FspmUpd.h.

8.4.2.27 UINT8 FSP_M_CONFIG::EvLoader

Offset 0x0514 - Enable or Disable EV Loader Enable or Disable EV Loader; **0: Disable**; 1: Enable.

\$EN_DIS

Definition at line 1219 of file FspmUpd.h.

8.4.2.28 UINT8 FSP_M_CONFIG::FclkFrequency

Offset 0x02D8 - Processor Early Power On Configuration FCLK setting **0: 800 MHz (ULT/ULX).**

1: 1 GHz (DT/Halo). Not supported on ULT/ULX.- 2: 400 MHz. - 3: Reserved 0:800 MHz, 1: 1 GHz, 2: 400 MHz, 3: Reserved

Definition at line 803 of file FspmUpd.h.

8.4.2.29 UINT8 FSP_M_CONFIG::FlashWearOutProtection

Offset 0x0300 - FlashWearOutProtection Enable/Disable.

0: Disable, Enable/Disable FlashWearOutProtection feature, 1: enable \$EN_DIS

Definition at line 906 of file FspmUpd.h.

8.4.2.30 UINT8 FSP_M_CONFIG::GtPllVoltageOffset

Offset 0x0515 - GT PLL voltage offset Core PLL voltage offset.

0: No offset. Range 0-63 0x0:0xFF

Definition at line 1225 of file FspmUpd.h.

8.4.2.31 UINT8 FSP_M_CONFIG::HeciTimeouts

Offset 0x01AC - HECI Timeouts Enable/Disable.

0: Disable, disable timeout check for HECI, 1: enable \$EN_DIS

Definition at line 411 of file FspmUpd.h.

8.4.2.32 UINT8 FSP_M_CONFIG::IgdDvmt50PreAlloc

Offset 0x00E3 - Internal Graphics Pre-allocated Memory Size of memory preallocated for internal graphics.

0x00:0 MB, 0x01:32 MB, 0x02:64 MB

Definition at line 196 of file FspmUpd.h.

8.4.2.33 UINT8 FSP_M_CONFIG::InitPcieAspmAfterOprom

Offset 0x0233 - PCIe ASPM programming will happen in relation to the Oprom Select when PCIe ASPM programming will happen in relation to the Oprom.

Before(0x0)(Default): Do PCIe ASPM programming before Oprom, After(0x1): Do PCIe ASPM programming after Oprom, requires an SMI handler to save/restore ASPM settings during S3 resume 0:Before, 1:After

Definition at line 532 of file FspmUpd.h.

8.4.2.34 UINT8 FSP_M_CONFIG::InternalGfx

Offset 0x00E4 - Internal Graphics Enable/disable internal graphics.

\$EN_DIS

Definition at line 202 of file FspmUpd.h.

8.4.2.35 UINT8 FSP_M_CONFIG::JtagC10PowerGateDisable

Offset 0x02D9 - Power JTAG in C10 and deeper power states Power JTAG in C10 and deeper power states; **0: Disable**; 1: Enable.

\$EN_DIS

Definition at line 809 of file FspmUpd.h.

8.4.2.36 UINT8 FSP_M_CONFIG::McPllVoltageOffset

Offset 0x0518 - Memory Controller PLL voltage offset Core PLL voltage offset.

0: No offset. Range 0-63 0x0:0xFF

Definition at line 1243 of file FspmUpd.h.

8.4.2.37 UINT16 FSP_M_CONFIG::MmioSize

Offset 0x00A0 - MMIO Size Size of MMIO space reserved for devices.

0(Default)=Auto, non-Zero=size in MB

Definition at line 163 of file FspmUpd.h.

8.4.2.38 UINT8 FSP_M_CONFIG::OcLock

Offset 0x02CE - Over clocking Lock Over clocking Lock Enable/Disable; **0: Disable**; 1: Enable.

\$EN_DIS

Definition at line 740 of file FspmUpd.h.

8.4.2.39 UINT8 FSP_M_CONFIG::PcdDebugInterfaceFlags

Offset 0x050C - Debug Interfaces Debug Interfaces.

BIT0-RAM, BIT1-UART, BIT3-USB3, BIT4-Serial IO, BIT5-TraceHub, BIT2 - Not used.

Definition at line 1168 of file FspmUpd.h.

8.4.2.40 UINT8 FSP_M_CONFIG::PcdIsaSerialUartBase

Offset 0x050E - ISA Serial Base selection Select ISA Serial Base address.

Default is 0x3F8. 0:0x3F8, 1:0x2F8

Definition at line 1180 of file FspmUpd.h.

8.4.2.41 UINT8 FSP_M_CONFIG::PcdSerialDebugBaudRate

Offset 0x0512 - PcdSerialDebugBaudRate Baud Rate for Serial Debug Messages.

3:9600, 4:19200, 6:56700, 7:115200. 3:9600, 4:19200, 6:56700, 7:115200

Definition at line 1204 of file FspmUpd.h.

8.4.2.42 UINT8 FSP_M_CONFIG::PcdSerialDebugLevel

Offset 0x0513 - PcdSerialDebugLevel Serial Debug Message Level.

0:Disable, 1:Error Only, 2:Error & Warnings, 3:Load, Error, Warnings & Info, 4:Load, Error, Warnings, Info & Event, 5:Load, Error, Warnings, Info & Verbose 0:Disable, 1:Error Only, 2:Error and Warnings, 3:Load Error Warnings and Info, 4:Load Error Warnings and Info, 5:Load Error Warnings Info and Verbose

Definition at line 1213 of file FspmUpd.h.

8.4.2.43 UINT8 FSP_M_CONFIG::PcdSerialUartNumber

Offset 0x050D - SerialUart Number Selection Select SerialUart Controller for debug.

0:SerialUart0, 1:SerialUart1, 2:SerialUart2

Definition at line 1174 of file FspmUpd.h.

8.4.2.44 UINT16 FSP_M_CONFIG::PchAcpiBase

Offset 0x04F4 - PCH Acpi Base Power management I/O base address.

Default is 0x1800.

Definition at line 1115 of file FspmUpd.h.

8.4.2.45 UINT32 FSP_M_CONFIG::PchHpetBase

Offset 0x030C - The HPET Base Address The HPET base address.

Default is 0xFED00000.

Definition at line 929 of file FspmUpd.h.

8.4.2.46 UINT8 FSP_M_CONFIG::PchHpetBdfValid

Offset 0x030B - PCH HPET BDF valid Whether the BDF value is valid.

0: Disable; 1: Enable. \$EN_DIS

Definition at line 924 of file FspmUpd.h.

8.4.2.47 UINT8 FSP_M_CONFIG::PchHpetBusNumber

Offset 0x0310 - PCH HPET Bus Number Bus Number HPETn used as Requestor / Completer ID.

Default is 0xF0.

Definition at line 934 of file FspmUpd.h.

8.4.2.48 UINT8 FSP_M_CONFIG::PchHpetDeviceNumber

Offset 0x0311 - PCH HPET Device Number Device Number HPETn used as Requestor / Completer ID.

Default is 0x1F.

Definition at line 939 of file FspmUpd.h.

8.4.2.49 UINT8 FSP_M_CONFIG::PchHpetEnable

Offset 0x030A - PCH HPET Enabled Enable/disable PCH HPET.

\$EN_DIS

Definition at line 918 of file FspmUpd.h.

8.4.2.50 UINT8 FSP_M_CONFIG::PchHpetFunctionNumber

Offset 0x0312 - PCH HPET Function Number Function Number HPETn used as Requestor / Completer ID.

Default is 0x00.

Definition at line 944 of file FspmUpd.h.

8.4.2.51 UINT8 FSP_M_CONFIG::PchLpcEnhancePort8xhDecoding

Offset 0x04F3 - PCH LPC Enhance the port 8xh decoding Original LPC only decodes one byte of port 80h.

\$EN_DIS

Definition at line 1110 of file FspmUpd.h.

8.4.2.52 UINT8 FSP_M_CONFIG::PchNumRsvdSmbusAddresses

Offset 0x04FA - Number of RsvdSmbusAddressTable.

The number of elements in the RsvdSmbusAddressTable.

Definition at line 1137 of file FspmUpd.h.

8.4.2.53 UINT8 FSP_M_CONFIG::PchPmPciePIISsc

Offset 0x050F - PCH Pm Pcie PII Ssc Specifies the Pcie PII Spread Spectrum Percentage.

The default is 0xFF: AUTO - No BIOS override.

Definition at line 1186 of file FspmUpd.h.

8.4.2.54 UINT8 FSP_M_CONFIG::PchPort80Route

Offset 0x04F6 - PCH Port80 Route Control where the Port 80h cycles are sent, 0: LPC; 1: PCI.

\$EN_DIS

Definition at line 1121 of file FspmUpd.h.

8.4.2.55 UINT32 FSP_M_CONFIG::PcieRpEnableMask

Offset 0x0508 - Enable PCIE RP Mask Enable/disable PCIE Root Ports.

0: disable, 1: enable. One bit for each port, bit0 for port1, bit1 for port2, and so on.

Definition at line 1162 of file FspmUpd.h.

8.4.2.56 UINT8 FSP_M_CONFIG::PeciC10Reset

Offset 0x0510 - Enable or Disable Peci C10 Reset command Enable or Disable Peci C10 Reset command; **0: Disable**; 1: Enable.

\$EN_DIS

Definition at line 1192 of file FspmUpd.h.

8.4.2.57 UINT8 FSP_M_CONFIG::PeciSxReset

Offset 0x0511 - Enable or Disable Peci Sx Reset command Enable or Disable Peci Sx Reset command; **0: Disable**; 1: Enable.

\$EN_DIS

Definition at line 1198 of file FspmUpd.h.

8.4.2.58 UINT32 FSP_M_CONFIG::PegDataPtr

Offset 0x024C - Memory data pointer for saved preset search results The reference code will store the Gen3 Preset Search results in the SaDataHob's PegData structure (SA_PEG_DATA) and platform code can save/restore this data to skip preset search in the following boots.

Range: 0-0xFFFFFFFF, default is 0

Definition at line 577 of file FspmUpd.h.

8.4.2.59 UINT8 FSP_M_CONFIG::PegDisableSpreadSpectrumClocking

Offset 0x0234 - PCIe Disable Spread Spectrum Clocking PCIe Disable Spread Spectrum Clocking.

Normal Operation(0x0)(Default) - SSC enabled, Disable SSC(0x1) - Disable SSC per platform design or for compliance testing 0:Normal Operation, 1:Disable SSC

Definition at line 539 of file FspmUpd.h.

8.4.2.60 UINT32 FSP_M_CONFIG::PrmrrSize

Offset 0x02E8 - PrmrrSize Enable/Disable.

0: Disable, define default value of PrmrrSize , 1: enable

Definition at line 880 of file FspmUpd.h.

8.4.2.61 UINT8 FSP_M_CONFIG::ProbelessTrace

Offset 0x00A2 - Probeless Trace Probeless Trace: 0=Disabled, 1=Enable.

Enabling Probeless Trace will reserve 128MB. This also requires IED to be enabled. \$EN_DIS

Definition at line 170 of file FspmUpd.h.

8.4.2.62 UINT8 FSP_M_CONFIG::Ratio

Offset 0x017B - Memory Ratio Automatic or the frequency will equal ratio times reference clock.

Set to Auto to recalculate memory timings listed below. 0:Auto, 4:4, 5:5, 6:6, 7:7, 8:8, 9:9, 10:10, 11:11, 12:12, 13:13, 14:14, 15:15

Definition at line 292 of file FspmUpd.h.

8.4.2.63 UINT8 FSP_M_CONFIG::RealtimeMemoryTiming

Offset 0x0519 - Realtime Memory Timing 0(Default): Disabled, 1: Enabled.

When enabled, it will allow the system to perform realtime memory timing changes after MRC_DONE. 0: Disabled, 1: Enabled

Definition at line 1250 of file FspmUpd.h.

8.4.2.64 UINT8 FSP_M_CONFIG::RefClk

Offset 0x017A - Memory Reference Clock Automatic, 100MHz, 133MHz.

0:Auto, 1:133MHz, 2:100MHz

Definition at line 285 of file FspmUpd.h.

8.4.2.65 UINT8 FSP_M_CONFIG::RingDownBin

Offset 0x02E3 - Ring Downbin Ring Downbin enable/disable.

When enabled, CPU will ensure the ring ratio is always lower than the core ratio. 0: Disable; **1: Enable.** \$EN_DIS

Definition at line 850 of file FspmUpd.h.

8.4.2.66 UINT8 FSP_M_CONFIG::RingMaxOcRatio

Offset 0x02D2 - Maximum clr turbo ratio override Maximum clr turbo ratio override allows to increase CPU clr frequency beyond the fused max turbo ratio limit.

0: Hardware defaults. Range: 0-83

Definition at line 763 of file FspmUpd.h.

8.4.2.67 UINT8 FSP_M_CONFIG::RingMinOcRatio

Offset 0x02D1 - Minimum clr turbo ratio override Minimum clr turbo ratio override.

0: Hardware defaults. Range: 0-83

Definition at line 757 of file FspmUpd.h.

8.4.2.68 UINT8 FSP_M_CONFIG::RingPllVoltageOffset

Offset 0x0516 - Ring PLL voltage offset Core PLL voltage offset.

0: No offset. Range 0-63 0x0:0xFF

Definition at line 1231 of file FspmUpd.h.

8.4.2.69 UINT8 FSP_M_CONFIG::RMT

Offset 0x00E7 - Rank Margin Tool Enable/disable Rank Margin Tool.

\$EN_DIS

Definition at line 222 of file FspmUpd.h.

8.4.2.70 UINT8 FSP_M_CONFIG::SaGv

Offset 0x00E6 - SA GV System Agent dynamic frequency support and when enabled memory will be training at two different frequencies.

Only effects ULX/ULT CPUs. 0=Disabled, 1=FixedLow, 2=FixedHigh, and 3=Enabled. 0:Disabled, 1:FixedLow, 2:FixedHigh, 3:Enabled

Definition at line 216 of file FspmUpd.h.

8.4.2.71 UINT8 FSP_M_CONFIG::SaPllVoltageOffset

Offset 0x0517 - System Agent PLL voltage offset Core PLL voltage offset.

0: No offset. Range 0-63 0x0:0xFF

Definition at line 1237 of file FspmUpd.h.

8.4.2.72 UINT32 FSP_M_CONFIG::SinitMemorySize

Offset 0x02EC - SinitMemorySize Enable/Disable.

0: Disable, define default value of SinitMemorySize , 1: enable

Definition at line 885 of file FspmUpd.h.

8.4.2.73 UINT8 FSP_M_CONFIG::SmbusArpEnable

Offset 0x04F7 - Enable SMBus ARP support Enable SMBus ARP support.

\$EN_DIS

Definition at line 1127 of file FspmUpd.h.

8.4.2.74 UINT8 FSP_M_CONFIG::SmbusEnable

Offset 0x00A5 - Enable SMBus Enable/disable SMBus controller.

\$EN_DIS

Definition at line 180 of file FspmUpd.h.

8.4.2.75 UINT8 FSP_M_CONFIG::SpdProfileSelected

Offset 0x0177 - SPD Profile Selected Select DIMM timing profile.

Options are 0=Default profile, 1=Custom profile, 2=XMP Profile 1, 3=XMP Profile 2 0:Default profile, 1:Custom profile, 2:XMP profile 1, 3:XMP profile 2

Definition at line 271 of file FspmUpd.h.

8.4.2.76 UINT8 FSP_M_CONFIG::tRTP

Offset 0x0189 - tRTP Min Internal Read to Precharge Command Delay Time, 0: AUTO, max: 15.

DDR4 legal values: 5, 6, 7, 8, 9, 10, 12

Definition at line 344 of file FspmUpd.h.

8.4.2.77 UINT32 FSP_M_CONFIG::TsegSize

Offset 0x009C - Tseg Size Size of SMRAM memory reserved.

0x400000 for Release build and 0x1000000 for Debug build 0x0400000:4MB, 0x01000000:16MB

Definition at line 158 of file FspmUpd.h.

8.4.2.78 UINT8 FSP_M_CONFIG::Txt

Offset 0x02E7 - Txt Enable/Disable.

0: Disable, Enable/Disable Txt feature, 1: enable \$EN_DIS

Definition at line 875 of file FspmUpd.h.

8.4.2.79 UINT64 FSP_M_CONFIG::TxtDprMemoryBase

Offset 0x02F0 - TxtDprMemoryBase Enable/Disable.

0: Disable, define default value of TxtDprMemoryBase , 1: enable

Definition at line 890 of file FspmUpd.h.

8.4.2.80 UINT32 FSP_M_CONFIG::TxtDprMemorySize

Offset 0x02F8 - TxtDprMemorySize Enable/Disable.

0: Disable, define default value of TxtDprMemorySize , 1: enable

Definition at line 895 of file FspmUpd.h.

8.4.2.81 UINT32 FSP_M_CONFIG::TxtHeapMemorySize

Offset 0x02FC - TxtHeapMemorySize Enable/Disable.

0: Disable, define default value of TxtHeapMemorySize , 1: enable

Definition at line 900 of file FspmUpd.h.

8.4.2.82 UINT8 FSP_M_CONFIG::TxtImplemented

Offset 0x02B5 - Enable/Disable MRC TXT dependency When enabled MRC execution will wait for TXT initialization to be done first.

Disabled(0x0)(Default): MRC will not wait for TXT initialization, Enabled(0x1): MRC will wait for TXT initialization
\$EN_DIS

Definition at line 642 of file FspmUpd.h.

8.4.2.83 UINT16 FSP_M_CONFIG::VddVoltage

Offset 0x0178 - Memory Voltage Memory Voltage Override (Vddq).

Default = no override 0:Default, 1100:1.10 Volts, 1150:1.15 Volts, 1200:1.20 Volts, 1250:1.25 Volts, 1300:1.30 Volts, 1350:1.35 Volts, 1400:1.40 Volts, 1450:1.45 Volts, 1500:1.50 Volts, 1550:1.55 Volts, 1600:1.60 Volts, 1650:1.65 Volts

Definition at line 279 of file FspmUpd.h.

8.4.2.84 UINT8 FSP_M_CONFIG::VmxEnable

Offset 0x02DA - Enable or Disable VMX Enable or Disable VMX; 0: Disable; 1: **Enable**.

\$EN_DIS

Definition at line 815 of file FspmUpd.h.

The documentation for this struct was generated from the following file:

- [FspmUpd.h](#)

8.5 FSP_M_TEST_CONFIG Struct Reference

Fsp M Test Configuration.

```
#include <FspmUpd.h>
```

Public Attributes

- [UINT32 Signature](#)
Offset 0x0520.
- [UINT8 SkipExtGfxScan](#)
Offset 0x0524 - Skip external display device scanning Enable: Do not scan for external display device, Disable (Default): Scan external display devices \$EN_DIS.
- [UINT8 BdatEnable](#)
Offset 0x0525 - Generate BIOS Data ACPI Table Enable: Generate BDAT for MRC RMT or SA PCIe data.
- [UINT8 ScanExtGfxForLegacyOpRom](#)
Offset 0x0526 - Detect External Graphics device for LegacyOpROM Detect and report if external graphics device only support LegacyOpROM or not (to support CSM auto-enable).
- [UINT8 LockPTMregs](#)
Offset 0x0527 - Lock PCU Thermal Management registers Lock PCU Thermal Management registers.
- [UINT8 DmiVc1](#)
Offset 0x0528 - Enable/Disable DmiVc1 Enable/Disable DmiVc1.
- [UINT8 DmiVcm](#)
Offset 0x0529 - Enable/Disable DmiVcm Enable/Disable DmiVcm.

- UINT8 [DmiMaxLinkSpeed](#)
Offset 0x052A - DMI Max Link Speed Auto (Default)(0x0): Maximum possible link speed, Gen1(0x1): Limit Link to Gen1 Speed, Gen2(0x2): Limit Link to Gen2 Speed, Gen3(0x3):Limit Link to Gen3 Speed 0:Auto, 1:Gen1, 2:Gen2, 3:Gen3.
 - UINT8 [DmiGen3EqPh2Enable](#)
Offset 0x052B - DMI Equalization Phase 2 DMI Equalization Phase 2.
 - UINT8 [DmiGen3EqPh3Method](#)
Offset 0x052C - DMI Gen3 Equalization Phase3 DMI Gen3 Equalization Phase3.
 - UINT8 [Peg0Gen3EqPh2Enable](#)
Offset 0x052D - Phase2 EQ enable on the PEG 0:1:0.
 - UINT8 [Peg1Gen3EqPh2Enable](#)
Offset 0x052E - Phase2 EQ enable on the PEG 0:1:1.
 - UINT8 [Peg2Gen3EqPh2Enable](#)
Offset 0x052F - Phase2 EQ enable on the PEG 0:1:2.
 - UINT8 [Peg0Gen3EqPh3Method](#)
Offset 0x0530 - Phase3 EQ method on the PEG 0:1:0.
 - UINT8 [Peg1Gen3EqPh3Method](#)
Offset 0x0531 - Phase3 EQ method on the PEG 0:1:1.
 - UINT8 [Peg2Gen3EqPh3Method](#)
Offset 0x0532 - Phase3 EQ method on the PEG 0:1:2.
 - UINT8 [PegGen3ProgramStaticEq](#)
Offset 0x0533 - Enable/Disable PEG GEN3 Static EQ Phase1 programming Program PEG Gen3 EQ Phase1 Static Presets.
 - UINT8 [Gen3SwEqAlwaysAttempt](#)
Offset 0x0534 - PEG Gen3 SwEq Always Attempt Gen3 Software Equalization will be executed every boot.
 - UINT8 [Gen3SwEqNumberOfPresets](#)
Offset 0x0535 - Select number of TxEq presets to test in the PCIe/DMI SwEq Select number of TxEq presets to test in the PCIe/DMI SwEq.
 - UINT8 [Gen3SwEqEnableVocTest](#)
Offset 0x0536 - Enable use of the Voltage Offset and Centering Test in the PCIe SwEq Enable use of the Voltage Offset and Centering Test in the PCIe Software Equalization Algorithm.
 - UINT8 [PegRxCemTestingMode](#)
Offset 0x0537 - PCIe Rx Compliance Testing Mode Disabled(0x0)(Default): Normal Operation - Disable PCIe Rx Compliance testing, Enabled(0x1): PCIe Rx Compliance Test Mode - PEG controller is in Rx Compliance Testing Mode; it should only be set when doing PCIe compliance testing \$EN_DIS.
 - UINT8 [PegRxCemLoopbackLane](#)
Offset 0x0538 - PCIe Rx Compliance Loopback Lane When PegRxCemTestingMode is Enabled the specified Lane (0 - 15) will be used for RxCEMLoopback.
 - UINT8 [PegGenerateBdatMarginTable](#)
Offset 0x0539 - Generate PCIe BDAT Margin Table Set this policy to enable the generation and addition of PCIe margin data to the BDAT table.
 - UINT8 [UnusedUpdSpace9](#) [6]
Offset 0x053A.
 - UINT8 [PegRxCemNonProtocolAwareness](#)
Offset 0x0540 - PCIe Non-Protocol Awareness for Rx Compliance Testing Set this policy to enable the generation and addition of PCIe margin data to the BDAT table.
 - UINT8 [PegGen3RxCtleOverride](#)
Offset 0x0541 - PCIe Override RxCTLE Disable(0x0)(Default): Normal Operation - RxCTLE adaptive behavior enabled, Enable(0x1): Override RxCTLE - Disable RxCTLE adaptive behavior to keep the configured RxCTLE peak values unmodified \$EN_DIS.
 - UINT8 [PegGen3Rsvd](#)
Offset 0x0542 - Rsvd Disable(0x0)(Default): Normal Operation - RxCTLE adaptive behavior enabled, Enable(0x1)↔ : Override RxCTLE - Disable RxCTLE adaptive behavior to keep the configured RxCTLE peak values unmodified \$EN_DIS.
-

- UINT8 [PanelPowerEnable](#)
Offset 0x0543 - Panel Power Enable Control for enabling/disabling VDD force bit (Required only for early enabling of eDP panel).
- UINT8 [PegGen3RootPortPreset](#) [16]
Offset 0x0544 - PEG Gen3 Root port preset values per lane Used for programming PEG Gen3 preset values per lane.
- UINT8 [PegGen3EndPointPreset](#) [16]
Offset 0x0554 - PEG Gen3 End port preset values per lane Used for programming PEG Gen3 preset values per lane.
- UINT8 [PegGen3EndPointHint](#) [16]
Offset 0x0564 - PEG Gen3 End port Hint values per lane Used for programming PEG Gen3 Hint values per lane.
- UINT16 [Gen3SwEqJitterDwellTime](#)
Offset 0x0574 - Jitter Dwell Time for PCIe Gen3 Software Equalization Range: 0-65535, default is 1000.
- UINT16 [Gen3SwEqJitterErrorTarget](#)
Offset 0x0576 - Jitter Error Target for PCIe Gen3 Software Equalization Range: 0-65535, default is 1.
- UINT16 [Gen3SwEqVocDwellTime](#)
Offset 0x0578 - VOC Dwell Time for PCIe Gen3 Software Equalization Range: 0-65535, default is 10000.
- UINT16 [Gen3SwEqVocErrorTarget](#)
Offset 0x057A - VOC Error Target for PCIe Gen3 Software Equalization Range: 0-65535, default is 2.
- UINT8 [SaPreMemTestRsvd](#) [4]
Offset 0x057C - SaPreMemTestRsvd Reserved for SA Pre-Mem Test \$EN_DIS.
- UINT64 [BiosAcmBase](#)
Offset 0x0580 - BiosAcmBase Enable/Disable.
- UINT32 [BiosAcmSize](#)
Offset 0x0588 - BiosAcmSize Enable/Disable.
- UINT32 [TgaSize](#)
Offset 0x058C - TgaSize Enable/Disable.
- UINT64 [TxtLcpPdBase](#)
Offset 0x0590 - TxtLcpPdBase Enable/Disable.
- UINT64 [TxtLcpPdSize](#)
Offset 0x0598 - TxtLcpPdSize Enable/Disable.
- UINT16 [TotalFlashSize](#)
Offset 0x05A0 - TotalFlashSize Enable/Disable.
- UINT16 [BiosSize](#)
Offset 0x05A2 - BiosSize Enable/Disable.
- UINT8 [PchDciEn](#)
Offset 0x05A4 - PCH Dci Enable Enable/disable PCH Dci.
- UINT8 [PchDciAutoDetect](#)
Offset 0x05A5 - PCH Dci Auto Detect Deprecated \$EN_DIS.
- UINT8 [SmbusDynamicPowerGating](#)
Offset 0x05A6 - Smbus dynamic power gating Disable or Enable Smbus dynamic power gating.
- UINT8 [WdtDisableAndLock](#)
Offset 0x05A7 - Disable and Lock Watch Dog Register Set 1 to clear WDT status, then disable and lock WDT registers.
- UINT8 [SmbusSpdWriteDisable](#)
Offset 0x05A8 - SMBUS SPD Write Disable Set/Clear Smbus SPD Write Disable.
- UINT8 [ChipsetInitMessage](#)
Offset 0x05A9 - ChipsetInit HECI message Enable/Disable.
- UINT8 [BypassPhySyncReset](#)
Offset 0x05AA - Bypass ChipsetInit sync reset.
- UINT8 [DidInitStat](#)
Offset 0x05AB - Force ME DID Init Status Test, 0: disable, 1: Success, 2: No Memory in Channels, 3: Memory Init Error, 4: Memory not preserved across reset, Set ME DID init stat value \$EN_DIS.

- UINT8 [DisableCpuReplacedPolling](#)
Offset 0x05AC - CPU Replaced Polling Disable Test, 0: disable, 1: enable, Setting this option disables CPU replacement polling loop \$EN_DIS.
- UINT8 [SendDidMsg](#)
Offset 0x05AD - ME DID Message Test, 0: disable, 1: enable, Enable/Disable ME DID Message (disable will prevent the DID message from being sent) \$EN_DIS.
- UINT8 [DisableHeciRetry](#)
Offset 0x05AE - Retry mechanism for HECI APIs Test, 0: disable, 1: enable, Enable/Disable HECI retry.
- UINT8 [DisableMessageCheck](#)
Offset 0x05AF - Check HECI message before send Test, 0: disable, 1: enable, Enable/Disable message check.
- UINT8 [SkipMbpHob](#)
Offset 0x05B0 - Skip MBP HOB Test, 0: disable, 1: enable, Enable/Disable MOB HOB.
- UINT8 [HeciCommunication2](#)
Offset 0x05B1 - HECI2 Interface Communication Test, 0: disable, 1: enable, Adds or Removes HECI2 Device from PCI space.
- UINT8 [KtDeviceEnable](#)
Offset 0x05B2 - Enable KT device Test, 0: disable, 1: enable, Enable or Disable KT device.
- UINT8 [IderDeviceEnable](#)
Offset 0x05B3 - Enable IDEr Test, 0: disable, 1: enable, Enable or Disable IDEr.
- UINT8 [ReservedFspmTestUpd](#) [12]
Offset 0x05B4.

8.5.1 Detailed Description

Fsp M Test Configuration.

Definition at line 1271 of file FspmUpd.h.

8.5.2 Member Data Documentation

8.5.2.1 UINT8 FSP_M_TEST_CONFIG::BdatEnable

Offset 0x0525 - Generate BIOS Data ACPI Table Enable: Generate BDAT for MRC RMT or SA PCIe data.

Disable (Default): Do not generate it \$EN_DIS

Definition at line 1288 of file FspmUpd.h.

8.5.2.2 UINT64 FSP_M_TEST_CONFIG::BiosAcmBase

Offset 0x0580 - BiosAcmBase Enable/Disable.

0: Disable, define default value of BiosAcmBase , 1: enable

Definition at line 1524 of file FspmUpd.h.

8.5.2.3 UINT32 FSP_M_TEST_CONFIG::BiosAcmSize

Offset 0x0588 - BiosAcmSize Enable/Disable.

0: Disable, define default value of BiosAcmSize , 1: enable

Definition at line 1529 of file FspmUpd.h.

8.5.2.4 UINT16 FSP_M_TEST_CONFIG::BiosSize

Offset 0x05A2 - BiosSize Enable/Disable.

0: Disable, define default value of BiosSize , 1: enable

Definition at line 1554 of file FspmUpd.h.

8.5.2.5 UINT8 FSP_M_TEST_CONFIG::BypassPhySyncReset

Offset 0x05AA - Bypass ChipsetInit sync reset.

0: disable, 1: enable, Set Enable to bypass the reset after ChipsetInit HECI message. \$EN_DIS

Definition at line 1598 of file FspmUpd.h.

8.5.2.6 UINT8 FSP_M_TEST_CONFIG::ChipsetInitMessage

Offset 0x05A9 - ChipsetInit HECI message Enable/Disable.

0: Disable, 1: enable, Enable or disable ChipsetInit HECI message. If disabled, it prevents from sending ChipsetInit HECI message. \$EN_DIS

Definition at line 1592 of file FspmUpd.h.

8.5.2.7 UINT8 FSP_M_TEST_CONFIG::DisableHeciRetry

Offset 0x05AE - Retry mechanism for HECI APIs Test, 0: disable, 1: enable, Enable/Disable HECI retry.

\$EN_DIS

Definition at line 1624 of file FspmUpd.h.

8.5.2.8 UINT8 FSP_M_TEST_CONFIG::DisableMessageCheck

Offset 0x05AF - Check HECI message before send Test, 0: disable, 1: enable, Enable/Disable message check.

\$EN_DIS

Definition at line 1630 of file FspmUpd.h.

8.5.2.9 UINT8 FSP_M_TEST_CONFIG::DmiGen3EqPh2Enable

Offset 0x052B - DMI Equalization Phase 2 DMI Equalization Phase 2.

(0x0): Disable phase 2, (0x1): Enable phase 2, (0x2)(Default): AUTO - Use the current default method 0:Disable phase2, 1:Enable phase2, 2:Auto

Definition at line 1327 of file FspmUpd.h.

8.5.2.10 UINT8 FSP_M_TEST_CONFIG::DmiGen3EqPh3Method

Offset 0x052C - DMI Gen3 Equalization Phase3 DMI Gen3 Equalization Phase3.

Auto(0x0)(Default): Use the current default method, HwEq(0x1): Use Adaptive Hardware Equalization, Sw↔Eq(0x2): Use Adaptive Software Equalization (Implemented in BIOS Reference Code), Static(0x3): Use the Static EQs provided in DmiGen3EndPointPreset array for Phase1 AND Phase3 (Instead of just Phase1), Disabled(0x4): Bypass Equalization Phase 3 0:Auto, 1:HwEq, 2:SwEq, 3:StaticEq, 4:BypassPhase3

Definition at line 1337 of file FspmUpd.h.

8.5.2.11 UINT8 FSP_M_TEST_CONFIG::DmiVc1

Offset 0x0528 - Enable/Disable DmiVc1 Enable/Disable DmiVc1.

Enable = 1, Disable (Default) = 0 \$EN_DIS

Definition at line 1307 of file FspmUpd.h.

8.5.2.12 UINT8 FSP_M_TEST_CONFIG::DmiVcm

Offset 0x0529 - Enable/Disable DmiVcm Enable/Disable DmiVcm.

Enable (Default) = 1, Disable = 0 \$EN_DIS

Definition at line 1313 of file FspmUpd.h.

8.5.2.13 UINT8 FSP_M_TEST_CONFIG::Gen3SwEqAlwaysAttempt

Offset 0x0534 - PEG Gen3 SwEq Always Attempt Gen3 Software Equalization will be executed every boot.

Disabled(0x0)(Default): Reuse EQ settings saved/restored from NVRAM whenever possible, Enabled(0x1): Re-test and generate new EQ values every boot, not recommended 0:Disable, 1:Enable

Definition at line 1403 of file FspmUpd.h.

8.5.2.14 UINT8 FSP_M_TEST_CONFIG::Gen3SwEqEnableVocTest

Offset 0x0536 - Enable use of the Voltage Offset and Centering Test in the PCIe SwEq Enable use of the Voltage Offset and Centering Test in the PCIe Software Equalization Algorithm.

Disabled(0x0): Disable VOC Test, Enabled(0x1): Enable VOC Test, Auto(0x2)(Default): Use the current default 0:Disable, 1:Enable, 2:Auto

Definition at line 1421 of file FspmUpd.h.

8.5.2.15 UINT16 FSP_M_TEST_CONFIG::Gen3SwEqJitterDwellTime

Offset 0x0574 - Jitter Dwell Time for PCIe Gen3 Software Equalization Range: 0-65535, default is 1000.

Warning

Do not change from the default

Definition at line 1498 of file FspmUpd.h.

8.5.2.16 UINT16 FSP_M_TEST_CONFIG::Gen3SwEqJitterErrorTarget

Offset 0x0576 - Jitter Error Target for PCIe Gen3 Software Equalization Range: 0-65535, default is 1.

Warning

Do not change from the default

Definition at line 1503 of file FspmUpd.h.

8.5.2.17 UINT8 FSP_M_TEST_CONFIG::Gen3SwEqNumberOfPresets

Offset 0x0535 - Select number of TxEq presets to test in the PCIe/DMI SwEq Select number of TxEq presets to test in the PCIe/DMI SwEq.

P7,P3,P5(0x0): Test Presets 7, 3, and 5, P0-P9(0x1): Test Presets 0-9, Auto(0x2)(Default): Use the current default method (Default)Auto will test Presets 7, 3, and 5. It is possible for this default to change over time;using Auto will ensure Reference Code always uses the latest default settings 0:P7 P3 P5, 1:P0 to P9, 2:Auto

Definition at line 1413 of file FspmUpd.h.

8.5.2.18 UINT16 FSP_M_TEST_CONFIG::Gen3SwEqVocDwellTime

Offset 0x0578 - VOC Dwell Time for PCIe Gen3 Software Equalization Range: 0-65535, default is 10000.

Warning

Do not change from the default

Definition at line 1508 of file FspmUpd.h.

8.5.2.19 UINT16 FSP_M_TEST_CONFIG::Gen3SwEqVocErrorTarget

Offset 0x057A - VOC Error Target for PCIe Gen3 Software Equalization Range: 0-65535, default is 2.

Warning

Do not change from the default

Definition at line 1513 of file FspmUpd.h.

8.5.2.20 UINT8 FSP_M_TEST_CONFIG::HeciCommunication2

Offset 0x05B1 - HECI2 Interface Communication Test, 0: disable, 1: enable, Adds or Removes HECI2 Device from PCI space.

\$EN_DIS

Definition at line 1642 of file FspmUpd.h.

8.5.2.21 UINT8 FSP_M_TEST_CONFIG::IdlerDeviceEnable

Offset 0x05B3 - Enable IDer Test, 0: disable, 1: enable, Enable or Disable IDer.

\$EN_DIS

Definition at line 1654 of file FspmUpd.h.

8.5.2.22 UINT8 FSP_M_TEST_CONFIG::KtDeviceEnable

Offset 0x05B2 - Enable KT device Test, 0: disable, 1: enable, Enable or Disable KT device.

\$EN_DIS

Definition at line 1648 of file FspmUpd.h.

8.5.2.23 UINT8 FSP_M_TEST_CONFIG::LockPTMregs

Offset 0x0527 - Lock PCU Thermal Management registers Lock PCU Thermal Management registers.

Enable(Default)=1, Disable=0 \$EN_DIS

Definition at line 1301 of file FspmUpd.h.

8.5.2.24 UINT8 FSP_M_TEST_CONFIG::PanelPowerEnable

Offset 0x0543 - Panel Power Enable Control for enabling/disabling VDD force bit (Required only for early enabling of eDP panel).

0=Disable, 1(Default)=Enable \$EN_DIS

Definition at line 1478 of file FspmUpd.h.

8.5.2.25 UINT8 FSP_M_TEST_CONFIG::PchDciEn

Offset 0x05A4 - PCH Dci Enable Enable/disable PCH Dci.

\$EN_DIS

Definition at line 1560 of file FspmUpd.h.

8.5.2.26 UINT8 FSP_M_TEST_CONFIG::Peg0Gen3EqPh2Enable

Offset 0x052D - Phase2 EQ enable on the PEG 0:1:0.

Phase2 EQ enable on the PEG 0:1:0. Disabled(0x0): Disable phase 2, Enabled(0x1): Enable phase 2, Auto(0x2)(Default): Use the current default method 0:Disable, 1:Enable, 2:Auto

Definition at line 1344 of file FspmUpd.h.

8.5.2.27 UINT8 FSP_M_TEST_CONFIG::Peg0Gen3EqPh3Method

Offset 0x0530 - Phase3 EQ method on the PEG 0:1:0.

PEG Gen3 Equalization Phase3. Auto(0x0)(Default): Use the current default method, HwEq(0x1): Use Adaptive Hardware Equalization, SwEq(0x2): Use Adaptive Software Equalization (Implemented in BIOS Reference Code), Static(0x3): Use the Static EQs provided in DmiGen3EndPointPreset array for Phase1 AND Phase3 (Instead of just Phase1), Disabled(0x4): Bypass Equalization Phase 3 0:Auto, 1:HwEq, 2:SwEq, 3:StaticEq, 4:BypassPhase3

Definition at line 1368 of file FspmUpd.h.

8.5.2.28 UINT8 FSP_M_TEST_CONFIG::Peg1Gen3EqPh2Enable

Offset 0x052E - Phase2 EQ enable on the PEG 0:1:1.

Phase2 EQ enable on the PEG 0:1:0. Disabled(0x0): Disable phase 2, Enabled(0x1): Enable phase 2, Auto(0x2)(Default): Use the current default method 0:Disable, 1:Enable, 2:Auto

Definition at line 1351 of file FspmUpd.h.

8.5.2.29 UINT8 FSP_M_TEST_CONFIG::Peg1Gen3EqPh3Method

Offset 0x0531 - Phase3 EQ method on the PEG 0:1:1.

PEG Gen3 Equalization Phase3. Auto(0x0)(Default): Use the current default method, HwEq(0x1): Use Adaptive Hardware Equalization, SwEq(0x2): Use Adaptive Software Equalization (Implemented in BIOS Reference Code),

Static(0x3): Use the Static EQs provided in DmiGen3EndPointPreset array for Phase1 AND Phase3 (Instead of just Phase1), Disabled(0x4): Bypass Equalization Phase 3 0:Auto, 1:HwEq, 2:SwEq, 3:StaticEq, 4:BypassPhase3

Definition at line 1378 of file FspmUpd.h.

8.5.2.30 UINT8 FSP_M_TEST_CONFIG::Peg2Gen3EqPh2Enable

Offset 0x052F - Phase2 EQ enable on the PEG 0:1:2.

Phase2 EQ enable on the PEG 0:1:0. Disabled(0x0): Disable phase 2, Enabled(0x1): Enable phase 2, Auto(0x2)(Default): Use the current default method 0:Disable, 1:Enable, 2:Auto

Definition at line 1358 of file FspmUpd.h.

8.5.2.31 UINT8 FSP_M_TEST_CONFIG::Peg2Gen3EqPh3Method

Offset 0x0532 - Phase3 EQ method on the PEG 0:1:2.

PEG Gen3 Equalization Phase3. Auto(0x0)(Default): Use the current default method, HwEq(0x1): Use Adaptive Hardware Equalization, SwEq(0x2): Use Adaptive Software Equalization (Implemented in BIOS Reference Code), Static(0x3): Use the Static EQs provided in DmiGen3EndPointPreset array for Phase1 AND Phase3 (Instead of just Phase1), Disabled(0x4): Bypass Equalization Phase 3 0:Auto, 1:HwEq, 2:SwEq, 3:StaticEq, 4:BypassPhase3

Definition at line 1388 of file FspmUpd.h.

8.5.2.32 UINT8 FSP_M_TEST_CONFIG::PegGen3EndPointHint[16]

Offset 0x0564 - PEG Gen3 End port Hint values per lane Used for programming PEG Gen3 Hint values per lane.

Range: 0-6, 2 is default for each lane

Definition at line 1493 of file FspmUpd.h.

8.5.2.33 UINT8 FSP_M_TEST_CONFIG::PegGen3EndPointPreset[16]

Offset 0x0554 - PEG Gen3 End port preset values per lane Used for programming PEG Gen3 preset values per lane.

Range: 0-9, 7 is default for each lane

Definition at line 1488 of file FspmUpd.h.

8.5.2.34 UINT8 FSP_M_TEST_CONFIG::PegGen3ProgramStaticEq

Offset 0x0533 - Enable/Disable PEG GEN3 Static EQ Phase1 programming Program PEG Gen3 EQ Phase1 Static Presets.

Disabled(0x0): Disable EQ Phase1 Static Presets Programming, Enabled(0x1)(Default): Enable EQ Phase1 Static Presets Programming \$EN_DIS

Definition at line 1395 of file FspmUpd.h.

8.5.2.35 UINT8 FSP_M_TEST_CONFIG::PegGen3RootPortPreset[16]

Offset 0x0544 - PEG Gen3 Root port preset values per lane Used for programming PEG Gen3 preset values per lane.

Range: 0-9, 8 is default for each lane

Definition at line 1483 of file FspmUpd.h.

8.5.2.36 UINT8 FSP_M_TEST_CONFIG::PegGenerateBdatMarginTable

Offset 0x0539 - Generate PCIe BDAT Margin Table Set this policy to enable the generation and addition of PCIe margin data to the BDAT table.

Disabled(0x0)(Default): Normal Operation - Disable PCIe BDAT margin data generation, Enable(0x1): Generate PCIe BDAT margin data \$EN_DIS

Definition at line 1442 of file FspmUpd.h.

8.5.2.37 UINT8 FSP_M_TEST_CONFIG::PegRxCemLoopbackLane

Offset 0x0538 - PCIe Rx Compliance Loopback Lane When PegRxCemTestingMode is Enabled the specified Lane (0 - 15) will be used for RxCEMLoopback.

Default is Lane 0

Definition at line 1434 of file FspmUpd.h.

8.5.2.38 UINT8 FSP_M_TEST_CONFIG::PegRxCemNonProtocolAwareness

Offset 0x0540 - PCIe Non-Protocol Awareness for Rx Compliance Testing Set this policy to enable the generation and addition of PCIe margin data to the BDAT table.

Disabled(0x0)(Default): Normal Operation - Disable non-protocol awareness, Enable(0x1): Non-Protocol Awareness Enabled - Enable non-protocol awareness for compliance testing \$EN_DIS

Definition at line 1455 of file FspmUpd.h.

8.5.2.39 UINT8 FSP_M_TEST_CONFIG::ScanExtGfxForLegacyOpRom

Offset 0x0526 - Detect External Graphics device for LegacyOpROM Detect and report if external graphics device only support LegacyOpROM or not (to support CSM auto-enable).

Enable(Default)=1, Disable=0 \$EN_DIS

Definition at line 1295 of file FspmUpd.h.

8.5.2.40 UINT8 FSP_M_TEST_CONFIG::SkipMbpHob

Offset 0x05B0 - Skip MBP HOB Test, 0: disable, 1: enable, Enable/Disable MOB HOB.

\$EN_DIS

Definition at line 1636 of file FspmUpd.h.

8.5.2.41 UINT8 FSP_M_TEST_CONFIG::SmbusDynamicPowerGating

Offset 0x05A6 - Smbus dynamic power gating Disable or Enable Smbus dynamic power gating.

\$EN_DIS

Definition at line 1572 of file FspmUpd.h.

8.5.2.42 UINT8 FSP_M_TEST_CONFIG::SmbusSpdWriteDisable

Offset 0x05A8 - SMBUS SPD Write Disable Set/Clear Smbus SPD Write Disable.

0: leave SPD Write Disable bit; 1: set SPD Write Disable bit. For security recommendations, SPD write disable bit must be set. \$EN_DIS

Definition at line 1585 of file FspmUpd.h.

8.5.2.43 UINT32 FSP_M_TEST_CONFIG::TgaSize

Offset 0x058C - TgaSize Enable/Disable.

0: Disable, define default value of TgaSize , 1: enable

Definition at line 1534 of file FspmUpd.h.

8.5.2.44 UINT16 FSP_M_TEST_CONFIG::TotalFlashSize

Offset 0x05A0 - TotalFlashSize Enable/Disable.

0: Disable, define default value of TotalFlashSize , 1: enable

Definition at line 1549 of file FspmUpd.h.

8.5.2.45 UINT64 FSP_M_TEST_CONFIG::TxtLcpPdBase

Offset 0x0590 - TxtLcpPdBase Enable/Disable.

0: Disable, define default value of TxtLcpPdBase , 1: enable

Definition at line 1539 of file FspmUpd.h.

8.5.2.46 UINT64 FSP_M_TEST_CONFIG::TxtLcpPdSize

Offset 0x0598 - TxtLcpPdSize Enable/Disable.

0: Disable, define default value of TxtLcpPdSize , 1: enable

Definition at line 1544 of file FspmUpd.h.

8.5.2.47 UINT8 FSP_M_TEST_CONFIG::WdtDisableAndLock

Offset 0x05A7 - Disable and Lock Watch Dog Register Set 1 to clear WDT status, then disable and lock WDT registers.

\$EN_DIS

Definition at line 1578 of file FspmUpd.h.

The documentation for this struct was generated from the following file:

- [FspmUpd.h](#)

8.6 FSP_S_CONFIG Struct Reference

Fsp S Configuration.

```
#include <FspsUpd.h>
```

Public Attributes

- UINT32 [LogoPtr](#)
Offset 0x0020 - Logo Pointer Points to PEI Display Logo Image.
- UINT32 [LogoSize](#)

- Offset 0x0024 - Logo Size Size of PEI Display Logo Image.*

 - UINT32 [GraphicsConfigPtr](#)
 - Offset 0x0028 - Graphics Configuration Ptr Points to VBT.*

 - UINT8 [Device4Enable](#)
 - Offset 0x002C - Enable Device 4 Enable/disable Device 4 \$EN_DIS.*

 - UINT8 [PchHdaEnable](#)
 - Offset 0x002D - Enable Intel HD Audio (Azalia) Enable/disable Azalia controller.*

 - UINT8 [PchHdaDspEnable](#)
 - Offset 0x002E - Enable HD Audio DSP Enable/disable HD Audio DSP feature.*

 - UINT8 [PchHdaloBufferOwnership](#)
 - Offset 0x002F - Select HDAudio IoBuffer Ownership Indicates the ownership of the I/O buffer between Intel HD Audio link vs I2S0 / I2S port.*

 - UINT8 [PchCio2Enable](#)
 - Offset 0x0030 - Enable CIO2 Controller Enable/disable SKYCAM CIO2 Controller.*

 - UINT8 [ScsEmmcEnabled](#)
 - Offset 0x0031 - Enable eMMC Controller Enable/disable eMMC Controller.*

 - UINT8 [ScsEmmcHs400Enabled](#)
 - Offset 0x0032 - Enable eMMC HS400 Mode Enable eMMC HS400 Mode.*

 - UINT8 [ScsSdCardEnabled](#)
 - Offset 0x0033 - Enable SdCard Controller Enable/disable SD Card Controller.*

 - UINT8 [PchIshEnable](#)
 - Offset 0x0034 - Enable PCH ISH Controller Enable/disable ISH Controller.*

 - UINT8 [ShowSpiController](#)
 - Offset 0x0035 - Show SPI controller Enable/disable to show SPI controller.*

 - UINT8 [UnusedUpdSpace0](#) [2]
 - Offset 0x0036.*

 - UINT32 [MicrocodeRegionBase](#)
 - Offset 0x0038 - MicrocodeRegionBase Memory Base of Microcode Updates.*

 - UINT32 [MicrocodeRegionSize](#)
 - Offset 0x003C - MicrocodeRegionSize Size of Microcode Updates.*

 - UINT8 [TurboMode](#)
 - Offset 0x0040 - Turbo Mode Enable/Disable Turbo mode.*

 - UINT8 [SataSalpSupport](#)
 - Offset 0x0041 - Enable SATA SALP Support Enable/disable SATA Aggressive Link Power Management.*

 - UINT8 [SataPortsEnable](#) [8]
 - Offset 0x0042 - Enable SATA ports Enable/disable SATA ports.*

 - UINT8 [SataPortsDevSlp](#) [8]
 - Offset 0x004A - Enable SATA DEVSLP Feature Enable/disable SATA DEVSLP per port.*

 - UINT8 [PortUsb20Enable](#) [16]
 - Offset 0x0052 - Enable USB2 ports Enable/disable per USB2 ports.*

 - UINT8 [PortUsb30Enable](#) [10]
 - Offset 0x0062 - Enable USB3 ports Enable/disable per USB3 ports.*

 - UINT8 [XdcIEnable](#)
 - Offset 0x006C - Enable xDCI controller Enable/disable to xDCI controller.*

 - UINT8 [SsicPortEnable](#)
 - Offset 0x006D - Enable XHCI SSIC Enable Enable/disable XHCI SSIC port.*

 - UINT8 [UnusedUpdSpace1](#)
 - Offset 0x006E.*

 - UINT8 [NumOfDevIntConfig](#)
 - Offset 0x006F - Number of DevIntConfig Entry Number of Device Interrupt Configuration Entry.*

 - UINT32 [DevIntConfigPtr](#)
-

- Offset 0x0070 - Address of PCH_DEVICE_INTERRUPT_CONFIG table.
 - UINT8 [SerialIoDevMode](#) [11]
 - Offset 0x0074 - Enable SerialIo Device Mode 0:Disabled, 1:ACPI Mode, 2:PCI Mode, 3:Hidden mode, 4:Legacy UA↔RT mode - Enable/disable SerialIo I2C0,I2C1,I2C2,I2C3,I2C4,I2C5,SPI0,SPI1,UART0,UART1,UART2 device mode respectively.
 - UINT8 [PxRcConfig](#) [8]
 - Offset 0x007F - PIRQx to IRQx Map Config PIRQx to IRQx mapping.
 - UINT8 [GpioIrqRoute](#)
 - Offset 0x0087 - Select GPIO IRQ Route GPIO IRQ Select.
 - UINT8 [ScIrqSelect](#)
 - Offset 0x0088 - Select ScIrqSelect SCI IRQ Select.
 - UINT8 [TcolrqSelect](#)
 - Offset 0x0089 - Select TcolrqSelect TCO IRQ Select.
 - UINT8 [TcolrqEnable](#)
 - Offset 0x008A - Enable/Disable Tco IRQ Enable/disable TCO IRQ \$EN_DIS.
 - UINT8 [PchHdaVerbTableEntryNum](#)
 - Offset 0x008B - PCH HDA Verb Table Entry Number Number of Entries in Verb Table.
 - UINT32 [PchHdaVerbTablePtr](#)
 - Offset 0x008C - PCH HDA Verb Table Pointer Pointer to Array of pointers to Verb Table.
 - UINT8 [UnusedUpdSpace2](#)
 - Offset 0x0090.
 - UINT8 [SataEnable](#)
 - Offset 0x0091 - Enable SATA Enable/disable SATA controller.
 - UINT8 [SataMode](#)
 - Offset 0x0092 - SATA Mode Select SATA controller working mode.
 - UINT8 [Usb2AfePetxiset](#) [16]
 - Offset 0x0093 - USB Per Port HS Preemphasis Bias USB Per Port HS Preemphasis Bias.
 - UINT8 [Usb2AfeTxiset](#) [16]
 - Offset 0x00A3 - USB Per Port HS Transmitter Bias USB Per Port HS Transmitter Bias.
 - UINT8 [Usb2AfePredeemp](#) [16]
 - Offset 0x00B3 - USB Per Port HS Transmitter Emphasis USB Per Port HS Transmitter Emphasis.
 - UINT8 [Usb2AfePehalfbit](#) [16]
 - Offset 0x00C3 - USB Per Port Half Bit Pre-emphasis USB Per Port Half Bit Pre-emphasis.
 - UINT8 [Usb3HsioTxDeEmphEnable](#) [10]
 - Offset 0x00D3 - Enable the write to USB 3.0 TX Output -3.5dB De-Emphasis Adjustment Enable the write to USB 3.0 TX Output -3.5dB De-Emphasis Adjustment.
 - UINT8 [Usb3HsioTxDeEmph](#) [10]
 - Offset 0x00DD - USB 3.0 TX Output -3.5dB De-Emphasis Adjustment Setting USB 3.0 TX Output -3.5dB De↔Emphasis Adjustment Setting, HSIO_TX_DWORD5[21:16], **Default = 29h** (approximately -3.5dB De-Emphasis).
 - UINT8 [Usb3HsioTxDownscaleAmpEnable](#) [10]
 - Offset 0x00E7 - Enable the write to USB 3.0 TX Output Downscale Amplitude Adjustment Enable the write to USB 3.0 TX Output Downscale Amplitude Adjustment, Each value in array can be between 0-1.
 - UINT8 [Usb3HsioTxDownscaleAmp](#) [10]
 - Offset 0x00F1 - USB 3.0 TX Output Downscale Amplitude Adjustment USB 3.0 TX Output Downscale Amplitude Adjustment, HSIO_TX_DWORD8[21:16], **Default = 00h**.
 - UINT8 [PchLanEnable](#)
 - Offset 0x00FB - Enable LAN Enable/disable LAN controller.
 - UINT8 [DelayUsbPdoProgramming](#)
 - Offset 0x00FC - Delay USB PDO Programming Enable/disable delay of PDO programming for USB from PEI phase to DXE phase.
 - UINT8 [UnusedUpdSpace3](#) [23]
 - Offset 0x00FD.
-

- UINT8 [PcieRpClkReqSupport](#) [24]
Offset 0x0114 - Enable PCIE RP CLKREQ Support Enable/disable PCIE Root Port CLKREQ support.
 - UINT8 [PcieRpClkReqNumber](#) [24]
Offset 0x012C - Configure CLKREQ Number Configure Root Port CLKREQ Number if CLKREQ is supported.
 - UINT8 [UnusedUpdSpace4](#) [5]
Offset 0x0144.
 - UINT8 [Heci3Enabled](#)
Offset 0x0149 - HECI3 state The HECI3 state from Mbp for reference in S3 path or when MbpHob is not installed.
 - UINT8 [UnusedUpdSpace5](#) [9]
Offset 0x014A.
 - UINT8 [AmtEnabled](#)
Offset 0x0153 - AMT Switch Enable/Disable.
 - UINT8 [WatchDog](#)
Offset 0x0154 - WatchDog Timer Switch Enable/Disable.
 - UINT8 [AsfEnabled](#)
Offset 0x0155 - ASF Switch Enable/Disable.
 - UINT8 [ManageabilityMode](#)
Offset 0x0156 - Manageability Mode set by Mebx Enable/Disable.
 - UINT8 [FwProgress](#)
Offset 0x0157 - PET Progress Enable/Disable.
 - UINT16 [WatchDogTimerOs](#)
Offset 0x0158 - OS Timer 16 bits Value, Set OS watchdog timer.
 - UINT16 [WatchDogTimerBios](#)
Offset 0x015A - BIOS Timer 16 bits Value, Set BIOS watchdog timer.
 - UINT8 [AmtSolEnabled](#)
Offset 0x015C - SOL Switch Enable/Disable.
 - UINT8 [UnusedUpdSpace6](#) [163]
Offset 0x015D.
 - UINT16 [DefaultSvid](#)
Offset 0x0200 - Subsystem Vendor ID for SA devices Subsystem ID that will be programmed to SA devices: Default SubSystemVendorId=0x8086.
 - UINT16 [DefaultSid](#)
Offset 0x0202 - Subsystem Device ID for SA devices Subsystem ID that will be programmed to SA devices: Default SubSystemId=0x2015.
 - UINT8 [CridEnable](#)
Offset 0x0204 - Enable/Disable SA CRID Enable: SA CRID, Disable (Default): SA CRID \$EN_DIS.
 - UINT8 [DmiAspm](#)
Offset 0x0205 - DMI ASPM 0=Disable, 2(Default)=L1 0:Disable, 2:L1.
 - UINT16 [PegPhysicalSlotNumber](#) [3]
Offset 0x0206 - PCIe Physical Slot Number per root port Physical Slot Number per root port.
 - UINT8 [PegDeEmphasis](#) [3]
Offset 0x020C - PCIe DeEmphasis control per root port 0: -6dB, 1(Default): -3.5dB 0:Disable, 2:L1.
 - UINT8 [PegSlotPowerLimitValue](#) [3]
Offset 0x020F - PCIe Slot Power Limit value per root port Slot power limit value per root port.
 - UINT8 [PegSlotPowerLimitScale](#) [3]
Offset 0x0212 - PCIe Slot Power Limit scale per root port Slot power limit scale per root port 0:1.0x, 1:0.1x, 2:0.01x, 3:0x001x.
 - UINT8 [PavpEnable](#)
Offset 0x0215 - Enable/Disable PavpEnable Enable(Default): Enable PavpEnable, Disable: Disable PavpEnable \$↔EN_DIS.
 - UINT8 [CdClock](#)
-

Offset 0x0216 - CdClock Frequency selection 0=308.57 Mhz, 1=337.5 Mhz, 2=432 Mhz, 3=450 Mhz, 4=540 Mhz, 5=617.14 Mhz, 6(Default)= 675 Mhz 0: 308.57 Mhz, 1: 337.5 Mhz, 2: 432 Mhz, 3: 450 Mhz, 4: 540 Mhz, 5: 617.14 Mhz, 6: 675 Mhz.

- [UINT8 PeiGraphicsPeimInit](#)

Offset 0x0217 - Enable/Disable PeiGraphicsPeimInit Enable: Enable PeiGraphicsPeimInit, Disable(Default): Disable PeiGraphicsPeimInit \$EN_DIS.

- [UINT8 SalmguEnable](#)

Offset 0x0218 - Enable/Disable SA IMGU(SKYCAME) Enable(Default): Enable SA IMGU(SKYCAME), Disable: Disable SA IMGU(SKYCAME) \$EN_DIS.

- [UINT8 GmmEnable](#)

Offset 0x0219 - Enable or disable GMM device 0=Disable, 1(Default)=Enable \$EN_DIS.

- [UINT8 X2ApicOptOut](#)

Offset 0x021A - State of X2APIC_OPT_OUT bit in the DMAR table 0=Disable/Clear, 1(Default)=Enable/Set \$EN_DIS.

- [UINT8 UnusedUpdSpace7](#) [1]

Offset 0x021B.

- [UINT32 VtdBaseAddress](#) [2]

Offset 0x021C - Base addresses for VT-d function MMIO access Base addresses for VT-d MMIO access per VT-d engine.

- [UINT8 UnusedUpdSpace8](#) [19]

Offset 0x0224.

- [UINT8 SaPostMemProductionRsvd](#) [16]

Offset 0x0237 - SaPostMemProductionRsvd Reserved for SA Post-Mem Production \$EN_DIS.

- [UINT8 UnusedUpdSpace9](#) [7]

Offset 0x0247.

- [UINT8 Psi3Enable](#) [5]

Offset 0x024E - Power State 3 enable/disable PCODE MMIO Mailbox: Power State 3 enable/disable; 0: Disable; **1: Enable**.

- [UINT8 Psi4Enable](#) [5]

Offset 0x0253 - Power State 4 enable/disable PCODE MMIO Mailbox: Power State 4 enable/disable; 0: Disable; **1: Enable**.For all VR Indexes.

- [UINT8 ImonSlope](#) [5]

Offset 0x0258 - Imon slope correction PCODE MMIO Mailbox: Imon slope correction.

- [UINT8 ImonOffset](#) [5]

Offset 0x025D - Imon offset correction PCODE MMIO Mailbox: Imon offset correction.

- [UINT8 VrConfigEnable](#) [5]

Offset 0x0262 - Enable/Disable BIOS configuration of VR Enable/Disable BIOS configuration of VR; **0: Disable**; 1: Enable.For all VR Indexes.

- [UINT8 TdcEnable](#) [5]

Offset 0x0267 - Thermal Design Current enable/disable PCODE MMIO Mailbox: Thermal Design Current enable/disable; **0: Disable**; 1: Enable.For all VR Indexes.

- [UINT8 TdcTimeWindow](#) [5]

Offset 0x026C - HECI3 state PCODE MMIO Mailbox: Thermal Design Current time window.

- [UINT8 TdcLock](#) [5]

Offset 0x0271 - Thermal Design Current Lock PCODE MMIO Mailbox: Thermal Design Current Lock; **0: Disable**; 1: Enable.For all VR Indexes.

- [UINT8 PsysSlope](#)

Offset 0x0276 - Platform Psys slope correction PCODE MMIO Mailbox: Platform Psys slope correction.

- [UINT8 PsysOffset](#)

Offset 0x0277 - Platform Psys offset correction PCODE MMIO Mailbox: Platform Psys offset correction.

- [UINT8 AcousticNoiseMitigation](#)

Offset 0x0278 - Acoustic Noise Mitigation feature Enable or Disable Acoustic Noise Mitigation feature.

- [UINT8 FastPkgCRampDisableIa](#)

- Offset 0x0279 - Disable Fast Slew Rate for Deep Package C States for VR IA domain Disable Fast Slew Rate for Deep Package C States based on Acoustic Noise Mitigation feature enabled.
- UINT8 [SlowSlewRateForIa](#)
Offset 0x027A - Slew Rate configuration for Deep Package C States for VR IA domain Slew Rate configuration for Deep Package C States for VR IA domain based on Acoustic Noise Mitigation feature enabled.
 - UINT8 [SlowSlewRateForGt](#)
Offset 0x027B - Slew Rate configuration for Deep Package C States for VR GT domain Slew Rate configuration for Deep Package C States for VR GT domain based on Acoustic Noise Mitigation feature enabled.
 - UINT8 [SlowSlewRateForSa](#)
Offset 0x027C - Slew Rate configuration for Deep Package C States for VR SA domain Slew Rate configuration for Deep Package C States for VR SA domain based on Acoustic Noise Mitigation feature enabled.
 - UINT8 [UnusedUpdSpace10](#) [9]
Offset 0x027D.
 - UINT16 [TdcPowerLimit](#) [5]
Offset 0x0286 - Thermal Design Current current limit PCODE MMIO Mailbox: Thermal Design Current current limit.
 - UINT8 [UnusedUpdSpace11](#) [8]
Offset 0x0290.
 - UINT16 [AcLoadline](#) [5]
Offset 0x0298 - AcLoadline PCODE MMIO Mailbox: AcLoadline in 1/100 mOhms (ie.
 - UINT16 [DcLoadline](#) [5]
Offset 0x02A2 - DcLoadline PCODE MMIO Mailbox: DcLoadline in 1/100 mOhms (ie.
 - UINT16 [Psi1Threshold](#) [5]
Offset 0x02AC - Power State 1 Threshold current PCODE MMIO Mailbox: Power State 1 current cutoff in 1/4 Amp increments.
 - UINT16 [Psi2Threshold](#) [5]
Offset 0x02B6 - Power State 2 Threshold current PCODE MMIO Mailbox: Power State 2 current cutoff in 1/4 Amp increments.
 - UINT16 [Psi3Threshold](#) [5]
Offset 0x02C0 - Power State 3 Threshold current PCODE MMIO Mailbox: Power State 3 current cutoff in 1/4 Amp increments.
 - UINT16 [IccMax](#) [5]
Offset 0x02CA - Icc Max limit PCODE MMIO Mailbox: VR Icc Max limit.
 - UINT16 [VrVoltageLimit](#) [5]
Offset 0x02D4 - VR Voltage Limit PCODE MMIO Mailbox: VR Voltage Limit.
 - UINT8 [UnusedUpdSpace12](#)
Offset 0x02DE.
 - UINT8 [FastPkgCRampDisableGt](#)
Offset 0x02DF - Disable Fast Slew Rate for Deep Package C States for VR GT domain Disable Fast Slew Rate for Deep Package C States based on Acoustic Noise Mitigation feature enabled.
 - UINT8 [FastPkgCRampDisableSa](#)
Offset 0x02E0 - Disable Fast Slew Rate for Deep Package C States for VR SA domain Disable Fast Slew Rate for Deep Package C States based on Acoustic Noise Mitigation feature enabled.
 - UINT8 [UnusedUpdSpace13](#)
Offset 0x02E1.
 - UINT8 [SendVrMbxCmd](#)
Offset 0x02E2 - Enable VR specific mailbox command VR specific mailbox commands.
 - UINT8 [SendVrMbxCmd1](#)
Offset 0x02E3 - Select VR specific mailbox command to send VR specific mailbox commands.
 - UINT32 [CpuS3ResumeMtrrData](#)
Offset 0x02E4 - CpuS3ResumeMtrrData Pointer to CPU S3 Resume MTRR Data.
 - CPU_CONFIG_FSP_DATA [CpuConfig](#)
Offset 0x02E8 - Cpu Configuration Cpu Configuration data.
 - UINT64 [MicrocodePatchAddress](#)
-

- Offset 0x02F0 - MicrocodePatchAddress Pointer to microcode patch that is suitable for this processor.*

 - UINT16 [CpuS3ResumeMtrrDataSize](#)

Offset 0x02F8 - CpuS3ResumeMtrrDataSize Size of S3 resume MTRR data.
- UINT8 [UnusedUpdSpace14](#)

Offset 0x02FA.
- UINT8 [PchSkyCamPortATermOvrEnable](#)

Offset 0x02FB - Enable SkyCam PortA Termination override Enable/disable PortA Termination override.
- UINT8 [PchSkyCamPortBTermOvrEnable](#)

Offset 0x02FC - Enable SkyCam PortB Termination override Enable/disable PortB Termination override.
- UINT8 [PchSkyCamPortCTermOvrEnable](#)

Offset 0x02FD - Enable SkyCam PortC Termination override Enable/disable PortC Termination override.
- UINT8 [PchSkyCamPortDTermOvrEnable](#)

Offset 0x02FE - Enable SkyCam PortD Termination override Enable/disable PortD Termination override.
- UINT8 [PchSkyCamPortATrimEnable](#)

Offset 0x02FF - Enable SkyCam PortA Clk Trim Enable/disable PortA Clk Trim.
- UINT8 [PchSkyCamPortBTrimEnable](#)

Offset 0x0300 - Enable SkyCam PortB Clk Trim Enable/disable PortB Clk Trim.
- UINT8 [PchSkyCamPortCTrimEnable](#)

Offset 0x0301 - Enable SkyCam PortC Clk Trim Enable/disable PortC Clk Trim.
- UINT8 [PchSkyCamPortDTrimEnable](#)

Offset 0x0302 - Enable SkyCam PortD Clk Trim Enable/disable PortD Clk Trim.
- UINT8 [PchSkyCamPortACtleEnable](#)

Offset 0x0303 - Enable SkyCam PortA Ctle Enable/disable PortA Ctle.
- UINT8 [PchSkyCamPortBCtleEnable](#)

Offset 0x0304 - Enable SkyCam PortB Ctle Enable/disable PortB Ctle.
- UINT8 [PchSkyCamPortCDCtleEnable](#)

Offset 0x0305 - Enable SkyCam PortCD Ctle Enable/disable PortCD Ctle.
- UINT8 [PchSkyCamPortACtleCapValue](#)

Offset 0x0306 - Enable SkyCam PortA Ctle Cap Value Enable/disable PortA Ctle Cap Value.
- UINT8 [PchSkyCamPortBCtleCapValue](#)

Offset 0x0307 - Enable SkyCam PortB Ctle Cap Value Enable/disable PortB Ctle Cap Value.
- UINT8 [PchSkyCamPortCDCtleCapValue](#)

Offset 0x0308 - Enable SkyCam PortCD Ctle Cap Value Enable/disable PortCD Ctle Cap Value.
- UINT8 [PchSkyCamPortACtleResValue](#)

Offset 0x0309 - Enable SkyCam PortA Ctle Res Value Enable/disable PortA Ctle Res Value.
- UINT8 [PchSkyCamPortBCtleResValue](#)

Offset 0x030A - Enable SkyCam PortB Ctle Res Value Enable/disable PortB Ctle Res Value.
- UINT8 [PchSkyCamPortCDCtleResValue](#)

Offset 0x030B - Enable SkyCam PortCD Ctle Res Value Enable/disable PortCD Ctle Res Value.
- UINT8 [PchSkyCamPortAClkTrimValue](#)

Offset 0x030C - Enable SkyCam PortA Clk Trim Value Enable/disable PortA Clk Trim Value.
- UINT8 [PchSkyCamPortBClkTrimValue](#)

Offset 0x030D - Enable SkyCam PortB Clk Trim Value Enable/disable PortB Clk Trim Value.
- UINT8 [PchSkyCamPortCClkTrimValue](#)

Offset 0x030E - Enable SkyCam PortC Clk Trim Value Enable/disable PortC Clk Trim Value.
- UINT8 [PchSkyCamPortDClkTrimValue](#)

Offset 0x030F - Enable SkyCam PortD Clk Trim Value Enable/disable PortD Clk Trim Value.
- UINT16 [PchSkyCamPortADDataTrimValue](#)

Offset 0x0310 - Enable SkyCam Port A Data Trim Value Enable/disable Port A Data Trim Value.
- UINT16 [PchSkyCamPortBDDataTrimValue](#)

Offset 0x0312 - Enable SkyCam Port B Data Trim Value Enable/disable Port B Data Trim Value.

- UINT16 [PchSkyCamPortCDDDataTrimValue](#)
Offset 0x0314 - Enable SkyCam C/D Data Trim Value Enable/disable C/D Data Trim Value.
 - UINT8 [PchDmiAspm](#)
Offset 0x0316 - Enable DMI ASPM ASPM on PCH side of the DMI Link.
 - UINT8 [PchPwrOptEnable](#)
Offset 0x0317 - Enable Power Optimizer Enable DMI Power Optimizer on PCH side.
 - UINT8 [PchWriteProtectionEnable](#) [5]
Offset 0x0318 - PCH Flash Protection Ranges Write Enable Write or erase is blocked by hardware.
 - UINT8 [PchReadProtectionEnable](#) [5]
Offset 0x031D - PCH Flash Protection Ranges Read Enable Read is blocked by hardware.
 - UINT16 [PchProtectedRangeLimit](#) [5]
Offset 0x0322 - PCH Protect Range Limit Left shifted address by 12 bits with address bits 11:0 are assumed to be FFFh for limit comparison.
 - UINT16 [PchProtectedRangeBase](#) [5]
Offset 0x032C - PCH Protect Range Base Left shifted address by 12 bits with address bits 11:0 are assumed to be 0.
 - UINT8 [PchHdaPme](#)
Offset 0x0336 - Enable Pme Enable Azalia wake-on-ring.
 - UINT8 [PchHdaIoBufferVoltage](#)
Offset 0x0337 - IO Buffer Voltage I/O Buffer Voltage Mode Select: 0: 3.3V, 1: 1.8V.
 - UINT8 [PchHdaVcType](#)
Offset 0x0338 - VC Type Virtual Channel Type Select: 0: VC0, 1: VC1.
 - UINT8 [PchHdaLinkFrequency](#)
Offset 0x0339 - HD Audio Link Frequency HDA Link Freq (PCH_HDAUDIO_LINK_FREQUENCY enum): 0: 6MHz, , 1: 12MHz, 2: 24MHz.
 - UINT8 [PchHdaIdispLinkFrequency](#)
Offset 0x033A - iDisp-Link Frequency iDisp-Link Freq (PCH_HDAUDIO_LINK_FREQUENCY enum): 4: 96MHz, 3: 48MHz.
 - UINT8 [PchHdaIdispLinkTmode](#)
Offset 0x033B - iDisp-Link T-mode iDisp-Link T-Mode (PCH_HDAUDIO_IDISP_TMODE enum): 0: 2T, 1: 1T.
 - UINT8 [PchHdaDspUaaCompliance](#)
Offset 0x033C - Universal Audio Architecture compliance for DSP enabled system 0: Not-UAA Compliant (Intel SST driver supported only), 1: UAA Compliant (HDA Inbox driver or SST driver supported).
 - UINT8 [PchHdaIdispCodecDisconnect](#)
Offset 0x033D - iDisplay Audio Codec disconnection 0: Not disconnected, enumerable, 1: Disconnected SDI, not enumerable.
 - UINT8 [PchHdaDspEndpointDmic](#)
Offset 0x033E - DSP DMIC Select (PCH_HDAUDIO_DMIC_TYPE enum) 0: Disable; 1: 2ch array; 2: 4ch array; 3: 1ch array.
 - UINT8 [PchHdaDspEndpointBluetooth](#)
Offset 0x033F - DSP Bluetooth enablement 0: Disable; 1: Enable.
 - UINT32 [PchHdaDspFeatureMask](#)
Offset 0x0340 - Bitmask of supported DSP features [BIT0] - WoV; [BIT1] - BT Sideband; [BIT2] - Codec VAD; [BIT5] - BT Intel HFP; [BIT6].
 - UINT32 [PchHdaDspPpModuleMask](#)
Offset 0x0344 - Bitmask of supported DSP Pre/Post-Processing Modules Deprecated: Specific pre/post-processing module bit position must be coherent with the ACPI implementation: _SB.PCI0.HDAS._DSM Function 3: Query Pre/Post Processing Module Support.
 - UINT8 [PchHdaDspEndpointI2s](#)
Offset 0x0348 - DSP I2S enablement 0: Disable; 1: Enable.
 - UINT8 [PchIoApicBdfValid](#)
Offset 0x0349 - Enable PCH Io Apic Set to 1 if BDF value is valid.
 - UINT8 [PchIoApicBusNumber](#)
-

- Offset 0x034A - PCH Io Apic Bus Number Bus/Device/Function used as Requestor / Completer ID.*

 - UINT8 [PchIoApicDeviceNumber](#)
 - Offset 0x034B - PCH Io Apic Device Number Bus/Device/Function used as Requestor / Completer ID.*

 - UINT8 [PchIoApicFunctionNumber](#)
 - Offset 0x034C - PCH Io Apic Function Number Bus/Device/Function used as Requestor / Completer ID.*

 - UINT8 [PchIoApicEntry24_119](#)
 - Offset 0x034D - Enable PCH Io Apic Entry 24-119 0: Disable; 1: Enable.*

 - UINT8 [PchIoApicId](#)
 - Offset 0x034E - PCH Io Apic ID This member determines IOAPIC ID.*

 - UINT8 [PchIoApicRangeSelect](#)
 - Offset 0x034F - PCH Io Apic Range Select Define address bits 19:12 for the IOxAPIC range.*

 - UINT8 [PchIshSpiGpioAssign](#)
 - Offset 0x0350 - Enable PCH ISH SPI GPIO pins assigned 0: Disable; 1: Enable.*

 - UINT8 [PchIshUart0GpioAssign](#)
 - Offset 0x0351 - Enable PCH ISH UART0 GPIO pins assigned 0: Disable; 1: Enable.*

 - UINT8 [PchIshUart1GpioAssign](#)
 - Offset 0x0352 - Enable PCH ISH UART1 GPIO pins assigned 0: Disable; 1: Enable.*

 - UINT8 [PchIshI2c0GpioAssign](#)
 - Offset 0x0353 - Enable PCH ISH I2C0 GPIO pins assigned 0: Disable; 1: Enable.*

 - UINT8 [PchIshI2c1GpioAssign](#)
 - Offset 0x0354 - Enable PCH ISH I2C1 GPIO pins assigned 0: Disable; 1: Enable.*

 - UINT8 [PchIshI2c2GpioAssign](#)
 - Offset 0x0355 - Enable PCH ISH I2C2 GPIO pins assigned 0: Disable; 1: Enable.*

 - UINT8 [PchIshGp0GpioAssign](#)
 - Offset 0x0356 - Enable PCH ISH GP_0 GPIO pin assigned 0: Disable; 1: Enable.*

 - UINT8 [PchIshGp1GpioAssign](#)
 - Offset 0x0357 - Enable PCH ISH GP_1 GPIO pin assigned 0: Disable; 1: Enable.*

 - UINT8 [PchIshGp2GpioAssign](#)
 - Offset 0x0358 - Enable PCH ISH GP_2 GPIO pin assigned 0: Disable; 1: Enable.*

 - UINT8 [PchIshGp3GpioAssign](#)
 - Offset 0x0359 - Enable PCH ISH GP_3 GPIO pin assigned 0: Disable; 1: Enable.*

 - UINT8 [PchIshGp4GpioAssign](#)
 - Offset 0x035A - Enable PCH ISH GP_4 GPIO pin assigned 0: Disable; 1: Enable.*

 - UINT8 [PchIshGp5GpioAssign](#)
 - Offset 0x035B - Enable PCH ISH GP_5 GPIO pin assigned 0: Disable; 1: Enable.*

 - UINT8 [PchIshGp6GpioAssign](#)
 - Offset 0x035C - Enable PCH ISH GP_6 GPIO pin assigned 0: Disable; 1: Enable.*

 - UINT8 [PchIshGp7GpioAssign](#)
 - Offset 0x035D - Enable PCH ISH GP_7 GPIO pin assigned 0: Disable; 1: Enable.*

 - UINT8 [PchIshPdtUnlock](#)
 - Offset 0x035E - PCH ISH PDT Unlock Msg 0: False; 1: True.*

 - UINT8 [PchLanLtrEnable](#)
 - Offset 0x035F - Enable PCH Lan LTR capability of PCH internal LAN 0: Disable; 1: Enable.*

 - UINT8 [PchLanK1OffEnable](#)
 - Offset 0x0360 - Enable PCH Lan use CLKREQ for GbE power management 0: Disable; 1: Enable.*

 - UINT8 [PchLanClkReqSupported](#)
 - Offset 0x0361 - Indicate whether dedicated CLKREQ# is supported 0: Disable; 1: Enable.*

 - UINT8 [PchLanClkReqNumber](#)
 - Offset 0x0362 - CLKREQ# used by GbE Valid if ClkReqSupported is TRUE.*

 - UINT8 [PchLockDownBiosLock](#)
-

Offset 0x0363 - Enable LOCKDOWN BIOS LOCK Enable the BIOS Lock feature and set EISS bit (D31:F5:RegD↔Ch[5]) for the BIOS region protection.

- UIN8 PchLockDownSpiEiss

Offset 0x0364 - Enable LOCKDOWN SPI Eiss Enable InSMM.STS (EISS) in SPI.

- UIN8 PchCrid

Offset 0x0365 - PCH Compatibility Revision ID This member describes whether or not the CRID feature of PCH should be enabled.

- UIN16 PchSubSystemVendorId

Offset 0x0366 - PCH Sub system vendor ID Default Subsystem Vendor ID of the PCH devices.

- UIN16 PchSubSystemId

Offset 0x0368 - PCH Sub system ID Default Subsystem ID of the PCH devices.

- UIN8 PchLegacyIoLowLatency

Offset 0x036A - PCH Legacy IO Low Latency Enable todo \$EN_DIS.

- UIN8 UnusedUpdSpace15 [5]

Offset 0x036B.

- UIN8 PcieRpHotPlug [24]

Offset 0x0370 - Enable PCIE RP HotPlug Indicate whether the root port is hot plug available.

- UIN8 PcieRpPmSci [24]

Offset 0x0388 - Enable PCIE RP Pm Sci Indicate whether the root port power manager SCI is enabled.

- UIN8 PcieRpExtSync [24]

Offset 0x03A0 - Enable PCIE RP Ext Sync Indicate whether the extended synch is enabled.

- UIN8 PcieRpTransmitterHalfSwing [24]

Offset 0x03B8 - Enable PCIE RP Transmitter Half Swing Indicate whether the Transmitter Half Swing is enabled.

- UIN8 PcieRpClkReqDetect [24]

Offset 0x03D0 - Enable PCIE RP Clk Req Detect Probe CLKREQ# signal before enabling CLKREQ# based power management.

- UIN8 PcieRpAdvancedErrorReporting [24]

Offset 0x03E8 - PCIE RP Advanced Error Report Indicate whether the Advanced Error Reporting is enabled.

- UIN8 PcieRpUnsupportedRequestReport [24]

Offset 0x0400 - PCIE RP Unsupported Request Report Indicate whether the Unsupported Request Report is enabled.

- UIN8 PcieRpFatalErrorReport [24]

Offset 0x0418 - PCIE RP Fatal Error Report Indicate whether the Fatal Error Report is enabled.

- UIN8 PcieRpNoFatalErrorReport [24]

Offset 0x0430 - PCIE RP No Fatal Error Report Indicate whether the No Fatal Error Report is enabled.

- UIN8 PcieRpCorrectableErrorReport [24]

Offset 0x0448 - PCIE RP Correctable Error Report Indicate whether the Correctable Error Report is enabled.

- UIN8 PcieRpSystemErrorOnFatalError [24]

Offset 0x0460 - PCIE RP System Error On Fatal Error Indicate whether the System Error on Fatal Error is enabled.

- UIN8 PcieRpSystemErrorOnNonFatalError [24]

Offset 0x0478 - PCIE RP System Error On Non Fatal Error Indicate whether the System Error on Non Fatal Error is enabled.

- UIN8 PcieRpSystemErrorOnCorrectableError [24]

Offset 0x0490 - PCIE RP System Error On Correctable Error Indicate whether the System Error on Correctable Error is enabled.

- UIN8 PcieRpMaxPayload [24]

Offset 0x04A8 - PCIE RP Max Payload Max Payload Size supported, Default 128B, see enum PCH_PCIE_MAX_↔PAYLOAD.

- UIN8 PcieRpDeviceResetPadActiveHigh [24]

Offset 0x04C0 - PCIE RP Device Reset Pad Active High Indicated whether PERST# is active 0: Low; 1: High, See: DeviceResetPad.

- UIN8 PcieRpPcieSpeed [24]

Offset 0x04D8 - PCIE RP Pcie Speed Determines each PCIE Port speed capability.

- UINT8 [PcieRpGen3EqPh3Method](#) [24]
Offset 0x04F0 - PCIE RP Gen3 Equalization Phase Method PCIE Gen3 Eq Ph3 Method (see PCH_PCIE_EQ_METHOD).
THOD).
- UINT8 [PcieRpPhysicalSlotNumber](#) [24]
Offset 0x0508 - PCIE RP Physical Slot Number Indicates the slot number for the root port.
- UINT8 [PcieRpCompletionTimeout](#) [24]
Offset 0x0520 - PCIE RP Completion Timeout The root port completion timeout(see: PCH_PCIE_COMPLETION_TIMEOUT).
- UINT32 [PcieRpDeviceResetPad](#) [24]
Offset 0x0538 - PCIE RP Device Reset Pad The PCH pin assigned to device PERST# signal if available, zero otherwise.
- UINT8 [PcieRpAspm](#) [24]
Offset 0x0598 - PCIE RP Aspm The ASPM configuration of the root port (see: PCH_PCIE_ASPM_CONTROL).
- UINT8 [PcieRpL1Substates](#) [24]
Offset 0x05B0 - PCIE RP L1 Substates The L1 Substates configuration of the root port (see: PCH_PCIE_L1SUBSTATES_CONTROL).
- UINT8 [PcieRpLtrEnable](#) [24]
Offset 0x05C8 - PCIE RP Ltr Enable Latency Tolerance Reporting Mechanism.
- UINT8 [PcieRpLtrConfigLock](#) [24]
Offset 0x05E0 - PCIE RP Ltr Config Lock 0: Disable; 1: Enable.
- UINT8 [PcieEqPh3LaneParamCm](#) [24]
Offset 0x05F8 - PCIE Eq Ph3 Lane Param Cm PCH_PCIE_EQ_LANE_PARAM.
- UINT8 [PcieEqPh3LaneParamCp](#) [24]
Offset 0x0610 - PCIE Eq Ph3 Lane Param Cp PCH_PCIE_EQ_LANE_PARAM.
- UINT8 [PcieSwEqCoeffListCm](#) [5]
Offset 0x0628 - PCIE Sw Eq CoeffList Cm PCH_PCIE_EQ_PARAM.
- UINT8 [PcieSwEqCoeffListCp](#) [5]
Offset 0x062D - PCIE Sw Eq CoeffList Cp PCH_PCIE_EQ_PARAM.
- UINT8 [PcieDisableRootPortClockGating](#)
Offset 0x0632 - PCIE Disable RootPort Clock Gating Describes whether the PCI Express Clock Gating for each root port is enabled by platform modules.
- UINT8 [PcieEnablePeerMemoryWrite](#)
Offset 0x0633 - PCIE Enable Peer Memory Write This member describes whether Peer Memory Writes are enabled on the platform.
- UINT8 [PcieAllowNoLtrIccPllShutdown](#)
Offset 0x0634 - PCIE Allow No Ltr Icc PLL Shutdown Allows BIOS to control ICC PLL Shutdown by determining PCIE devices are LTR capable or leaving untouched.
- UINT8 [PcieComplianceTestMode](#)
Offset 0x0635 - PCIE Compliance Test Mode Compliance Test Mode shall be enabled when using Compliance Load Board.
- UINT16 [PcieDetectTimeoutMs](#)
Offset 0x0636 - PCIE Rp Detect Timeout Ms Will wait for link to exit Detect state for enabled ports before assuming there is no device and potentially disabling the port.
- UINT8 [PcieRpFunctionSwap](#)
Offset 0x0638 - PCIE Rp Function Swap Allows BIOS to use root port function number swapping when root port of function 0 is disabled.
- UINT8 [PchPmPmeB0S5Dis](#)
Offset 0x0639 - PCH Pm PME_B0_S5_DIS When cleared (default), wake events from PME_B0_STS are allowed in S5 if PME_B0_EN = 1.
- UINT8 [PchPmSlpS0VmEnable](#)
Offset 0x063A - PCH Pm Slp S0 Voltage Margining Enable Indicates platform has support for VCCPrim_Core Voltage Margining in SLP_S0# asserted state.
- UINT8 [UnusedUpdSpace16](#) [5]

- Offset 0x063B.
- UINT8 [PchPmWolEnableOverride](#)
Offset 0x0640 - PCH Pm Wol Enable Override Corresponds to the WOL Enable Override bit in the General PM Configuration B (GEN_PMCON_B) register.
 - UINT8 [PchPmPcieWakeFromDeepSx](#)
Offset 0x0641 - PCH Pm Pcie Wake From DeepSx Determine if enable PCIe to wake from deep Sx.
 - UINT8 [PchPmWoWlanEnable](#)
Offset 0x0642 - PCH Pm WoW lan Enable Determine if WLAN wake from Sx, corresponds to the HOST_WLAN_PP_EN bit in the PWRM_CFG3 register.
 - UINT8 [PchPmWoWlanDeepSxEnable](#)
Offset 0x0643 - PCH Pm WoW lan DeepSx Enable Determine if WLAN wake from DeepSx, corresponds to the DSX_WLAN_PP_EN bit in the PWRM_CFG3 register.
 - UINT8 [PchPmLanWakeFromDeepSx](#)
Offset 0x0644 - PCH Pm Lan Wake From DeepSx Determine if enable LAN to wake from deep Sx.
 - UINT8 [PchPmDeepSxPol](#)
Offset 0x0645 - PCH Pm Deep Sx Pol Deep Sx Policy.
 - UINT8 [PchPmSlpS3MinAssert](#)
Offset 0x0646 - PCH Pm Slp S3 Min Assert SLP_S3 Minimum Assertion Width Policy.
 - UINT8 [PchPmSlpS4MinAssert](#)
Offset 0x0647 - PCH Pm Slp S4 Min Assert SLP_S4 Minimum Assertion Width Policy.
 - UINT8 [PchPmSlpSusMinAssert](#)
Offset 0x0648 - PCH Pm Slp Sus Min Assert SLP_SUS Minimum Assertion Width Policy.
 - UINT8 [PchPmSlpAMinAssert](#)
Offset 0x0649 - PCH Pm Slp A Min Assert SLP_A Minimum Assertion Width Policy.
 - UINT8 [UnusedUpdSpace17](#) [6]
Offset 0x064A.
 - UINT8 [PchPmLpcClockRun](#)
Offset 0x0650 - PCH Pm Lpc Clock Run This member describes whether or not the LPC ClockRun feature of PCH should be enabled.
 - UINT8 [PchPmSlpStrchSusUp](#)
Offset 0x0651 - PCH Pm Slp Strch Sus Up Enable SLP_X Stretching After SUS Well Power Up.
 - UINT8 [PchPmSlpLanLowDc](#)
Offset 0x0652 - PCH Pm Slp Lan Low Dc Enable/Disable SLP_LAN# Low on DC Power.
 - UINT8 [PchPmPwrBtnOverridePeriod](#)
Offset 0x0653 - PCH Pm Pwr Btn Override Period PCH power button override period.
 - UINT8 [PchPmDisableDsxAcPresentPulldown](#)
Offset 0x0654 - PCH Pm Disable Dsx Ac Present Pulldown When Disable, PCH will internal pull down AC_PRESENT in deep SX and during G3 exit.
 - UINT8 [PchPmCapsuleResetType](#)
Offset 0x0655 - PCH Pm Capsule Reset Type Deprecated: Determines type of reset issued during UpdateCapsule().
 - UINT8 [PchPmDisableNativePowerButton](#)
Offset 0x0656 - PCH Pm Disable Native Power Button Power button native mode disable.
 - UINT8 [PchPmSlpS0Enable](#)
Offset 0x0657 - PCH Pm Slp S0 Enable Indicates whether SLP_S0# is to be asserted when PCH reaches idle state.
 - UINT8 [PchPmMeWakeSts](#)
Offset 0x0658 - PCH Pm ME_WAKE_STS Clear the ME_WAKE_STS bit in the Power and Reset Status (PRSTS) register.
 - UINT8 [PchPmWolOvrWkSts](#)
Offset 0x0659 - PCH Pm WOL_OVR_WK_STS Clear the WOL_OVR_WK_STS bit in the Power and Reset Status (PRSTS) register.
 - UINT8 [PchPmPwrCycDur](#)
Offset 0x065A - PCH Pm Reset Power Cycle Duration Could be customized in the unit of second.

- UINT8 [UnusedUpdSpace18](#)
Offset 0x065B.
 - UINT8 [PchPort61hEnable](#)
Offset 0x065C - PCH Port 61h Config Enable/Disable Used for the emulation feature for Port61h read.
 - UINT8 [SataPwrOptEnable](#)
Offset 0x065D - PCH Sata Pwr Opt Enable SATA Power Optimizer on PCH side.
 - UINT8 [EsataSpeedLimit](#)
Offset 0x065E - PCH Sata eSATA Speed Limit When enabled, BIOS will configure the PxSCTL.SPD to 2 to limit the eSATA port speed.
 - UINT8 [SataSpeedLimit](#)
Offset 0x065F - PCH Sata Speed Limit Indicates the maximum speed the SATA controller can support 0h: Pch→SataSpeedDefault.
 - UINT8 [SataPortsHotPlug](#) [8]
Offset 0x0660 - Enable SATA Port HotPlug Enable SATA Port HotPlug.
 - UINT8 [SataPortsInterlockSw](#) [8]
Offset 0x0668 - Enable SATA Port Interlock Sw Enable SATA Port Interlock Sw.
 - UINT8 [SataPortsExternal](#) [8]
Offset 0x0670 - Enable SATA Port External Enable SATA Port External.
 - UINT8 [SataPortsSpinUp](#) [8]
Offset 0x0678 - Enable SATA Port SpinUp Enable the COMRESET initialization Sequence to the device.
 - UINT8 [SataPortsSolidStateDrive](#) [8]
Offset 0x0680 - Enable SATA Port Solid State Drive 0: HDD; 1: SSD.
 - UINT8 [SataPortsEnableDitoConfig](#) [8]
Offset 0x0688 - Enable SATA Port Enable Dito Config Enable DEVSLP Idle Timeout settings (DmVal, DitoVal).
 - UINT8 [SataPortsDmVal](#) [8]
Offset 0x0690 - Enable SATA Port DmVal DITO multiplier.
 - UINT16 [SataPortsDitoVal](#) [8]
Offset 0x0698 - Enable SATA Port DmVal DEVSLP Idle Timeout (DITO), Default is 625.
 - UINT8 [SataPortsZpOdd](#) [8]
Offset 0x06A8 - Enable SATA Port ZpOdd Support zero power ODD.
 - UINT8 [SataRstRaidAlternateId](#)
Offset 0x06B0 - PCH Sata Rst Raid Alternate Id Enable RAID Alternate ID.
 - UINT8 [SataRstRaid0](#)
Offset 0x06B1 - PCH Sata Rst Raid0 RAID0.
 - UINT8 [SataRstRaid1](#)
Offset 0x06B2 - PCH Sata Rst Raid1 RAID1.
 - UINT8 [SataRstRaid10](#)
Offset 0x06B3 - PCH Sata Rst Raid10 RAID10.
 - UINT8 [SataRstRaid5](#)
Offset 0x06B4 - PCH Sata Rst Raid5 RAID5.
 - UINT8 [SataRstIrrt](#)
Offset 0x06B5 - PCH Sata Rst Irrt Intel Rapid Recovery Technology.
 - UINT8 [SataRstOromUiBanner](#)
Offset 0x06B6 - PCH Sata Rst Orom Ui Banner OROM UI and BANNER.
 - UINT8 [SataRstOromUiDelay](#)
Offset 0x06B7 - PCH Sata Rst Orom Ui Delay 00b: 2 secs; 01b: 4 secs; 10b: 6 secs; 11: 8 secs (see: PCH_SAT↔A_OROM_DELAY).
 - UINT8 [SataRstHddUnlock](#)
Offset 0x06B8 - PCH Sata Rst Hdd Unlock Indicates that the HDD password unlock in the OS is enabled.
 - UINT8 [SataRstLedLocate](#)
-

Offset 0x06B9 - PCH Sata Rst Led Locate Indicates that the LED/SGPIO hardware is attached and ping to locate feature is enabled on the OS.

- UINT8 [SataRstIrrtOnly](#)

Offset 0x06BA - PCH Sata Rst Irrt Only Allow only IRRT drives to span internal and external ports.

- UINT8 [SataRstSmartStorage](#)

Offset 0x06BB - PCH Sata Rst Smart Storage RST Smart Storage caching Bit.

- UINT8 [SataRstPcieEnable](#) [3]

Offset 0x06BC - PCH Sata Rst Pcie Storage Remap enable Enable Intel RST for PCIe Storage remapping.

- UINT8 [SataRstPcieStoragePort](#) [3]

Offset 0x06BF - PCH Sata Rst Pcie Storage Port Intel RST for PCIe Storage remapping - PCIe Port Selection (1-based, 0 = autodetect).

- UINT8 [SataRstPcieDeviceResetDelay](#) [3]

Offset 0x06C2 - PCH Sata Rst Pcie Device Reset Delay PCIe Storage Device Reset Delay in milliseconds.

- UINT8 [PchScsEmmcHs400TuningRequired](#)

Offset 0x06C5 - Enable eMMC HS400 Training Determine if HS400 Training is required.

- UINT8 [PchScsEmmcHs400DIIDataValid](#)

Offset 0x06C6 - Set HS400 Tuning Data Valid Set if HS400 Tuning Data Valid.

- UINT8 [PchScsEmmcHs400RxStrobeDII1](#)

Offset 0x06C7 - Rx Strobe Delay Control Rx Strobe Delay Control - Rx Strobe Delay DLL 1 (HS400 Mode).

- UINT8 [PchScsEmmcHs400TxDataDII](#)

Offset 0x06C8 - Tx Data Delay Control Tx Data Delay Control 1 - Tx Data Delay (HS400 Mode).

- UINT8 [PchScsEmmcHs400DriverStrength](#)

Offset 0x06C9 - I/O Driver Strength I/O driver strength: 0 - 33 Ohm, 1 - 40 Ohm, 2 - 50 Ohm.

- UINT8 [SerialIoGpio](#)

Offset 0x06CA - Enable Pch Serial IO GPIO Determines if enable Serial IO GPIO.

- UINT8 [SerialIoI2cVoltage](#) [6]

Offset 0x06CB - IO voltage for I2C controllers Selects the IO voltage for I2C controllers, 0: PchSerialIoI2c33V, 1: PchSerialIoI2c18V.

- UINT8 [SerialIoSpiCsPolarity](#) [2]

Offset 0x06D1 - SPI ChipSelect signal polarity Selects SPI ChipSelect signal polarity.

- UINT8 [SerialIoUartHwFlowCtrl](#) [3]

Offset 0x06D3 - Enables UART hardware flow control, CTS and RTS lines Enables UART hardware flow control, CTS and RTS linesh.

- UINT8 [SerialIoDebugUartNumber](#)

Offset 0x06D6 - UART Number For Debug Purpose UART number for debug purpose.

- UINT8 [SerialIoEnableDebugUartAfterPost](#)

Offset 0x06D7 - Enable Debug UART Controller Enable debug UART controller after post.

- UINT8 [PchSirqEnable](#)

Offset 0x06D8 - Enable Serial IRQ Determines if enable Serial IRQ.

- UINT8 [PchSirqMode](#)

Offset 0x06D9 - Serial IRQ Mode Select Serial IRQ Mode Select, 0: quiet mode, 1: continuous mode.

- UINT8 [PchStartFramePulse](#)

Offset 0x06DA - Start Frame Pulse Width Start Frame Pulse Width, 0: PchSfpw4Clk, 1: PchSfpw6Clk, 2: PchSfpw8Clk.

- UINT8 [PchThermalDeviceEnable](#)

Offset 0x06DB - Enable Thermal Device Enable Thermal Device.

- UINT16 [PchT0Level](#)

Offset 0x06DC - Thermal Throttling Customized T0Level Value Customized T0Level value.

- UINT16 [PchT1Level](#)

Offset 0x06DE - Thermal Throttling Customized T1Level Value Customized T1Level value.

- UINT16 [PchT2Level](#)

Offset 0x06E0 - Thermal Throttling Customized T2Level Value Customized T2Level value.

- UINT8 [PchTsmicLock](#)
Offset 0x06E2 - Thermal Device SMI Enable This locks down SMI Enable on Alert Thermal Sensor Trip.
- UINT8 [PchTTEnable](#)
Offset 0x06E3 - Enable The Thermal Throttle Enable the thermal throttle function.
- UINT8 [PchTTState13Enable](#)
Offset 0x06E4 - PMSync State 13 When set to 1 and the programmed GPIO pin is a 1, then PMSync state 13 will force at least T2 state.
- UINT8 [PchTTLock](#)
Offset 0x06E5 - Thermal Throttle Lock Thermal Throttle Lock.
- UINT8 [TTSuggestedSetting](#)
Offset 0x06E6 - Thermal Throttling Suggested Setting Thermal Throttling Suggested Setting.
- UINT8 [TTCrossThrottling](#)
Offset 0x06E7 - Enable PCH Cross Throttling Enable/Disable PCH Cross Throttling \$EN_DIS.
- UINT8 [PchDmiTsawEn](#)
Offset 0x06E8 - DMI Thermal Sensor Autonomous Width Enable DMI Thermal Sensor Autonomous Width Enable.
- UINT8 [DmiSuggestedSetting](#)
Offset 0x06E9 - DMI Thermal Sensor Suggested Setting DMT thermal sensor suggested representative values.
- UINT8 [DmiTS0TW](#)
Offset 0x06EA - Thermal Sensor 0 Target Width Thermal Sensor 0 Target Width.
- UINT8 [DmiTS1TW](#)
Offset 0x06EB - Thermal Sensor 1 Target Width Thermal Sensor 1 Target Width.
- UINT8 [DmiTS2TW](#)
Offset 0x06EC - Thermal Sensor 2 Target Width Thermal Sensor 2 Target Width.
- UINT8 [DmiTS3TW](#)
Offset 0x06ED - Thermal Sensor 3 Target Width Thermal Sensor 3 Target Width.
- UINT8 [SataP0T1M](#)
Offset 0x06EE - Port 0 T1 Multiplier Port 0 T1 Multiplier.
- UINT8 [SataP0T2M](#)
Offset 0x06EF - Port 0 T2 Multiplier Port 0 T2 Multiplier.
- UINT8 [SataP0T3M](#)
Offset 0x06F0 - Port 0 T3 Multiplier Port 0 T3 Multiplier.
- UINT8 [SataP0TDisp](#)
Offset 0x06F1 - Port 0 Tdispatch Port 0 Tdispatch.
- UINT8 [SataP1T1M](#)
Offset 0x06F2 - Port 1 T1 Multiplier Port 1 T1 Multiplier.
- UINT8 [SataP1T2M](#)
Offset 0x06F3 - Port 1 T2 Multiplier Port 1 T2 Multiplier.
- UINT8 [SataP1T3M](#)
Offset 0x06F4 - Port 1 T3 Multiplier Port 1 T3 Multiplier.
- UINT8 [SataP1TDisp](#)
Offset 0x06F5 - Port 1 Tdispatch Port 1 Tdispatch.
- UINT8 [SataP0Tinact](#)
Offset 0x06F6 - Port 0 Tinactive Port 0 Tinactive.
- UINT8 [SataP0TDispFinit](#)
Offset 0x06F7 - Port 0 Alternate Fast Init Tdispatch Port 0 Alternate Fast Init Tdispatch.
- UINT8 [SataP1Tinact](#)
Offset 0x06F8 - Port 1 Tinactive Port 1 Tinactive.
- UINT8 [SataP1TDispFinit](#)
Offset 0x06F9 - Port 1 Alternate Fast Init Tdispatch Port 1 Alternate Fast Init Tdispatch.
- UINT8 [SataThermalSuggestedSetting](#)
Offset 0x06FA - Sata Thermal Throttling Suggested Setting Sata Thermal Throttling Suggested Setting.

- UINT8 [PchMemoryThrottlingEnable](#)
Offset 0x06FB - Enable Memory Thermal Throttling Enable Memory Thermal Throttling.
 - UINT8 [PchMemoryPmsyncEnable](#) [2]
Offset 0x06FC - Memory Thermal Throttling Enable Memory Thermal Throttling.
 - UINT8 [PchMemoryC0TransmitEnable](#) [2]
Offset 0x06FE - Enable Memory Thermal Throttling Enable Memory Thermal Throttling.
 - UINT8 [PchMemoryPinSelection](#) [2]
Offset 0x0700 - Enable Memory Thermal Throttling Enable Memory Thermal Throttling.
 - UINT16 [PchTemperatureHotLevel](#)
Offset 0x0702 - Thermal Device Temperature Decides the temperature.
 - UINT8 [PchDisableComplianceMode](#)
Offset 0x0704 - Disable XHCI Compliance Mode This policy will disable XHCI compliance mode on all ports.
 - UINT8 [Usb2OverCurrentPin](#) [16]
Offset 0x0705 - USB2 Port Over Current Pin Describe the specific over current pin number of USB 2.0 Port N.
 - UINT8 [Usb3OverCurrentPin](#) [10]
Offset 0x0715 - USB3 Port Over Current Pin Describe the specific over current pin number of USB 3.0 Port N.
 - UINT8 [Early8254ClockGatingEnable](#)
Offset 0x071F - Enable 8254 Static Clock Gating in early POST time Set 8254CGE=1 is required for C11 support.
 - UINT8 [SataRstOptaneMemory](#)
Offset 0x0720 - PCH Sata Rst Optane Memory Optane Memory \$EN_DIS.
 - UINT8 [UnusedUpdSpace19](#) [3]
Offset 0x0721.
 - UINT32 [PchPcieDeviceOverrideTablePtr](#)
Offset 0x0724 - Pch PCIE device override table pointer The PCIE device table is being used to override PCIE device ASPM settings.
 - UINT8 [EnableTcoTimer](#)
Offset 0x0728 - Enable TCO timer.
 - UINT8 [EcCmdProvisionEav](#)
Offset 0x0729 - EcCmdProvisionEav Ephemeral Authorization Value default values.
 - UINT8 [EcCmdLock](#)
Offset 0x072A - EcCmdLock EcCmdLock default values.
 - UINT8 [UnusedUpdSpace20](#) [5]
Offset 0x072B.
 - UINT64 [SendEcCmd](#)
Offset 0x0730 - SendEcCmd SendEcCmd function pointer.
 - UINT64 [BgpdtHash](#) [4]
Offset 0x0738 - BgpdtHash[4] BgpdtHash values.
 - UINT64 [BiosGuardModulePtr](#)
Offset 0x0758 - BiosGuardModulePtr BiosGuardModulePtr default values.
 - UINT32 [BiosGuardAttr](#)
Offset 0x0760 - BiosGuardAttr BiosGuardAttr default values.
 - UINT8 [SgxSinitNvsData](#)
Offset 0x0764 - SgxSinitNvsData SgxSinitNvsData default values.
 - UINT8 [UnusedUpdSpace21](#) [3]
Offset 0x0765.
 - UINT64 [SgxEpoch0](#)
Offset 0x0768 - SgxEpoch0 SgxEpoch0 default values.
 - UINT64 [SgxEpoch1](#)
Offset 0x0770 - SgxEpoch1 SgxEpoch1 default values.
 - UINT8 [MeUnconfigOnRtcClear](#)
-

Offset 0x0778 - Enable/Disable ME Unconfig on RTC clear Enable(Default): Enable ME Unconfig On Rtc Clear, Disable: Disable ME Unconfig On Rtc Clear \$EN_DIS.

- UINT8 [MeUnconfigsValid](#)

Offset 0x0779 - Check if MeUnconfigOnRtcClear is valid The MeUnconfigOnRtcClear item could be not valid due to CMOS is clear.

- UINT8 [ReservedFspUpd](#) [6]

Offset 0x077A.

8.6.1 Detailed Description

Fsp S Configuration.

Definition at line 87 of file FspUpd.h.

8.6.2 Member Data Documentation

8.6.2.1 UINT16 FSP_S_CONFIG::AcLoadline[5]

Offset 0x0298 - AcLoadline PCODE MMIO Mailbox: AcLoadline in 1/100 mOhms (ie.

1250 = 12.50 mOhm); Range is 0-6249. **Intel Recommended Defaults vary by domain and SKU.**

Definition at line 667 of file FspUpd.h.

8.6.2.2 UINT8 FSP_S_CONFIG::AcousticNoiseMitigation

Offset 0x0278 - Acoustic Noise Mitigation feature Enable or Disable Acoustic Noise Mitigation feature.

0: Disabled; 1: Enabled \$EN_DIS

Definition at line 619 of file FspUpd.h.

8.6.2.3 UINT8 FSP_S_CONFIG::AmtEnabled

Offset 0x0153 - AMT Switch Enable/Disable.

0: Disable, 1: enable, Enable or disable AMT functionality. \$EN_DIS

Definition at line 402 of file FspUpd.h.

8.6.2.4 UINT8 FSP_S_CONFIG::AmtSolEnabled

Offset 0x015C - SOL Switch Enable/Disable.

0: Disable, 1: enable, Serial Over Lan enable/disable state by Mebx \$EN_DIS

Definition at line 445 of file FspUpd.h.

8.6.2.5 UINT8 FSP_S_CONFIG::AsfEnabled

Offset 0x0155 - ASF Switch Enable/Disable.

0: Disable, 1: enable, Enable or disable ASF functionality. \$EN_DIS

Definition at line 414 of file FspUpd.h.

8.6.2.6 UINT16 FSP_S_CONFIG::DcLoadline[5]

Offset 0x02A2 - DcLoadline PCODE MMIO Mailbox: DcLoadline in 1/100 mOhms (ie. 1250 = 12.50 mOhm); Range is 0-6249. **Intel Recommended Defaults vary by domain and SKU.**
Definition at line 673 of file FspsUpd.h.

8.6.2.7 UINT8 FSP_S_CONFIG::DelayUsbPdoProgramming

Offset 0x00FC - Delay USB PDO Programming Enable/disable delay of PDO programming for USB from PEI phase to DXE phase.

0: disable, 1: enable \$EN_DIS

Definition at line 365 of file FspsUpd.h.

8.6.2.8 UINT32 FSP_S_CONFIG::DevIntConfigPtr

Offset 0x0070 - Address of PCH_DEVICE_INTERRUPT_CONFIG table.

The address of the table of PCH_DEVICE_INTERRUPT_CONFIG.

Definition at line 243 of file FspsUpd.h.

8.6.2.9 UINT8 FSP_S_CONFIG::DmiSuggestedSetting

Offset 0x06E9 - DMI Thermal Sensor Suggested Setting DMT thermal sensor suggested representative values.

\$EN_DIS

Definition at line 1822 of file FspsUpd.h.

8.6.2.10 UINT8 FSP_S_CONFIG::Early8254ClockGatingEnable

Offset 0x071F - Enable 8254 Static Clock Gating in early POST time Set 8254CGE=1 is required for C11 support.

However, set 8254CGE=1 in POST time might fail to boot legacy OS which using 8254 timer. Make sure it won't break legacy OS boot before enabling this. \$EN_DIS

Definition at line 1961 of file FspsUpd.h.

8.6.2.11 UINT8 FSP_S_CONFIG::EcCmdLock

Offset 0x072A - EcCmdLock EcCmdLock default values.

Locks Ephemeral Authorization Value sent previously

Definition at line 1997 of file FspsUpd.h.

8.6.2.12 UINT8 FSP_S_CONFIG::EcCmdProvisionEav

Offset 0x0729 - EcCmdProvisionEav Ephemeral Authorization Value default values.

Provisions an ephemeral shared secret to the EC

Definition at line 1992 of file FspsUpd.h.

8.6.2.13 UINT8 FSP_S_CONFIG::EnableTcoTimer

Offset 0x0728 - Enable TCO timer.

When FALSE, it disables PCH ACPI timer, and stops TCO timer. NOTE: This will have huge power impact when it's enabled. If TCO timer is disabled, uCode ACPI timer emulation must be enabled, and WDAT table must not be exposed to the OS. \$EN_DIS

Definition at line 1987 of file FspsUpd.h.

8.6.2.14 UINT8 FSP_S_CONFIG::EsataSpeedLimit

Offset 0x065E - PCH Sata eSATA Speed Limit When enabled, BIOS will configure the PxSCTL.SPD to 2 to limit the eSATA port speed.

\$EN_DIS

Definition at line 1540 of file FspsUpd.h.

8.6.2.15 UINT8 FSP_S_CONFIG::FastPkgCRampDisableGt

Offset 0x02DF - Disable Fast Slew Rate for Deep Package C States for VR GT domain Disable Fast Slew Rate for Deep Package C States based on Acoustic Noise Mitigation feature enabled.

0: **False**; 1: True \$EN_DIS

Definition at line 712 of file FspsUpd.h.

8.6.2.16 UINT8 FSP_S_CONFIG::FastPkgCRampDisableIa

Offset 0x0279 - Disable Fast Slew Rate for Deep Package C States for VR IA domain Disable Fast Slew Rate for Deep Package C States based on Acoustic Noise Mitigation feature enabled.

0: **False**; 1: True \$EN_DIS

Definition at line 626 of file FspsUpd.h.

8.6.2.17 UINT8 FSP_S_CONFIG::FastPkgCRampDisableSa

Offset 0x02E0 - Disable Fast Slew Rate for Deep Package C States for VR SA domain Disable Fast Slew Rate for Deep Package C States based on Acoustic Noise Mitigation feature enabled.

0: **False**; 1: True \$EN_DIS

Definition at line 719 of file FspsUpd.h.

8.6.2.18 UINT8 FSP_S_CONFIG::FwProgress

Offset 0x0157 - PET Progress Enable/Disable.

0: Disable, 1: enable, Enable/Disable PET Events Progress to receive PET Events. \$EN_DIS

Definition at line 427 of file FspsUpd.h.

8.6.2.19 UINT8 FSP_S_CONFIG::GpioIrqRoute

Offset 0x0087 - Select GPIO IRQ Route GPIO IRQ Select.

The valid value is 14 or 15.

Definition at line 262 of file FspsUpd.h.

8.6.2.20 UINT8 FSP_S_CONFIG::Heci3Enabled

Offset 0x0149 - HECI3 state The HECI3 state from Mbp for reference in S3 path or when MbpHob is not installed.

0: disable, 1: enable \$EN_DIS

Definition at line 392 of file FspsUpd.h.

8.6.2.21 UINT16 FSP_S_CONFIG::IccMax[5]

Offset 0x02CA - Icc Max limit PCODE MMIO Mailbox: VR Icc Max limit.

0-255A in 1/4 A units. 400 = 100A

Definition at line 696 of file FspsUpd.h.

8.6.2.22 UINT8 FSP_S_CONFIG::ImonOffset[5]

Offset 0x025D - Imon offset correction PCODE MMIO Mailbox: Imon offset correction.

Value is a 2's complement signed integer. Units 1/1000, Range 0-63999. For an offset = 12.580, use 12580. **0: Auto**

Definition at line 577 of file FspsUpd.h.

8.6.2.23 UINT8 FSP_S_CONFIG::ImonSlope[5]

Offset 0x0258 - Imon slope correction PCODE MMIO Mailbox: Imon slope correction.

Specified in 1/100 increment values. Range is 0-200. 125 = 1.25. **0: Auto**. For all VR Indexes

Definition at line 571 of file FspsUpd.h.

8.6.2.24 UINT8 FSP_S_CONFIG::ManageabilityMode

Offset 0x0156 - Manageability Mode set by Mebx Enable/Disable.

0: Disable, 1: enable, Enable or disable Manageability Mode. \$EN_DIS

Definition at line 420 of file FspsUpd.h.

8.6.2.25 UINT8 FSP_S_CONFIG::MeUnconfigsValid

Offset 0x0779 - Check if MeUnconfigOnRtcClear is valid The MeUnconfigOnRtcClear item could be not valid due to CMOS is clear.

\$EN_DIS

Definition at line 2054 of file FspsUpd.h.

8.6.2.26 UINT64 FSP_S_CONFIG::MicrocodePatchAddress

Offset 0x02F0 - MicrocodePatchAddress Pointer to microcode patch that is suitable for this processor.

0:Disable, 1:Enable

Definition at line 754 of file FspsUpd.h.

8.6.2.27 UINT8 FSP_S_CONFIG::NumOfDevIntConfig

Offset 0x006F - Number of DevIntConfig Entry Number of Device Interrupt Configuration Entry.

If this is not zero, the DevIntConfigPtr must not be NULL.

Definition at line 238 of file FspsUpd.h.

8.6.2.28 UINT8 FSP_S_CONFIG::PchCio2Enable

Offset 0x0030 - Enable CIO2 Controller Enable/disable SKYCAM CIO2 Controller.

\$EN_DIS

Definition at line 136 of file FspsUpd.h.

8.6.2.29 UINT8 FSP_S_CONFIG::PchCrid

Offset 0x0365 - PCH Compatibility Revision ID This member describes whether or not the CRID feature of PCH should be enabled.

\$EN_DIS

Definition at line 1171 of file FspsUpd.h.

8.6.2.30 UINT8 FSP_S_CONFIG::PchDisableComplianceMode

Offset 0x0704 - Disable XHCI Compliance Mode This policy will disable XHCI compliance mode on all ports.

Compliance Mode should be default enabled. \$EN_DIS

Definition at line 1943 of file FspsUpd.h.

8.6.2.31 UINT8 FSP_S_CONFIG::PchDmiAspm

Offset 0x0316 - Enable DMI ASPM ASPM on PCH side of the DMI Link.

\$EN_DIS

Definition at line 900 of file FspsUpd.h.

8.6.2.32 UINT8 FSP_S_CONFIG::PchDmiTsawEn

Offset 0x06E8 - DMI Thermal Sensor Autonomous Width Enable DMI Thermal Sensor Autonomous Width Enable.

\$EN_DIS

Definition at line 1816 of file FspsUpd.h.

8.6.2.33 UINT8 FSP_S_CONFIG::PchHdaDspEnable

Offset 0x002E - Enable HD Audio DSP Enable/disable HD Audio DSP feature.

\$EN_DIS

Definition at line 120 of file FspsUpd.h.

8.6.2.34 UINT8 FSP_S_CONFIG::PchHdaDspEndpointBluetooth

Offset 0x033F - DSP Bluetooth enablement 0: Disable; 1: Enable.

\$EN_DIS

Definition at line 982 of file FspsUpd.h.

8.6.2.35 UINT8 FSP_S_CONFIG::PchHdaDspEndpointI2s

Offset 0x0348 - DSP I2S enablement 0: Disable; 1: Enable.

\$EN_DIS

Definition at line 1002 of file FspsUpd.h.

8.6.2.36 UINT32 FSP_S_CONFIG::PchHdaDspFeatureMask

Offset 0x0340 - Bitmask of supported DSP features [BIT0] - WoV; [BIT1] - BT Sideband; [BIT2] - Codec VAD; [BIT5] - BT Intel HFP; [BIT6].

- BT Intel A2DP; [BIT7] - DSP based speech pre-processing disabled; [BIT8] - 0: Intel WoV, 1: Windows Voice Activation.

Definition at line 989 of file FspsUpd.h.

8.6.2.37 UINT8 FSP_S_CONFIG::PchHdaDspUaaCompliance

Offset 0x033C - Universal Audio Architecture compliance for DSP enabled system 0: Not-UAA Compliant (Intel SST driver supported only), 1: UAA Compliant (HDA Inbox driver or SST driver supported).

\$EN_DIS

Definition at line 965 of file FspsUpd.h.

8.6.2.38 UINT8 FSP_S_CONFIG::PchHdaEnable

Offset 0x002D - Enable Intel HD Audio (Azalia) Enable/disable Azalia controller.

\$EN_DIS

Definition at line 114 of file FspsUpd.h.

8.6.2.39 UINT8 FSP_S_CONFIG::PchHdaDispCodecDisconnect

Offset 0x033D - iDisplay Audio Codec disconnection 0: Not disconnected, enumerable, 1: Disconnected SDI, not enumerable.

\$EN_DIS

Definition at line 971 of file FspsUpd.h.

8.6.2.40 UINT8 FSP_S_CONFIG::PchHdaIoBufferOwnership

Offset 0x002F - Select HDAudio IoBuffer Ownership Indicates the ownership of the I/O buffer between Intel HD Audio link vs I2S0 / I2S1 port.

0: Intel HD-Audio link owns all the I/O buffers. 1: Intel HD-Audio link owns 4 of the I/O buffers for 1 HD-Audio codec connection, and I2S1 port owns 4 of the I/O buffers for 1 I2S codec connection. 2: Reserved. 3: I2S0 and I2S1 ports own all the I/O buffers. 0:HD-A Link, 1:Shared HD-A Link and I2S Port, 3:I2S Ports

Definition at line 130 of file FspsUpd.h.

8.6.2.41 UINT8 FSP_S_CONFIG::PchHdaPme

Offset 0x0336 - Enable Pme Enable Azalia wake-on-ring.

\$EN_DIS

Definition at line 933 of file FspUpd.h.

8.6.2.42 UINT8 FSP_S_CONFIG::PchIoApicBdfValid

Offset 0x0349 - Enable PCH Io Apic Set to 1 if BDF value is valid.

\$EN_DIS

Definition at line 1008 of file FspUpd.h.

8.6.2.43 UINT8 FSP_S_CONFIG::PchIoApicBusNumber

Offset 0x034A - PCH Io Apic Bus Number Bus/Device/Function used as Requestor / Completer ID.

Default is 0xF0.

Definition at line 1013 of file FspUpd.h.

8.6.2.44 UINT8 FSP_S_CONFIG::PchIoApicDeviceNumber

Offset 0x034B - PCH Io Apic Device Number Bus/Device/Function used as Requestor / Completer ID.

Default is 0x1F.

Definition at line 1018 of file FspUpd.h.

8.6.2.45 UINT8 FSP_S_CONFIG::PchIoApicEntry24_119

Offset 0x034D - Enable PCH Io Apic Entry 24-119 0: Disable; 1: Enable.

\$EN_DIS

Definition at line 1029 of file FspUpd.h.

8.6.2.46 UINT8 FSP_S_CONFIG::PchIoApicFunctionNumber

Offset 0x034C - PCH Io Apic Function Number Bus/Device/Function used as Requestor / Completer ID.

Default is 0x00.

Definition at line 1023 of file FspUpd.h.

8.6.2.47 UINT8 FSP_S_CONFIG::PchIoApicId

Offset 0x034E - PCH Io Apic ID This member determines IOAPIC ID.

Default is 0x02.

Definition at line 1034 of file FspUpd.h.

8.6.2.48 UINT8 FSP_S_CONFIG::PchIoApicRangeSelect

Offset 0x034F - PCH Io Apic Range Select Define address bits 19:12 for the IOxAPIC range.

Default is 0.

Definition at line 1039 of file FspsUpd.h.

8.6.2.49 `UINT8 FSP_S_CONFIG::PchIshEnable`

Offset 0x0034 - Enable PCH ISH Controller Enable/disable ISH Controller.

`$EN_DIS`

Definition at line 160 of file FspsUpd.h.

8.6.2.50 `UINT8 FSP_S_CONFIG::PchIshGp0GpioAssign`

Offset 0x0356 - Enable PCH ISH GP_0 GPIO pin assigned 0: Disable; 1: Enable.

`$EN_DIS`

Definition at line 1081 of file FspsUpd.h.

8.6.2.51 `UINT8 FSP_S_CONFIG::PchIshGp1GpioAssign`

Offset 0x0357 - Enable PCH ISH GP_1 GPIO pin assigned 0: Disable; 1: Enable.

`$EN_DIS`

Definition at line 1087 of file FspsUpd.h.

8.6.2.52 `UINT8 FSP_S_CONFIG::PchIshGp2GpioAssign`

Offset 0x0358 - Enable PCH ISH GP_2 GPIO pin assigned 0: Disable; 1: Enable.

`$EN_DIS`

Definition at line 1093 of file FspsUpd.h.

8.6.2.53 `UINT8 FSP_S_CONFIG::PchIshGp3GpioAssign`

Offset 0x0359 - Enable PCH ISH GP_3 GPIO pin assigned 0: Disable; 1: Enable.

`$EN_DIS`

Definition at line 1099 of file FspsUpd.h.

8.6.2.54 `UINT8 FSP_S_CONFIG::PchIshGp4GpioAssign`

Offset 0x035A - Enable PCH ISH GP_4 GPIO pin assigned 0: Disable; 1: Enable.

`$EN_DIS`

Definition at line 1105 of file FspsUpd.h.

8.6.2.55 `UINT8 FSP_S_CONFIG::PchIshGp5GpioAssign`

Offset 0x035B - Enable PCH ISH GP_5 GPIO pin assigned 0: Disable; 1: Enable.

`$EN_DIS`

Definition at line 1111 of file FspsUpd.h.

8.6.2.56 UINT8 FSP_S_CONFIG::PchIshGp6GpioAssign

Offset 0x035C - Enable PCH ISH GP_6 GPIO pin assigned 0: Disable; 1: Enable.

\$EN_DIS

Definition at line 1117 of file FspsUpd.h.

8.6.2.57 UINT8 FSP_S_CONFIG::PchIshGp7GpioAssign

Offset 0x035D - Enable PCH ISH GP_7 GPIO pin assigned 0: Disable; 1: Enable.

\$EN_DIS

Definition at line 1123 of file FspsUpd.h.

8.6.2.58 UINT8 FSP_S_CONFIG::PchIshI2c0GpioAssign

Offset 0x0353 - Enable PCH ISH I2C0 GPIO pins assigned 0: Disable; 1: Enable.

\$EN_DIS

Definition at line 1063 of file FspsUpd.h.

8.6.2.59 UINT8 FSP_S_CONFIG::PchIshI2c1GpioAssign

Offset 0x0354 - Enable PCH ISH I2C1 GPIO pins assigned 0: Disable; 1: Enable.

\$EN_DIS

Definition at line 1069 of file FspsUpd.h.

8.6.2.60 UINT8 FSP_S_CONFIG::PchIshI2c2GpioAssign

Offset 0x0355 - Enable PCH ISH I2C2 GPIO pins assigned 0: Disable; 1: Enable.

\$EN_DIS

Definition at line 1075 of file FspsUpd.h.

8.6.2.61 UINT8 FSP_S_CONFIG::PchIshPdtUnlock

Offset 0x035E - PCH ISH PDT Unlock Msg 0: False; 1: True.

\$EN_DIS

Definition at line 1129 of file FspsUpd.h.

8.6.2.62 UINT8 FSP_S_CONFIG::PchIshSpiGpioAssign

Offset 0x0350 - Enable PCH ISH SPI GPIO pins assigned 0: Disable; 1: Enable.

\$EN_DIS

Definition at line 1045 of file FspsUpd.h.

8.6.2.63 UINT8 FSP_S_CONFIG::PchIshUart0GpioAssign

Offset 0x0351 - Enable PCH ISH UART0 GPIO pins assigned 0: Disable; 1: Enable.

\$EN_DIS

Definition at line 1051 of file FspsUpd.h.

8.6.2.64 UINT8 FSP_S_CONFIG::PchIshUart1GpioAssign

Offset 0x0352 - Enable PCH ISH UART1 GPIO pins assigned 0: Disable; 1: Enable.

\$EN_DIS

Definition at line 1057 of file FspsUpd.h.

8.6.2.65 UINT8 FSP_S_CONFIG::PchLanClkReqSupported

Offset 0x0361 - Indicate whether dedicated CLKREQ# is supported 0: Disable; 1: Enable.

\$EN_DIS

Definition at line 1147 of file FspsUpd.h.

8.6.2.66 UINT8 FSP_S_CONFIG::PchLanEnable

Offset 0x00FB - Enable LAN Enable/disable LAN controller.

\$EN_DIS

Definition at line 358 of file FspsUpd.h.

8.6.2.67 UINT8 FSP_S_CONFIG::PchLanK10ffEnable

Offset 0x0360 - Enable PCH Lan use CLKREQ for GbE power management 0: Disable; 1: Enable.

\$EN_DIS

Definition at line 1141 of file FspsUpd.h.

8.6.2.68 UINT8 FSP_S_CONFIG::PchLanLtrEnable

Offset 0x035F - Enable PCH Lan LTR capability of PCH internal LAN 0: Disable; 1: Enable.

\$EN_DIS

Definition at line 1135 of file FspsUpd.h.

8.6.2.69 UINT8 FSP_S_CONFIG::PchLockDownBiosLock

Offset 0x0363 - Enable LOCKDOWN BIOS LOCK Enable the BIOS Lock feature and set EISS bit (D31:F5:RegD↔Ch[5]) for the BIOS region protection.

\$EN_DIS

Definition at line 1159 of file FspsUpd.h.

8.6.2.70 UINT8 FSP_S_CONFIG::PchLockDownSpiEiss

Offset 0x0364 - Enable LOCKDOWN SPI Eiss Enable InSMM.STS (EISS) in SPI.

\$EN_DIS

Definition at line 1165 of file FspsUpd.h.

8.6.2.71 UINT8 FSP_S_CONFIG::PchMemoryThrottlingEnable

Offset 0x06FB - Enable Memory Thermal Throttling Enable Memory Thermal Throttling.

\$EN_DIS

Definition at line 1916 of file FspUpd.h.

8.6.2.72 UINT32 FSP_S_CONFIG::PchPcieDeviceOverrideTablePtr

Offset 0x0724 - Pch PCIE device override table pointer The PCIE device table is being used to override PCIE device ASPM settings.

This is a pointer points to a 32bit address. And it's only used in PostMem phase. Please refer to PCH_PCIE_DEVICE_OVERRIDE structure for the table. Last entry VendorId must be 0.

Definition at line 1979 of file FspUpd.h.

8.6.2.73 UINT8 FSP_S_CONFIG::PchPmCapsuleResetType

Offset 0x0655 - PCH Pm Capsule Reset Type Deprecated: Determines type of reset issued during UpdateCapsule().

Always Warm reset. \$EN_DIS

Definition at line 1487 of file FspUpd.h.

8.6.2.74 UINT8 FSP_S_CONFIG::PchPmDeepSxPol

Offset 0x0645 - PCH Pm Deep Sx Pol Deep Sx Policy.

\$EN_DIS

Definition at line 1428 of file FspUpd.h.

8.6.2.75 UINT8 FSP_S_CONFIG::PchPmDisableDsxAcPresentPulldown

Offset 0x0654 - PCH Pm Disable Dsx Ac Present Pulldown When Disable, PCH will internal pull down AC_PRESENT in deep SX and during G3 exit.

\$EN_DIS

Definition at line 1481 of file FspUpd.h.

8.6.2.76 UINT8 FSP_S_CONFIG::PchPmDisableNativePowerButton

Offset 0x0656 - PCH Pm Disable Native Power Button Power button native mode disable.

\$EN_DIS

Definition at line 1493 of file FspUpd.h.

8.6.2.77 UINT8 FSP_S_CONFIG::PchPmLanWakeFromDeepSx

Offset 0x0644 - PCH Pm Lan Wake From DeepSx Determine if enable LAN to wake from deep Sx.

\$EN_DIS

Definition at line 1422 of file FspUpd.h.

8.6.2.78 UINT8 FSP_S_CONFIG::PchPmLpcClockRun

Offset 0x0650 - PCH Pm Lpc Clock Run This member describes whether or not the LPC ClockRun feature of PCH should be enabled.

\$EN_DIS

Definition at line 1458 of file FspsUpd.h.

8.6.2.79 UINT8 FSP_S_CONFIG::PchPmMeWakeSts

Offset 0x0658 - PCH Pm ME_WAKE_STS Clear the ME_WAKE_STS bit in the Power and Reset Status (PRSTS) register.

\$EN_DIS

Definition at line 1505 of file FspsUpd.h.

8.6.2.80 UINT8 FSP_S_CONFIG::PchPmPcieWakeFromDeepSx

Offset 0x0641 - PCH Pm Pcie Wake From DeepSx Determine if enable PCIe to wake from deep Sx.

\$EN_DIS

Definition at line 1403 of file FspsUpd.h.

8.6.2.81 UINT8 FSP_S_CONFIG::PchPmPmeB0S5Dis

Offset 0x0639 - PCH Pm PME_B0_S5_DIS When cleared (default), wake events from PME_B0_STS are allowed in S5 if PME_B0_EN = 1.

\$EN_DIS

Definition at line 1381 of file FspsUpd.h.

8.6.2.82 UINT8 FSP_S_CONFIG::PchPmPwrBtnOverridePeriod

Offset 0x0653 - PCH Pm Pwr Btn Override Period PCH power button override period.

000b-4s, 001b-6s, 010b-8s, 011b-10s, 100b-12s, 101b-14s.

Definition at line 1475 of file FspsUpd.h.

8.6.2.83 UINT8 FSP_S_CONFIG::PchPmPwrCycDur

Offset 0x065A - PCH Pm Reset Power Cycle Duration Could be customized in the unit of second.

Please refer to EDS for all support settings. 0 is default, 1 is 1 second, 2 is 2 seconds, ...

Definition at line 1517 of file FspsUpd.h.

8.6.2.84 UINT8 FSP_S_CONFIG::PchPmSlpAMinAssert

Offset 0x0649 - PCH Pm Slp A Min Assert SLP_A Minimum Assertion Width Policy.

Default is PchSlpA2s.

Definition at line 1448 of file FspsUpd.h.

8.6.2.85 UINT8 FSP_S_CONFIG::PchPmSlpLanLowDc

Offset 0x0652 - PCH Pm Slp Lan Low Dc Enable/Disable SLP_LAN# Low on DC Power.

\$EN_DIS

Definition at line 1470 of file FspUpd.h.

8.6.2.86 UINT8 FSP_S_CONFIG::PchPmSlpS0Enable

Offset 0x0657 - PCH Pm Slp S0 Enable Indicates whether SLP_S0# is to be asserted when PCH reaches idle state.

\$EN_DIS

Definition at line 1499 of file FspUpd.h.

8.6.2.87 UINT8 FSP_S_CONFIG::PchPmSlpS0VmEnable

Offset 0x063A - PCH Pm Slp S0 Voltage Margining Enable Indicates platform has support for VCCPrim_Core Voltage Margining in SLP_S0# asserted state.

\$EN_DIS

Definition at line 1387 of file FspUpd.h.

8.6.2.88 UINT8 FSP_S_CONFIG::PchPmSlpS3MinAssert

Offset 0x0646 - PCH Pm Slp S3 Min Assert SLP_S3 Minimum Assertion Width Policy.

Default is PchSlpS350ms.

Definition at line 1433 of file FspUpd.h.

8.6.2.89 UINT8 FSP_S_CONFIG::PchPmSlpS4MinAssert

Offset 0x0647 - PCH Pm Slp S4 Min Assert SLP_S4 Minimum Assertion Width Policy.

Default is PchSlpS44s.

Definition at line 1438 of file FspUpd.h.

8.6.2.90 UINT8 FSP_S_CONFIG::PchPmSlpStrchSusUp

Offset 0x0651 - PCH Pm Slp Strch Sus Up Enable SLP_X Stretching After SUS Well Power Up.

\$EN_DIS

Definition at line 1464 of file FspUpd.h.

8.6.2.91 UINT8 FSP_S_CONFIG::PchPmSlpSusMinAssert

Offset 0x0648 - PCH Pm Slp Sus Min Assert SLP_SUS Minimum Assertion Width Policy.

Default is PchSlpSus4s.

Definition at line 1443 of file FspUpd.h.

8.6.2.92 UINT8 FSP_S_CONFIG::PchPmWolEnableOverride

Offset 0x0640 - PCH Pm Wol Enable Override Corresponds to the WOL Enable Override bit in the General PM Configuration B (GEN_PMCON_B) register.

\$EN_DIS

Definition at line 1397 of file FspsUpd.h.

8.6.2.93 UINT8 FSP_S_CONFIG::PchPmWolOvrWkSts

Offset 0x0659 - PCH Pm WOL_OVR_WK_STS Clear the WOL_OVR_WK_STS bit in the Power and Reset Status (PRSTS) register.

\$EN_DIS

Definition at line 1511 of file FspsUpd.h.

8.6.2.94 UINT8 FSP_S_CONFIG::PchPmWoWlanDeepSxEnable

Offset 0x0643 - PCH Pm WoW lan DeepSx Enable Determine if WLAN wake from DeepSx, corresponds to the DSX_WLAN_PP_EN bit in the PWRM_CFG3 register.

\$EN_DIS

Definition at line 1416 of file FspsUpd.h.

8.6.2.95 UINT8 FSP_S_CONFIG::PchPmWoWlanEnable

Offset 0x0642 - PCH Pm WoW lan Enable Determine if WLAN wake from Sx, corresponds to the HOST_WLAN_PP_EN bit in the PWRM_CFG3 register.

\$EN_DIS

Definition at line 1409 of file FspsUpd.h.

8.6.2.96 UINT8 FSP_S_CONFIG::PchPort61hEnable

Offset 0x065C - PCH Port 61h Config Enable/Disable Used for the emulation feature for Port61h read.

The port is trapped and the SMI handler will toggle bit4 according to the handler's internal state. \$EN_DIS

Definition at line 1528 of file FspsUpd.h.

8.6.2.97 UINT8 FSP_S_CONFIG::PchPwrOptEnable

Offset 0x0317 - Enable Power Optimizer Enable DMI Power Optimizer on PCH side.

\$EN_DIS

Definition at line 906 of file FspsUpd.h.

8.6.2.98 UINT8 FSP_S_CONFIG::PchScsEmmcHs400DIIDataValid

Offset 0x06C6 - Set HS400 Tuning Data Valid Set if HS400 Tuning Data Valid.

\$EN_DIS

Definition at line 1689 of file FspsUpd.h.

8.6.2.99 UINT8 FSP_S_CONFIG::PchScsEmmcHs400TuningRequired

Offset 0x06C5 - Enable eMMC HS400 Training Determine if HS400 Training is required.

\$EN_DIS

Definition at line 1683 of file FspUpd.h.

8.6.2.100 UINT8 FSP_S_CONFIG::PchSirqEnable

Offset 0x06D8 - Enable Serial IRQ Determines if enable Serial IRQ.

\$EN_DIS

Definition at line 1741 of file FspUpd.h.

8.6.2.101 UINT8 FSP_S_CONFIG::PchSirqMode

Offset 0x06D9 - Serial IRQ Mode Select Serial IRQ Mode Select, 0: quiet mode, 1: continuous mode.

\$EN_DIS

Definition at line 1747 of file FspUpd.h.

8.6.2.102 UINT8 FSP_S_CONFIG::PchSkyCamPortACtleEnable

Offset 0x0303 - Enable SkyCam PortA Ctle Enable/disable PortA Ctle.

\$EN_DIS

Definition at line 817 of file FspUpd.h.

8.6.2.103 UINT8 FSP_S_CONFIG::PchSkyCamPortATermOvrEnable

Offset 0x02FB - Enable SkyCam PortA Termination override Enable/disable PortA Termination override.

\$EN_DIS

Definition at line 769 of file FspUpd.h.

8.6.2.104 UINT8 FSP_S_CONFIG::PchSkyCamPortATrimEnable

Offset 0x02FF - Enable SkyCam PortA Clk Trim Enable/disable PortA Clk Trim.

\$EN_DIS

Definition at line 793 of file FspUpd.h.

8.6.2.105 UINT8 FSP_S_CONFIG::PchSkyCamPortBCtleEnable

Offset 0x0304 - Enable SkyCam PortB Ctle Enable/disable PortB Ctle.

\$EN_DIS

Definition at line 823 of file FspUpd.h.

8.6.2.106 UINT8 FSP_S_CONFIG::PchSkyCamPortBTermOvrEnable

Offset 0x02FC - Enable SkyCam PortB Termination override Enable/disable PortB Termination override.

\$EN_DIS

Definition at line 775 of file FspsUpd.h.

8.6.2.107 UINT8 FSP_S_CONFIG::PchSkyCamPortBTrimEnable

Offset 0x0300 - Enable SkyCam PortB Clk Trim Enable/disable PortB Clk Trim.

\$EN_DIS

Definition at line 799 of file FspsUpd.h.

8.6.2.108 UINT8 FSP_S_CONFIG::PchSkyCamPortCDClteEnable

Offset 0x0305 - Enable SkyCam PortCD Clte Enable/disable PortCD Clte.

\$EN_DIS

Definition at line 829 of file FspsUpd.h.

8.6.2.109 UINT8 FSP_S_CONFIG::PchSkyCamPortCTermOvrEnable

Offset 0x02FD - Enable SkyCam PortC Termination override Enable/disable PortC Termination override.

\$EN_DIS

Definition at line 781 of file FspsUpd.h.

8.6.2.110 UINT8 FSP_S_CONFIG::PchSkyCamPortCTrimEnable

Offset 0x0301 - Enable SkyCam PortC Clk Trim Enable/disable PortC Clk Trim.

\$EN_DIS

Definition at line 805 of file FspsUpd.h.

8.6.2.111 UINT8 FSP_S_CONFIG::PchSkyCamPortDTermOvrEnable

Offset 0x02FE - Enable SkyCam PortD Termination override Enable/disable PortD Termination override.

\$EN_DIS

Definition at line 787 of file FspsUpd.h.

8.6.2.112 UINT8 FSP_S_CONFIG::PchSkyCamPortDTrimEnable

Offset 0x0302 - Enable SkyCam PortD Clk Trim Enable/disable PortD Clk Trim.

\$EN_DIS

Definition at line 811 of file FspsUpd.h.

8.6.2.113 UINT16 FSP_S_CONFIG::PchSubSystemId

Offset 0x0368 - PCH Sub system ID Default Subsystem ID of the PCH devices.

Default is 0x7270.

Definition at line 1181 of file FspsUpd.h.

8.6.2.114 UINT16 FSP_S_CONFIG::PchSubSystemVendorId

Offset 0x0366 - PCH Sub system vendor ID Default Subsystem Vendor ID of the PCH devices.

Default is 0x8086.

Definition at line 1176 of file FspUpd.h.

8.6.2.115 UINT8 FSP_S_CONFIG::PchThermalDeviceEnable

Offset 0x06DB - Enable Thermal Device Enable Thermal Device.

\$EN_DIS

Definition at line 1758 of file FspUpd.h.

8.6.2.116 UINT8 FSP_S_CONFIG::PchTsmicLock

Offset 0x06E2 - Thermal Device SMI Enable This locks down SMI Enable on Alert Thermal Sensor Trip.

\$EN_DIS

Definition at line 1779 of file FspUpd.h.

8.6.2.117 UINT8 FSP_S_CONFIG::PchTTEnable

Offset 0x06E3 - Enable The Thermal Throttle Enable the thermal throttle function.

\$EN_DIS

Definition at line 1785 of file FspUpd.h.

8.6.2.118 UINT8 FSP_S_CONFIG::PchTTLock

Offset 0x06E5 - Thermal Throttle Lock Thermal Throttle Lock.

\$EN_DIS

Definition at line 1798 of file FspUpd.h.

8.6.2.119 UINT8 FSP_S_CONFIG::PchTTState13Enable

Offset 0x06E4 - PMSync State 13 When set to 1 and the programmed GPIO pin is a 1, then PMSync state 13 will force at least T2 state.

\$EN_DIS

Definition at line 1792 of file FspUpd.h.

8.6.2.120 UINT8 FSP_S_CONFIG::PcieAllowNoLtrIccPllShutdown

Offset 0x0634 - PCIE Allow No Ltr Icc PLL Shutdown Allows BIOS to control ICC PLL Shutdown by determining PCIe devices are LTR capable or leaving untouched.

\$EN_DIS

Definition at line 1356 of file FspUpd.h.

8.6.2.121 UINT8 FSP_S_CONFIG::PcieComplianceTestMode

Offset 0x0635 - PCIE Compliance Test Mode Compliance Test Mode shall be enabled when using Compliance Load Board.

\$EN_DIS

Definition at line 1362 of file FspsUpd.h.

8.6.2.122 UINT8 FSP_S_CONFIG::PcieDisableRootPortClockGating

Offset 0x0632 - PCIE Disable RootPort Clock Gating Describes whether the PCI Express Clock Gating for each root port is enabled by platform modules.

0: Disable; 1: Enable. \$EN_DIS

Definition at line 1343 of file FspsUpd.h.

8.6.2.123 UINT8 FSP_S_CONFIG::PcieEnablePeerMemoryWrite

Offset 0x0633 - PCIE Enable Peer Memory Write This member describes whether Peer Memory Writes are enabled on the platform.

\$EN_DIS

Definition at line 1349 of file FspsUpd.h.

8.6.2.124 UINT8 FSP_S_CONFIG::PcieEqPh3LaneParamCm[24]

Offset 0x05F8 - PCIE Eq Ph3 Lane Param Cm PCH_PCIE_EQ_LANE_PARAM.

Coefficient C-1.

Definition at line 1321 of file FspsUpd.h.

8.6.2.125 UINT8 FSP_S_CONFIG::PcieEqPh3LaneParamCp[24]

Offset 0x0610 - PCIE Eq Ph3 Lane Param Cp PCH_PCIE_EQ_LANE_PARAM.

Coefficient C+1.

Definition at line 1326 of file FspsUpd.h.

8.6.2.126 UINT8 FSP_S_CONFIG::PcieRpAspm[24]

Offset 0x0598 - PCIE RP Aspm The ASPM configuration of the root port (see: PCH_PCIE_ASPM_CONTROL).

Default is PchPcieAspmAutoConfig.

Definition at line 1300 of file FspsUpd.h.

8.6.2.127 UINT8 FSP_S_CONFIG::PcieRpClkReqNumber[24]

Offset 0x012C - Configure CLKREQ Number Configure Root Port CLKREQ Number if CLKREQ is supported.

Each value in array can be between 0-6. One byte for each port, byte0 for port1, byte1 for port2, and so on.

Definition at line 381 of file FspsUpd.h.

8.6.2.128 `UINT8 FSP_S_CONFIG::PcieRpClkReqSupport[24]`

Offset 0x0114 - Enable PCIE RP CLKREQ Support Enable/disable PCIE Root Port CLKREQ support.

0: disable, 1: enable. One byte for each port, byte0 for port1, byte1 for port2, and so on.

Definition at line 375 of file FspUpd.h.

8.6.2.129 `UINT8 FSP_S_CONFIG::PcieRpCompletionTimeout[24]`

Offset 0x0520 - PCIE RP Completion Timeout The root port completion timeout(see: PCH_PCIE_COMPLETION_TIMEOUT).

Default is PchPcieCompletionTO_Default.

Definition at line 1288 of file FspUpd.h.

8.6.2.130 `UINT32 FSP_S_CONFIG::PcieRpDeviceResetPad[24]`

Offset 0x0538 - PCIE RP Device Reset Pad The PCH pin assigned to device PERST# signal if available, zero otherwise.

See also DeviceResetPadActiveHigh.

Definition at line 1294 of file FspUpd.h.

8.6.2.131 `UINT8 FSP_S_CONFIG::PcieRpFunctionSwap`

Offset 0x0638 - PCIE Rp Function Swap Allows BIOS to use root port function number swapping when root port of function 0 is disabled.

\$EN_DIS

Definition at line 1375 of file FspUpd.h.

8.6.2.132 `UINT8 FSP_S_CONFIG::PcieRpGen3EqPh3Method[24]`

Offset 0x04F0 - PCIE RP Gen3 Equalization Phase Method PCIe Gen3 Eq Ph3 Method (see PCH_PCIE_EQ_METHOD).

0: Default; 2: Software Search; 4: Fixed Coefficients.

Definition at line 1278 of file FspUpd.h.

8.6.2.133 `UINT8 FSP_S_CONFIG::PcieRpL1Substates[24]`

Offset 0x05B0 - PCIE RP L1 Substates The L1 Substates configuration of the root port (see: PCH_PCIE_L1SUBSTATES_CONTROL).

Default is PchPcieL1SubstatesL1_1_2.

Definition at line 1306 of file FspUpd.h.

8.6.2.134 `UINT8 FSP_S_CONFIG::PcieRpPcieSpeed[24]`

Offset 0x04D8 - PCIE RP Pcie Speed Determines each PCIE Port speed capability.

0: Auto; 1: Gen1; 2: Gen2; 3: Gen3 (see: PCH_PCIE_SPEED).

Definition at line 1272 of file FspUpd.h.

8.6.2.135 UINT8 FSP_S_CONFIG::PcieRpPhysicalSlotNumber[24]

Offset 0x0508 - PCIE RP Physical Slot Number Indicates the slot number for the root port.

Default is the value as root port index.

Definition at line 1283 of file FspsUpd.h.

8.6.2.136 UINT8 FSP_S_CONFIG::PcieSwEqCoeffListCm[5]

Offset 0x0628 - PCIE Sw Eq CoeffList Cm PCH_PCIE_EQ_PARAM.

Coefficient C-1.

Definition at line 1331 of file FspsUpd.h.

8.6.2.137 UINT8 FSP_S_CONFIG::PcieSwEqCoeffListCp[5]

Offset 0x062D - PCIE Sw Eq CoeffList Cp PCH_PCIE_EQ_PARAM.

Coefficient C+1.

Definition at line 1336 of file FspsUpd.h.

8.6.2.138 UINT8 FSP_S_CONFIG::PortUsb20Enable[16]

Offset 0x0052 - Enable USB2 ports Enable/disable per USB2 ports.

One byte for each port, byte0 for port0, byte1 for port1, and so on.

Definition at line 210 of file FspsUpd.h.

8.6.2.139 UINT8 FSP_S_CONFIG::PortUsb30Enable[10]

Offset 0x0062 - Enable USB3 ports Enable/disable per USB3 ports.

One byte for each port, byte0 for port0, byte1 for port1, and so on.

Definition at line 216 of file FspsUpd.h.

8.6.2.140 UINT16 FSP_S_CONFIG::Psi1Threshold[5]

Offset 0x02AC - Power State 1 Threshold current PCODE MMIO Mailbox: Power State 1 current cutoff in 1/4 Amp increments.

Range is 0-128A. Default Value = 20A.

Definition at line 679 of file FspsUpd.h.

8.6.2.141 UINT16 FSP_S_CONFIG::Psi2Threshold[5]

Offset 0x02B6 - Power State 2 Threshold current PCODE MMIO Mailbox: Power State 2 current cutoff in 1/4 Amp increments.

Range is 0-128A. Default Value = 5A.

Definition at line 685 of file FspsUpd.h.

8.6.2.142 UINT8 FSP_S_CONFIG::Psi3Enable[5]

Offset 0x024E - Power State 3 enable/disable PCODE MMIO Mailbox: Power State 3 enable/disable; 0: Disable; **1: Enable.**

For all VR Indexes

Definition at line 559 of file FspsUpd.h.

8.6.2.143 UINT16 FSP_S_CONFIG::Psi3Threshold[5]

Offset 0x02C0 - Power State 3 Threshold current PCODE MMIO Mailbox: Power State 3 current cutoff in 1/4 Amp increments.

Range is 0-128A. Default Value = 1A.

Definition at line 691 of file FspsUpd.h.

8.6.2.144 UINT8 FSP_S_CONFIG::PsysOffset

Offset 0x0277 - Platform Psys offset correction PCODE MMIO Mailbox: Platform Psys offset correction.

0 - Auto Units 1/4, Range 0-255. Value of 100 = $100/4 = 25$ offset

Definition at line 613 of file FspsUpd.h.

8.6.2.145 UINT8 FSP_S_CONFIG::PsysSlope

Offset 0x0276 - Platform Psys slope correction PCODE MMIO Mailbox: Platform Psys slope correction.

0 - Auto Specified in 1/100 increment values. Range is 0-200. 125 = 1.25

Definition at line 607 of file FspsUpd.h.

8.6.2.146 UINT8 FSP_S_CONFIG::PxRcConfig[8]

Offset 0x007F - PIRQx to IRQx Map Config PIRQx to IRQx mapping.

The valid value is 0x00 to 0x0F for each. First byte is for PIRQA, second byte is for PIRQB, and so on. The setting is only available in Legacy 8259 PCI mode.

Definition at line 257 of file FspsUpd.h.

8.6.2.147 UINT8 FSP_S_CONFIG::SataEnable

Offset 0x0091 - Enable SATA Enable/disable SATA controller.

\$EN_DIS

Definition at line 298 of file FspsUpd.h.

8.6.2.148 UINT8 FSP_S_CONFIG::SataMode

Offset 0x0092 - SATA Mode Select SATA controller working mode.

0:AHCI, 1:RAID

Definition at line 304 of file FspsUpd.h.

8.6.2.149 UINT8 FSP_S_CONFIG::SataP0TDispFinit

Offset 0x06F7 - Port 0 Alternate Fast Init Tdispatch Port 0 Alternate Fast Init Tdispatch.

\$EN_DIS

Definition at line 1893 of file FspsUpd.h.

8.6.2.150 UINT8 FSP_S_CONFIG::SataP1TDispFinit

Offset 0x06F9 - Port 1 Alternate Fast Init Tdispatch Port 1 Alternate Fast Init Tdispatch.

\$EN_DIS

Definition at line 1904 of file FspsUpd.h.

8.6.2.151 UINT8 FSP_S_CONFIG::SataPortsDevSlp[8]

Offset 0x004A - Enable SATA DEVSLP Feature Enable/disable SATA DEVSLP per port.

0 is disable, 1 is enable. One byte for each port, byte0 for port0, byte1 for port1, and so on.

Definition at line 204 of file FspsUpd.h.

8.6.2.152 UINT8 FSP_S_CONFIG::SataPortsDmVal[8]

Offset 0x0690 - Enable SATA Port DmVal DITO multiplier.

Default is 15.

Definition at line 1580 of file FspsUpd.h.

8.6.2.153 UINT8 FSP_S_CONFIG::SataPortsEnable[8]

Offset 0x0042 - Enable SATA ports Enable/disable SATA ports.

One byte for each port, byte0 for port0, byte1 for port1, and so on.

Definition at line 198 of file FspsUpd.h.

8.6.2.154 UINT8 FSP_S_CONFIG::SataPwrOptEnable

Offset 0x065D - PCH Sata Pwr Opt Enable SATA Power Optimizer on PCH side.

\$EN_DIS

Definition at line 1534 of file FspsUpd.h.

8.6.2.155 UINT8 FSP_S_CONFIG::SataRstHddUnlock

Offset 0x06B8 - PCH Sata Rst Hdd Unlock Indicates that the HDD password unlock in the OS is enabled.

\$EN_DIS

Definition at line 1643 of file FspsUpd.h.

8.6.2.156 UINT8 FSP_S_CONFIG::SataRstIrrt

Offset 0x06B5 - PCH Sata Rst Irrt Intel Rapid Recovery Technology.

\$EN_DIS

Definition at line 1626 of file FspUpd.h.

8.6.2.157 UINT8 FSP_S_CONFIG::SataRstIrrtOnly

Offset 0x06BA - PCH Sata Rst Irrt Only Allow only IRRT drives to span internal and external ports.

\$EN_DIS

Definition at line 1656 of file FspUpd.h.

8.6.2.158 UINT8 FSP_S_CONFIG::SataRstLedLocate

Offset 0x06B9 - PCH Sata Rst Led Locate Indicates that the LED/SGPIO hardware is attached and ping to locate feature is enabled on the OS.

\$EN_DIS

Definition at line 1650 of file FspUpd.h.

8.6.2.159 UINT8 FSP_S_CONFIG::SataRstOromUiBanner

Offset 0x06B6 - PCH Sata Rst Orom Ui Banner OROM UI and BANNER.

\$EN_DIS

Definition at line 1632 of file FspUpd.h.

8.6.2.160 UINT8 FSP_S_CONFIG::SataRstPcieDeviceResetDelay[3]

Offset 0x06C2 - PCH Sata Rst Pcie Device Reset Delay PCIe Storage Device Reset Delay in milliseconds.

Default value is 100ms

Definition at line 1677 of file FspUpd.h.

8.6.2.161 UINT8 FSP_S_CONFIG::SataRstRaid0

Offset 0x06B1 - PCH Sata Rst Raid0 RAID0.

\$EN_DIS

Definition at line 1602 of file FspUpd.h.

8.6.2.162 UINT8 FSP_S_CONFIG::SataRstRaid1

Offset 0x06B2 - PCH Sata Rst Raid1 RAID1.

\$EN_DIS

Definition at line 1608 of file FspUpd.h.

8.6.2.163 UINT8 FSP_S_CONFIG::SataRstRaid10

Offset 0x06B3 - PCH Sata Rst Raid10 RAID10.

\$EN_DIS

Definition at line 1614 of file FspUpd.h.

8.6.2.164 UINT8 FSP_S_CONFIG::SataRstRaid5

Offset 0x06B4 - PCH Sata Rst Raid5 RAID5.

\$EN_DIS

Definition at line 1620 of file FspsUpd.h.

8.6.2.165 UINT8 FSP_S_CONFIG::SataRstRaidAlternateId

Offset 0x06B0 - PCH Sata Rst Raid Alternate Id Enable RAID Alternate ID.

0:Client, 1:Alternate, 2:Server

Definition at line 1596 of file FspsUpd.h.

8.6.2.166 UINT8 FSP_S_CONFIG::SataRstSmartStorage

Offset 0x06BB - PCH Sata Rst Smart Storage RST Smart Storage caching Bit.

\$EN_DIS

Definition at line 1662 of file FspsUpd.h.

8.6.2.167 UINT8 FSP_S_CONFIG::SataSalpSupport

Offset 0x0041 - Enable SATA SALP Support Enable/disable SATA Aggressive Link Power Management.

\$EN_DIS

Definition at line 192 of file FspsUpd.h.

8.6.2.168 UINT8 FSP_S_CONFIG::SataThermalSuggestedSetting

Offset 0x06FA - Sata Thermal Throttling Suggested Setting Sata Thermal Throttling Suggested Setting.

\$EN_DIS

Definition at line 1910 of file FspsUpd.h.

8.6.2.169 UINT8 FSP_S_CONFIG::ScilrqSelect

Offset 0x0088 - Select ScilrqSelect SCI IRQ Select.

The valid value is 9, 10, 11, and 20, 21, 22, 23 for APIC only.

Definition at line 267 of file FspsUpd.h.

8.6.2.170 UINT8 FSP_S_CONFIG::ScsEmmcEnabled

Offset 0x0031 - Enable eMMC Controller Enable/disable eMMC Controller.

\$EN_DIS

Definition at line 142 of file FspsUpd.h.

8.6.2.171 UINT8 FSP_S_CONFIG::ScsEmmcHs400Enabled

Offset 0x0032 - Enable eMMC HS400 Mode Enable eMMC HS400 Mode.

\$EN_DIS

Definition at line 148 of file FspUpd.h.

8.6.2.172 UINT8 FSP_S_CONFIG::ScsSdCardEnabled

Offset 0x0033 - Enable SdCard Controller Enable/disable SD Card Controller.

\$EN_DIS

Definition at line 154 of file FspUpd.h.

8.6.2.173 UINT64 FSP_S_CONFIG::SendEcCmd

Offset 0x0730 - SendEcCmd SendEcCmd function pointer.

```
typedef EFI_STATUS (EFI_API *PLATFORM_SEND_EC_COMMAND) (IN EC_COMMAND_TYPE
EcCmdType, IN UINT8 EcCmd, IN UINT8 SendData, IN OUT UINT8 *ReceiveData);
```

Definition at line 2008 of file FspUpd.h.

8.6.2.174 UINT8 FSP_S_CONFIG::SendVrMbxCmd

Offset 0x02E2 - Enable VR specific mailbox command VR specific mailbox commands.

00b - no VR specific command sent. 01b - A VR mailbox command specifically for the MPS IMPV8 VR will be sent. 10b - VR specific command sent for PS4 exit issue. 11b - Reserved. \$EN_DIS

Definition at line 731 of file FspUpd.h.

8.6.2.175 UINT8 FSP_S_CONFIG::SendVrMbxCmd1

Offset 0x02E3 - Select VR specific mailbox command to send VR specific mailbox commands.

000b - no VR specific command sent. 001b - VR mailbox command specifically for the MPS IMPV8 VR will be sent. 010b - VR specific command sent for PS4 exit issue. 100b - VR specific command sent for MPS VR decay issue.

Definition at line 738 of file FspUpd.h.

8.6.2.176 UINT8 FSP_S_CONFIG::SerialIoDebugUartNumber

Offset 0x06D6 - UART Number For Debug Purpose UART number for debug purpose.

0:UART0, 1: UART1, 2:UART2.

Definition at line 1730 of file FspUpd.h.

8.6.2.177 UINT8 FSP_S_CONFIG::SerialIoDevMode[11]

Offset 0x0074 - Enable SerialIo Device Mode 0:Disabled, 1:ACPI Mode, 2:PCI Mode, 3:Hidden mode, 4:Legacy UART mode - Enable/disable SerialIo I2C0,I2C1,I2C2,I2C3,I2C4,I2C5,SPI0,SPI1,UART0,UART1,UART2 device mode respectively.

One byte for each controller, byte0 for I2C0, byte1 for I2C1, and so on.

Definition at line 250 of file FspUpd.h.

8.6.2.178 UINT8 FSP_S_CONFIG::SerialIoGpio

Offset 0x06CA - Enable Pch Serial IO GPIO Determines if enable Serial IO GPIO.

\$EN_DIS

Definition at line 1710 of file FspsUpd.h.

8.6.2.179 UINT8 FSP_S_CONFIG::ShowSpiController

Offset 0x0035 - Show SPI controller Enable/disable to show SPI controller.

\$EN_DIS

Definition at line 166 of file FspsUpd.h.

8.6.2.180 UINT8 FSP_S_CONFIG::SlowSlewRateForGt

Offset 0x027B - Slew Rate configuration for Deep Package C States for VR GT domain Slew Rate configuration for Deep Package C States for VR GT domain based on Acoustic Noise Mitigation feature enabled.

0: Fast/2; 1: Fast/4; 2: Fast/8; 3: Fast/16 0: Fast/2, 1: Fast/4, 2: Fast/8, 3: Fast/16

Definition at line 640 of file FspsUpd.h.

8.6.2.181 UINT8 FSP_S_CONFIG::SlowSlewRateForIa

Offset 0x027A - Slew Rate configuration for Deep Package C States for VR IA domain Slew Rate configuration for Deep Package C States for VR IA domain based on Acoustic Noise Mitigation feature enabled.

0: Fast/2; 1: Fast/4; 2: Fast/8; 3: Fast/16 0: Fast/2, 1: Fast/4, 2: Fast/8, 3: Fast/16

Definition at line 633 of file FspsUpd.h.

8.6.2.182 UINT8 FSP_S_CONFIG::SlowSlewRateForSa

Offset 0x027C - Slew Rate configuration for Deep Package C States for VR SA domain Slew Rate configuration for Deep Package C States for VR SA domain based on Acoustic Noise Mitigation feature enabled.

0: Fast/2; 1: Fast/4; 2: Fast/8; 3: Fast/16 0: Fast/2, 1: Fast/4, 2: Fast/8, 3: Fast/16

Definition at line 647 of file FspsUpd.h.

8.6.2.183 UINT8 FSP_S_CONFIG::SsicPortEnable

Offset 0x006D - Enable XHCI SSIC Enable Enable/disable XHCI SSIC port.

\$EN_DIS

Definition at line 228 of file FspsUpd.h.

8.6.2.184 UINT8 FSP_S_CONFIG::TcolrqSelect

Offset 0x0089 - Select TcolrqSelect TCO IRQ Select.

The valid value is 9, 10, 11, 20, 21, 22, 23.

Definition at line 272 of file FspsUpd.h.

8.6.2.185 **UINT16 FSP_S_CONFIG::TdcPowerLimit[5]**

Offset 0x0286 - Thermal Design Current current limit PCODE MMIO Mailbox: Thermal Design Current current limit. Specified in 1/8A units. Range is 0-4095. 1000 = 125A. **0: Auto**. For all VR Indexes
Definition at line 657 of file FspsUpd.h.

8.6.2.186 **UINT8 FSP_S_CONFIG::TdcTimeWindow[5]**

Offset 0x026C - HECI3 state PCODE MMIO Mailbox: Thermal Design Current time window.
Defined in milli seconds. Valid Values 1 - 1ms , 2 - 2ms , 3 - 3ms , 4 - 4ms , 5 - 5ms , 6 - 6ms , 7 - 7ms , 8 - 8ms , 10 - 10ms. For all VR Indexe
Definition at line 595 of file FspsUpd.h.

8.6.2.187 **UINT8 FSP_S_CONFIG::TTSuggestedSetting**

Offset 0x06E6 - Thermal Throttling Suggested Setting Thermal Throttling Suggested Setting.
\$EN_DIS
Definition at line 1804 of file FspsUpd.h.

8.6.2.188 **UINT8 FSP_S_CONFIG::TurboMode**

Offset 0x0040 - Turbo Mode Enable/Disable Turbo mode.
0: disable, 1: enable \$EN_DIS
Definition at line 186 of file FspsUpd.h.

8.6.2.189 **UINT8 FSP_S_CONFIG::Usb2AfePehalfbit[16]**

Offset 0x00C3 - USB Per Port Half Bit Pre-emphasis USB Per Port Half Bit Pre-emphasis.
1b - half-bit pre-emphasis, 0b - full-bit pre-emphasis. One byte for each port.
Definition at line 328 of file FspsUpd.h.

8.6.2.190 **UINT8 FSP_S_CONFIG::Usb2AfePetxiset[16]**

Offset 0x0093 - USB Per Port HS Preemphasis Bias USB Per Port HS Preemphasis Bias.
000b-0mV, 001b-11.25mV, 010b-16.9mV, 011b-28.15mV, 100b-28.15mV, 101b-39.35mV, 110b-45mV, 111b-56.↵
3mV. One byte for each port.
Definition at line 310 of file FspsUpd.h.

8.6.2.191 **UINT8 FSP_S_CONFIG::Usb2AfePredeemp[16]**

Offset 0x00B3 - USB Per Port HS Transmitter Emphasis USB Per Port HS Transmitter Emphasis.
00b - Emphasis OFF, 01b - De-emphasis ON, 10b - Pre-emphasis ON, 11b - Pre-emphasis & De-emphasis ON.
One byte for each port.
Definition at line 322 of file FspsUpd.h.

8.6.2.192 UINT8 FSP_S_CONFIG::Usb2AfeTxiset[16]

Offset 0x00A3 - USB Per Port HS Transmitter Bias USB Per Port HS Transmitter Bias.

000b-0mV, 001b-11.25mV, 010b-16.9mV, 011b-28.15mV, 100b-28.15mV, 101b-39.35mV, 110b-45mV, 111b-56.3mV, One byte for each port.

Definition at line 316 of file FspsUpd.h.

8.6.2.193 UINT8 FSP_S_CONFIG::Usb3HsioTxDeEmph[10]

Offset 0x00DD - USB 3.0 TX Output -3.5dB De-Emphasis Adjustment Setting USB 3.0 TX Output -3.5dB De-Emphasis Adjustment Setting, HSIO_TX_DWORD5[21:16], **Default = 29h** (approximately -3.5dB De-Emphasis).

One byte for each port.

Definition at line 340 of file FspsUpd.h.

8.6.2.194 UINT8 FSP_S_CONFIG::Usb3HsioTxDeEmphEnable[10]

Offset 0x00D3 - Enable the write to USB 3.0 TX Output -3.5dB De-Emphasis Adjustment Enable the write to USB 3.0 TX Output -3.5dB De-Emphasis Adjustment.

Each value in array can be between 0-1. One byte for each port.

Definition at line 334 of file FspsUpd.h.

8.6.2.195 UINT8 FSP_S_CONFIG::Usb3HsioTxDownscaleAmp[10]

Offset 0x00F1 - USB 3.0 TX Output Downscale Amplitude Adjustment USB 3.0 TX Output Downscale Amplitude Adjustment, HSIO_TX_DWORD8[21:16], **Default = 00h**.

One byte for each port.

Definition at line 352 of file FspsUpd.h.

8.6.2.196 UINT8 FSP_S_CONFIG::Usb3HsioTxDownscaleAmpEnable[10]

Offset 0x00E7 - Enable the write to USB 3.0 TX Output Downscale Amplitude Adjustment Enable the write to USB 3.0 TX Output Downscale Amplitude Adjustment, Each value in array can be between 0-1.

One byte for each port.

Definition at line 346 of file FspsUpd.h.

8.6.2.197 UINT16 FSP_S_CONFIG::VrVoltageLimit[5]

Offset 0x02D4 - VR Voltage Limit PCODE MMIO Mailbox: VR Voltage Limit.

Range is 0-7999mV.

Definition at line 701 of file FspsUpd.h.

8.6.2.198 UINT8 FSP_S_CONFIG::WatchDog

Offset 0x0154 - WatchDog Timer Switch Enable/Disable.

0: Disable, 1: enable, Enable or disable WatchDog timer. \$EN_DIS

Definition at line 408 of file FspsUpd.h.

8.6.2.199 `UINT16 FSP_S_CONFIG::WatchDogTimerBios`

Offset 0x015A - BIOS Timer 16 bits Value, Set BIOS watchdog timer.

\$EN_DIS

Definition at line 439 of file FspUpd.h.

8.6.2.200 `UINT16 FSP_S_CONFIG::WatchDogTimerOs`

Offset 0x0158 - OS Timer 16 bits Value, Set OS watchdog timer.

\$EN_DIS

Definition at line 433 of file FspUpd.h.

8.6.2.201 `UINT8 FSP_S_CONFIG::XdcEnable`

Offset 0x006C - Enable xDCI controller Enable/disable to xDCI controller.

\$EN_DIS

Definition at line 222 of file FspUpd.h.

The documentation for this struct was generated from the following file:

- [FspUpd.h](#)

8.7 FSP_S_TEST_CONFIG Struct Reference

Fsp S Test Configuration.

```
#include <FspUpd.h>
```

Public Attributes

- `UINT32` [Signature](#)
Offset 0x0780.
- `UINT8` [ChapDeviceEnable](#)
Offset 0x0784 - Enable/Disable Device 7 Enable: Device 7 enabled, Disable (Default): Device 7 disabled \$EN_DIS.
- `UINT8` [SkipPamLock](#)
Offset 0x0785 - Skip PAM register lock Enable: PAM register will not be locked by RC, platform code should lock it, Disable(Default): PAM registers will be locked by RC \$EN_DIS.
- `UINT8` [EdramTestMode](#)
Offset 0x0786 - ED RAM Test Mode Enable: PAM register will not be locked by RC, platform code should lock it, Disable(Default): PAM registers will be locked by RC 0: ED RAM SW disable, 1: ED RAM SW Enable, 2: ED RAM HW mode.
- `UINT8` [DmiExtSync](#)
Offset 0x0787 - DMI Extended Sync Control Enable: Enable DMI Extended Sync Control, Disable(Default): Disable DMI Extended Sync Control \$EN_DIS.
- `UINT8` [DmiIot](#)
Offset 0x0788 - DMI IOT Control Enable: Enable DMI IOT Control, Disable(Default): Disable DMI IOT Control \$EN_DIS.
- `UINT8` [PegMaxPayload](#) [3]
Offset 0x0789 - PEG Max Payload size per root port 0xFF(Default):Auto, 0x1: Force 128B, 0x2: Force 256B 0xFF: Auto, 0x1: Force 128B, 0x2: Force 256B.
- `UINT8` [RenderStandby](#)

Offset 0x078C - Enable/Disable IGFX RenderStandby Enable(Default): Enable IGFX RenderStandby, Disable: Disable IGFX RenderStandby \$EN_DIS.

- UINT8 [PmSupport](#)

Offset 0x078D - Enable/Disable IGFX PmSupport Enable(Default): Enable IGFX PmSupport, Disable: Disable IGFX PmSupport \$EN_DIS.

- UINT8 [CdynmaxClampEnable](#)

Offset 0x078E - Enable/Disable CdynmaxClamp Enable(Default): Enable CdynmaxClamp, Disable: Disable CdynmaxClamp \$EN_DIS.

- UINT8 [VtdDisable](#)

Offset 0x078F - Disable VT-d 0=Enable/FALSE(VT-d disabled), 1=Disable/TRUE (VT-d enabled) \$EN_DIS.

- UINT8 [GtFreqMax](#)

Offset 0x0790 - GT Frequency Limit 0xFF: Auto(Default), 2: 100 Mhz, 3: 150 Mhz, 4: 200 Mhz, 5: 250 Mhz, 6: 300 Mhz, 7: 350 Mhz, 8: 400 Mhz, 9: 450 Mhz, 0xA: 500 Mhz, 0xB: 550 Mhz, 0xC: 600 Mhz, 0xD: 650 Mhz, 0xE: 700 Mhz, 0xF: 750 Mhz, 0x10: 800 Mhz, 0x11: 850 Mhz, 0x12:900 Mhz, 0x13: 950 Mhz, 0x14: 1000 Mhz, 0x15: 1050 Mhz, 0x16: 1100 Mhz, 0x17: 1150 Mhz, 0x18: 1200 Mhz 0xFF: Auto(Default), 2: 100 Mhz, 3: 150 Mhz, 4: 200 Mhz, 5: 250 Mhz, 6: 300 Mhz, 7: 350 Mhz, 8: 400 Mhz, 9: 450 Mhz, 0xA: 500 Mhz, 0xB: 550 Mhz, 0xC: 600 Mhz, 0xD: 650 Mhz, 0xE: 700 Mhz, 0xF: 750 Mhz, 0x10: 800 Mhz, 0x11: 850 Mhz, 0x12:900 Mhz, 0x13: 950 Mhz, 0x14: 1000 Mhz, 0x15: 1050 Mhz, 0x16: 1100 Mhz, 0x17: 1150 Mhz, 0x18: 1200 Mhz.

- UINT8 [SaPostMemTestRsvd](#) [11]

Offset 0x0791 - SaPostMemTestRsvd Reserved for SA Post-Mem Test \$EN_DIS.

- UINT8 [OneCoreRatioLimit](#)

Offset 0x079C - 1-Core Ratio Limit 1-Core Ratio Limit: For XE part: LFM to 255, For overclocking part: LFM to Fused 1-Core Ratio Limit + OC Bins.This 1-Core Ratio Limit Must be greater than or equal to 2-Core Ratio Limit, 3-Core Ratio Limit, 4-Core Ratio Limit, 5-Core Ratio Limit, 6-Core Ratio Limit, 7-Core Ratio Limit, 8-Core Ratio Limit.

- UINT8 [TwoCoreRatioLimit](#)

Offset 0x079D - 2-Core Ratio Limit 2-Core Ratio Limit: For XE part: LFM to 255, For overclocking part: LFM to Fused 2-Core Ratio Limit + OC Bins.This 2-Core Ratio Limit Must be Less than or equal to 1-Core Ratio Limit.Range is 0 to 83.

- UINT8 [ThreeCoreRatioLimit](#)

Offset 0x079E - 3-Core Ratio Limit 3-Core Ratio Limit: For XE part: LFM to 255, For overclocking part: LFM to Fused 3-Core Ratio Limit + OC Bins.This 3-Core Ratio Limit Must be Less than or equal to 1-Core Ratio Limit.Range is 0 to 83.

- UINT8 [FourCoreRatioLimit](#)

Offset 0x079F - 4-Core Ratio Limit 4-Core Ratio Limit: For XE part: LFM to 255, For overclocking part: LFM to Fused 4-Core Ratio Limit + OC Bins.This 4-Core Ratio Limit Must be Less than or equal to 1-Core Ratio Limit.Range is 0 to 83.

- UINT8 [UnusedUpdSpace22](#)

Offset 0x07A0.

- UINT8 [Hwp](#)

Offset 0x07A1 - Enable or Disable HWP Enable or Disable HWP(Hardware P states) Support.

- UINT8 [HdcControl](#)

Offset 0x07A2 - Hardware Duty Cycle Control Hardware Duty Cycle Control configuration.

- UINT8 [PowerLimit1Time](#)

Offset 0x07A3 - Package Long duration turbo mode time Package Long duration turbo mode time window in seconds.

- UINT8 [PowerLimit2](#)

Offset 0x07A4 - Short Duration Turbo Mode Enable or Disable short duration Turbo Mode.

- UINT8 [TurboPowerLimitLock](#)

Offset 0x07A5 - Turbo settings Lock Lock all Turbo settings Enable/Disable; **0: Disable** , 1: Enable \$EN_DIS.

- UINT8 [PowerLimit3Time](#)

Offset 0x07A6 - Package PL3 time window Package PL3 time window range for this policy in milliseconds.

- UINT8 [PowerLimit3DutyCycle](#)

Offset 0x07A7 - Package PL3 Duty Cycle Package PL3 Duty Cycle; Valid Range is 0 to 100.

- UINT8 [PowerLimit3Lock](#)

Offset 0x07A8 - Package PL3 Lock Package PL3 Lock Enable/Disable; **0: Disable** ; **1: Enable** \$EN_DIS.

- UINT8 [PowerLimit4Lock](#)
Offset 0x07A9 - Package PL4 Lock Package PL4 Lock Enable/Disable; **0: Disable** ; **1: Enable** \$EN_DIS.
- UINT8 [TccActivationOffset](#)
Offset 0x07AA - TCC Activation Offset TCC Activation Offset.
- UINT8 [TccOffsetClamp](#)
Offset 0x07AB - Tcc Offset Clamp Enable/Disable Tcc Offset Clamp for Runtime Average Temperature Limit (RATL) allows CPU to throttle below P1. For SKL Y SKU, the recommended default for this policy is **1: Enabled**, For all other SKUs the recommended default are **0: Disabled**.
- UINT8 [TccOffsetLock](#)
Offset 0x07AC - Tcc Offset Lock Tcc Offset Lock for Runtime Average Temperature Limit (RATL) to lock temperature target; **0: Disabled**; **1: Enabled**.
- UINT8 [NumberOfEntries](#)
Offset 0x07AD - Custom Ratio State Entries The number of custom ratio state entries, ranges from 0 to 40 for a valid custom ratio table. Sets the number of custom P-states.
- UINT8 [Custom1PowerLimit1Time](#)
Offset 0x07AE - Custom Short term Power Limit time window Short term Power Limit time window value for custom CTDTP level 1.
- UINT8 [Custom1TurboActivationRatio](#)
Offset 0x07AF - Custom Turbo Activation Ratio Turbo Activation Ratio for custom cTDP level 1.
- UINT8 [Custom1ConfigTdpControl](#)
Offset 0x07B0 - Custom Config Tdp Control Config Tdp Control (0/1/2) value for custom cTDP level 1.
- UINT8 [Custom2PowerLimit1Time](#)
Offset 0x07B1 - Custom Short term Power Limit time window Short term Power Limit time window value for custom CTDTP level 2.
- UINT8 [Custom2TurboActivationRatio](#)
Offset 0x07B2 - Custom Turbo Activation Ratio Turbo Activation Ratio for custom cTDP level 2.
- UINT8 [Custom2ConfigTdpControl](#)
Offset 0x07B3 - Custom Config Tdp Control Config Tdp Control (0/1/2) value for custom cTDP level 1.
- UINT8 [Custom3PowerLimit1Time](#)
Offset 0x07B4 - Custom Short term Power Limit time window Short term Power Limit time window value for custom CTDTP level 3.
- UINT8 [Custom3TurboActivationRatio](#)
Offset 0x07B5 - Custom Turbo Activation Ratio Turbo Activation Ratio for custom cTDP level 3.
- UINT8 [Custom3ConfigTdpControl](#)
Offset 0x07B6 - Custom Config Tdp Control Config Tdp Control (0/1/2) value for custom cTDP level 1.
- UINT8 [ConfigTdpLock](#)
Offset 0x07B7 - ConfigTdp mode settings Lock Lock the ConfigTdp mode settings from runtime changes; **0: Disable**; **1: Enable** \$EN_DIS.
- UINT8 [ConfigTdpBios](#)
Offset 0x07B8 - Load Configurable TDP SSDT Configure whether to load Configurable TDP SSDT; **0: Disable**; **1: Enable**.
- UINT8 [PsysPowerLimit1](#)
Offset 0x07B9 - PL1 Enable value PL1 Enable value to limit average platform power.
- UINT8 [PsysPowerLimit1Time](#)
Offset 0x07BA - PL1 timewindow PL1 timewindow in seconds. Valid values (Unit in seconds) 0 to 8 , 10 , 12 , 14 , 16 , 20 , 24 , 28 , 32 , 40 , 48 , 56 , 64 , 80 , 96 , 112 , 128.
- UINT8 [PsysPowerLimit2](#)
Offset 0x07BB - PL2 Enable Value PL2 Enable activates the PL2 value to limit average platform power.
- UINT8 [UnusedUpdSpace23](#) [2]
Offset 0x07BC.
- UINT8 [MlcStreamerPrefetcher](#)
Offset 0x07BE - Enable or Disable MLC Streamer Prefetcher Enable or Disable MLC Streamer Prefetcher; **0: Disable**; **1: Enable**.

- UINT8 [MlcSpatialPrefetcher](#)
Offset 0x07BF - Enable or Disable MLC Spatial Prefetcher Enable or Disable MLC Spatial Prefetcher; 0: Disable; 1: **Enable** \$EN_DIS.
 - UINT8 [MonitorMwaitEnable](#)
Offset 0x07C0 - Enable or Disable Monitor /MWAIT instructions Enable or Disable Monitor /MWAIT instructions; 0: Disable; 1: **Enable**.
 - UINT8 [MachineCheckEnable](#)
Offset 0x07C1 - Enable or Disable initialization of machine check registers Enable or Disable initialization of machine check registers; 0: Disable; 1: **Enable**.
 - UINT8 [DebugInterfaceEnable](#)
Offset 0x07C2 - Enable or Disable processor debug features Enable or Disable processor debug features; **0: Disable**; 1: Enable.
 - UINT8 [DebugInterfaceLockEnable](#)
Offset 0x07C3 - Lock or Unlock debug interface features Lock or Unlock debug interface features; 0: Disable; 1: **Enable**.
 - UINT8 [AplIdleManner](#)
Offset 0x07C4 - AP Idle Manner of waiting for SIPI AP Idle Manner of waiting for SIPI; 1: HALT loop; **2: MWAIT loop**; 3: RUN loop.
 - UINT8 [ApHandoffManner](#)
Offset 0x07C5 - Settings for AP Handoff to OS Settings for AP Handoff to OS; 1: HALT loop; **2: MWAIT loop**.
 - UINT8 [UnusedUpdSpace24](#) [2]
Offset 0x07C6.
 - UINT8 [ProcTraceOutputScheme](#)
Offset 0x07C8 - Control on Processor Trace output scheme Control on Processor Trace output scheme; **0: Single Range Output**; 1: ToPA Output.
 - UINT8 [ProcTraceEnable](#)
Offset 0x07C9 - Enable or Disable Processor Trace feature Enable or Disable Processor Trace feature; **0: Disable**; 1: Enable.
 - UINT8 [ProcTraceMemSize](#)
Offset 0x07CA - Memory region allocation for Processor Trace Memory region allocation for Processor Trace, Total Memory required is up to requested value * 2 (for memory alignment) * 8 active threads, to enable Processor Trace, PcdFspReservedMemoryLength must be increased by the total memory required, and PlatformMemorySize policy must also be increased by the total memory required over 32MB, Valid Values are 0 - 4KB , 0x1 - 8KB , 0x2 - 16KB , 0x3 - 32KB , 0x4 - 64KB , 0x5 - 128KB , 0x6 - 256KB , 0x7 - 512KB , 0x8 - 1MB , 0x9 - 2MB , 0xA - 4MB , 0xB - 8MB , 0xC - 16MB , 0xD - 32MB , 0xE - 64MB , 0xF - 128MB , 0xFF: Disable.
 - UINT8 [UnusedUpdSpace25](#)
Offset 0x07CB.
 - UINT8 [VoltageOptimization](#)
Offset 0x07CC - Enable or Disable Voltage Optimization feature Enable or Disable Voltage Optimization feature 0: Disable; 1: **Enable** \$EN_DIS.
 - UINT8 [Eist](#)
Offset 0x07CD - Enable or Disable Intel SpeedStep Technology Enable or Disable Intel SpeedStep Technology.
 - UINT8 [EnergyEfficientPState](#)
Offset 0x07CE - Enable or Disable Energy Efficient P-state Enable or Disable Energy Efficient P-state will be applied in Turbo mode.
 - UINT8 [EnergyEfficientTurbo](#)
Offset 0x07CF - Enable or Disable Energy Efficient Turbo Enable or Disable Energy Efficient Turbo, will be applied in Turbo mode.
 - UINT8 [TStates](#)
Offset 0x07D0 - Enable or Disable T states Enable or Disable T states; **0: Disable**; 1: Enable.
 - UINT8 [BiProcHot](#)
Offset 0x07D1 - Enable or Disable Bi-Directional PROCHOT# Enable or Disable Bi-Directional PROCHOT#; 0↔ : Disable; 1: **Enable** \$EN_DIS.
 - UINT8 [DisableProcHotOut](#)
-

Offset 0x07D2 - Enable or Disable PROCHOT# signal being driven externally Enable or Disable PROCHOT# signal being driven externally; 0: Disable; 1: **Enable**.

- UIN8 [ProcHotResponse](#)

Offset 0x07D3 - Enable or Disable PROCHOT# Response Enable or Disable PROCHOT# Response; 0: **Disable**; 1: **Enable**.

- UIN8 [DisableVrThermalAlert](#)

Offset 0x07D4 - Enable or Disable VR Thermal Alert Enable or Disable VR Thermal Alert; 0: **Disable**; 1: **Enable**.

- UIN8 [AutoThermalReporting](#)

Offset 0x07D5 - Enable or Disable Thermal Reporting Enable or Disable Thermal Reporting through ACPI tables; 0: **Disable**; 1: **Enable**.

- UIN8 [ThermalMonitor](#)

Offset 0x07D6 - Enable or Disable Thermal Monitor Enable or Disable Thermal Monitor; 0: **Disable**; 1: **Enable** \$EN_DIS.

- UIN8 [Cx](#)

Offset 0x07D7 - Enable or Disable CPU power states (C-states) Enable or Disable CPU power states (C-states).

- UIN8 [PmgCstCfgCtrlLock](#)

Offset 0x07D8 - Configure C-State Configuration Lock Configure C-State Configuration Lock; 0: **Disable**; 1: **Enable**.

- UIN8 [C1e](#)

Offset 0x07D9 - Enable or Disable Enhanced C-states Enable or Disable Enhanced C-states.

- UIN8 [PkgCStateDemotion](#)

Offset 0x07DA - Enable or Disable Package C-State Demotion Enable or Disable Package C-State Demotion.

- UIN8 [PkgCStateUnDemotion](#)

Offset 0x07DB - Enable or Disable Package C-State UnDemotion Enable or Disable Package C-State UnDemotion.

- UIN8 [CStatePreWake](#)

Offset 0x07DC - Enable or Disable CState-Pre wake Enable or Disable CState-Pre wake.

- UIN8 [TimedMwait](#)

Offset 0x07DD - Enable or Disable TimedMwait Support.

- UIN8 [CstCfgCtrlIoMwaitRedirection](#)

Offset 0x07DE - Enable or Disable IO to MWAIT redirection Enable or Disable IO to MWAIT redirection; 0: **Disable**; 1: **Enable**.

- UIN8 [PkgCStateLimit](#)

Offset 0x07DF - Set the Max Pkg Cstate Set the Max Pkg Cstate.

- UIN8 [CstateLatencyControl0TimeUnit](#)

Offset 0x07E0 - TimeUnit for C-State Latency Control0 TimeUnit for C-State Latency Control0; Valid values 0 - 1ns , 1 - 32ns , 2 - 1024ns , 3 - 32768ns , 4 - 1048576ns , 5 - 33554432ns.

- UIN8 [CstateLatencyControl1TimeUnit](#)

Offset 0x07E1 - TimeUnit for C-State Latency Control1 TimeUnit for C-State Latency Control1; Valid values 0 - 1ns , 1 - 32ns , 2 - 1024ns , 3 - 32768ns , 4 - 1048576ns , 5 - 33554432ns.

- UIN8 [CstateLatencyControl2TimeUnit](#)

Offset 0x07E2 - TimeUnit for C-State Latency Control2 TimeUnit for C-State Latency Control2; Valid values 0 - 1ns , 1 - 32ns , 2 - 1024ns , 3 - 32768ns , 4 - 1048576ns , 5 - 33554432ns.

- UIN8 [CstateLatencyControl3TimeUnit](#)

Offset 0x07E3 - TimeUnit for C-State Latency Control3 TimeUnit for C-State Latency Control3; Valid values 0 - 1ns , 1 - 32ns , 2 - 1024ns , 3 - 32768ns , 4 - 1048576ns , 5 - 33554432ns.

- UIN8 [CstateLatencyControl4TimeUnit](#)

Offset 0x07E4 - TimeUnit for C-State Latency Control4 TimeUnit for C-State Latency Control4; Valid values 0 - 1ns , 1 - 32ns , 2 - 1024ns , 3 - 32768ns , 4 - 1048576ns , 5 - 33554432ns.

- UIN8 [CstateLatencyControl5TimeUnit](#)

Offset 0x07E5 - TimeUnit for C-State Latency Control5 TimeUnit for C-State Latency Control5; Valid values 0 - 1ns , 1 - 32ns , 2 - 1024ns , 3 - 32768ns , 4 - 1048576ns , 5 - 33554432ns.

- UIN8 [PpmlrmSetting](#)

Offset 0x07E6 - Interrupt Redirection Mode Select Interrupt Redirection Mode Select; 0: Fixed priority; 1: Round robin; 2: Hash vector; 4: PAIR with fixed priority; 5: PAIR with round robin; 6: PAIR with hash vector; 7: No change.

- UIN8 [ProcHotLock](#)
Offset 0x07E7 - Lock prohot configuration Lock prohot configuration Enable/Disable; **0: Disable**; 1: Enable \$EN↔
_DIS.
- UIN8 [ConfigTdpLevel](#)
Offset 0x07E8 - Configuration for boot TDP selection Configuration for boot TDP selection; **0: TDP Nominal**; 1: TDP
Down; 2: TDP Up; 0xFF : Deactivate 0:TDP Nominal, 1:TDP Down, 2:TDP Up, 0xFF:Deactivate.
- UIN8 [RaceToHalt](#)
Offset 0x07E9 - Race To Halt Enable/Disable Race To Halt feature.
- UIN16 [MaxRatio](#)
Offset 0x07EA - Max P-State Ratio Max P-State Ratio , Valid Range 0 to 0x7F.
- UIN16 [StateRatio](#) [40]
Offset 0x07EC - Maximum P-state ratio to use in the custom P-state table Maximum P-state ratio to use in the custom
P-state table.
- UIN16 [CstateLatencyControl0Irtl](#)
Offset 0x083C - Interrupt Response Time Limit of C-State LatencyControl0 Interrupt Response Time Limit of C-State
LatencyControl0.
- UIN16 [CstateLatencyControl1Irtl](#)
Offset 0x083E - Interrupt Response Time Limit of C-State LatencyControl1 Interrupt Response Time Limit of C-State
LatencyControl1.Range of value 0 to 0x3FF.
- UIN16 [CstateLatencyControl2Irtl](#)
Offset 0x0840 - Interrupt Response Time Limit of C-State LatencyControl2 Interrupt Response Time Limit of C-State
LatencyControl2.Range of value 0 to 0x3FF.
- UIN16 [CstateLatencyControl3Irtl](#)
Offset 0x0842 - Interrupt Response Time Limit of C-State LatencyControl3 Interrupt Response Time Limit of C-State
LatencyControl3.Range of value 0 to 0x3FF.
- UIN16 [CstateLatencyControl4Irtl](#)
Offset 0x0844 - Interrupt Response Time Limit of C-State LatencyControl4 Interrupt Response Time Limit of C-State
LatencyControl4.Range of value 0 to 0x3FF.
- UIN16 [CstateLatencyControl5Irtl](#)
Offset 0x0846 - Interrupt Response Time Limit of C-State LatencyControl5 Interrupt Response Time Limit of C-State
LatencyControl5.Range of value 0 to 0x3FF.
- UIN32 [PowerLimit1](#)
Offset 0x0848 - Package Long duration turbo mode power limit Package Long duration turbo mode power limit.
- UIN32 [PowerLimit2Power](#)
Offset 0x084C - Package Short duration turbo mode power limit Package Short duration turbo mode power limit.
- UIN32 [PowerLimit3](#)
Offset 0x0850 - Package PL3 power limit Package PL3 power limit.
- UIN32 [PowerLimit4](#)
Offset 0x0854 - Package PL4 power limit Package PL4 power limit.
- UIN32 [TccOffsetTimeWindowForRatl](#)
Offset 0x0858 - Tcc Offset Time Window for RATL Package PL4 power limit.
- UIN32 [Custom1PowerLimit1](#)
Offset 0x085C - Short term Power Limit value for custom cTDP level 1 Short term Power Limit value for custom cTDP
level 1.
- UIN32 [Custom1PowerLimit2](#)
Offset 0x0860 - Long term Power Limit value for custom cTDP level 1 Long term Power Limit value for custom cTDP
level 1.
- UIN32 [Custom2PowerLimit1](#)
Offset 0x0864 - Short term Power Limit value for custom cTDP level 2 Short term Power Limit value for custom cTDP
level 2.
- UIN32 [Custom2PowerLimit2](#)
Offset 0x0868 - Long term Power Limit value for custom cTDP level 2 Long term Power Limit value for custom cTDP
level 2.

- UINT32 [Custom3PowerLimit1](#)
Offset 0x086C - Short term Power Limit value for custom cTDP level 3 Short term Power Limit value for custom cTDP level 3.
- UINT32 [Custom3PowerLimit2](#)
Offset 0x0870 - Long term Power Limit value for custom cTDP level 3 Long term Power Limit value for custom cTDP level 3.
- UINT32 [PsysPowerLimit1Power](#)
Offset 0x0874 - Platform PL1 power Platform PL1 power.
- UINT32 [PsysPowerLimit2Power](#)
Offset 0x0878 - Platform PL2 power Platform PL2 power.
- UINT16 [PsysPmax](#)
Offset 0x087C - Platform Power Pmax PCODE MMIO Mailbox: Platform Power Pmax.
- UINT16 [CpuS3ResumeDataSize](#)
Offset 0x087E - CpuS3ResumeDataSize Size of CPU S3 Resume Data.
- UINT32 [CpuS3ResumeData](#)
Offset 0x0880 - CpuS3ResumeData Pointer to CPU S3 Resume Data.
- UINT8 [FiveCoreRatioLimit](#)
Offset 0x0884 - 5-Core Ratio Limit 5-Core Ratio Limit: For XE part: LFM to 255, For overclocking part: LFM to Fused 5-Core Ratio Limit + OC Bins.This 5-Core Ratio Limit Must be Less than or equal to 1-Core Ratio Limit.Range is 0 to 83.
- UINT8 [SixCoreRatioLimit](#)
Offset 0x0885 - 6-Core Ratio Limit 6-Core Ratio Limit: For XE part: LFM to 255, For overclocking part: LFM to Fused 6-Core Ratio Limit + OC Bins.This 6-Core Ratio Limit Must be Less than or equal to 1-Core Ratio Limit.Range is 0 to 83.
- UINT8 [SevenCoreRatioLimit](#)
Offset 0x0886 - 7-Core Ratio Limit 7-Core Ratio Limit: For XE part: LFM to 255, For overclocking part: LFM to Fused 7-Core Ratio Limit + OC Bins.This 7-Core Ratio Limit Must be Less than or equal to 1-Core Ratio Limit.Range is 0 to 83.
- UINT8 [EightCoreRatioLimit](#)
Offset 0x0887 - 8-Core Ratio Limit 8-Core Ratio Limit: For XE part: LFM to 255, For overclocking part: LFM to Fused 8-Core Ratio Limit + OC Bins.This 8-Core Ratio Limit Must be Less than or equal to 1-Core Ratio Limit.Range is 0 to 83.
- UINT8 [ThreeStrikeCounterDisable](#)
*Offset 0x0888 - Set Three Strike Counter Disable False (default): Three Strike counter will be incremented and True: Prevents Three Strike counter from incrementing; **0: False**; 1: True.*
- UINT8 [ReservedCpuPostMemTest](#) [1]
Offset 0x0889 - ReservedCpuPostMemTest Reserved for CPU Post-Mem Test \$EN_DIS.
- UINT8 [SgxSinitDataFromTpm](#)
Offset 0x088A - SgxSinitDataFromTpm SgxSinitDataFromTpm default values.
- UINT8 [EndOfPostMessage](#)
Offset 0x088B - End of Post message Test, Send End of Post message.
- UINT8 [DisableD0I3SettingForHeci](#)
Offset 0x088C - D0I3 Setting for HECI Disable Test, 0: disable, 1: enable, Setting this option disables setting D0I3 bit for all HECI devices \$EN_DIS.
- UINT8 [PchLockDownGlobalSmi](#)
Offset 0x088D - Enable LOCKDOWN SMI Enable SMI_LOCK bit to prevent writes to the Global SMI Enable bit.
- UINT16 [PchHdaResetWaitTimer](#)
Offset 0x088E - HD Audio Reset Wait Timer The delay timer after Azalia reset, the value is number of microseconds.
- UINT8 [PchLockDownBiosInterface](#)
Offset 0x0890 - Enable LOCKDOWN BIOS Interface Enable BIOS Interface Lock Down bit to prevent writes to the Backup Control Register.
- UINT8 [PchLockDownRtcLock](#)
Offset 0x0891 - RTC CMOS RAM LOCK Enable RTC lower and upper 128 byte Lock bits to lock Bytes 38h-3Fh in the upper and and lower 128-byte bank of RTC RAM.

- UINT8 [PchSbiUnlock](#)
Offset 0x0892 - PCH Sbi lock bit This unlock the SBI lock bit to allow SBI after post time.
- UINT8 [PchSbAccessUnlock](#)
Offset 0x0893 - PCH Psf lock bit The PSF registers will be locked before 3rd party code execution.
- UINT16 [PcieRpLtrMaxSnoopLatency](#) [24]
Offset 0x0894 - PCIE RP Ltr Max Snoop Latency Latency Tolerance Reporting, Max Snoop Latency.
- UINT16 [PcieRpLtrMaxNoSnoopLatency](#) [24]
Offset 0x08C4 - PCIE RP Ltr Max No Snoop Latency Latency Tolerance Reporting, Max Non-Snoop Latency.
- UINT8 [PcieRpSnoopLatencyOverrideMode](#) [24]
Offset 0x08F4 - PCIE RP Snoop Latency Override Mode Latency Tolerance Reporting, Snoop Latency Override Mode.
- UINT8 [PcieRpSnoopLatencyOverrideMultiplier](#) [24]
Offset 0x090C - PCIE RP Snoop Latency Override Multiplier Latency Tolerance Reporting, Snoop Latency Override Multiplier.
- UINT16 [PcieRpSnoopLatencyOverrideValue](#) [24]
Offset 0x0924 - PCIE RP Snoop Latency Override Value Latency Tolerance Reporting, Snoop Latency Override Value.
- UINT8 [PcieRpNonSnoopLatencyOverrideMode](#) [24]
Offset 0x0954 - PCIE RP Non Snoop Latency Override Mode Latency Tolerance Reporting, Non-Snoop Latency Override Mode.
- UINT8 [PcieRpNonSnoopLatencyOverrideMultiplier](#) [24]
Offset 0x096C - PCIE RP Non Snoop Latency Override Multiplier Latency Tolerance Reporting, Non-Snoop Latency Override Multiplier.
- UINT16 [PcieRpNonSnoopLatencyOverrideValue](#) [24]
Offset 0x0984 - PCIE RP Non Snoop Latency Override Value Latency Tolerance Reporting, Non-Snoop Latency Override Value.
- UINT8 [PcieRpSlotPowerLimitScale](#) [24]
Offset 0x09B4 - PCIE RP Slot Power Limit Scale Specifies scale used for slot power limit value.
- UINT16 [PcieRpSlotPowerLimitValue](#) [24]
Offset 0x09CC - PCIE RP Slot Power Limit Value Specifies upper limit on power supply by slot.
- UINT8 [PcieRpUptp](#) [24]
Offset 0x09FC - PCIE RP Upstream Port Transmitter Preset Used during Gen3 Link Equalization.
- UINT8 [PcieRpDptp](#) [24]
Offset 0x0A14 - PCIE RP Downstream Port Transmitter Preset Used during Gen3 Link Equalization.
- UINT8 [PcieEnablePort8xhDecode](#)
Offset 0x0A2C - PCIE RP Enable Port8xh Decode This member describes whether PCIE root port Port 8xh Decode is enabled.
- UINT8 [PchPciePort8xhDecodePortIndex](#)
Offset 0x0A2D - PCIE Port8xh Decode Port Index The Index of PCIe Port that is selected for Port8xh Decode (0 Based).
- UINT8 [PchPmDisableEnergyReport](#)
Offset 0x0A2E - PCH Pm Disable Energy Report Disable/Enable PCH to CPU energy report feature.
- UINT8 [PchPmPmcReadDisable](#)
Offset 0x0A2F - PCH Pm Pmc Read Disable When set to true, this bit disallows host reads to PMC XRAM.
- UINT8 [SataTestMode](#)
Offset 0x0A30 - PCH Sata Test Mode Allow entrance to the PCH SATA test modes.
- UINT8 [ReservedFspstestUpd](#) [15]
Offset 0x0A31.

8.7.1 Detailed Description

Fsp S Test Configuration.

Definition at line 2063 of file FspstestUpd.h.

8.7.2 Member Data Documentation

8.7.2.1 UINT8 FSP_S_TEST_CONFIG::ApHandoffManner

Offset 0x07C5 - Settings for AP Handoff to OS Settings for AP Handoff to OS; 1: HALT loop; **2: MWAIT loop.**

1:HALT loop, 2:MWAIT loop

Definition at line 2394 of file FspsUpd.h.

8.7.2.2 UINT8 FSP_S_TEST_CONFIG::ApIdleManner

Offset 0x07C4 - AP Idle Manner of waiting for SIPI AP Idle Manner of waiting for SIPI; 1: HALT loop; **2: MWAIT loop**; 3: RUN loop.

1:HALT loop, 2:MWAIT loop, 3:RUN loop

Definition at line 2388 of file FspsUpd.h.

8.7.2.3 UINT8 FSP_S_TEST_CONFIG::AutoThermalReporting

Offset 0x07D5 - Enable or Disable Thermal Reporting Enable or Disable Thermal Reporting through ACPI tables; 0: Disable; **1: Enable.**

\$EN_DIS

Definition at line 2487 of file FspsUpd.h.

8.7.2.4 UINT8 FSP_S_TEST_CONFIG::C1e

Offset 0x07D9 - Enable or Disable Enhanced C-states Enable or Disable Enhanced C-states.

0: Disable; **1: Enable** \$EN_DIS

Definition at line 2511 of file FspsUpd.h.

8.7.2.5 UINT8 FSP_S_TEST_CONFIG::ConfigTdpBios

Offset 0x07B8 - Load Configurable TDP SSDT Configure whether to load Configurable TDP SSDT; **0: Disable**; 1: Enable.

\$EN_DIS

Definition at line 2323 of file FspsUpd.h.

8.7.2.6 UINT16 FSP_S_TEST_CONFIG::CstateLatencyControl0Intl

Offset 0x083C - Interrupt Response Time Limit of C-State LatencyControl0 Interrupt Response Time Limit of C-State LatencyControl0.

Range of value 0 to 0x3FF

Definition at line 2630 of file FspsUpd.h.

8.7.2.7 UINT8 FSP_S_TEST_CONFIG::CStatePreWake

Offset 0x07DC - Enable or Disable CState-Pre wake Enable or Disable CState-Pre wake.

Disable; **1: Enable** \$EN_DIS

Definition at line 2531 of file FspsUpd.h.

8.7.2.8 UINT8 FSP_S_TEST_CONFIG::CstCfgCtrlIoMwaitRedirection

Offset 0x07DE - Enable or Disable IO to MWAIT redirection Enable or Disable IO to MWAIT redirection; **0: Disable;**
1: Enable.

\$EN_DIS

Definition at line 2543 of file FspsUpd.h.

8.7.2.9 UINT8 FSP_S_TEST_CONFIG::Custom1ConfigTdpControl

Offset 0x07B0 - Custom Config Tdp Control Config Tdp Control (0/1/2) value for custom cTDP level 1.

Valid Range is 0 to 2

Definition at line 2281 of file FspsUpd.h.

8.7.2.10 UINT32 FSP_S_TEST_CONFIG::Custom1PowerLimit1

Offset 0x085C - Short term Power Limit value for custom cTDP level 1 Short term Power Limit value for custom cTDP level 1.

Units are based on POWER_MGMT_CONFIG.CustomPowerUnit.Valid Range 0 to 4095875 in Step size of 125

Definition at line 2691 of file FspsUpd.h.

8.7.2.11 UINT8 FSP_S_TEST_CONFIG::Custom1PowerLimit1Time

Offset 0x07AE - Custom Short term Power Limit time window Short term Power Limit time window value for custom CTDP level 1.

Valid Range 0 to 128

Definition at line 2271 of file FspsUpd.h.

8.7.2.12 UINT32 FSP_S_TEST_CONFIG::Custom1PowerLimit2

Offset 0x0860 - Long term Power Limit value for custom cTDP level 1 Long term Power Limit value for custom cTDP level 1.

Units are based on POWER_MGMT_CONFIG.CustomPowerUnit.Valid Range 0 to 4095875 in Step size of 125

Definition at line 2697 of file FspsUpd.h.

8.7.2.13 UINT8 FSP_S_TEST_CONFIG::Custom1TurboActivationRatio

Offset 0x07AF - Custom Turbo Activation Ratio Turbo Activation Ratio for custom cTDP level 1.

Valid Range 0 to 255

Definition at line 2276 of file FspsUpd.h.

8.7.2.14 UINT8 FSP_S_TEST_CONFIG::Custom2ConfigTdpControl

Offset 0x07B3 - Custom Config Tdp Control Config Tdp Control (0/1/2) value for custom cTDP level 1.

Valid Range is 0 to 2

Definition at line 2296 of file FspsUpd.h.

8.7.2.15 UINT32 FSP_S_TEST_CONFIG::Custom2PowerLimit1

Offset 0x0864 - Short term Power Limit value for custom cTDP level 2 Short term Power Limit value for custom cTDP level 2.

Units are based on POWER_MGMT_CONFIG.CustomPowerUnit.Valid Range 0 to 4095875 in Step size of 125

Definition at line 2703 of file FspsUpd.h.

8.7.2.16 UINT8 FSP_S_TEST_CONFIG::Custom2PowerLimit1Time

Offset 0x07B1 - Custom Short term Power Limit time window Short term Power Limit time window value for custom CTDP level 2.

Valid Range 0 to 128

Definition at line 2286 of file FspsUpd.h.

8.7.2.17 UINT32 FSP_S_TEST_CONFIG::Custom2PowerLimit2

Offset 0x0868 - Long term Power Limit value for custom cTDP level 2 Long term Power Limit value for custom cTDP level 2.

Units are based on POWER_MGMT_CONFIG.CustomPowerUnit.Valid Range 0 to 4095875 in Step size of 125

Definition at line 2709 of file FspsUpd.h.

8.7.2.18 UINT8 FSP_S_TEST_CONFIG::Custom2TurboActivationRatio

Offset 0x07B2 - Custom Turbo Activation Ratio Turbo Activation Ratio for custom cTDP level 2.

Valid Range 0 to 255

Definition at line 2291 of file FspsUpd.h.

8.7.2.19 UINT8 FSP_S_TEST_CONFIG::Custom3ConfigTdpControl

Offset 0x07B6 - Custom Config Tdp Control Config Tdp Control (0/1/2) value for custom cTDP level 1.

Valid Range is 0 to 2

Definition at line 2311 of file FspsUpd.h.

8.7.2.20 UINT32 FSP_S_TEST_CONFIG::Custom3PowerLimit1

Offset 0x086C - Short term Power Limit value for custom cTDP level 3 Short term Power Limit value for custom cTDP level 3.

Units are based on POWER_MGMT_CONFIG.CustomPowerUnit.Valid Range 0 to 4095875 in Step size of 125

Definition at line 2715 of file FspsUpd.h.

8.7.2.21 UINT8 FSP_S_TEST_CONFIG::Custom3PowerLimit1Time

Offset 0x07B4 - Custom Short term Power Limit time window Short term Power Limit time window value for custom CTDP level 3.

Valid Range 0 to 128

Definition at line 2301 of file FspsUpd.h.

8.7.2.22 UINT32 FSP_S_TEST_CONFIG::Custom3PowerLimit2

Offset 0x0870 - Long term Power Limit value for custom cTDP level 3 Long term Power Limit value for custom cTDP level 3.

Units are based on POWER_MGMT_CONFIG.CustomPowerUnit.Valid Range 0 to 4095875 in Step size of 125

Definition at line 2721 of file FspsUpd.h.

8.7.2.23 UINT8 FSP_S_TEST_CONFIG::Custom3TurboActivationRatio

Offset 0x07B5 - Custom Turbo Activation Ratio Turbo Activation Ratio for custom cTDP level 3.

Valid Range 0 to 255

Definition at line 2306 of file FspsUpd.h.

8.7.2.24 UINT8 FSP_S_TEST_CONFIG::Cx

Offset 0x07D7 - Enable or Disable CPU power states (C-states) Enable or Disable CPU power states (C-states).

0: Disable; 1: **Enable** \$EN_DIS

Definition at line 2499 of file FspsUpd.h.

8.7.2.25 UINT8 FSP_S_TEST_CONFIG::DebugInterfaceEnable

Offset 0x07C2 - Enable or Disable processor debug features Enable or Disable processor debug features; **0**: **Disable**; 1: Enable.

\$EN_DIS

Definition at line 2376 of file FspsUpd.h.

8.7.2.26 UINT8 FSP_S_TEST_CONFIG::DebugInterfaceLockEnable

Offset 0x07C3 - Lock or Unlock debug interface features Lock or Unlock debug interface features; 0: Disable; 1: **Enable**.

\$EN_DIS

Definition at line 2382 of file FspsUpd.h.

8.7.2.27 UINT8 FSP_S_TEST_CONFIG::DisableProcHotOut

Offset 0x07D2 - Enable or Disable PROCHOT# signal being driven externally Enable or Disable PROCHOT# signal being driven externally; 0: Disable; 1: **Enable**.

\$EN_DIS

Definition at line 2469 of file FspsUpd.h.

8.7.2.28 UINT8 FSP_S_TEST_CONFIG::DisableVrThermalAlert

Offset 0x07D4 - Enable or Disable VR Thermal Alert Enable or Disable VR Thermal Alert; **0**: **Disable**; 1: Enable.

\$EN_DIS

Definition at line 2481 of file FspsUpd.h.

8.7.2.29 UINT8 FSP_S_TEST_CONFIG::Eist

Offset 0x07CD - Enable or Disable Intel SpeedStep Technology Enable or Disable Intel SpeedStep Technology.

0: Disable; **1: Enable** \$EN_DIS

Definition at line 2437 of file FspUpd.h.

8.7.2.30 UINT8 FSP_S_TEST_CONFIG::EndOfPostMessage

Offset 0x088B - End of Post message Test, Send End of Post message.

Disable(0x0): Disable EOP message, Send in PEI(0x1): EOP send in PEI, Send in DXE(0x2)(Default): EOP send in PEI 0:Disable, 1:Send in PEI, 2:Send in DXE, 3:Reserved

Definition at line 2802 of file FspUpd.h.

8.7.2.31 UINT8 FSP_S_TEST_CONFIG::EnergyEfficientPState

Offset 0x07CE - Enable or Disable Energy Efficient P-state Enable or Disable Energy Efficient P-state will be applied in Turbo mode.

Disable; **1: Enable** \$EN_DIS

Definition at line 2444 of file FspUpd.h.

8.7.2.32 UINT8 FSP_S_TEST_CONFIG::EnergyEfficientTurbo

Offset 0x07CF - Enable or Disable Energy Efficient Turbo Enable or Disable Energy Efficient Turbo, will be applied in Turbo mode.

Disable; **1: Enable** \$EN_DIS

Definition at line 2451 of file FspUpd.h.

8.7.2.33 UINT8 FSP_S_TEST_CONFIG::HdcControl

Offset 0x07A2 - Hardware Duty Cycle Control Hardware Duty Cycle Control configuration.

0: Disabled; **1: Enabled** 2-3:Reserved \$EN_DIS

Definition at line 2196 of file FspUpd.h.

8.7.2.34 UINT8 FSP_S_TEST_CONFIG::Hwp

Offset 0x07A1 - Enable or Disable HWP Enable or Disable HWP(Hardware P states) Support.

0: Disable; **1: Enable**; 2-3:Reserved \$EN_DIS

Definition at line 2190 of file FspUpd.h.

8.7.2.35 UINT8 FSP_S_TEST_CONFIG::MachineCheckEnable

Offset 0x07C1 - Enable or Disable initialization of machine check registers Enable or Disable initialization of machine check registers; 0: Disable; **1: Enable**.

\$EN_DIS

Definition at line 2370 of file FspUpd.h.

8.7.2.36 UINT8 FSP_S_TEST_CONFIG::MicStreamerPrefetcher

Offset 0x07BE - Enable or Disable MLC Streamer Prefetcher Enable or Disable MLC Streamer Prefetcher; 0↔ : Disable; **1: Enable.**

\$EN_DIS

Definition at line 2352 of file FspUpd.h.

8.7.2.37 UINT8 FSP_S_TEST_CONFIG::MonitorMwaitEnable

Offset 0x07C0 - Enable or Disable Monitor /MWAIT instructions Enable or Disable Monitor /MWAIT instructions; 0: Disable; **1: Enable.**

\$EN_DIS

Definition at line 2364 of file FspUpd.h.

8.7.2.38 UINT8 FSP_S_TEST_CONFIG::NumberOfEntries

Offset 0x07AD - Custom Ratio State Entries The number of custom ratio state entries, ranges from 0 to 40 for a valid custom ratio table.Sets the number of custom P-states.

At least 2 states must be present

Definition at line 2266 of file FspUpd.h.

8.7.2.39 UINT8 FSP_S_TEST_CONFIG::OneCoreRatioLimit

Offset 0x079C - 1-Core Ratio Limit 1-Core Ratio Limit: For XE part: LFM to 255, For overclocking part: LFM to Fused 1-Core Ratio Limit + OC Bins.This 1-Core Ratio Limit Must be greater than or equal to 2-Core Ratio Limit, 3-Core Ratio Limit, 4-Core Ratio Limit, 5-Core Ratio Limit, 6-Core Ratio Limit, 7-Core Ratio Limit, 8-Core Ratio Limit.

Range is 0 to 83

Definition at line 2158 of file FspUpd.h.

8.7.2.40 UINT16 FSP_S_TEST_CONFIG::PchHdaResetWaitTimer

Offset 0x088E - HD Audio Reset Wait Timer The delay timer after Azalia reset, the value is number of microseconds. Default is 600.

Definition at line 2820 of file FspUpd.h.

8.7.2.41 UINT8 FSP_S_TEST_CONFIG::PchLockDownBiosInterface

Offset 0x0890 - Enable LOCKDOWN BIOS Interface Enable BIOS Interface Lock Down bit to prevent writes to the Backup Control Register.

\$EN_DIS

Definition at line 2826 of file FspUpd.h.

8.7.2.42 UINT8 FSP_S_TEST_CONFIG::PchLockDownGlobalSmi

Offset 0x088D - Enable LOCKDOWN SMI Enable SMI_LOCK bit to prevent writes to the Global SMI Enable bit.

\$EN_DIS

Definition at line 2815 of file FspsUpd.h.

8.7.2.43 UINT8 FSP_S_TEST_CONFIG::PchLockDownRtcLock

Offset 0x0891 - RTC CMOS RAM LOCK Enable RTC lower and upper 128 byte Lock bits to lock Bytes 38h-3Fh in the upper and lower 128-byte bank of RTC RAM.

\$EN_DIS

Definition at line 2833 of file FspsUpd.h.

8.7.2.44 UINT8 FSP_S_TEST_CONFIG::PchPmDisableEnergyReport

Offset 0x0A2E - PCH Pm Disable Energy Report Disable/Enable PCH to CPU enery report feature.

\$EN_DIS

Definition at line 2923 of file FspsUpd.h.

8.7.2.45 UINT8 FSP_S_TEST_CONFIG::PchPmPmcReadDisable

Offset 0x0A2F - PCH Pm Pmc Read Disable When set to true, this bit disallows host reads to PMC XRAM.

\$EN_DIS

Definition at line 2929 of file FspsUpd.h.

8.7.2.46 UINT8 FSP_S_TEST_CONFIG::PchSbAccessUnlock

Offset 0x0893 - PCH Psf lock bit The PSF registers will be locked before 3rd party code execution.

0: Disable; 1: Enable. \$EN_DIS

Definition at line 2845 of file FspsUpd.h.

8.7.2.47 UINT8 FSP_S_TEST_CONFIG::PchSbiUnlock

Offset 0x0892 - PCH Sbi lock bit This unlock the SBI lock bit to allow SBI after post time.

0: Disable; 1: Enable. \$EN_DIS

Definition at line 2839 of file FspsUpd.h.

8.7.2.48 UINT8 FSP_S_TEST_CONFIG::PcieEnablePort8xhDecode

Offset 0x0A2C - PCIE RP Enable Port8xh Decode This member describes whether PCIE root port Port 8xh Decode is enabled.

0: Disable; 1: Enable. \$EN_DIS

Definition at line 2912 of file FspsUpd.h.

8.7.2.49 UINT8 FSP_S_TEST_CONFIG::PcieRpDptp[24]

Offset 0x0A14 - PCIE RP Downstream Port Transmitter Preset Used during Gen3 Link Equalization.

Used for all lanes. Default is 7.

Definition at line 2905 of file FspsUpd.h.

8.7.2.50 UINT8 FSP_S_TEST_CONFIG::PcieRpSlotPowerLimitScale[24]

Offset 0x09B4 - PCIE RP Slot Power Limit Scale Specifies scale used for slot power limit value.

Leave as 0 to set to default.

Definition at line 2890 of file FspsUpd.h.

8.7.2.51 UINT16 FSP_S_TEST_CONFIG::PcieRpSlotPowerLimitValue[24]

Offset 0x09CC - PCIE RP Slot Power Limit Value Specifies upper limit on power supply by slot.

Leave as 0 to set to default.

Definition at line 2895 of file FspsUpd.h.

8.7.2.52 UINT8 FSP_S_TEST_CONFIG::PcieRpUptp[24]

Offset 0x09FC - PCIE RP Upstream Port Transmitter Preset Used during Gen3 Link Equalization.

Used for all lanes. Default is 5.

Definition at line 2900 of file FspsUpd.h.

8.7.2.53 UINT8 FSP_S_TEST_CONFIG::PkgCStateDemotion

Offset 0x07DA - Enable or Disable Package C-State Demotion Enable or Disable Package C-State Demotion.

0: Disable; 1: Enable; **2: Auto** (Auto: Enabled for Skylake; Disabled for Kabylake) \$EN_DIS

Definition at line 2518 of file FspsUpd.h.

8.7.2.54 UINT8 FSP_S_TEST_CONFIG::PkgCStateLimit

Offset 0x07DF - Set the Max Pkg Cstate Set the Max Pkg Cstate.

Default set to Auto which limits the Max Pkg Cstate to deep C-state. Valid values 0 - C0/C1 , 1 - C2 , 2 - C3 , 3 - C6 , 4 - C7 , 5 - C7S , 6 - C8 , 7 - C9 , 8 - C10 , 254 - CPU Default , 255 - Auto

Definition at line 2550 of file FspsUpd.h.

8.7.2.55 UINT8 FSP_S_TEST_CONFIG::PkgCStateUnDemotion

Offset 0x07DB - Enable or Disable Package C-State UnDemotion Enable or Disable Package C-State UnDemotion.

0: Disable; 1: Enable; **2: Auto** (Auto: Enabled for Skylake; Disabled for Kabylake) \$EN_DIS

Definition at line 2525 of file FspsUpd.h.

8.7.2.56 UINT8 FSP_S_TEST_CONFIG::PmgCstCfgCtrlLock

Offset 0x07D8 - Configure C-State Configuration Lock Configure C-State Configuration Lock; 0: Disable; **1: Enable.**

\$EN_DIS

Definition at line 2505 of file FspsUpd.h.

8.7.2.57 UINT32 FSP_S_TEST_CONFIG::PowerLimit1

Offset 0x0848 - Package Long duration turbo mode power limit Package Long duration turbo mode power limit.

Units are based on POWER_MGMT_CONFIG.CustomPowerUnit. Valid Range 0 to 4095875 in Step size of 125
Definition at line 2661 of file FspsUpd.h.

8.7.2.58 UINT8 FSP_S_TEST_CONFIG::PowerLimit1Time

Offset 0x07A3 - Package Long duration turbo mode time Package Long duration turbo mode time window in seconds.

Valid values(Unit in seconds) 0 to 8 , 10 , 12 , 14 , 16 , 20 , 24 , 28 , 32 , 40 , 48 , 56 , 64 , 80 , 96 , 112 , 128

Definition at line 2202 of file FspsUpd.h.

8.7.2.59 UINT8 FSP_S_TEST_CONFIG::PowerLimit2

Offset 0x07A4 - Short Duration Turbo Mode Enable or Disable short duration Turbo Mode.

0 : Disable; **1: Enable** \$EN_DIS

Definition at line 2208 of file FspsUpd.h.

8.7.2.60 UINT32 FSP_S_TEST_CONFIG::PowerLimit2Power

Offset 0x084C - Package Short duration turbo mode power limit Package Short duration turbo mode power limit.

Units are based on POWER_MGMT_CONFIG.CustomPowerUnit.Valid Range 0 to 4095875 in Step size of 125

Definition at line 2667 of file FspsUpd.h.

8.7.2.61 UINT32 FSP_S_TEST_CONFIG::PowerLimit3

Offset 0x0850 - Package PL3 power limit Package PL3 power limit.

Units are based on POWER_MGMT_CONFIG.CustomPowerUnit.Valid Range 0 to 4095875 in Step size of 125

Definition at line 2673 of file FspsUpd.h.

8.7.2.62 UINT8 FSP_S_TEST_CONFIG::PowerLimit3Time

Offset 0x07A6 - Package PL3 time window Package PL3 time window range for this policy in milliseconds.

Valid values are 0, 3 to 8, 10, 12, 14, 16, 20 , 24, 28, 32, 40, 48, 55, 56, 64

Definition at line 2220 of file FspsUpd.h.

8.7.2.63 UINT32 FSP_S_TEST_CONFIG::PowerLimit4

Offset 0x0854 - Package PL4 power limit Package PL4 power limit.

Units are based on POWER_MGMT_CONFIG.CustomPowerUnit.Valid Range 0 to 4095875 in Step size of 125

Definition at line 2679 of file FspsUpd.h.

8.7.2.64 UINT8 FSP_S_TEST_CONFIG::ProcHotResponse

Offset 0x07D3 - Enable or Disable PROCHOT# Response Enable or Disable PROCHOT# Response; **0: Disable**; **1: Enable**.

\$EN_DIS

Definition at line 2475 of file FspsUpd.h.

8.7.2.65 UINT8 FSP_S_TEST_CONFIG::ProcTraceEnable

Offset 0x07C9 - Enable or Disable Processor Trace feature Enable or Disable Processor Trace feature; **0: Disable**; 1: Enable.

\$EN_DIS

Definition at line 2410 of file FspsUpd.h.

8.7.2.66 UINT8 FSP_S_TEST_CONFIG::ProcTraceOutputScheme

Offset 0x07C8 - Control on Processor Trace output scheme Control on Processor Trace output scheme; **0: Single Range Output**; 1: ToPA Output.

0:Single Range Output, 1:ToPA Output

Definition at line 2404 of file FspsUpd.h.

8.7.2.67 UINT16 FSP_S_TEST_CONFIG::PsysPmax

Offset 0x087C - Platform Power Pmax PCODE MMIO Mailbox: Platform Power Pmax.

0 - Auto Specified in 1/8 Watt increments. Range 0-1024 Watts. Value of 800 = 100W

Definition at line 2739 of file FspsUpd.h.

8.7.2.68 UINT8 FSP_S_TEST_CONFIG::PsysPowerLimit1

Offset 0x07B9 - PL1 Enable value PL1 Enable value to limit average platform power.

0: Disable; 1: Enable. \$EN_DIS

Definition at line 2329 of file FspsUpd.h.

8.7.2.69 UINT32 FSP_S_TEST_CONFIG::PsysPowerLimit1Power

Offset 0x0874 - Platform PL1 power Platform PL1 power.

Units are based on POWER_MGMT_CONFIG.CustomPowerUnit.Valid Range 0 to 4095875 in Step size of 125

Definition at line 2727 of file FspsUpd.h.

8.7.2.70 UINT8 FSP_S_TEST_CONFIG::PsysPowerLimit2

Offset 0x07BB - PL2 Enable Value PL2 Enable activates the PL2 value to limit average platform power.

0: Disable; 1: Enable. \$EN_DIS

Definition at line 2342 of file FspsUpd.h.

8.7.2.71 UINT32 FSP_S_TEST_CONFIG::PsysPowerLimit2Power

Offset 0x0878 - Platform PL2 power Platform PL2 power.

Units are based on POWER_MGMT_CONFIG.CustomPowerUnit.Valid Range 0 to 4095875 in Step size of 125

Definition at line 2733 of file FspsUpd.h.

8.7.2.72 UINT8 FSP_S_TEST_CONFIG::RaceToHalt

Offset 0x07E9 - Race To Halt Enable/Disable Race To Halt feature.

RTH will dynamically increase CPU frequency in order to enter pkg C-State faster to reduce overall power. (RTH is controlled through MSR 1FC bit 20)Disable; **1: Enable** \$EN_DIS

Definition at line 2613 of file FspUpd.h.

8.7.2.73 UINT8 FSP_S_TEST_CONFIG::SataTestMode

Offset 0x0A30 - PCH Sata Test Mode Allow entrance to the PCH SATA test modes.

\$EN_DIS

Definition at line 2935 of file FspUpd.h.

8.7.2.74 UINT16 FSP_S_TEST_CONFIG::StateRatio[40]

Offset 0x07EC - Maximum P-state ratio to use in the custom P-state table Maximum P-state ratio to use in the custom P-state table.

NumOfCustomPStates has valid range between 0 to 40. For no. of P-States supported(NumOfCustomPStates) , StateRatio[NumOfCustomPStates] are configurable. Valid Range of value is 0 to 0x7F

Definition at line 2625 of file FspUpd.h.

8.7.2.75 UINT8 FSP_S_TEST_CONFIG::TccActivationOffset

Offset 0x07AA - TCC Activation Offset TCC Activation Offset.

Offset from factory set TCC activation temperature at which the Thermal Control Circuit must be activated. TCC will be activated at TCC Activation Temperature, in volts.For SKL Y SKU, the recommended default for this policy is **10**, For all other SKUs the recommended default are **0**

Definition at line 2245 of file FspUpd.h.

8.7.2.76 UINT8 FSP_S_TEST_CONFIG::TccOffsetClamp

Offset 0x07AB - Tcc Offset Clamp Enable/Disable Tcc Offset Clamp for Runtime Average Temperature Limit (RATL) allows CPU to throttle below P1.For SKL Y SKU, the recommended default for this policy is **1: Enabled**, For all other SKUs the recommended default are **0: Disabled**.

\$EN_DIS

Definition at line 2253 of file FspUpd.h.

8.7.2.77 UINT8 FSP_S_TEST_CONFIG::TccOffsetLock

Offset 0x07AC - Tcc Offset Lock Tcc Offset Lock for Runtime Average Temperature Limit (RATL) to lock temperature target; **0: Disabled**; 1: Enabled.

\$EN_DIS

Definition at line 2260 of file FspUpd.h.

8.7.2.78 UINT32 FSP_S_TEST_CONFIG::TccOffsetTimeWindowForRatl

Offset 0x0858 - Tcc Offset Time Window for RATL Package PL4 power limit.

Units are based on POWER_MGMT_CONFIG.CustomPowerUnit.Valid Range 0 to 4095875 in Step size of 125
 Definition at line 2685 of file FspsUpd.h.

8.7.2.79 UINT8 FSP_S_TEST_CONFIG::ThreeStrikeCounterDisable

Offset 0x0888 - Set Three Strike Counter Disable False (default): Three Strike counter will be incremented and True: Prevents Three Strike counter from incrementing; **0: False**; 1: True.

0: False, 1: True

Definition at line 2784 of file FspsUpd.h.

8.7.2.80 UINT8 FSP_S_TEST_CONFIG::TimedMwait

Offset 0x07DD - Enable or Disable TimedMwait Support.

Enable or Disable TimedMwait Support. **Disable**; 1: Enable \$EN_DIS

Definition at line 2537 of file FspsUpd.h.

8.7.2.81 UINT8 FSP_S_TEST_CONFIG::TStates

Offset 0x07D0 - Enable or Disable T states Enable or Disable T states; **0: Disable**; 1: Enable.

\$EN_DIS

Definition at line 2457 of file FspsUpd.h.

The documentation for this struct was generated from the following file:

- [FspsUpd.h](#)

8.8 FSP_T_CONFIG Struct Reference

Fsp T Configuration.

```
#include <FsptUpd.h>
```

Public Attributes

- UINT8 [PcdSerialloUartDebugEnabled](#)
Offset 0x0040 - PcdSerialloUartDebugEnabled Enable Seriallo Uart debug library with/without initializing Seriallo Uart device in FSP.
- UINT8 [PcdSerialloUartNumber](#)
Offset 0x0041 - PcdSerialloUartNumber Select Seriallo Uart Controller for debug.
- UINT8 [UnusedUpdSpace0](#) [2]
Offset 0x0042.
- UINT32 [PcdSerialloUartInputClock](#)
Offset 0x0044.
- UINT64 [PcdPciExpressBaseAddress](#)
Offset 0x0048 - Pci Express Base Address Base address to be programmed for Pci Express.
- UINT32 [PcdPciExpressRegionLength](#)
Offset 0x0050 - Pci Express Region Length Region Length to be programmed for Pci Express.
- UINT8 [ReservedFsptUpd1](#) [12]
Offset 0x0054.

8.8.1 Detailed Description

Fsp T Configuration.

Definition at line 68 of file FsptUpd.h.

8.8.2 Member Data Documentation

8.8.2.1 UINT8 FSP_T_CONFIG::PcdSerialloUartDebugEnabled

Offset 0x0040 - PcdSerialloUartDebugEnabled Enable Seriallo Uart debug library with/without initializing Seriallo Uart device in FSP.

0:Disable, 1:Enable and Initialize, 2:Enable without Initializing

Definition at line 74 of file FsptUpd.h.

8.8.2.2 UINT8 FSP_T_CONFIG::PcdSerialloUartNumber

Offset 0x0041 - PcdSerialloUartNumber Select Seriallo Uart Controller for debug.

0:SerialloUart0, 1:SerialloUart1, 2:SerialloUart2

Definition at line 80 of file FsptUpd.h.

The documentation for this struct was generated from the following file:


- [FsptUpd.h](#)

8.9 FSPM_UPD Struct Reference

Fsp M UPD Configuration.

```
#include <FspmUpd.h>
```

Collaboration diagram for FSPM_UPD:

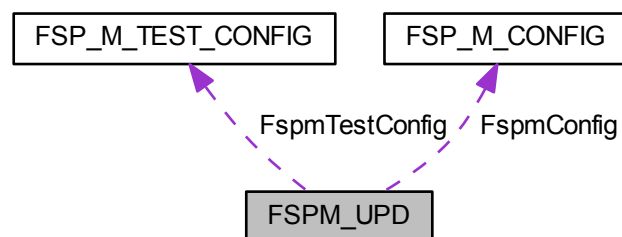

Public Attributes

- FSP_UPD_HEADER [FspUpdHeader](#)
Offset 0x0000.
- FSPM_ARCH_UPD [FspmArchUpd](#)

- [FSP_M_CONFIG FspmConfig](#)
Offset 0x0020.
- [FSP_M_TEST_CONFIG FspmTestConfig](#)
Offset 0x0040.
- [UINT8 UnusedUpdSpace10](#) [134]
Offset 0x0520.
- [UINT16 UpdTerminator](#)
Offset 0x05C0.
- [UINT16 UpdTerminator](#)
Offset 0x0646.

8.9.1 Detailed Description

Fsp M UPD Configuration.

Definition at line 1663 of file FspmUpd.h.

The documentation for this struct was generated from the following file:


- [FspmUpd.h](#)

8.10 FSPS_UPD Struct Reference

Fsp S UPD Configuration.

```
#include <FspsUpd.h>
```

Collaboration diagram for FSPS_UPD:

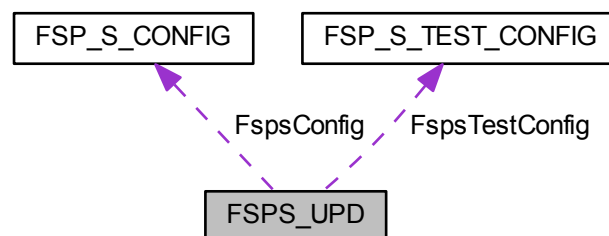

Public Attributes

- [FSP_UPD_HEADER FspUpdHeader](#)
Offset 0x0000.
- [FSP_S_CONFIG FspsConfig](#)
Offset 0x0020.
- [FSP_S_TEST_CONFIG FspsTestConfig](#)
Offset 0x0780.
- [UINT8 UnusedUpdSpace26](#) [470]
Offset 0x0A40.
- [UINT16 UpdTerminator](#)
Offset 0x0C16.

8.10.1 Detailed Description

Fsp S UPD Configuration.

Definition at line 2944 of file FspUpd.h.

The documentation for this struct was generated from the following file:

- [FspUpd.h](#)

8.11 FSPT_CORE_UPD Struct Reference

Fsp T Core UPD.

```
#include <FsptUpd.h>
```

Public Attributes

- UINT32 [MicrocodeRegionBase](#)
Offset 0x0020.
- UINT32 [MicrocodeRegionSize](#)
Offset 0x0024.
- UINT32 [CodeRegionBase](#)
Offset 0x0028.
- UINT32 [CodeRegionSize](#)
Offset 0x002C.
- UINT8 [Reserved](#) [16]
Offset 0x0030.

8.11.1 Detailed Description

Fsp T Core UPD.

Definition at line 43 of file FsptUpd.h.

The documentation for this struct was generated from the following file:


- [FsptUpd.h](#)

8.12 FSPT_UPD Struct Reference

Fsp T UPD Configuration.

```
#include <FsptUpd.h>
```

Collaboration diagram for FSPT_UPD:

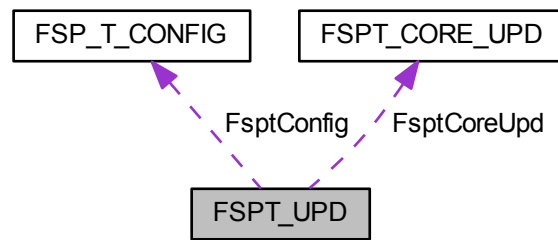

Public Attributes

- FSP_UPD_HEADER [FspUpdHeader](#)
Offset 0x0000.
- FSPT_CORE_UPD [FsptCoreUpd](#)
Offset 0x0020.
- FSP_T_CONFIG [FsptConfig](#)
Offset 0x0040.
- UINT8 [UnusedUpdSpace1](#) [6]
Offset 0x0060.
- UINT16 [UpdTerminator](#)
Offset 0x0066.

8.12.1 Detailed Description

Fsp T UPD Configuration.

Definition at line 107 of file FsptUpd.h.

The documentation for this struct was generated from the following file:

- [FsptUpd.h](#)

8.13 GPIO_CONFIG Struct Reference

GPIO configuration structure used for pin programming.

```
#include <GpioConfig.h>
```

Public Attributes

- UINT32 [PadMode](#): 5
Pad Mode Pad can be set as GPIO or one of its native functions.
- UINT32 [HostSoftPadOwn](#): 2
Host Software Pad Ownership Set pad to ACPI mode or GPIO Driver Mode.

- UINT32 [Direction](#): 6
GPIO Direction Can choose between In, In with inversion, Out, both In and Out, both In with inversion and out or disabling both.
- UINT32 [OutputState](#): 2
Output State Set Pad output value.
- UINT32 [InterruptConfig](#): 9
GPIO Interrupt Configuration Set Pad to cause one of interrupts (IOxAPIC/SCI/SMI/NMI).
- UINT32 [PowerConfig](#): 8
GPIO Power Configuration.
- UINT32 [ElectricalConfig](#): 9
GPIO Electrical Configuration This setting controls pads termination and voltage tolerance.
- UINT32 [LockConfig](#): 4
GPIO Lock Configuration This setting controls pads lock.
- UINT32 [OtherSettings](#): 2
Additional GPIO configuration Refer to definition of GPIO_OTHER_CONFIG for supported settings.
- UINT32 [RsvdBits](#): 17
Reserved bits for future extension.

8.13.1 Detailed Description

GPIO configuration structure used for pin programming.

Structure contains fields that can be used to configure pad.

Definition at line 55 of file GpioConfig.h.

8.13.2 Member Data Documentation

8.13.2.1 UINT32 GPIO_CONFIG::Direction

GPIO Direction Can choose between In, In with inversion, Out, both In and Out, both In with inversion and out or disabling both.

Refer to definition of GPIO_DIRECTION for supported settings.

Definition at line 76 of file GpioConfig.h.

8.13.2.2 UINT32 GPIO_CONFIG::ElectricalConfig

GPIO Electrical Configuration This setting controls pads termination and voltage tolerance.

Refer to definition of GPIO_ELECTRICAL_CONFIG for supported settings.

Definition at line 102 of file GpioConfig.h.

8.13.2.3 UINT32 GPIO_CONFIG::HostSoftPadOwn

Host Software Pad Ownership Set pad to ACPI mode or GPIO Driver Mode.

Refer to definition of GPIO_HOSTSW_OWN.

Definition at line 70 of file GpioConfig.h.

8.13.2.4 UINT32 GPIO_CONFIG::InterruptConfig

GPIO Interrupt Configuration Set Pad to cause one of interrupts (IOxAPIC/SCI/SMI/NMI).

This setting is applicable only if GPIO is in GpioMode with input enabled. Refer to definition of GPIO_INT_CONFIG for supported settings.

Definition at line 90 of file GpioConfig.h.

8.13.2.5 UINT32 GPIO_CONFIG::LockConfig

GPIO Lock Configuration This setting controls pads lock.

Refer to definition of GPIO_LOCK_CONFIG for supported settings.

Definition at line 108 of file GpioConfig.h.

8.13.2.6 UINT32 GPIO_CONFIG::OutputState

Output State Set Pad output value.

Refer to definition of GPIO_OUTPUT_STATE for supported settings. This setting takes place when output is enabled.

Definition at line 83 of file GpioConfig.h.

8.13.2.7 UINT32 GPIO_CONFIG::PadMode

Pad Mode Pad can be set as GPIO or one of its native functions.

When in native mode setting Direction (except Inversion), OutputState, InterruptConfig, Host Software Pad Ownership and OutputStateLock are unnecessary. Refer to definition of GPIO_PAD_MODE. Refer to EDS for each native mode according to the pad.

Definition at line 64 of file GpioConfig.h.

8.13.2.8 UINT32 GPIO_CONFIG::PowerConfig

GPIO Power Configuration.

This setting controls Pad Reset Configuration. Refer to definition of GPIO_RESET_CONFIG for supported settings.

Definition at line 96 of file GpioConfig.h.

The documentation for this struct was generated from the following file:

- [GpioConfig.h](#)

8.14 MEMORY_PLATFORM_DATA Struct Reference

Memory Platform Data Hob.

```
#include <MemInfoHob.h>
```

8.14.1 Detailed Description

Memory Platform Data Hob.

Revision 1:

- Initial version. **Revision 2:**
- Added TsegBase, PrmrrSize, PrmrrBase, Gttbase, MmioSize, PciEBaseAddress fields

Definition at line 245 of file MemInfoHob.h.

The documentation for this struct was generated from the following file:

- [MemInfoHob.h](#)

8.15 SI_CHIPSET_INIT_INFO Struct Reference

The ChipsetInit Info structure provides the information of ME ChipsetInit CRC and BIOS ChipsetInit CRC.

```
#include <FspmUpd.h>
```

8.15.1 Detailed Description

The ChipsetInit Info structure provides the information of ME ChipsetInit CRC and BIOS ChipsetInit CRC.

Definition at line 46 of file FspmUpd.h.

The documentation for this struct was generated from the following file:

- [FspmUpd.h](#)

8.16 SI_PCH_DEVICE_INTERRUPT_CONFIG Struct Reference

The PCH_DEVICE_INTERRUPT_CONFIG block describes interrupt pin, IRQ and interrupt mode for PCH device.

```
#include <FspsUpd.h>
```

Public Attributes

- UINT8 [Device](#)
Device number.
- UINT8 [Function](#)
Device function.
- UINT8 [IntX](#)
Interrupt pin: INTA-INTD (see SI_PCH_INT_PIN)
- UINT8 [Irq](#)
IRQ to be set for device.

8.16.1 Detailed Description

The PCH_DEVICE_INTERRUPT_CONFIG block describes interrupt pin, IRQ and interrupt mode for PCH device.

Definition at line 75 of file FspsUpd.h.

The documentation for this struct was generated from the following file:

- [FspsUpd.h](#)
-

8.17 SMBIOS_CACHE_INFO Struct Reference

SMBIOS Cache Info HOB Structure.

```
#include <SmbiosCacheInfoHob.h>
```

Public Attributes

- UINT16 [NumberOfCacheLevels](#)
Based on Number of Cache Types L1/L2/L3.
- UINT8 [SocketDesignationStrIndex](#)
String Index in the string Buffer. Example "L1-CACHE".
- UINT16 [CacheConfiguration](#)
Format defined in SMBIOS Spec v3.0 Section 7.8 Table 36.
- UINT16 [MaxCacheSize](#)
Format defined in SMBIOS Spec v3.0 Section 7.8.1.
- UINT16 [InstalledSize](#)
Format defined in SMBIOS Spec v3.0 Section 7.8.1.
- UINT16 [SupportedSramType](#)
Format defined in SMBIOS Spec v3.0 Section 7.8.2.
- UINT16 [CurrentSramType](#)
Format defined in SMBIOS Spec v3.0 Section 7.8.2.
- UINT8 [CacheSpeed](#)
Cache Speed in nanoseconds. 0 if speed is unknown.
- UINT8 [ErrorCorrectionType](#)
ENUM Format defined in SMBIOS Spec v3.0 Section 7.8.3.
- UINT8 [SystemCacheType](#)
ENUM Format defined in SMBIOS Spec v3.0 Section 7.8.4.
- UINT8 [Associativity](#)
ENUM Format defined in SMBIOS Spec v3.0 Section 7.8.5.

8.17.1 Detailed Description

SMBIOS Cache Info HOB Structure.

Definition at line 32 of file `SmbiosCacheInfoHob.h`.

The documentation for this struct was generated from the following file:

- [SmbiosCacheInfoHob.h](#)

8.18 SMBIOS_PROCESSOR_INFO Struct Reference

SMBIOS Processor Info HOB Structure.

```
#include <SmbiosProcessorInfoHob.h>
```

Public Attributes

- [UINT8 ProcessorType](#)
ENUM defined in SMBIOS Spec v3.0 Section 7.5.1.
- [UINT16 ProcessorFamily](#)
This info is used for both ProcessorFamily and ProcessorFamily2 fields See ENUM defined in SMBIOS Spec v3.0 Section 7.5.2.
- [UINT8 ProcessorManufacturerStrIndex](#)
Index of the String in the String Buffer.
- [UINT64 ProcessorId](#)
ENUM defined in SMBIOS Spec v3.0 Section 7.5.3.
- [UINT8 ProcessorVersionStrIndex](#)
Index of the String in the String Buffer.
- [UINT8 Voltage](#)
Format defined in SMBIOS Spec v3.0 Section 7.5.4.
- [UINT16 ExternalClockInMHz](#)
External Clock Frequency. Set to 0 if unknown.
- [UINT16 CurrentSpeedInMHz](#)
Snapshot of current processor speed during boot.
- [UINT8 Status](#)
Format defined in the SMBIOS Spec v3.0 Table 21.
- [UINT8 ProcessorUpgrade](#)
ENUM defined in SMBIOS Spec v3.0 Section 7.5.5.
- [UINT16 CoreCount](#)
This info is used for both CoreCount & CoreCount2 fields See detailed description in SMBIOS Spec v3.0 Section 7.5.6.
- [UINT16 EnabledCoreCount](#)
This info is used for both CoreEnabled & CoreEnabled2 fields See detailed description in SMBIOS Spec v3.0 Section 7.5.7.
- [UINT16 ThreadCount](#)
This info is used for both ThreadCount & ThreadCount2 fields See detailed description in SMBIOS Spec v3.0 Section 7.5.8.
- [UINT16 ProcessorCharacteristics](#)
Format defined in SMBIOS Spec v3.0 Section 7.5.9.

8.18.1 Detailed Description

SMBIOS Processor Info HOB Structure.

Definition at line 32 of file SmbiosProcessorInfoHob.h.

The documentation for this struct was generated from the following file:

- [SmbiosProcessorInfoHob.h](#)
-


Chapter 9

File Documentation

9.1 CpuConfigFspData.h File Reference

FSP CPU Data Config Block.

This graph shows which files directly or indirectly include this file:

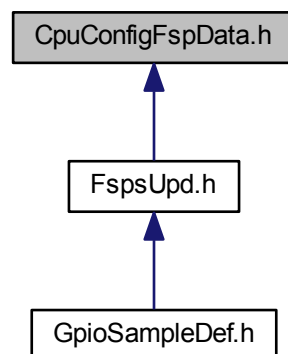

9.1.1 Detailed Description

FSP CPU Data Config Block.

Copyright

INTEL CONFIDENTIAL Copyright 2016 Intel Corporation.

The source code contained or described herein and all documents related to the source code ("Material") are owned by Intel Corporation or its suppliers or licensors. Title to the Material remains with Intel Corporation or its suppliers and licensors. The Material may contain trade secrets and proprietary and confidential information of Intel Corporation and its suppliers and licensors, and is protected by worldwide copyright and trade secret laws and treaty provisions. No part of the Material may be used, copied, reproduced, modified, published, uploaded, posted, transmitted, distributed, or disclosed in any way without Intel's prior express written permission.

No license under any patent, copyright, trade secret or other intellectual property right is granted to or conferred upon

you by disclosure or delivery of the Materials, either expressly, by implication, inducement, estoppel or otherwise. Any license under such intellectual property rights must be express and approved by Intel in writing.

Unless otherwise agreed by Intel in writing, you may not remove or alter this notice or any other notice embedded in Materials by Intel or Intel's suppliers or licensors in any way.

This file contains an 'Intel Peripheral Driver' and is uniquely identified as "Intel Reference Module" and is licensed for Intel CPUs and chipsets under the terms of your license agreement with Intel or your vendor. This file may be modified by the user, subject to additional terms of the license agreement.

Specification Reference:

9.2 DoxygenFspIntegrationGuide.h File Reference

This file contains doxygen KabylakeFspIntegration Guide.

9.2.1 Detailed Description

This file contains doxygen KabylakeFspIntegration Guide.

Copyright


Copyright (c) 2015 - 2017 Intel Corporation. All rights reserved This software and associated documentation (if any) is furnished under a license and may only be used or copied in accordance with the terms of the license. Except as permitted by such license, no part of this software or documentation may be reproduced, stored in a retrieval system, or transmitted in any form or by any means without the express written consent of Intel Corporation. This file contains an 'Intel Peripheral Driver' and uniquely identified as "Intel Reference Module" and is licensed for Intel CPUs and chipsets under the terms of your license agreement with Intel or your vendor. This file may be modified by the user, subject to additional terms of the license agreement

9.3 FspmUpd.h File Reference


Copyright (c) 2017, Intel Corporation.

```
#include <FspUpd.h>
#include <MemInfoHob.h>
```

Include dependency graph for FspmUpd.h:

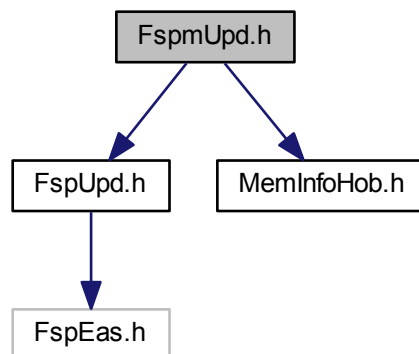

This graph shows which files directly or indirectly include this file:



Classes

- struct [SI_CHIPSET_INIT_INFO](#)
The ChipsetInit Info structure provides the information of ME ChipsetInit CRC and BIOS ChipsetInit CRC.
- struct [FSP_M_CONFIG](#)
Fsp M Configuration.
- struct [FSP_M_TEST_CONFIG](#)
Fsp M Test Configuration.
- struct [FSPM_UPD](#)
Fsp M UPD Configuration.

9.3.1 Detailed Description

Copyright (c) 2017, Intel Corporation.

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution. Neither the name of Intel Corporation nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.


This file is automatically generated. Please do NOT modify !!!

9.4 FspUpd.h File Reference


Copyright (c) 2017, Intel Corporation.

```
#include <FspUpd.h>
#include <ConfigBlock/CpuConfigFspData.h>
```

Include dependency graph for FspUpd.h:

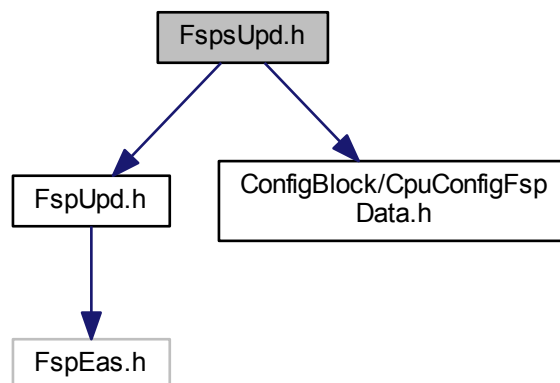

This graph shows which files directly or indirectly include this file:



Classes

- struct [AZALIA_HEADER](#)
Azalia Header structure.
- struct [AUDIO_AZALIA_VERB_TABLE](#)
Audio Azalia Verb Table structure.
- struct [SI_PCH_DEVICE_INTERRUPT_CONFIG](#)
The PCH_DEVICE_INTERRUPT_CONFIG block describes interrupt pin, IRQ and interrupt mode for PCH device.
- struct [FSP_S_CONFIG](#)
Fsp S Configuration.
- struct [FSP_S_TEST_CONFIG](#)
Fsp S Test Configuration.
- struct [FSPS_UPD](#)
Fsp S UPD Configuration.

Macros

- #define [SI_PCH_MAX_DEVICE_INTERRUPT_CONFIG](#) 64
Number of all PCH devices.

Enumerations

- enum [SI_PCH_INT_PIN](#)
Refer to the definition of PCH_INT_PIN.

9.4.1 Detailed Description

Copyright (c) 2017, Intel Corporation.

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the

following disclaimer in the documentation and/or other materials provided with the distribution. Neither the name of Intel Corporation nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL ALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

This file is automatically generated. Please do NOT modify !!!

9.4.2 Enumeration Type Documentation

9.4.2.1 enum SI_PCH_INT_PIN

Refer to the definition of PCH_INT_PIN.

Enumerator

SiPchNoInt No Interrupt Pin.


Definition at line 65 of file FspUpd.h.

9.5 FspUpd.h File Reference


Copyright (c) 2017, Intel Corporation.

```
#include <FspUpd.h>
```

Include dependency graph for FspUpd.h:

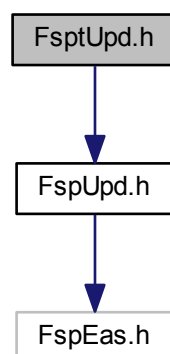

This graph shows which files directly or indirectly include this file:



Classes

- struct [FSPT_CORE_UPD](#)
Fsp T Core UPD.
- struct [FSP_T_CONFIG](#)
Fsp T Configuration.
- struct [FSPT_UPD](#)
Fsp T UPD Configuration.

9.5.1 Detailed Description

Copyright (c) 2017, Intel Corporation.

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution. Neither the name of Intel Corporation nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.


This file is automatically generated. Please do NOT modify !!!

9.6 FspUpd.h File Reference


Copyright (c) 2017, Intel Corporation.

```
#include <FspEas.h>
```

Include dependency graph for FspUpd.h:



This graph shows which files directly or indirectly include this file:

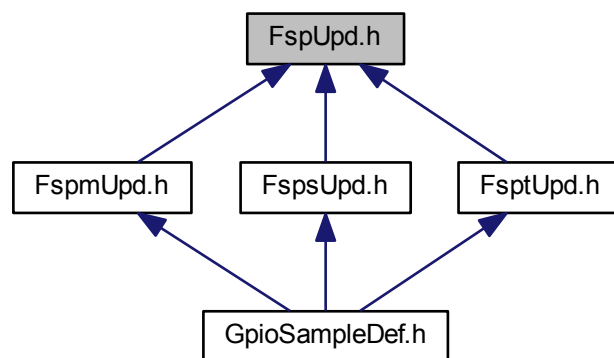

9.6.1 Detailed Description

Copyright (c) 2017, Intel Corporation.

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution. Neither the name of Intel Corporation nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL ALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL,

SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

This file is automatically generated. Please do NOT modify !!!

9.7 GpioConfig.h File Reference

Header file for GpioConfig structure used by GPIO library.

Classes

- struct [GPIO_CONFIG](#)
GPIO configuration structure used for pin programming.

Macros

- #define [B_GPIO_INT_CONFIG_INT_SOURCE_MASK](#) 0x1F
Mask for GPIO_INT_CONFIG for interrupt source.
- #define [B_GPIO_INT_CONFIG_INT_TYPE_MASK](#) 0xE0
Mask for GPIO_INT_CONFIG for interrupt type.
- #define [B_GPIO_ELECTRICAL_CONFIG_TERMINATION_MASK](#) 0x1F
Mask for GPIO_ELECTRICAL_CONFIG for termination value.
- #define [B_GPIO_ELECTRICAL_CONFIG_1V8_TOLERANCE_MASK](#) 0x60
Mask for GPIO_ELECTRICAL_CONFIG for 1v8 tolerance setting.
- #define [B_GPIO_LOCK_CONFIG_PAD_CONF_LOCK_MASK](#) 0x3
Mask for GPIO_LOCK_CONFIG for Pad Configuration Lock.
- #define [B_GPIO_LOCK_CONFIG_OUTPUT_LOCK_MASK](#) 0x5
Mask for GPIO_LOCK_CONFIG for Pad Output Lock.
- #define [B_GPIO_OTHER_CONFIG_RXRAW_MASK](#) 0x3
Mask for GPIO_OTHER_CONFIG for RxRaw1 setting.

Typedefs

- typedef UINT32 [GPIO_PAD](#)
For any GpioPad usage in code use GPIO_PAD type.
- typedef UINT32 [GPIO_GROUP](#)
For any GpioGroup usage in code use GPIO_GROUP type.

Enumerations

- enum [GPIO_HARDWARE_DEFAULT](#)
- enum [GPIO_PAD_MODE](#)
GPIO Pad Mode Refer to GPIO documentation on native functions available for certain pad.
- enum [GPIO_HOSTSW_OWN](#)
Host Software Pad Ownership modes This setting affects GPIO interrupt status registers.
- enum [GPIO_DIRECTION](#)
GPIO Direction.

- enum [GPIO_OUTPUT_STATE](#)
GPIO Output State This field is relevant only if output is enabled.
- enum [GPIO_INT_CONFIG](#)
GPIO interrupt configuration This setting is applicable only if pad is in GPIO mode and has input enabled.
- enum [GPIO_RESET_CONFIG](#)
GPIO Power Configuration GPIO_RESET_CONFIG allows to set GPIO Reset type (PADCFG_DW0.PadRstCfg) which will be used to reset certain GPIO settings.
- enum [GPIO_ELECTRICAL_CONFIG](#)
GPIO Electrical Configuration Set GPIO termination and Pad Tolerance (applicable only for some pads) Field from GpioTermNone to GpioTermNative can be OR'ed with GpioTolerance1v8.
- enum [GPIO_LOCK_CONFIG](#)
GPIO LockConfiguration Set GPIO configuration lock and output state lock.
- enum [GPIO_OTHER_CONFIG](#)
Other GPIO Configuration GPIO_OTHER_CONFIG is used for less often settings and for future extensions Supported settings:

9.7.1 Detailed Description

Header file for GpioConfig structure used by GPIO library.

Copyright

INTEL CONFIDENTIAL Copyright 2014 - 2016 Intel Corporation.

The source code contained or described herein and all documents related to the source code ("Material") are owned by Intel Corporation or its suppliers or licensors. Title to the Material remains with Intel Corporation or its suppliers and licensors. The Material may contain trade secrets and proprietary and confidential information of Intel Corporation and its suppliers and licensors, and is protected by worldwide copyright and trade secret laws and treaty provisions. No part of the Material may be used, copied, reproduced, modified, published, uploaded, posted, transmitted, distributed, or disclosed in any way without Intel's prior express written permission.

No license under any patent, copyright, trade secret or other intellectual property right is granted to or conferred upon you by disclosure or delivery of the Materials, either expressly, by implication, inducement, estoppel or otherwise. Any license under such intellectual property rights must be express and approved by Intel in writing.

Unless otherwise agreed by Intel in writing, you may not remove or alter this notice or any other notice embedded in Materials by Intel or Intel's suppliers or licensors in any way.

This file contains an 'Intel Peripheral Driver' and is uniquely identified as "Intel Reference Module" and is licensed for Intel CPUs and chipsets under the terms of your license agreement with Intel or your vendor. This file may be modified by the user, subject to additional terms of the license agreement.

Specification Reference:

9.7.2 Enumeration Type Documentation

9.7.2.1 enum GPIO_DIRECTION

GPIO Direction.

Enumerator

- GpioDirDefault** Leave pad direction setting unmodified.
- GpioDirInOut** Set pad for both output and input.
- GpioDirInInvOut** Set pad for both output and input with inversion.

GpioDirIn Set pad for input only.
GpioDirInInv Set pad for input with inversion.
GpioDirOut Set pad for output only.
GpioDirNone Disable both output and input.

Definition at line 167 of file GpioConfig.h.

9.7.2.2 enum GPIO_ELECTRICAL_CONFIG

GPIO Electrical Configuration Set GPIO termination and Pad Tolerance (applicable only for some pads) Field from GpioTermNone to GpioTermNative can be OR'ed with GpioTolerance1v8.

Enumerator

GpioTermDefault Leave termination setting unmodified.
GpioTermNone none
GpioTermWpd5K 5kOhm weak pull-down
GpioTermWpd20K 20kOhm weak pull-down
GpioTermWpu1K 1kOhm weak pull-up
GpioTermWpu2K 2kOhm weak pull-up
GpioTermWpu5K 5kOhm weak pull-up
GpioTermWpu20K 20kOhm weak pull-up
GpioTermWpu1K2K 1kOhm & 2kOhm weak pull-up
GpioTermNative Native function controls pads termination This setting is applicable only to some native modes. Please check EDS to determine which native functionality can control pads termination
GpioNoTolerance1v8 Disable 1.8V pad tolerance.
GpioTolerance1v8 Enable 1.8V pad tolerance.

Definition at line 296 of file GpioConfig.h.

9.7.2.3 enum GPIO_HARDWARE_DEFAULT

Enumerator

GpioHardwareDefault Leave setting unmodified.

Definition at line 118 of file GpioConfig.h.

9.7.2.4 enum GPIO_HOSTSW_OWN

Host Software Pad Ownership modes This setting affects GPIO interrupt status registers.

Depending on chosen ownership some GPIO Interrupt status register get updated and other masked. Please refer to EDS for HOSTSW_OWN register description.

Enumerator

GpioHostOwnDefault Leave ownership value unmodified.
GpioHostOwnAcpi Set HOST ownership to ACPI. Use this setting if pad is not going to be used by GPIO OS driver. If GPIO is configured to generate SCI/SMI/NMI then this setting must be used for interrupts to work
GpioHostOwnGpio Set HOST ownership to GPIO Driver mode. Use this setting only if GPIO pad should be controlled by GPIO OS Driver. GPIO OS Driver will be able to control the pad if appropriate entry in ACPI exists (refer to ACPI specification for GpioIo and GpioInt descriptors)

Definition at line 146 of file GpioConfig.h.

9.7.2.5 enum GPIO_INT_CONFIG

GPIO interrupt configuration This setting is applicable only if pad is in GPIO mode and has input enabled.

GPIO_INT_CONFIG allows to choose which interrupt is generated (IOxAPIC/SCI/SMI/NMI) and how it is triggered (edge or level). Refer to PADCFG_DW0 register description in EDS for details on this settings. Field from GpioIntNmi to GpioIntApic can be OR'ed with GpioIntLevel to GpioIntBothEdge to describe an interrupt e.g. GpioIntApic | GpioIntLevel If GPIO is set to cause an SCI then also GPI_GPE_EN is enabled for this pad. If GPIO is set to cause an NMI then also GPI_NMI_EN is enabled for this pad. Not all GPIO are capable of generating an SMI or NMI interrupt. When routing GPIO to cause an IOxAPIC interrupt care must be taken, as this interrupt cannot be shared and its IRQn number is not configurable. Refer to EDS for GPIO pads IRQ numbers (PADCFG_DW1.IntSel) If GPIO is under GPIO OS driver control and appropriate ACPI GpioInt descriptor exist then use only trigger type setting (from GpioIntLevel to GpioIntBothEdge). This type of GPIO Driver interrupt doesn't have any additional routing setting required to be set by BIOS. Interrupt is handled by GPIO OS Driver.

Enumerator

- GpioIntDefault** Leave value of interrupt routing unmodified.
- GpioIntDis** Disable IOxAPIC/SCI/SMI/NMI interrupt generation.
- GpioIntNmi** Enable NMI interrupt only.
- GpioIntSmi** Enable SMI interrupt only.
- GpioIntSci** Enable SCI interrupt only.
- GpioIntApic** Enable IOxAPIC interrupt only.
- GpioIntLevel** Set interrupt as level triggered.
- GpioIntEdge** Set interrupt as edge triggered (type of edge depends on input inversion)
- GpioIntLvlEdgDis** Disable interrupt trigger.
- GpioIntBothEdge** Set interrupt as both edge triggered.

Definition at line 207 of file GpioConfig.h.

9.7.2.6 enum GPIO_LOCK_CONFIG

GPIO LockConfiguration Set GPIO configuration lock and output state lock.

GpioLockPadConfig and GpioLockOutputState can be OR'ed. Lock settings reset is in Powergood domain. Care must be taken when using this setting as fields it locks may be reset by a different signal and can be controllable by what is in GPIO_RESET_CONFIG (PADCFG_DW0.PadRstCfg). GPIO library provides functions which allow to unlock a GPIO pad.

Enumerator

- GpioLockDefault** Leave lock setting unmodified.
- GpioPadConfigLock** Lock Pad Configuration.
- GpioOutputStateLock** Lock GPIO pad output value.

Definition at line 329 of file GpioConfig.h.

9.7.2.7 enum GPIO_OTHER_CONFIG

Other GPIO Configuration GPIO_OTHER_CONFIG is used for less often settings and for future extensions Supported settings:

- RX raw override to '1' - allows to override input value to '1' This setting is applicable only if in input mode (both in GPIO and native usage). The override takes place at the internal pad state directly from buffer and before the RXINV.

Enumerator

GpioRxRaw1Default Use default input override value.

GpioRxRaw1Dis Don't override input.

GpioRxRaw1En Override input to '1'.

Definition at line 346 of file GpioConfig.h.

9.7.2.8 enum GPIO_OUTPUT_STATE

GPIO Output State This field is relevant only if output is enabled.

Enumerator

GpioOutDefault Leave output value unmodified.

GpioOutLow Set output to low.

GpioOutHigh Set output to high.

Definition at line 181 of file GpioConfig.h.

9.7.2.9 enum GPIO_PAD_MODE

GPIO Pad Mode Refer to GPIO documentation on native functions available for certain pad.

If GPIO is set to one of NativeX modes then following settings are not applicable and can be skipped:

- Interrupt related settings
- Host Software Ownership
- Output/Input enabling/disabling
- Output lock

Definition at line 132 of file GpioConfig.h.

9.7.2.10 enum GPIO_RESET_CONFIG

GPIO Power Configuration GPIO_RESET_CONFIG allows to set GPIO Reset type (PADCFG_DW0.PadRstCfg) which will be used to reset certain GPIO settings.

Refer to EDS for settings that are controllable by PadRstCfg.

Enumerator

GpioResetDefault Leave value of pad reset unmodified.

GpioResetPwrGood Deprecated settings. Maintained only for compatibility.GPP: RSMRST; GPD: DSW_↔ PWROK; (PadRstCfg = 00b = "Powergood")

GpioResetDeep Deep GPIO Reset (PadRstCfg = 01b = "Deep GPIO Reset")

GpioResetNormal GPIO Reset (PadRstCfg = 10b = "GPIO Reset")

GpioResetResume GPP: Reserved; GPD: RSMRST; (PadRstCfg = 11b = "Resume Reset")

GpioResumeReset New GPIO reset configuration options. Resume Reset (RSMRST) GPP: PadRstCfg = 00b = "Powergood" GPD: PadRstCfg = 11b = "Resume Reset" Pad setting will reset on:

- DeepSx transition
- G3 Pad settings will not reset on:
- S3/S4/S5 transition

- Warm/Cold/Global reset

GpioHostDeepReset Host Deep Reset PadRstCfg = 01b = "Deep GPIO Reset" Pad settings will reset on:

- Warm/Cold/Global reset
- DeepSx transition
- G3 Pad settings will not reset on:
- S3/S4/S5 transition

GpioPlatformReset Platform Reset (PLTRST) PadRstCfg = 10b = "GPIO Reset" Pad settings will reset on:

- S3/S4/S5 transition
- Warm/Cold/Global reset
- DeepSx transition
- G3

GpioDswReset Deep Sleep Well Reset (DSW_PWROK) GPP: not applicable GPD: PadRstCfg = 00b = "↔ Powergood" Pad settings will reset on:

- G3 Pad settings will not reset on:
- S3/S4/S5 transition
- Warm/Cold/Global reset
- DeepSx transition

Definition at line 229 of file GpioConfig.h.

9.8 GpioSampleDef.h File Reference


Copyright (c) 2015, Intel Corporation.

```
#include <FsptUpd.h>
```

```
#include <FspmUpd.h>
```

```
#include <FspsUpd.h>
```

Include dependency graph for GpioSampleDef.h:

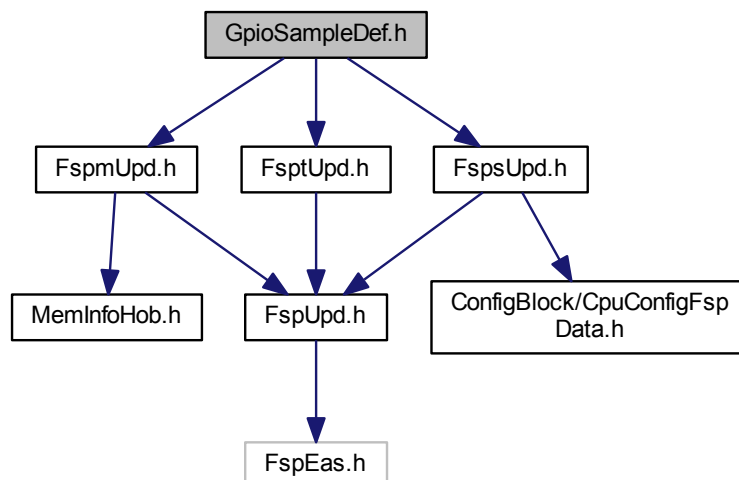

9.8.1 Detailed Description

Copyright (c) 2015, Intel Corporation.

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution. Neither the name of Intel Corporation nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.


THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

This file is automatically generated. Please do NOT modify !!!

9.9 MemInfoHob.h File Reference

This file contains definitions required for creation of Memory S3 Save data, Memory Info data and Memory Platform data hobs.

This graph shows which files directly or indirectly include this file:

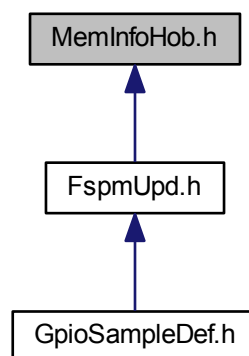

Classes

- struct [DIMM_INFO](#)

Memory SMBIOS & OC Memory Data Hob.

- struct [MEMORY_PLATFORM_DATA](#)

Memory Platform Data Hob.

Macros

- #define [WARM_BOOT](#) 2

Host reset states from MRC.

- #define [MAX_SPD_SAVE](#) 29

Defines taken from MRC so avoid having to include MrcInterface.h.

9.9.1 Detailed Description

This file contains definitions required for creation of Memory S3 Save data, Memory Info data and Memory Platform data hobs.

Copyright

INTEL CONFIDENTIAL Copyright 1999 - 2016 Intel Corporation.

The source code contained or described herein and all documents related to the source code ("Material") are owned by Intel Corporation or its suppliers or licensors. Title to the Material remains with Intel Corporation or its suppliers and licensors. The Material may contain trade secrets and proprietary and confidential information of Intel Corporation and its suppliers and licensors, and is protected by worldwide copyright and trade secret laws and treaty provisions. No part of the Material may be used, copied, reproduced, modified, published, uploaded, posted, transmitted, distributed, or disclosed in any way without Intel's prior express written permission.

No license under any patent, copyright, trade secret or other intellectual property right is granted to or conferred upon you by disclosure or delivery of the Materials, either expressly, by implication, inducement, estoppel or otherwise. Any license under such intellectual property rights must be express and approved by Intel in writing.

Unless otherwise agreed by Intel in writing, you may not remove or alter this notice or any other notice embedded in Materials by Intel or Intel's suppliers or licensors in any way.

This file contains an 'Intel Peripheral Driver' and is uniquely identified as "Intel Reference Module" and is licensed for Intel CPUs and chipsets under the terms of your license agreement with Intel or your vendor. This file may be modified by the user, subject to additional terms of the license agreement.


Specification Reference:

9.10 SmbiosCacheInfoHob.h File Reference

Header file for SMBIOS Cache Info HOB.

```
#include <Uefi.h>
#include <Pi/PiHob.h>
```

Include dependency graph for SmbiosCacheInfoHob.h:



Classes

- struct [SMBIOS_CACHE_INFO](#)

SMBIOS Cache Info HOB Structure.

9.10.1 Detailed Description

Header file for SMBIOS Cache Info HOB.

Copyright (c) 2015, Intel Corporation. All rights reserved.

This program and the accompanying materials are licensed and made available under the terms and conditions of the BSD License which accompanies this distribution. The full text of the license may be found at <http://opensource.org/licenses/bsd-license.php>

THE PROGRAM IS DISTRIBUTED UNDER THE BSD LICENSE ON AN "AS IS" BASIS, WITHOUT WARRANTIES OR REPRESENTATIONS OF ANY KIND, EITHER EXPRESS OR IMPLIED.

Specification Reference:


System Management BIOS (SMBIOS) Reference Specification v3.0.0 dated 2015-Feb-12 (DSP0134) http://www.dmtf.org/sites/default/files/standards/documents/DSP0134_3.0.0.pdf

9.11 SmbiosProcessorInfoHob.h File Reference

Header file for SMBIOS Processor Info HOB.

```
#include <Uefi.h>
#include <Pi/PiHob.h>
```

Include dependency graph for SmbiosProcessorInfoHob.h:

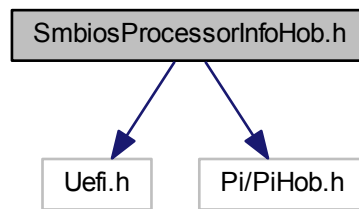

Classes

- struct [SMBIOS_PROCESSOR_INFO](#)
SMBIOS Processor Info HOB Structure.

9.11.1 Detailed Description

Header file for SMBIOS Processor Info HOB.

Copyright (c) 2015, Intel Corporation. All rights reserved.

This program and the accompanying materials are licensed and made available under the terms and conditions of the BSD License which accompanies this distribution. The full text of the license may be found at <http://opensource.org/licenses/bsd-license.php>

THE PROGRAM IS DISTRIBUTED UNDER THE BSD LICENSE ON AN "AS IS" BASIS, WITHOUT WARRANTIES OR REPRESENTATIONS OF ANY KIND, EITHER EXPRESS OR IMPLIED.

Specification Reference:

System Management BIOS (SMBIOS) Reference Specification v3.0.0 dated 2015-Feb-12 (DSP0134) http://www.dmtf.org/sites/default/files/standards/documents/DSP0134_3.0.0.pdf

Index

AUDIO_AZALIA_VERB_TABLE, [23](#)
AZALIA_HEADER, [24](#)
AcLoadline
 FSP_S_CONFIG, [73](#)
AcousticNoiseMitigation
 FSP_S_CONFIG, [73](#)
ActiveCoreCount
 FSP_M_CONFIG, [35](#)
AmtEnabled
 FSP_S_CONFIG, [73](#)
AmtSolEnabled
 FSP_S_CONFIG, [73](#)
ApHandoffManner
 FSP_S_TEST_CONFIG, [109](#)
AplIdleManner
 FSP_S_TEST_CONFIG, [109](#)
ApertureSize
 FSP_M_CONFIG, [35](#)
AsfEnabled
 FSP_S_CONFIG, [73](#)
AutoThermalReporting
 FSP_S_TEST_CONFIG, [109](#)
Avx2RatioOffset
 FSP_M_CONFIG, [35](#)
Avx3RatioOffset
 FSP_M_CONFIG, [35](#)

BclkAdaptiveVoltage
 FSP_M_CONFIG, [36](#)
BdatEnable
 FSP_M_TEST_CONFIG, [50](#)
BiosAcmBase
 FSP_M_TEST_CONFIG, [50](#)
BiosAcmSize
 FSP_M_TEST_CONFIG, [50](#)
BiosGuard
 FSP_M_CONFIG, [36](#)
BiosSize
 FSP_M_TEST_CONFIG, [50](#)
BistOnReset
 FSP_M_CONFIG, [36](#)
BootFrequency
 FSP_M_CONFIG, [36](#)
BypassPhySyncReset
 FSP_M_TEST_CONFIG, [51](#)

C1e
 FSP_S_TEST_CONFIG, [109](#)
CStatePreWake
 FSP_S_TEST_CONFIG, [109](#)

ChipsetInitMessage
 FSP_M_TEST_CONFIG, [51](#)
CleanMemory
 FSP_M_CONFIG, [36](#)
CmdTriStateDis
 FSP_M_CONFIG, [36](#)
ConfigTdpBios
 FSP_S_TEST_CONFIG, [109](#)
CoreMaxOcRatio
 FSP_M_CONFIG, [37](#)
CorePllVoltageOffset
 FSP_M_CONFIG, [37](#)
CoreVoltageAdaptive
 FSP_M_CONFIG, [37](#)
CoreVoltageMode
 FSP_M_CONFIG, [37](#)
CoreVoltageOverride
 FSP_M_CONFIG, [37](#)
CpuConfigFspData.h, [131](#)
CpuRatio
 FSP_M_CONFIG, [37](#)
CpuRatioOverride
 FSP_M_CONFIG, [37](#)
CstCfgCtrlIoMwaitRedirection
 FSP_S_TEST_CONFIG, [109](#)
CstateLatencyControl0Irtl
 FSP_S_TEST_CONFIG, [109](#)
Custom1ConfigTdpControl
 FSP_S_TEST_CONFIG, [110](#)
Custom1PowerLimit1
 FSP_S_TEST_CONFIG, [110](#)
Custom1PowerLimit1Time
 FSP_S_TEST_CONFIG, [110](#)
Custom1PowerLimit2
 FSP_S_TEST_CONFIG, [110](#)
Custom1TurboActivationRatio
 FSP_S_TEST_CONFIG, [110](#)
Custom2ConfigTdpControl
 FSP_S_TEST_CONFIG, [110](#)
Custom2PowerLimit1
 FSP_S_TEST_CONFIG, [110](#)
Custom2PowerLimit1Time
 FSP_S_TEST_CONFIG, [111](#)
Custom2PowerLimit2
 FSP_S_TEST_CONFIG, [111](#)
Custom2TurboActivationRatio
 FSP_S_TEST_CONFIG, [111](#)
Custom3ConfigTdpControl
 FSP_S_TEST_CONFIG, [111](#)

- Custom3PowerLimit1
 - FSP_S_TEST_CONFIG, 111
- Custom3PowerLimit1Time
 - FSP_S_TEST_CONFIG, 111
- Custom3PowerLimit2
 - FSP_S_TEST_CONFIG, 111
- Custom3TurboActivationRatio
 - FSP_S_TEST_CONFIG, 112
- Cx
 - FSP_S_TEST_CONFIG, 112
- DIMM_INFO, 24
- DcLoadline
 - FSP_S_CONFIG, 73
- DdrFreqLimit
 - FSP_M_CONFIG, 38
- DebugInterfaceEnable
 - FSP_S_TEST_CONFIG, 112
- DebugInterfaceLockEnable
 - FSP_S_TEST_CONFIG, 112
- DelayUsbPdoProgramming
 - FSP_S_CONFIG, 74
- DevIntConfigPtr
 - FSP_S_CONFIG, 74
- Direction
 - GPIO_CONFIG, 125
- DisableHeciRetry
 - FSP_M_TEST_CONFIG, 51
- DisableMessageCheck
 - FSP_M_TEST_CONFIG, 51
- DisableProcHotOut
 - FSP_S_TEST_CONFIG, 112
- DisableVrThermalAlert
 - FSP_S_TEST_CONFIG, 112
- DmiDeEmphasis
 - FSP_M_CONFIG, 38
- DmiGen3EndPointHint
 - FSP_M_CONFIG, 38
- DmiGen3EndPointPreset
 - FSP_M_CONFIG, 38
- DmiGen3EqPh2Enable
 - FSP_M_TEST_CONFIG, 51
- DmiGen3EqPh3Method
 - FSP_M_TEST_CONFIG, 51
- DmiGen3ProgramStaticEq
 - FSP_M_CONFIG, 38
- DmiGen3RootPortPreset
 - FSP_M_CONFIG, 38
- DmiSuggestedSetting
 - FSP_S_CONFIG, 74
- DmiVc1
 - FSP_M_TEST_CONFIG, 51
- DmiVcm
 - FSP_M_TEST_CONFIG, 52
- DoxygenFspIntegrationGuide.h, 132
- Early8254ClockGatingEnable
 - FSP_S_CONFIG, 74
- EcCmdLock
 - FSP_S_CONFIG, 74
- EcCmdProvisionEav
 - FSP_S_CONFIG, 74
- Eist
 - FSP_S_TEST_CONFIG, 112
- ElectricalConfig
 - GPIO_CONFIG, 125
- EnableC6Dram
 - FSP_M_CONFIG, 38
- EnableSgx
 - FSP_M_CONFIG, 39
- EnableTcoTimer
 - FSP_S_CONFIG, 74
- EnableTraceHub
 - FSP_M_CONFIG, 39
- EndOfPostMessage
 - FSP_S_TEST_CONFIG, 113
- EnergyEfficientPState
 - FSP_S_TEST_CONFIG, 113
- EnergyEfficientTurbo
 - FSP_S_TEST_CONFIG, 113
- EsataSpeedLimit
 - FSP_S_CONFIG, 75
- EvLoader
 - FSP_M_CONFIG, 39
- FClkFrequency
 - FSP_M_CONFIG, 39
- FSP_M_CONFIG, 25
 - ActiveCoreCount, 35
 - ApertureSize, 35
 - Avx2RatioOffset, 35
 - Avx3RatioOffset, 35
 - BclkAdaptiveVoltage, 36
 - BiosGuard, 36
 - BistOnReset, 36
 - BootFrequency, 36
 - CleanMemory, 36
 - CmdTriStateDis, 36
 - CoreMaxOcRatio, 37
 - CorePllVoltageOffset, 37
 - CoreVoltageAdaptive, 37
 - CoreVoltageMode, 37
 - CoreVoltageOverride, 37
 - CpuRatio, 37
 - CpuRatioOverride, 37
 - DdrFreqLimit, 38
 - DmiDeEmphasis, 38
 - DmiGen3EndPointHint, 38
 - DmiGen3EndPointPreset, 38
 - DmiGen3ProgramStaticEq, 38
 - DmiGen3RootPortPreset, 38
 - EnableC6Dram, 38
 - EnableSgx, 39
 - EnableTraceHub, 39
 - EvLoader, 39
 - FClkFrequency, 39
 - FlashWearOutProtection, 39
 - GtPllVoltageOffset, 39

- HeciTimeouts, [39](#)
- IgdDvmt50PreAlloc, [40](#)
- InitPcieAspmAfterOprom, [40](#)
- InternalGfx, [40](#)
- JtagC10PowerGateDisable, [40](#)
- McPllVoltageOffset, [40](#)
- MmioSize, [40](#)
- OcLock, [40](#)
- PcdDebugInterfaceFlags, [41](#)
- PcdIsaSerialUartBase, [41](#)
- PcdSerialDebugBaudRate, [41](#)
- PcdSerialDebugLevel, [41](#)
- PcdSerialUartNumber, [41](#)
- PchAcpiBase, [41](#)
- PchHpetBase, [41](#)
- PchHpetBdfValid, [41](#)
- PchHpetBusNumber, [42](#)
- PchHpetDeviceNumber, [42](#)
- PchHpetEnable, [42](#)
- PchHpetFunctionNumber, [42](#)
- PchLpcEnhancePort8xhDecoding, [42](#)
- PchNumRsvdSmbusAddresses, [42](#)
- PchPmPciePllSsc, [42](#)
- PchPort80Route, [43](#)
- PcieRpEnableMask, [43](#)
- PeciC10Reset, [43](#)
- PeciSxReset, [43](#)
- PegDataPtr, [43](#)
- PegDisableSpreadSpectrumClocking, [43](#)
- PrmrrSize, [43](#)
- ProbelessTrace, [44](#)
- RMT, [45](#)
- Ratio, [44](#)
- RealtimeMemoryTiming, [44](#)
- RefClk, [44](#)
- RingDownBin, [44](#)
- RingMaxOcRatio, [44](#)
- RingMinOcRatio, [44](#)
- RingPllVoltageOffset, [44](#)
- SaGv, [45](#)
- SaPllVoltageOffset, [45](#)
- SinitMemorySize, [45](#)
- SmbusArpEnable, [45](#)
- SmbusEnable, [45](#)
- SpdProfileSelected, [45](#)
- tRTP, [46](#)
- TsegSize, [46](#)
- Txt, [46](#)
- TxtDprMemoryBase, [46](#)
- TxtDprMemorySize, [46](#)
- TxtHeapMemorySize, [46](#)
- TxtImplemented, [46](#)
- VddVoltage, [47](#)
- VmxEnable, [47](#)
- FSP_M_TEST_CONFIG, [47](#)
 - BdatEnable, [50](#)
 - BiosAcmBase, [50](#)
 - BiosAcmSize, [50](#)
 - BiosSize, [50](#)
 - BypassPhySyncReset, [51](#)
 - ChipsetInitMessage, [51](#)
 - DisableHeciRetry, [51](#)
 - DisableMessageCheck, [51](#)
 - DmiGen3EqPh2Enable, [51](#)
 - DmiGen3EqPh3Method, [51](#)
 - DmiVc1, [51](#)
 - DmiVcm, [52](#)
 - Gen3SwEqAlwaysAttempt, [52](#)
 - Gen3SwEqEnableVocTest, [52](#)
 - Gen3SwEqJitterDwellTime, [52](#)
 - Gen3SwEqJitterErrorTarget, [52](#)
 - Gen3SwEqNumberOfPresets, [52](#)
 - Gen3SwEqVocDwellTime, [53](#)
 - Gen3SwEqVocErrorTarget, [53](#)
 - HeciCommunication2, [53](#)
 - IderDeviceEnable, [53](#)
 - KtDeviceEnable, [53](#)
 - LockPTMregs, [53](#)
 - PanelPowerEnable, [54](#)
 - PchDciEn, [54](#)
 - Peg0Gen3EqPh2Enable, [54](#)
 - Peg0Gen3EqPh3Method, [54](#)
 - Peg1Gen3EqPh2Enable, [54](#)
 - Peg1Gen3EqPh3Method, [54](#)
 - Peg2Gen3EqPh2Enable, [55](#)
 - Peg2Gen3EqPh3Method, [55](#)
 - PegGen3EndPointHint, [55](#)
 - PegGen3EndPointPreset, [55](#)
 - PegGen3ProgramStaticEq, [55](#)
 - PegGen3RootPortPreset, [55](#)
 - PegGenerateBdatMarginTable, [55](#)
 - PegRxCemLoopbackLane, [56](#)
 - PegRxCemNonProtocolAwareness, [56](#)
 - ScanExtGfxForLegacyOpRom, [56](#)
 - SkipMbpHob, [56](#)
 - SmbusDynamicPowerGating, [56](#)
 - SmbusSpdWriteDisable, [56](#)
 - TgaSize, [57](#)
 - TotalFlashSize, [57](#)
 - TxtLcpPdBase, [57](#)
 - TxtLcpPdSize, [57](#)
 - WdtDisableAndLock, [57](#)
- FSP_S_CONFIG, [57](#)
 - AcLoadline, [73](#)
 - AcousticNoiseMitigation, [73](#)
 - AmtEnabled, [73](#)
 - AmtSolEnabled, [73](#)
 - AsfEnabled, [73](#)
 - DcLoadline, [73](#)
 - DelayUsbPdoProgramming, [74](#)
 - DevIntConfigPtr, [74](#)
 - DmiSuggestedSetting, [74](#)
 - Early8254ClockGatingEnable, [74](#)
 - EcCmdLock, [74](#)
 - EcCmdProvisionEav, [74](#)
 - EnableTcoTimer, [74](#)

- EsataSpeedLimit, [75](#)
- FastPkgCRampDisableGt, [75](#)
- FastPkgCRampDisableLa, [75](#)
- FastPkgCRampDisableSa, [75](#)
- FwProgress, [75](#)
- GpioIrqRoute, [75](#)
- Heci3Enabled, [75](#)
- IccMax, [76](#)
- ImonOffset, [76](#)
- ImonSlope, [76](#)
- ManageabilityMode, [76](#)
- MeUnconfigsValid, [76](#)
- MicrocodePatchAddress, [76](#)
- NumOfDevIntConfig, [76](#)
- PchCio2Enable, [77](#)
- PchCrid, [77](#)
- PchDisableComplianceMode, [77](#)
- PchDmiAspm, [77](#)
- PchDmiTsawEn, [77](#)
- PchHdaDspEnable, [77](#)
- PchHdaDspEndpointBluetooth, [77](#)
- PchHdaDspEndpointI2s, [78](#)
- PchHdaDspFeatureMask, [78](#)
- PchHdaDspUaaCompliance, [78](#)
- PchHdaEnable, [78](#)
- PchHdaIDispCodecDisconnect, [78](#)
- PchHdaIloBufferOwnership, [78](#)
- PchHdaPme, [78](#)
- PchIoApicBdfValid, [79](#)
- PchIoApicBusNumber, [79](#)
- PchIoApicDeviceNumber, [79](#)
- PchIoApicEntry24_119, [79](#)
- PchIoApicFunctionNumber, [79](#)
- PchIoApicId, [79](#)
- PchIoApicRangeSelect, [79](#)
- PchIshEnable, [80](#)
- PchIshGp0GpioAssign, [80](#)
- PchIshGp1GpioAssign, [80](#)
- PchIshGp2GpioAssign, [80](#)
- PchIshGp3GpioAssign, [80](#)
- PchIshGp4GpioAssign, [80](#)
- PchIshGp5GpioAssign, [80](#)
- PchIshGp6GpioAssign, [80](#)
- PchIshGp7GpioAssign, [81](#)
- PchIshI2c0GpioAssign, [81](#)
- PchIshI2c1GpioAssign, [81](#)
- PchIshI2c2GpioAssign, [81](#)
- PchIshPdtUnlock, [81](#)
- PchIshSpiGpioAssign, [81](#)
- PchIshUart0GpioAssign, [81](#)
- PchIshUart1GpioAssign, [82](#)
- PchLanClkReqSupported, [82](#)
- PchLanEnable, [82](#)
- PchLanK1OffEnable, [82](#)
- PchLanLtrEnable, [82](#)
- PchLockDownBiosLock, [82](#)
- PchLockDownSpiEiss, [82](#)
- PchMemoryThrottlingEnable, [82](#)
- PchPcieDeviceOverrideTablePtr, [83](#)
- PchPmCapsuleResetType, [83](#)
- PchPmDeepSxPol, [83](#)
- PchPmDisableDsxAcPresentPulldown, [83](#)
- PchPmDisableNativePowerButton, [83](#)
- PchPmLanWakeFromDeepSx, [83](#)
- PchPmLpcClockRun, [83](#)
- PchPmMeWakeSts, [84](#)
- PchPmPcieWakeFromDeepSx, [84](#)
- PchPmPmeB0S5Dis, [84](#)
- PchPmPwrBtnOverridePeriod, [84](#)
- PchPmPwrCycDur, [84](#)
- PchPmSlpAMinAssert, [84](#)
- PchPmSlpLanLowDc, [84](#)
- PchPmSlpS0Enable, [85](#)
- PchPmSlpS0VmEnable, [85](#)
- PchPmSlpS3MinAssert, [85](#)
- PchPmSlpS4MinAssert, [85](#)
- PchPmSlpStrchSusUp, [85](#)
- PchPmSlpSusMinAssert, [85](#)
- PchPmWoWlanDeepSxEnable, [86](#)
- PchPmWoWlanEnable, [86](#)
- PchPmWoLEnableOverride, [85](#)
- PchPmWoLOverWkSts, [86](#)
- PchPort61hEnable, [86](#)
- PchPwrOptEnable, [86](#)
- PchScsEmmcHs400DIIIDataValid, [86](#)
- PchScsEmmcHs400TuningRequired, [86](#)
- PchSirqEnable, [87](#)
- PchSirqMode, [87](#)
- PchSkyCamPortACTleEnable, [87](#)
- PchSkyCamPortATermOvrEnable, [87](#)
- PchSkyCamPortATrimEnable, [87](#)
- PchSkyCamPortBCTleEnable, [87](#)
- PchSkyCamPortBTermOvrEnable, [87](#)
- PchSkyCamPortBTrimEnable, [88](#)
- PchSkyCamPortCDCtleEnable, [88](#)
- PchSkyCamPortCTermOvrEnable, [88](#)
- PchSkyCamPortCTrimEnable, [88](#)
- PchSkyCamPortDTermOvrEnable, [88](#)
- PchSkyCamPortDTrimEnable, [88](#)
- PchSubSystemId, [88](#)
- PchSubSystemVendorId, [88](#)
- PchTTEnable, [89](#)
- PchTTLock, [89](#)
- PchTTState13Enable, [89](#)
- PchThermalDeviceEnable, [89](#)
- PchTsmicLock, [89](#)
- PcieAllowNoLtrIccPIIShutdown, [89](#)
- PcieComplianceTestMode, [89](#)
- PcieDisableRootPortClockGating, [90](#)
- PcieEnablePeerMemoryWrite, [90](#)
- PcieEqPh3LaneParamCm, [90](#)
- PcieEqPh3LaneParamCp, [90](#)
- PcieRpAspm, [90](#)
- PcieRpClkReqNumber, [90](#)
- PcieRpClkReqSupport, [90](#)
- PcieRpCompletionTimeout, [91](#)

- PcieRpDeviceResetPad, [91](#)
 - PcieRpFunctionSwap, [91](#)
 - PcieRpGen3EqPh3Method, [91](#)
 - PcieRpL1Substates, [91](#)
 - PcieRpPcieSpeed, [91](#)
 - PcieRpPhysicalSlotNumber, [91](#)
 - PcieSwEqCoeffListCm, [92](#)
 - PcieSwEqCoeffListCp, [92](#)
 - PortUsb20Enable, [92](#)
 - PortUsb30Enable, [92](#)
 - Psi1Threshold, [92](#)
 - Psi2Threshold, [92](#)
 - Psi3Enable, [92](#)
 - Psi3Threshold, [93](#)
 - PsysOffset, [93](#)
 - PsysSlope, [93](#)
 - PxRcConfig, [93](#)
 - SataEnable, [93](#)
 - SataMode, [93](#)
 - SataP0TDispFinit, [93](#)
 - SataP1TDispFinit, [94](#)
 - SataPortsDevSlp, [94](#)
 - SataPortsDmVal, [94](#)
 - SataPortsEnable, [94](#)
 - SataPwrOptEnable, [94](#)
 - SataRstHddUnlock, [94](#)
 - SataRstLrrt, [94](#)
 - SataRstLrrtOnly, [95](#)
 - SataRstLedLocate, [95](#)
 - SataRstOromUiBanner, [95](#)
 - SataRstPcieDeviceResetDelay, [95](#)
 - SataRstRaid0, [95](#)
 - SataRstRaid1, [95](#)
 - SataRstRaid10, [95](#)
 - SataRstRaid5, [95](#)
 - SataRstRaidAlternateld, [96](#)
 - SataRstSmartStorage, [96](#)
 - SataSalpSupport, [96](#)
 - SataThermalSuggestedSetting, [96](#)
 - ScilrqSelect, [96](#)
 - ScsEmmcEnabled, [96](#)
 - ScsEmmcHs400Enabled, [96](#)
 - ScsSdCardEnabled, [97](#)
 - SendEcCmd, [97](#)
 - SendVrMbxCmd, [97](#)
 - SendVrMbxCmd1, [97](#)
 - SerialloDebugUartNumber, [97](#)
 - SerialloDevMode, [97](#)
 - SerialloGpio, [97](#)
 - ShowSpiController, [98](#)
 - SlowSlewRateForGt, [98](#)
 - SlowSlewRateForIa, [98](#)
 - SlowSlewRateForSa, [98](#)
 - SsicPortEnable, [98](#)
 - TTSuggestedSetting, [99](#)
 - TcolrqSelect, [98](#)
 - TdcPowerLimit, [98](#)
 - TdcTimeWindow, [99](#)
 - TurboMode, [99](#)
 - Usb2AfePehalfbit, [99](#)
 - Usb2AfePetxiset, [99](#)
 - Usb2AfePredeemp, [99](#)
 - Usb2AfeTxiset, [99](#)
 - Usb3HsioTxDeEmph, [100](#)
 - Usb3HsioTxDeEmphEnable, [100](#)
 - Usb3HsioTxDownscaleAmp, [100](#)
 - Usb3HsioTxDownscaleAmpEnable, [100](#)
 - VrVoltageLimit, [100](#)
 - WatchDog, [100](#)
 - WatchDogTimerBios, [100](#)
 - WatchDogTimerOs, [101](#)
 - XdciEnable, [101](#)
 - FSP_S_TEST_CONFIG, [101](#)
 - ApHandoffManner, [109](#)
 - AplIdleManner, [109](#)
 - AutoThermalReporting, [109](#)
 - C1e, [109](#)
 - CStatePreWake, [109](#)
 - ConfigTdpBios, [109](#)
 - CstCfgCtrlIoMwaitRedirection, [109](#)
 - CstateLatencyControl0Irtl, [109](#)
 - Custom1ConfigTdpControl, [110](#)
 - Custom1PowerLimit1, [110](#)
 - Custom1PowerLimit1Time, [110](#)
 - Custom1PowerLimit2, [110](#)
 - Custom1TurboActivationRatio, [110](#)
 - Custom2ConfigTdpControl, [110](#)
 - Custom2PowerLimit1, [110](#)
 - Custom2PowerLimit1Time, [111](#)
 - Custom2PowerLimit2, [111](#)
 - Custom2TurboActivationRatio, [111](#)
 - Custom3ConfigTdpControl, [111](#)
 - Custom3PowerLimit1, [111](#)
 - Custom3PowerLimit1Time, [111](#)
 - Custom3PowerLimit2, [111](#)
 - Custom3TurboActivationRatio, [112](#)
 - Cx, [112](#)
 - DebugInterfaceEnable, [112](#)
 - DebugInterfaceLockEnable, [112](#)
 - DisableProcHotOut, [112](#)
 - DisableVrThermalAlert, [112](#)
 - Eist, [112](#)
 - EndOfPostMessage, [113](#)
 - EnergyEfficientPState, [113](#)
 - EnergyEfficientTurbo, [113](#)
 - HdcControl, [113](#)
 - Hwp, [113](#)
 - MachineCheckEnable, [113](#)
 - MlcStreamerPrefetcher, [113](#)
 - MonitorMwaitEnable, [114](#)
 - NumberOfEntries, [114](#)
 - OneCoreRatioLimit, [114](#)
 - PchHdaResetWaitTimer, [114](#)
 - PchLockDownBiosInterface, [114](#)
 - PchLockDownGlobalSmi, [114](#)
 - PchLockDownRtcLock, [115](#)
-

- PchPmDisableEnergyReport, 115
- PchPmPmcReadDisable, 115
- PchSbAccessUnlock, 115
- PchSbiUnlock, 115
- PcieEnablePort8xhDecode, 115
- PcieRpDptp, 115
- PcieRpSlotPowerLimitScale, 115
- PcieRpSlotPowerLimitValue, 116
- PcieRpUptp, 116
- PkgCStateDemotion, 116
- PkgCStateLimit, 116
- PkgCStateUnDemotion, 116
- PmgCstCfgCtrlLock, 116
- PowerLimit1, 116
- PowerLimit1Time, 117
- PowerLimit2, 117
- PowerLimit2Power, 117
- PowerLimit3, 117
- PowerLimit3Time, 117
- PowerLimit4, 117
- ProcHotResponse, 117
- ProcTraceEnable, 117
- ProcTraceOutputScheme, 118
- PsysPmax, 118
- PsysPowerLimit1, 118
- PsysPowerLimit1Power, 118
- PsysPowerLimit2, 118
- PsysPowerLimit2Power, 118
- RaceToHalt, 118
- SataTestMode, 119
- StateRatio, 119
- TStates, 120
- TccActivationOffset, 119
- TccOffsetClamp, 119
- TccOffsetLock, 119
- TccOffsetTimeWindowForRatl, 119
- ThreeStrikeCounterDisable, 120
- TimedMwait, 120
- FSP_T_CONFIG, 120
 - PcdSerialUartDebugEnabled, 121
 - PcdSerialUartNumber, 121
- FSPM_UPD, 121
- FSPS_UPD, 122
- FSPT_CORE_UPD, 123
- FSPT_UPD, 123
- FastPkgCRampDisableGt
 - FSP_S_CONFIG, 75
- FastPkgCRampDisableIa
 - FSP_S_CONFIG, 75
- FastPkgCRampDisableSa
 - FSP_S_CONFIG, 75
- FlashWearOutProtection
 - FSP_M_CONFIG, 39
- FspUpd.h, 137
- FspmUpd.h, 132
- FspUpd.h, 134
 - SI_PCH_INT_PIN, 136
 - SiPchNoInt, 136
- FsptUpd.h, 136
- FwProgress
 - FSP_S_CONFIG, 75
- GPIO_CONFIG, 124
 - Direction, 125
 - ElectricalConfig, 125
 - HostSoftPadOwn, 125
 - InterruptConfig, 125
 - LockConfig, 126
 - OutputState, 126
 - PadMode, 126
 - PowerConfig, 126
- GPIO_DIRECTION
 - GpioConfig.h, 140
- GPIO_ELECTRICAL_CONFIG
 - GpioConfig.h, 141
- GPIO_HARDWARE_DEFAULT
 - GpioConfig.h, 141
- GPIO_HOSTSW_OWN
 - GpioConfig.h, 141
- GPIO_INT_CONFIG
 - GpioConfig.h, 141
- GPIO_LOCK_CONFIG
 - GpioConfig.h, 142
- GPIO_OTHER_CONFIG
 - GpioConfig.h, 142
- GPIO_OUTPUT_STATE
 - GpioConfig.h, 143
- GPIO_PAD_MODE
 - GpioConfig.h, 143
- GPIO_RESET_CONFIG
 - GpioConfig.h, 143
- Gen3SwEqAlwaysAttempt
 - FSP_M_TEST_CONFIG, 52
- Gen3SwEqEnableVocTest
 - FSP_M_TEST_CONFIG, 52
- Gen3SwEqJitterDwellTime
 - FSP_M_TEST_CONFIG, 52
- Gen3SwEqJitterErrorTarget
 - FSP_M_TEST_CONFIG, 52
- Gen3SwEqNumberOfPresets
 - FSP_M_TEST_CONFIG, 52
- Gen3SwEqVocDwellTime
 - FSP_M_TEST_CONFIG, 53
- Gen3SwEqVocErrorTarget
 - FSP_M_TEST_CONFIG, 53
- GpioConfig.h, 139
 - GPIO_DIRECTION, 140
 - GPIO_ELECTRICAL_CONFIG, 141
 - GPIO_HARDWARE_DEFAULT, 141
 - GPIO_HOSTSW_OWN, 141
 - GPIO_INT_CONFIG, 141
 - GPIO_LOCK_CONFIG, 142
 - GPIO_OTHER_CONFIG, 142
 - GPIO_OUTPUT_STATE, 143
 - GPIO_PAD_MODE, 143
 - GPIO_RESET_CONFIG, 143
 - GpioDirDefault, 140

- GpioDirIn, [140](#)
- GpioDirInInv, [141](#)
- GpioDirInInvOut, [140](#)
- GpioDirInOut, [140](#)
- GpioDirNone, [141](#)
- GpioDirOut, [141](#)
- GpioDswReset, [144](#)
- GpioHardwareDefault, [141](#)
- GpioHostDeepReset, [144](#)
- GpioHostOwnAcpi, [141](#)
- GpioHostOwnDefault, [141](#)
- GpioHostOwnGpio, [141](#)
- GpioIntApic, [142](#)
- GpioIntBothEdge, [142](#)
- GpioIntDefault, [142](#)
- GpioIntDis, [142](#)
- GpioIntEdge, [142](#)
- GpioIntLevel, [142](#)
- GpioIntLvlEdgDis, [142](#)
- GpioIntNmi, [142](#)
- GpioIntSci, [142](#)
- GpioIntSmi, [142](#)
- GpioLockDefault, [142](#)
- GpioNoTolerance1v8, [141](#)
- GpioOutDefault, [143](#)
- GpioOutHigh, [143](#)
- GpioOutLow, [143](#)
- GpioOutputStateLock, [142](#)
- GpioPadConfigLock, [142](#)
- GpioPlatformReset, [144](#)
- GpioResetDeep, [143](#)
- GpioResetDefault, [143](#)
- GpioResetNormal, [143](#)
- GpioResetPwrGood, [143](#)
- GpioResetResume, [143](#)
- GpioResumeReset, [143](#)
- GpioRxRaw1Default, [143](#)
- GpioRxRaw1Dis, [143](#)
- GpioRxRaw1En, [143](#)
- GpioTermDefault, [141](#)
- GpioTermNative, [141](#)
- GpioTermNone, [141](#)
- GpioTermWpd20K, [141](#)
- GpioTermWpd5K, [141](#)
- GpioTermWpu1K, [141](#)
- GpioTermWpu1K2K, [141](#)
- GpioTermWpu20K, [141](#)
- GpioTermWpu2K, [141](#)
- GpioTermWpu5K, [141](#)
- GpioTolerance1v8, [141](#)
- GpioDirDefault
 - GpioConfig.h, [140](#)
- GpioDirIn
 - GpioConfig.h, [140](#)
- GpioDirInInv
 - GpioConfig.h, [141](#)
- GpioDirInInvOut
 - GpioConfig.h, [140](#)
- GpioDirInOut
 - GpioConfig.h, [140](#)
- GpioDirNone
 - GpioConfig.h, [141](#)
- GpioDirOut
 - GpioConfig.h, [141](#)
- GpioDswReset
 - GpioConfig.h, [144](#)
- GpioHardwareDefault
 - GpioConfig.h, [141](#)
- GpioHostDeepReset
 - GpioConfig.h, [144](#)
- GpioHostOwnAcpi
 - GpioConfig.h, [141](#)
- GpioHostOwnDefault
 - GpioConfig.h, [141](#)
- GpioHostOwnGpio
 - GpioConfig.h, [141](#)
- GpioIntApic
 - GpioConfig.h, [142](#)
- GpioIntBothEdge
 - GpioConfig.h, [142](#)
- GpioIntDefault
 - GpioConfig.h, [142](#)
- GpioIntDis
 - GpioConfig.h, [142](#)
- GpioIntEdge
 - GpioConfig.h, [142](#)
- GpioIntLevel
 - GpioConfig.h, [142](#)
- GpioIntLvlEdgDis
 - GpioConfig.h, [142](#)
- GpioIntNmi
 - GpioConfig.h, [142](#)
- GpioIntSci
 - GpioConfig.h, [142](#)
- GpioIntSmi
 - GpioConfig.h, [142](#)
- GpioIrqRoute
 - FSP_S_CONFIG, [75](#)
- GpioLockDefault
 - GpioConfig.h, [142](#)
- GpioNoTolerance1v8
 - GpioConfig.h, [141](#)
- GpioOutDefault
 - GpioConfig.h, [143](#)
- GpioOutHigh
 - GpioConfig.h, [143](#)
- GpioOutLow
 - GpioConfig.h, [143](#)
- GpioOutputStateLock
 - GpioConfig.h, [142](#)
- GpioPadConfigLock
 - GpioConfig.h, [142](#)
- GpioPlatformReset
 - GpioConfig.h, [144](#)
- GpioResetDeep
 - GpioConfig.h, [143](#)

- GpioResetDefault
 - GpioConfig.h, [143](#)
 - GpioResetNormal
 - GpioConfig.h, [143](#)
 - GpioResetPwrGood
 - GpioConfig.h, [143](#)
 - GpioResetResume
 - GpioConfig.h, [143](#)
 - GpioResumeReset
 - GpioConfig.h, [143](#)
 - GpioRxRaw1Default
 - GpioConfig.h, [143](#)
 - GpioRxRaw1Dis
 - GpioConfig.h, [143](#)
 - GpioRxRaw1En
 - GpioConfig.h, [143](#)
 - GpioSampleDef.h, [144](#)
 - GpioTermDefault
 - GpioConfig.h, [141](#)
 - GpioTermNative
 - GpioConfig.h, [141](#)
 - GpioTermNone
 - GpioConfig.h, [141](#)
 - GpioTermWpd20K
 - GpioConfig.h, [141](#)
 - GpioTermWpd5K
 - GpioConfig.h, [141](#)
 - GpioTermWpu1K
 - GpioConfig.h, [141](#)
 - GpioTermWpu1K2K
 - GpioConfig.h, [141](#)
 - GpioTermWpu20K
 - GpioConfig.h, [141](#)
 - GpioTermWpu2K
 - GpioConfig.h, [141](#)
 - GpioTermWpu5K
 - GpioConfig.h, [141](#)
 - GpioTolerance1v8
 - GpioConfig.h, [141](#)
 - GtPllVoltageOffset
 - FSP_M_CONFIG, [39](#)
 - HdcControl
 - FSP_S_TEST_CONFIG, [113](#)
 - Heci3Enabled
 - FSP_S_CONFIG, [75](#)
 - HeciCommunication2
 - FSP_M_TEST_CONFIG, [53](#)
 - HeciTimeouts
 - FSP_M_CONFIG, [39](#)
 - HostSoftPadOwn
 - GPIO_CONFIG, [125](#)
 - Hwp
 - FSP_S_TEST_CONFIG, [113](#)
 - IccMax
 - FSP_S_CONFIG, [76](#)
 - IderDeviceEnable
 - FSP_M_TEST_CONFIG, [53](#)
 - IgdDvmt50PreAlloc
 - FSP_M_CONFIG, [40](#)
 - ImonOffset
 - FSP_S_CONFIG, [76](#)
 - ImonSlope
 - FSP_S_CONFIG, [76](#)
 - InitPcieAspmAfterOprom
 - FSP_M_CONFIG, [40](#)
 - InternalGfx
 - FSP_M_CONFIG, [40](#)
 - InterruptConfig
 - GPIO_CONFIG, [125](#)
 - JtagC10PowerGateDisable
 - FSP_M_CONFIG, [40](#)
 - KitDeviceEnable
 - FSP_M_TEST_CONFIG, [53](#)
 - LockConfig
 - GPIO_CONFIG, [126](#)
 - LockPTMregs
 - FSP_M_TEST_CONFIG, [53](#)
 - MEMORY_PLATFORM_DATA, [126](#)
 - MachineCheckEnable
 - FSP_S_TEST_CONFIG, [113](#)
 - ManageabilityMode
 - FSP_S_CONFIG, [76](#)
 - McPllVoltageOffset
 - FSP_M_CONFIG, [40](#)
 - MeUnconfigsValid
 - FSP_S_CONFIG, [76](#)
 - MemInfoHob.h, [145](#)
 - MicrocodePatchAddress
 - FSP_S_CONFIG, [76](#)
 - MlcStreamerPrefetcher
 - FSP_S_TEST_CONFIG, [113](#)
 - MmioSize
 - FSP_M_CONFIG, [40](#)
 - MonitorMwaitEnable
 - FSP_S_TEST_CONFIG, [114](#)
 - NumOfDevIntConfig
 - FSP_S_CONFIG, [76](#)
 - NumberOfEntries
 - FSP_S_TEST_CONFIG, [114](#)
 - OcLock
 - FSP_M_CONFIG, [40](#)
 - OneCoreRatioLimit
 - FSP_S_TEST_CONFIG, [114](#)
 - OutputState
 - GPIO_CONFIG, [126](#)
 - PadMode
 - GPIO_CONFIG, [126](#)
 - PanelPowerEnable
 - FSP_M_TEST_CONFIG, [54](#)
 - PcdDebugInterfaceFlags
-

- FSP_M_CONFIG, [41](#)
 - PcdIsaSerialUartBase
 - FSP_M_CONFIG, [41](#)
 - PcdSerialDebugBaudRate
 - FSP_M_CONFIG, [41](#)
 - PcdSerialDebugLevel
 - FSP_M_CONFIG, [41](#)
 - PcdSerialIoUartDebugEnabled
 - FSP_T_CONFIG, [121](#)
 - PcdSerialIoUartNumber
 - FSP_M_CONFIG, [41](#)
 - FSP_T_CONFIG, [121](#)
 - PchAcpiBase
 - FSP_M_CONFIG, [41](#)
 - PchCio2Enable
 - FSP_S_CONFIG, [77](#)
 - PchCrid
 - FSP_S_CONFIG, [77](#)
 - PchDciEn
 - FSP_M_TEST_CONFIG, [54](#)
 - PchDisableComplianceMode
 - FSP_S_CONFIG, [77](#)
 - PchDmiAspm
 - FSP_S_CONFIG, [77](#)
 - PchDmiTsawEn
 - FSP_S_CONFIG, [77](#)
 - PchHdaDspEnable
 - FSP_S_CONFIG, [77](#)
 - PchHdaDspEndpointBluetooth
 - FSP_S_CONFIG, [77](#)
 - PchHdaDspEndpointI2s
 - FSP_S_CONFIG, [78](#)
 - PchHdaDspFeatureMask
 - FSP_S_CONFIG, [78](#)
 - PchHdaDspUaaCompliance
 - FSP_S_CONFIG, [78](#)
 - PchHdaEnable
 - FSP_S_CONFIG, [78](#)
 - PchHdaIDispCodecDisconnect
 - FSP_S_CONFIG, [78](#)
 - PchHdaIoBufferOwnership
 - FSP_S_CONFIG, [78](#)
 - PchHdaPme
 - FSP_S_CONFIG, [78](#)
 - PchHdaResetWaitTimer
 - FSP_S_TEST_CONFIG, [114](#)
 - PchHpetBase
 - FSP_M_CONFIG, [41](#)
 - PchHpetBdfValid
 - FSP_M_CONFIG, [41](#)
 - PchHpetBusNumber
 - FSP_M_CONFIG, [42](#)
 - PchHpetDeviceNumber
 - FSP_M_CONFIG, [42](#)
 - PchHpetEnable
 - FSP_M_CONFIG, [42](#)
 - PchHpetFunctionNumber
 - FSP_M_CONFIG, [42](#)
 - PchIoApicBdfValid
 - FSP_S_CONFIG, [79](#)
 - PchIoApicBusNumber
 - FSP_S_CONFIG, [79](#)
 - PchIoApicDeviceNumber
 - FSP_S_CONFIG, [79](#)
 - PchIoApicEntry24_119
 - FSP_S_CONFIG, [79](#)
 - PchIoApicFunctionNumber
 - FSP_S_CONFIG, [79](#)
 - PchIoApicId
 - FSP_S_CONFIG, [79](#)
 - PchIoApicRangeSelect
 - FSP_S_CONFIG, [79](#)
 - PchIshEnable
 - FSP_S_CONFIG, [80](#)
 - PchIshGp0GpioAssign
 - FSP_S_CONFIG, [80](#)
 - PchIshGp1GpioAssign
 - FSP_S_CONFIG, [80](#)
 - PchIshGp2GpioAssign
 - FSP_S_CONFIG, [80](#)
 - PchIshGp3GpioAssign
 - FSP_S_CONFIG, [80](#)
 - PchIshGp4GpioAssign
 - FSP_S_CONFIG, [80](#)
 - PchIshGp5GpioAssign
 - FSP_S_CONFIG, [80](#)
 - PchIshGp6GpioAssign
 - FSP_S_CONFIG, [80](#)
 - PchIshGp7GpioAssign
 - FSP_S_CONFIG, [81](#)
 - PchIshI2c0GpioAssign
 - FSP_S_CONFIG, [81](#)
 - PchIshI2c1GpioAssign
 - FSP_S_CONFIG, [81](#)
 - PchIshI2c2GpioAssign
 - FSP_S_CONFIG, [81](#)
 - PchIshPdtUnlock
 - FSP_S_CONFIG, [81](#)
 - PchIshSpiGpioAssign
 - FSP_S_CONFIG, [81](#)
 - PchIshUart0GpioAssign
 - FSP_S_CONFIG, [81](#)
 - PchIshUart1GpioAssign
 - FSP_S_CONFIG, [82](#)
 - PchLanClkReqSupported
 - FSP_S_CONFIG, [82](#)
 - PchLanEnable
 - FSP_S_CONFIG, [82](#)
 - PchLanK1OffEnable
 - FSP_S_CONFIG, [82](#)
 - PchLanLtrEnable
 - FSP_S_CONFIG, [82](#)
 - PchLockDownBiosInterface
 - FSP_S_TEST_CONFIG, [114](#)
 - PchLockDownBiosLock
 - FSP_S_CONFIG, [82](#)
-

- PchLockDownGlobalSmi
FSP_S_TEST_CONFIG, 114
 - PchLockDownRtcLock
FSP_S_TEST_CONFIG, 115
 - PchLockDownSpiEiss
FSP_S_CONFIG, 82
 - PchLpcEnhancePort8xhDecoding
FSP_M_CONFIG, 42
 - PchMemoryThrottlingEnable
FSP_S_CONFIG, 82
 - PchNumRsvdSmbusAddresses
FSP_M_CONFIG, 42
 - PchPcieDeviceOverrideTablePtr
FSP_S_CONFIG, 83
 - PchPmCapsuleResetType
FSP_S_CONFIG, 83
 - PchPmDeepSxPol
FSP_S_CONFIG, 83
 - PchPmDisableDsxAcPresentPulldown
FSP_S_CONFIG, 83
 - PchPmDisableEnergyReport
FSP_S_TEST_CONFIG, 115
 - PchPmDisableNativePowerButton
FSP_S_CONFIG, 83
 - PchPmLanWakeFromDeepSx
FSP_S_CONFIG, 83
 - PchPmLpcClockRun
FSP_S_CONFIG, 83
 - PchPmMeWakeSts
FSP_S_CONFIG, 84
 - PchPmPciePIISsc
FSP_M_CONFIG, 42
 - PchPmPcieWakeFromDeepSx
FSP_S_CONFIG, 84
 - PchPmPmcReadDisable
FSP_S_TEST_CONFIG, 115
 - PchPmPmeB0S5Dis
FSP_S_CONFIG, 84
 - PchPmPwrBtnOverridePeriod
FSP_S_CONFIG, 84
 - PchPmPwrCycDur
FSP_S_CONFIG, 84
 - PchPmSlpAMinAssert
FSP_S_CONFIG, 84
 - PchPmSlpLanLowDc
FSP_S_CONFIG, 84
 - PchPmSlpS0Enable
FSP_S_CONFIG, 85
 - PchPmSlpS0VmEnable
FSP_S_CONFIG, 85
 - PchPmSlpS3MinAssert
FSP_S_CONFIG, 85
 - PchPmSlpS4MinAssert
FSP_S_CONFIG, 85
 - PchPmSlpStrchSusUp
FSP_S_CONFIG, 85
 - PchPmSlpSusMinAssert
FSP_S_CONFIG, 85
 - PchPmWoWlanDeepSxEnable
FSP_S_CONFIG, 86
 - PchPmWoWlanEnable
FSP_S_CONFIG, 86
 - PchPmWolEnableOverride
FSP_S_CONFIG, 85
 - PchPmWolOvrWkSts
FSP_S_CONFIG, 86
 - PchPort61hEnable
FSP_S_CONFIG, 86
 - PchPort80Route
FSP_M_CONFIG, 43
 - PchPwrOptEnable
FSP_S_CONFIG, 86
 - PchSbAccessUnlock
FSP_S_TEST_CONFIG, 115
 - PchSbiUnlock
FSP_S_TEST_CONFIG, 115
 - PchScsEmmcHs400DIIDataValid
FSP_S_CONFIG, 86
 - PchScsEmmcHs400TuningRequired
FSP_S_CONFIG, 86
 - PchSirqEnable
FSP_S_CONFIG, 87
 - PchSirqMode
FSP_S_CONFIG, 87
 - PchSkyCamPortACTleEnable
FSP_S_CONFIG, 87
 - PchSkyCamPortATermOvrEnable
FSP_S_CONFIG, 87
 - PchSkyCamPortATrimEnable
FSP_S_CONFIG, 87
 - PchSkyCamPortBCtleEnable
FSP_S_CONFIG, 87
 - PchSkyCamPortBTermOvrEnable
FSP_S_CONFIG, 87
 - PchSkyCamPortBTrimEnable
FSP_S_CONFIG, 88
 - PchSkyCamPortCDCtleEnable
FSP_S_CONFIG, 88
 - PchSkyCamPortCTermOvrEnable
FSP_S_CONFIG, 88
 - PchSkyCamPortCTrimEnable
FSP_S_CONFIG, 88
 - PchSkyCamPortDTermOvrEnable
FSP_S_CONFIG, 88
 - PchSkyCamPortDTrimEnable
FSP_S_CONFIG, 88
 - PchSubSystemId
FSP_S_CONFIG, 88
 - PchSubSystemVendorId
FSP_S_CONFIG, 88
 - PchTTEnable
FSP_S_CONFIG, 89
 - PchTTLock
FSP_S_CONFIG, 89
 - PchTTState13Enable
FSP_S_CONFIG, 89
-

- PchThermalDeviceEnable
FSP_S_CONFIG, 89
 - PchTsmicLock
FSP_S_CONFIG, 89
 - PcieAllowNoLtrIccPIIShutdown
FSP_S_CONFIG, 89
 - PcieComplianceTestMode
FSP_S_CONFIG, 89
 - PcieDisableRootPortClockGating
FSP_S_CONFIG, 90
 - PcieEnablePeerMemoryWrite
FSP_S_CONFIG, 90
 - PcieEnablePort8xhDecode
FSP_S_TEST_CONFIG, 115
 - PcieEqPh3LaneParamCm
FSP_S_CONFIG, 90
 - PcieEqPh3LaneParamCp
FSP_S_CONFIG, 90
 - PcieRpAspm
FSP_S_CONFIG, 90
 - PcieRpClkReqNumber
FSP_S_CONFIG, 90
 - PcieRpClkReqSupport
FSP_S_CONFIG, 90
 - PcieRpCompletionTimeout
FSP_S_CONFIG, 91
 - PcieRpDeviceResetPad
FSP_S_CONFIG, 91
 - PcieRpDptp
FSP_S_TEST_CONFIG, 115
 - PcieRpEnableMask
FSP_M_CONFIG, 43
 - PcieRpFunctionSwap
FSP_S_CONFIG, 91
 - PcieRpGen3EqPh3Method
FSP_S_CONFIG, 91
 - PcieRpL1Substates
FSP_S_CONFIG, 91
 - PcieRpPcieSpeed
FSP_S_CONFIG, 91
 - PcieRpPhysicalSlotNumber
FSP_S_CONFIG, 91
 - PcieRpSlotPowerLimitScale
FSP_S_TEST_CONFIG, 115
 - PcieRpSlotPowerLimitValue
FSP_S_TEST_CONFIG, 116
 - PcieRpUptp
FSP_S_TEST_CONFIG, 116
 - PcieSwEqCoeffListCm
FSP_S_CONFIG, 92
 - PcieSwEqCoeffListCp
FSP_S_CONFIG, 92
 - PeciC10Reset
FSP_M_CONFIG, 43
 - PeciSxReset
FSP_M_CONFIG, 43
 - Peg0Gen3EqPh2Enable
FSP_M_TEST_CONFIG, 54
 - Peg1Gen3EqPh2Enable
FSP_M_TEST_CONFIG, 54
 - Peg1Gen3EqPh3Method
FSP_M_TEST_CONFIG, 54
 - Peg2Gen3EqPh2Enable
FSP_M_TEST_CONFIG, 55
 - Peg2Gen3EqPh3Method
FSP_M_TEST_CONFIG, 55
 - PegDataPtr
FSP_M_CONFIG, 43
 - PegDisableSpreadSpectrumClocking
FSP_M_CONFIG, 43
 - PegGen3EndPointHint
FSP_M_TEST_CONFIG, 55
 - PegGen3EndPointPreset
FSP_M_TEST_CONFIG, 55
 - PegGen3ProgramStaticEq
FSP_M_TEST_CONFIG, 55
 - PegGen3RootPortPreset
FSP_M_TEST_CONFIG, 55
 - PegGenerateBdatMarginTable
FSP_M_TEST_CONFIG, 55
 - PegRxCemLoopbackLane
FSP_M_TEST_CONFIG, 56
 - PegRxCemNonProtocolAwareness
FSP_M_TEST_CONFIG, 56
 - PkgCStateDemotion
FSP_S_TEST_CONFIG, 116
 - PkgCStateLimit
FSP_S_TEST_CONFIG, 116
 - PkgCStateUnDemotion
FSP_S_TEST_CONFIG, 116
 - PmgCstCfgCtrlLock
FSP_S_TEST_CONFIG, 116
 - PortUsb20Enable
FSP_S_CONFIG, 92
 - PortUsb30Enable
FSP_S_CONFIG, 92
 - PowerConfig
GPIO_CONFIG, 126
 - PowerLimit1
FSP_S_TEST_CONFIG, 116
 - PowerLimit1Time
FSP_S_TEST_CONFIG, 117
 - PowerLimit2
FSP_S_TEST_CONFIG, 117
 - PowerLimit2Power
FSP_S_TEST_CONFIG, 117
 - PowerLimit3
FSP_S_TEST_CONFIG, 117
 - PowerLimit3Time
FSP_S_TEST_CONFIG, 117
 - PowerLimit4
FSP_S_TEST_CONFIG, 117
 - PrmrrSize
FSP_M_CONFIG, 43
-

- ProbelessTrace
 - FSP_M_CONFIG, 44
- ProcHotResponse
 - FSP_S_TEST_CONFIG, 117
- ProcTraceEnable
 - FSP_S_TEST_CONFIG, 117
- ProcTraceOutputScheme
 - FSP_S_TEST_CONFIG, 118
- Psi1Threshold
 - FSP_S_CONFIG, 92
- Psi2Threshold
 - FSP_S_CONFIG, 92
- Psi3Enable
 - FSP_S_CONFIG, 92
- Psi3Threshold
 - FSP_S_CONFIG, 93
- PsysOffset
 - FSP_S_CONFIG, 93
- PsysPmax
 - FSP_S_TEST_CONFIG, 118
- PsysPowerLimit1
 - FSP_S_TEST_CONFIG, 118
- PsysPowerLimit1Power
 - FSP_S_TEST_CONFIG, 118
- PsysPowerLimit2
 - FSP_S_TEST_CONFIG, 118
- PsysPowerLimit2Power
 - FSP_S_TEST_CONFIG, 118
- PsysSlope
 - FSP_S_CONFIG, 93
- PxRcConfig
 - FSP_S_CONFIG, 93
- RMT
 - FSP_M_CONFIG, 45
- RaceToHalt
 - FSP_S_TEST_CONFIG, 118
- Ratio
 - FSP_M_CONFIG, 44
- RealtimeMemoryTiming
 - FSP_M_CONFIG, 44
- RefClk
 - FSP_M_CONFIG, 44
- RingDownBin
 - FSP_M_CONFIG, 44
- RingMaxOcRatio
 - FSP_M_CONFIG, 44
- RingMinOcRatio
 - FSP_M_CONFIG, 44
- RingPIIVoltageOffset
 - FSP_M_CONFIG, 44
- SI_CHIPSET_INIT_INFO, 127
- SI_PCH_DEVICE_INTERRUPT_CONFIG, 127
- SI_PCH_INT_PIN
 - FspUpd.h, 136
- SMBIOS_CACHE_INFO, 128
- SMBIOS_PROCESSOR_INFO, 128
- SaGv
 - FSP_M_CONFIG, 45
- SaPIIVoltageOffset
 - FSP_M_CONFIG, 45
- SataEnable
 - FSP_S_CONFIG, 93
- SataMode
 - FSP_S_CONFIG, 93
- SataP0TDispFinit
 - FSP_S_CONFIG, 93
- SataP1TDispFinit
 - FSP_S_CONFIG, 94
- SataPortsDevSlp
 - FSP_S_CONFIG, 94
- SataPortsDmVal
 - FSP_S_CONFIG, 94
- SataPortsEnable
 - FSP_S_CONFIG, 94
- SataPwrOptEnable
 - FSP_S_CONFIG, 94
- SataRstHddUnlock
 - FSP_S_CONFIG, 94
- SataRstLrrt
 - FSP_S_CONFIG, 94
- SataRstLrrtOnly
 - FSP_S_CONFIG, 95
- SataRstLedLocate
 - FSP_S_CONFIG, 95
- SataRstOromUiBanner
 - FSP_S_CONFIG, 95
- SataRstPcieDeviceResetDelay
 - FSP_S_CONFIG, 95
- SataRstRaid0
 - FSP_S_CONFIG, 95
- SataRstRaid1
 - FSP_S_CONFIG, 95
- SataRstRaid10
 - FSP_S_CONFIG, 95
- SataRstRaid5
 - FSP_S_CONFIG, 95
- SataRstRaidAlternateId
 - FSP_S_CONFIG, 96
- SataRstSmartStorage
 - FSP_S_CONFIG, 96
- SataSalpSupport
 - FSP_S_CONFIG, 96
- SataTestMode
 - FSP_S_TEST_CONFIG, 119
- SataThermalSuggestedSetting
 - FSP_S_CONFIG, 96
- ScanExtGfxForLegacyOpRom
 - FSP_M_TEST_CONFIG, 56
- ScilrqSelect
 - FSP_S_CONFIG, 96
- ScsEmmcEnabled
 - FSP_S_CONFIG, 96
- ScsEmmcHs400Enabled
 - FSP_S_CONFIG, 96
- ScsSdCardEnabled

- FSP_S_CONFIG, 97
- SendEcCmd
 - FSP_S_CONFIG, 97
- SendVrMbxCmd
 - FSP_S_CONFIG, 97
- SendVrMbxCmd1
 - FSP_S_CONFIG, 97
- SerialloDebugUartNumber
 - FSP_S_CONFIG, 97
- SerialloDevMode
 - FSP_S_CONFIG, 97
- SerialloGpio
 - FSP_S_CONFIG, 97
- ShowSpiController
 - FSP_S_CONFIG, 98
- SiPchNoInt
 - FspsUpd.h, 136
- SinitMemorySize
 - FSP_M_CONFIG, 45
- SkipMbpHob
 - FSP_M_TEST_CONFIG, 56
- SlowSlewRateForGt
 - FSP_S_CONFIG, 98
- SlowSlewRateForIa
 - FSP_S_CONFIG, 98
- SlowSlewRateForSa
 - FSP_S_CONFIG, 98
- SmbiosCacheInfoHob.h, 146
- SmbiosProcessorInfoHob.h, 147
- SmbusArpEnable
 - FSP_M_CONFIG, 45
- SmbusDynamicPowerGating
 - FSP_M_TEST_CONFIG, 56
- SmbusEnable
 - FSP_M_CONFIG, 45
- SmbusSpdWriteDisable
 - FSP_M_TEST_CONFIG, 56
- SpdProfileSelected
 - FSP_M_CONFIG, 45
- SsicPortEnable
 - FSP_S_CONFIG, 98
- StateRatio
 - FSP_S_TEST_CONFIG, 119
- tRTP
 - FSP_M_CONFIG, 46
- TStates
 - FSP_S_TEST_CONFIG, 120
- TTSuggestedSetting
 - FSP_S_CONFIG, 99
- TccActivationOffset
 - FSP_S_TEST_CONFIG, 119
- TccOffsetClamp
 - FSP_S_TEST_CONFIG, 119
- TccOffsetLock
 - FSP_S_TEST_CONFIG, 119
- TccOffsetTimeWindowForRatl
 - FSP_S_TEST_CONFIG, 119
- TcolrqSelect
 - FSP_S_CONFIG, 98
- TdcPowerLimit
 - FSP_S_CONFIG, 98
- TdcTimeWindow
 - FSP_S_CONFIG, 99
- TgaSize
 - FSP_M_TEST_CONFIG, 57
- ThreeStrikeCounterDisable
 - FSP_S_TEST_CONFIG, 120
- TimedMwait
 - FSP_S_TEST_CONFIG, 120
- TotalFlashSize
 - FSP_M_TEST_CONFIG, 57
- TsegSize
 - FSP_M_CONFIG, 46
- TurboMode
 - FSP_S_CONFIG, 99
- Txt
 - FSP_M_CONFIG, 46
- TxDprMemoryBase
 - FSP_M_CONFIG, 46
- TxDprMemorySize
 - FSP_M_CONFIG, 46
- TxtHeapMemorySize
 - FSP_M_CONFIG, 46
- TxtImplemented
 - FSP_M_CONFIG, 46
- TxtLcpPdBase
 - FSP_M_TEST_CONFIG, 57
- TxtLcpPdSize
 - FSP_M_TEST_CONFIG, 57
- Usb2AfePehalfbit
 - FSP_S_CONFIG, 99
- Usb2AfePetxiset
 - FSP_S_CONFIG, 99
- Usb2AfePredeemp
 - FSP_S_CONFIG, 99
- Usb2AfeTxiset
 - FSP_S_CONFIG, 99
- Usb3HsioTxDeEmph
 - FSP_S_CONFIG, 100
- Usb3HsioTxDeEmphEnable
 - FSP_S_CONFIG, 100
- Usb3HsioTxDownscaleAmp
 - FSP_S_CONFIG, 100
- Usb3HsioTxDownscaleAmpEnable
 - FSP_S_CONFIG, 100
- VddVoltage
 - FSP_M_CONFIG, 47
- VmxEnable
 - FSP_M_CONFIG, 47
- VrVoltageLimit
 - FSP_S_CONFIG, 100
- WatchDog
 - FSP_S_CONFIG, 100
- WatchDogTimerBios

FSP_S_CONFIG, [100](#)
WatchDogTimerOs
FSP_S_CONFIG, [101](#)
WdtDisableAndLock
FSP_M_TEST_CONFIG, [57](#)

XdcEnable
FSP_S_CONFIG, [101](#)
