



Darwin_v2.0在rtos预览camera1的使用说明

一 硬件简介

硬件板:Darwin_X2000_V2.0 + spi nand 开发板

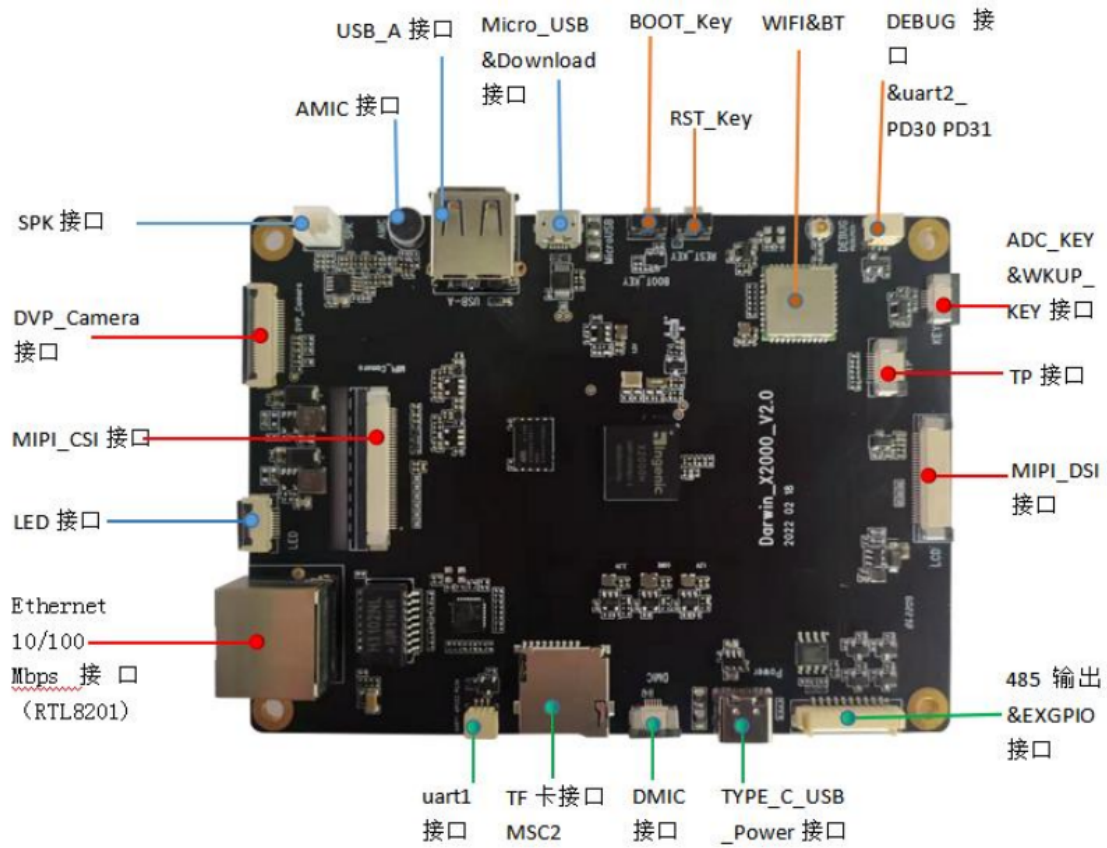

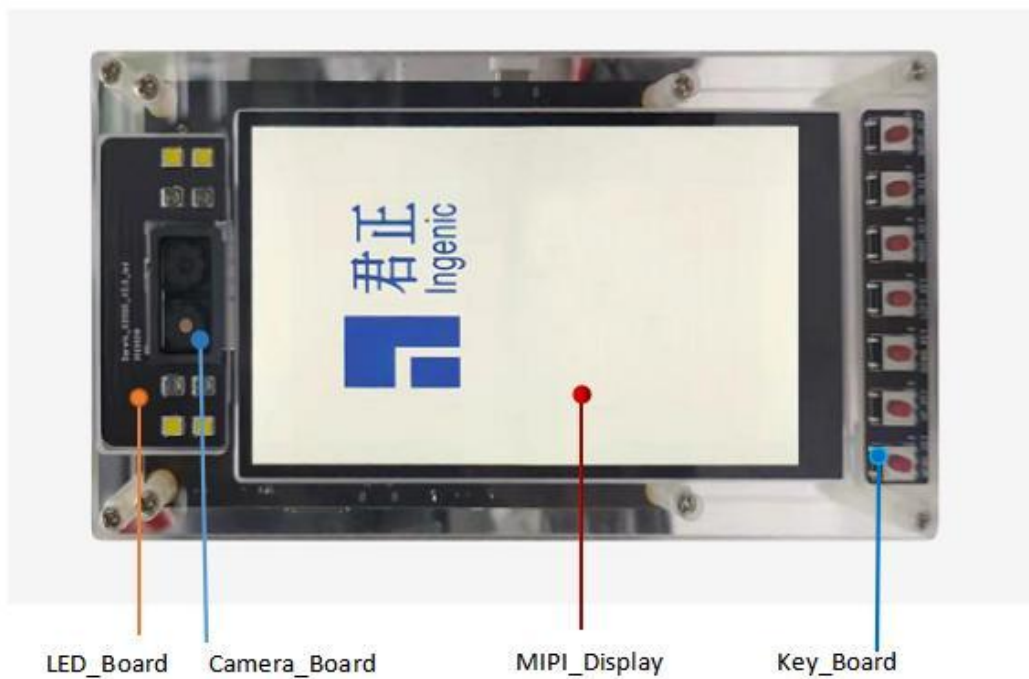


二 软件配置





Ctrl + S 保存当前配置

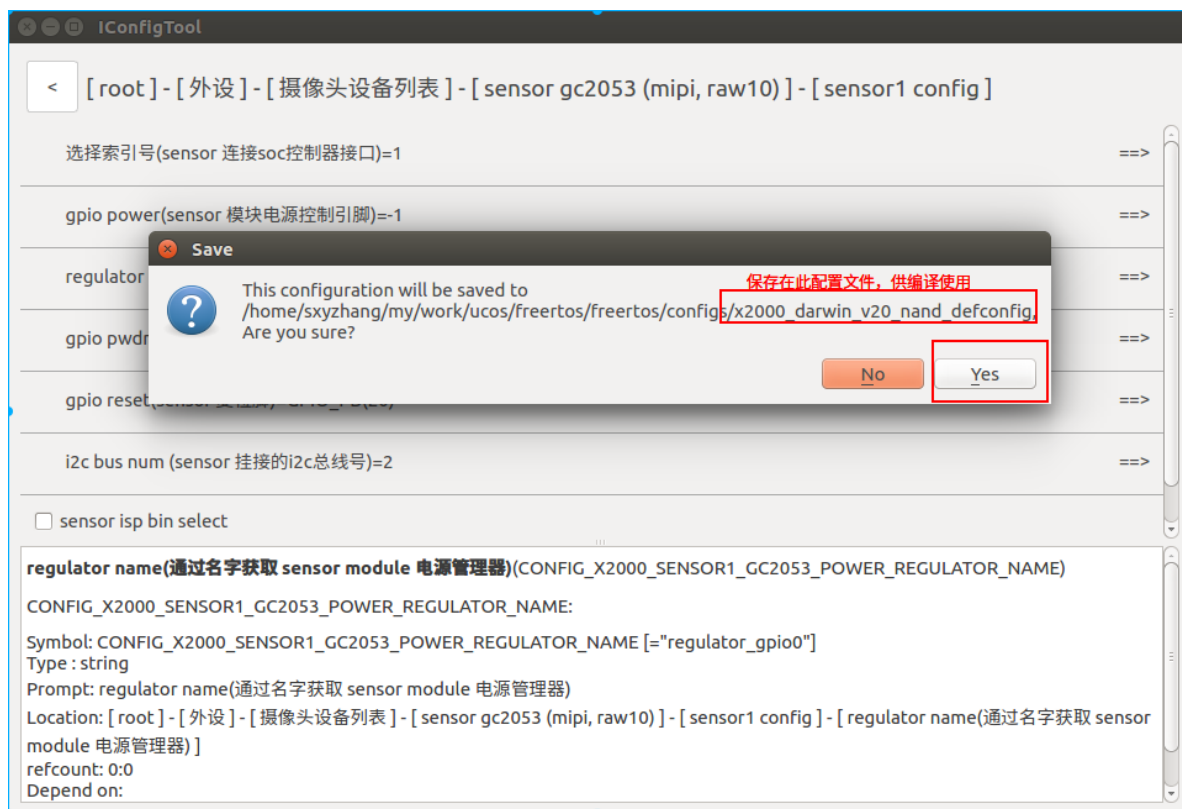

三 软件修改

3.1 添加编译测试demo文件

```
1 | sxyzhang@T430:~/my/work/ucos/freertos/freertos$ vim vendor/Makefile
2 | src-y += vendor.c   example/driver/camera_to_lcd_example.c   # 添加编译
   | 测试demo文件
```

3.2 修改demo程序的vic号

```
1 | xxyzhang@T430:~/my/work/ucos/freertos/freertos$ git diff
   | example/driver/camera_to_lcd_example.c
2 | diff --git a/example/driver/camera_to_lcd_example.c
   | b/example/driver/camera_to_lcd_example.c
3 | index 7648cf7..3998d56 100644
4 | --- a/example/driver/camera_to_lcd_example.c
5 | +++ b/example/driver/camera_to_lcd_example.c
6 | @@ -42,7 +42,7 @@ void test_camera_to_lcd(void)
7 |
8 |     fb = lcd_init(&fb_info);
9 |
10 | -    camera = camera_detect(0);
11 | +    camera = camera_detect(1);      # 指定测试vic1
12 |     if (!camera) {
13 |         printf("camera not found\n");
14 |         return;
```

3.3 添加测试入口函数

```
1 | sxyzhang@T430:~/my/work/ucos/freertos/freertos$ git diff  
   vendor/vendor.c  
2 | diff --git a/vendor/vendor.c b/vendor/vendor.c  
3 | index 898113a..5834e91 100644  
4 | --- a/vendor/vendor.c  
5 | +++ b/vendor/vendor.c  
6 | @@ -1,6 +1,15 @@  
7 | #include <stdio.h>  
8 |  
9 | void vendor_init(void)  
10 | {  
11 |     printf("vendor init...\n");  
12 | + test_camera_to_lcd();  
13 | }
```

四 编译

```
1 | sxyzhang@T430:~/my/work/ucos/freertos/freertos$ make  
   x2000_darwin_v20_nand_defconfig  
2 | sxyzhang@T430:~/my/work/ucos/freertos/freertos$ make
```