

1. Description


1.1. Project

Project Name	TOE_INEE
Board Name	custom
Generated with:	STM32CubeMX 5.4.0
Date	12/21/2019

1.2. MCU

MCU Series	STM32F1
MCU Line	STM32F105/107
MCU name	STM32F105R8Tx
MCU Package	LQFP64
MCU Pin number	64

2. Pinout Configuration

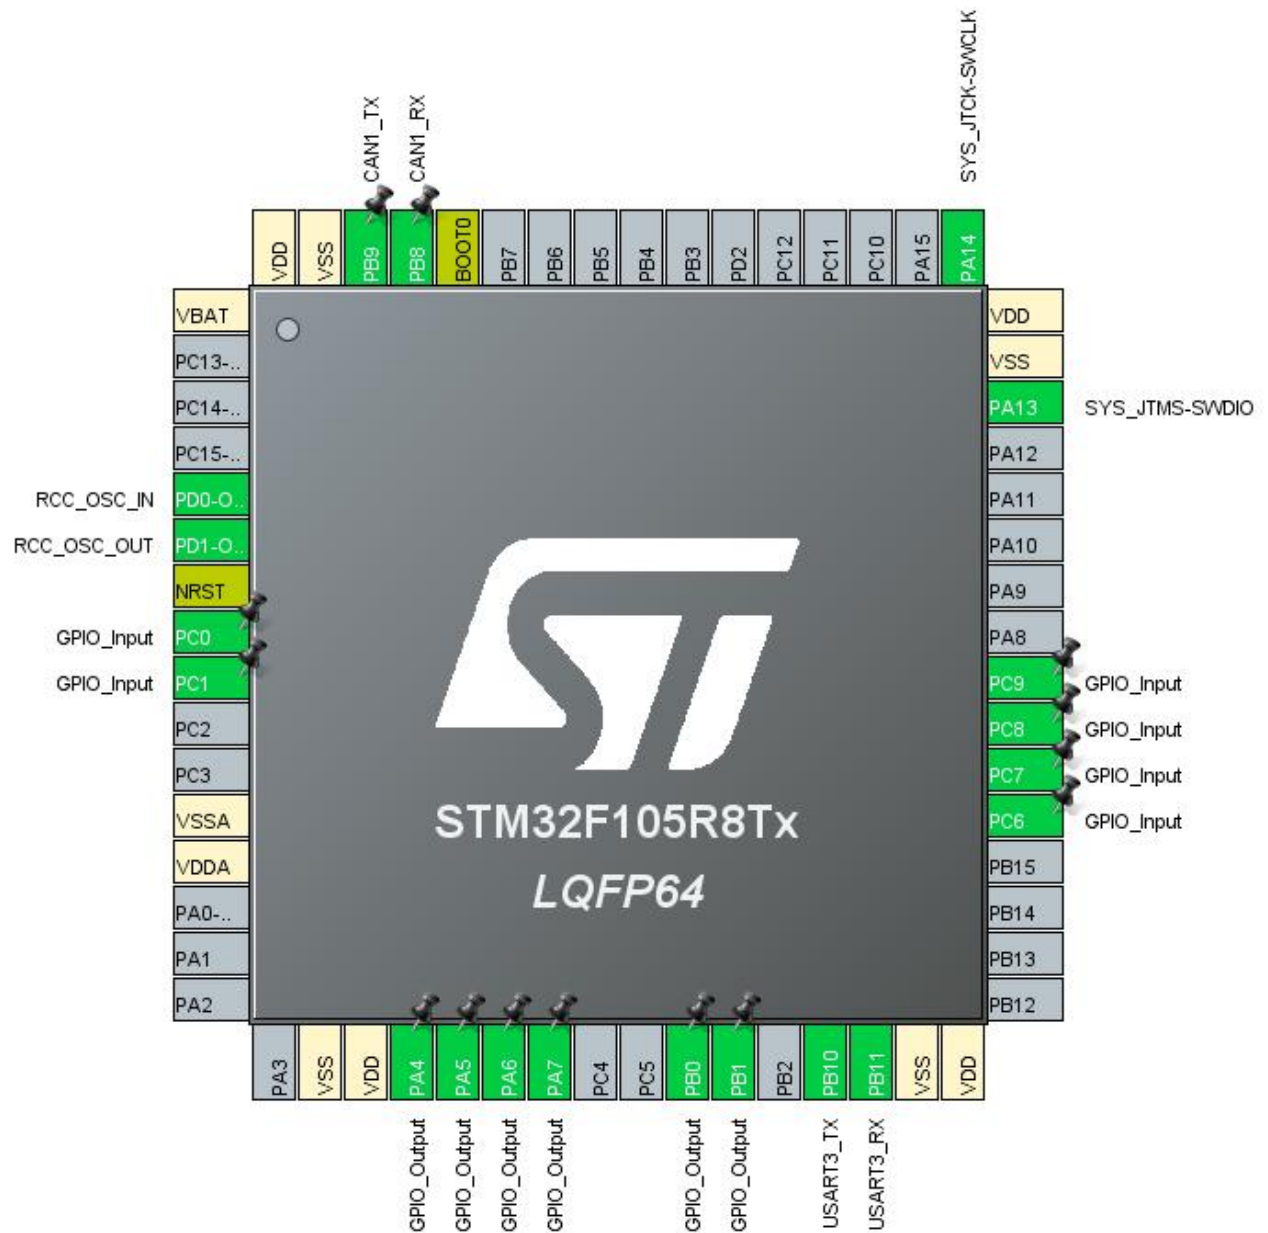


3. Pins Configuration

Pin Number LQFP64	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	VBAT	Power		
5	PD0-OSC_IN	I/O	RCC_OSC_IN	
6	PD1-OSC_OUT	I/O	RCC_OSC_OUT	
7	NRST	Reset		
8	PC0 *	I/O	GPIO_Input	
9	PC1 *	I/O	GPIO_Input	
12	VSSA	Power		
13	VDDA	Power		
18	VSS	Power		
19	VDD	Power		
20	PA4 *	I/O	GPIO_Output	
21	PA5 *	I/O	GPIO_Output	
22	PA6 *	I/O	GPIO_Output	
23	PA7 *	I/O	GPIO_Output	
26	PB0 *	I/O	GPIO_Output	
27	PB1 *	I/O	GPIO_Output	
29	PB10	I/O	USART3_TX	
30	PB11	I/O	USART3_RX	
31	VSS	Power		
32	VDD	Power		
37	PC6 *	I/O	GPIO_Input	
38	PC7 *	I/O	GPIO_Input	
39	PC8 *	I/O	GPIO_Input	
40	PC9 *	I/O	GPIO_Input	
46	PA13	I/O	SYS_JTMS-SWDIO	
47	VSS	Power		
48	VDD	Power		
49	PA14	I/O	SYS_JTCK-SWCLK	
60	BOOT0	Boot		
61	PB8	I/O	CAN1_RX	
62	PB9	I/O	CAN1_TX	
63	VSS	Power		
64	VDD	Power		

* The pin is affected with an I/O function

4. Clock Tree Configuration

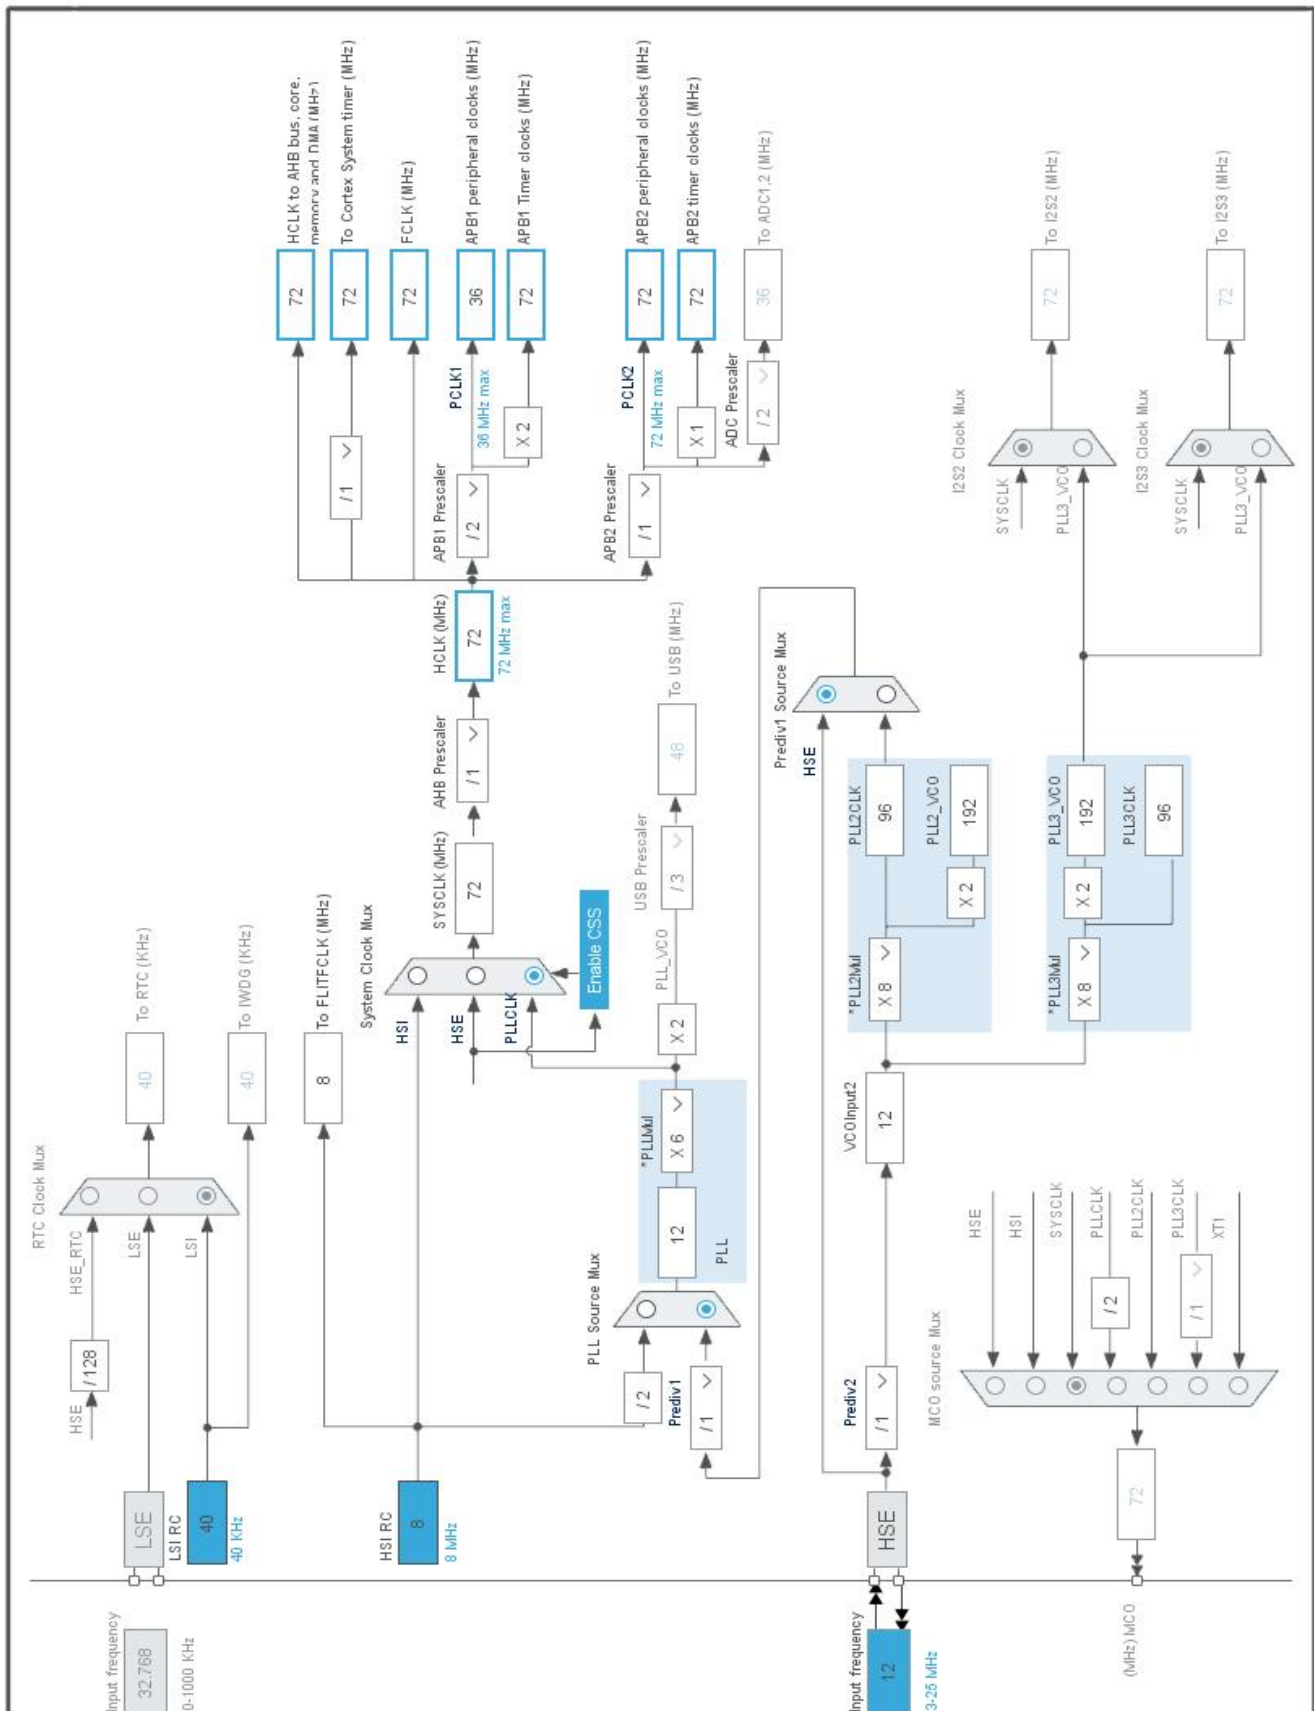

5. Software Project

5.1. Project Settings

Name	Value
Project Name	TOE_INEE
Project Folder	E:\RM2020\RM_ENGINEER\TOE_INEE
Toolchain / IDE	MDK-ARM V5
Firmware Package Name and Version	STM32Cube FW_F1 V1.8.0

5.2. Code Generation Settings

Name	Value
STM32Cube MCU packages and embedded software	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	Yes
Backup previously generated files when re-generating	No
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No

6. Power Consumption Calculator report

6.1. Microcontroller Selection

Series	STM32F1
Line	STM32F105/107
MCU	STM32F105R8Tx
Datasheet	15274_Rev10

6.2. Parameter Selection

Temperature	25
Vdd	3.3

7. IPs and Middleware Configuration

7.1. CAN1

mode: Mode

7.1.1. Parameter Settings:

Bit Timings Parameters:

Prescaler (for Time Quantum)	3 *
Time Quantum	83.33333333333334 *
Time Quanta in Bit Segment 1	6 Times *
Time Quanta in Bit Segment 2	5 Times *
Time for one Bit	1000
ReSynchronization Jump Width	1 Time

Basic Parameters:

Time Triggered Communication Mode	Disable
Automatic Bus-Off Management	Enable *
Automatic Wake-Up Mode	Disable
Automatic Retransmission	Disable
Receive Fifo Locked Mode	Disable
Transmit Fifo Priority	Enable *

Advanced Parameters:

Operating Mode	Normal
----------------	--------

7.2. GPIO

7.3. RCC

High Speed Clock (HSE): Crystal/Ceramic Resonator

7.3.1. Parameter Settings:

System Parameters:

VDD voltage (V)	3.3
Instruction Cache	Enabled
Prefetch Buffer	Enabled
Data Cache	Enabled
Flash Latency(WS)	2 WS (3 CPU cycle)

RCC Parameters:

HSI Calibration Value	16
-----------------------	----

HSE Startup Timeout Value (ms)	100
LSE Startup Timeout Value (ms)	5000

7.4. SYS

Debug: Serial Wire

Timebase Source: SysTick

7.5. USART3

Mode: Asynchronous

7.5.1. Parameter Settings:

Basic Parameters:

Baud Rate	115200
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples

7.6. FREERTOS

Interface: CMSIS_V1

7.6.1. Config parameters:

API:

FreeRTOS API	CMSIS v1
--------------	----------

Versions:

FreeRTOS version	10.0.1
CMSIS-RTOS version	1.02

Kernel settings:

USE_PREEMPTION	Enabled
CPU_CLOCK_HZ	SystemCoreClock
TICK_RATE_HZ	1000
MAX_PRIORITIES	7
MINIMAL_STACK_SIZE	128
MAX_TASK_NAME_LEN	16

USE_16_BIT_TICKS	Disabled
IDLE_SHOULD_YIELD	Enabled
USE_MUTEXES	Enabled
USE_RECURSIVE_MUTEXES	Disabled
USE_COUNTING_SEMAPHORES	Disabled
QUEUE_REGISTRY_SIZE	8
USE_APPLICATION_TASK_TAG	Disabled
ENABLE_BACKWARD_COMPATIBILITY	Enabled
USE_PORT_OPTIMISED_TASK_SELECTION	Enabled
USE_TICKLESS_IDLE	Disabled
USE_TASK_NOTIFICATIONS	Enabled
RECORD_STACK_HIGH_ADDRESS	Disabled

Memory management settings:

Memory Allocation	Dynamic / Static
TOTAL_HEAP_SIZE	4096
Memory Management scheme	heap_4

Hook function related definitions:

USE_IDLE_HOOK	Disabled
USE_TICK_HOOK	Disabled
USE_MALLOC_FAILED_HOOK	Disabled
USE_DAEMON_TASK_STARTUP_HOOK	Disabled
CHECK_FOR_STACK_OVERFLOW	Disabled

Run time and task stats gathering related definitions:

GENERATE_RUN_TIME_STATS	Disabled
USE_TRACE_FACILITY	Disabled
USE_STATS_FORMATTING_FUNCTIONS	Disabled

Co-routine related definitions:

USE_CO_ROUTINES	Disabled
MAX_CO_ROUTINE_PRIORITIES	2

Software timer definitions:

USE_TIMERS	Disabled
------------	----------

Interrupt nesting behaviour configuration:

LIBRARY_LOWEST_INTERRUPT_PRIORITY	15
LIBRARY_MAX_SYSCALL_INTERRUPT_PRIORITY	5

7.6.2. Include parameters:

Include definitions:

vTaskPrioritySet	Enabled
uxTaskPriorityGet	Enabled
vTaskDelete	Enabled

vTaskCleanUpResources	Disabled
vTaskSuspend	Enabled
vTaskDelayUntil	Enabled *
vTaskDelay	Enabled
xTaskGetSchedulerState	Enabled
xTaskResumeFromISR	Enabled
xQueueGetMutexHolder	Disabled
xSemaphoreGetMutexHolder	Disabled
pcTaskGetTaskName	Disabled
uxTaskGetStackHighWaterMark	Disabled
xTaskGetCurrentTaskHandle	Disabled
eTaskGetState	Disabled
xEventGroupSetBitFromISR	Disabled
xTimerPendFunctionCall	Disabled
xTaskAbortDelay	Disabled
xTaskGetHandle	Disabled

*** User modified value**

8. System Configuration

8.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
CAN1	PB8	CAN1_RX	Input mode	No pull-up and no pull-down	n/a	
	PB9	CAN1_TX	Alternate Function Push Pull	n/a	High *	
RCC	PD0-OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	
	PD1-OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	
SYS	PA13	SYS_JTMS-SWDIO	n/a	n/a	n/a	
	PA14	SYS_JTCK-SWCLK	n/a	n/a	n/a	
USART3	PB10	USART3_TX	Alternate Function Push Pull	n/a	High *	
	PB11	USART3_RX	Input mode	No pull-up and no pull-down	n/a	
GPIO	PC0	GPIO_Input	Input mode	No pull-up and no pull-down	n/a	
	PC1	GPIO_Input	Input mode	No pull-up and no pull-down	n/a	
	PA4	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	
	PA5	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	
	PA6	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	
	PA7	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	
	PB0	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	
	PB1	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	
	PC6	GPIO_Input	Input mode	Pull-up *	n/a	
	PC7	GPIO_Input	Input mode	Pull-up *	n/a	
	PC8	GPIO_Input	Input mode	Pull-up *	n/a	
	PC9	GPIO_Input	Input mode	Pull-up *	n/a	

8.2. DMA configuration

DMA request	Stream	Direction	Priority
USART3_RX	DMA1_Channel3	Peripheral To Memory	Low

USART3_RX: DMA1_Channel3 DMA request Settings:

Mode: **Circular ***
Peripheral Increment: Disable
Memory Increment: **Enable ***
Peripheral Data Width: Byte
Memory Data Width: Byte

8.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Prefetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	15	0
System tick timer	true	15	0
DMA1 channel3 global interrupt	true	5	0
CAN1 TX interrupt	true	5	0
CAN1 RX0 interrupt	true	5	0
USART3 global interrupt	true	5	0
PVD interrupt through EXTI line 16	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
CAN1 RX1 interrupt	unused		
CAN1 SCE interrupt	unused		

* User modified value

9. Software Pack Report