



Getting Started with Maxwell: Transient Problem



ANSYS, Inc.
Southpointe
2600 Ansys Drive
Canonsburg, PA 15317
ansysinfo@ansys.com
<https://www.ansys.com>
(T) 724-746-3304
(F) 724-514-9494

Release 2022 R1
January 2022

ANSYS, Inc. and
ANSYS Europe,
Ltd. are UL
registered ISO
9001:2015 com-
panies.

Copyright and Trademark Information

© 1986-2022 ANSYS, Inc. Unauthorized use, distribution or duplication is prohibited.

ANSYS, Ansys Workbench, AUTODYN, CFX, FLUENT and any and all ANSYS, Inc. brand, product, service and feature names, logos and slogans are registered trademarks or trademarks of ANSYS, Inc. or its subsidiaries located in the United States or other countries. ICEM CFD is a trademark used by ANSYS, Inc. under license. All other brand, product, service and feature names or trademarks are the property of their respective owners. FLEXlm and FLEXnet are trademarks of Flexera Software LLC.

Disclaimer Notice

THIS Ansys SOFTWARE PRODUCT AND PROGRAM DOCUMENTATION INCLUDE TRADE SECRETS AND ARE CONFIDENTIAL AND PROPRIETARY PRODUCTS OF ANSYS, INC., ITS SUBSIDIARIES, OR LICENSORS. The software products and documentation are furnished by ANSYS, Inc., its subsidiaries, or affiliates under a software license agreement that contains provisions concerning non-disclosure, copying, length and nature of use, compliance with exporting laws, warranties, disclaimers, limitations of liability, and remedies, and other provisions. The software products and documentation may be used, disclosed, transferred, or copied only in accordance with the terms and conditions of that software license agreement.

ANSYS, Inc. and ANSYS Europe, Ltd. are UL registered ISO 9001: 2015 companies.

U.S. Government Rights

For U.S. Government users, except as specifically granted by the ANSYS, Inc. software license agreement, the use, duplication, or disclosure by the United States Government is subject to restrictions stated in the ANSYS, Inc. software license agreement and FAR 12.212 (for non-DOD licenses).

Third-Party Software

See the legal information in the product help files for the complete Legal Notice for Ansys proprietary software and third-party software. If you are unable to access the Legal Notice, please contact ANSYS, Inc.

Conventions Used in this Guide

Please take a moment to review how instructions and other useful information are presented in this documentation.

- Procedures are presented as numbered lists. A single bullet indicates that the procedure has only one step.
- Bold type is used for the following:
 - Keyboard entries that should be typed in their entirety exactly as shown. For example, “**copy file1**” means you must type the word **copy**, then type a space, and then type **file1**.
 - On-screen prompts and messages, names of options and text boxes, and menu commands. Menu commands are often separated by greater than signs (>). For example, “click **HFSS > Excitations > Assign > Wave Port.**”
 - Labeled keys on the computer keyboard. For example, “Press **Enter**” means to press the key labeled **Enter**.
- Italic type is used for the following:
 - Emphasis.
 - The titles of publications.
 - Keyboard entries when a name or a variable must be typed in place of the words in italics. For example, “**copy filename**” means you must type the word **copy**, then type a space, and then type the name of the file.
- The plus sign (+) is used between keyboard keys to indicate that you should press the keys at the same time. For example, “Press Shift+F1” means to press the **Shift** key and, while holding it down, press the **F1** key also. You should always depress the modifier key or keys first (for example, Shift, Ctrl, Alt, or Ctrl+Shift), continue to hold it/them down, and then press the last key in the instruction.

Accessing Commands: *Ribbons*, *menu bars*, and *shortcut menus* are three methods that can be used to see what commands are available in the application.

- The *Ribbon* occupies the rectangular area at the top of the application window and contains multiple tabs. Each tab has relevant commands that are organized, grouped, and labeled. An example of a typical user interaction is as follows:

"Click **Draw > Line**"



This instruction means that you should click the **Line** command on the **Draw** ribbon tab. An image of the command icon, or a partial view of the ribbon, is often included with the instruction.

- The *menu bar* (located above the ribbon) is a group of the main commands of an application arranged by category such File, Edit, View, Project, etc. An example of a typical user interaction is as follows:

"On the **File** menu, click the **Open Examples** command" means you can click the **File** menu and then click **Open Examples** to launch the dialog box.

- Another alternative is to use the *shortcut menu* that appears when you click the right-mouse button. An example of a typical user interaction is as follows:

"Right-click and select **Assign Excitation> Wave Port**" means when you click the right-mouse button with an object face selected, you can execute the excitation commands from the shortcut menu (and the corresponding sub-menus).

Getting Help: Ansys Technical Support

For information about Ansys Technical Support, go to the Ansys corporate Support website, <http://www.ansys.com/Support>. You can also contact your Ansys account manager in order to obtain this information.

All Ansys software files are ASCII text and can be sent conveniently by e-mail. When reporting difficulties, it is extremely helpful to include very specific information about what steps were taken or what stages the simulation reached, including software files as applicable. This allows more rapid and effective debugging.

Help Menu

To access help from the Help menu, click **Help** and select from the menu:

- **[product name] Help** - opens the contents of the help. This help includes the help for the product and its *Getting Started Guides*.
- **[product name] Scripting Help** - opens the contents of the *Scripting Guide*.
- **[product name] Getting Started Guides** - opens a topic that contains links to Getting Started Guides in the help system.

Context-Sensitive Help

To access help from the user interface, press **F1**. The help specific to the active product (design type) opens.

You can press **F1** while the cursor is pointing at a menu command or while a particular dialog box or dialog box tab is open. In this case, the help page associated with the command or open dialog box is displayed automatically.

Table of Contents

Table of Contents	Contents-1
1 - Introduction	1-1
The Maxwell Desktop	1-2
2 - Setting Up the Design	2-1
3 - Importing the Geometric Model	3-1
Open the Magnetostatic Project	3-1
4 - Defining the Design Properties	4-1
Define the Currents	4-2
Add a Winding	4-3
Add a Winding Terminal	4-3
Boundary Conditions	4-4
Set Up the External Circuit	4-4
Add the Circuit Elements	4-5
Connect the Circuit Elements in Series	4-7
Export the Netlist	4-8
Save the Maxwell Circuit Design	4-8
Assign the External Circuit	4-9
5 - Setting Up and Running the Analysis	5-1
Run the Analysis	5-1
6 - Post Processing the Results	6-1
Plot the Magnetic Flux Density Vector	6-1
Create an Object List	6-1
Plot the Quantity	6-1
Set the Solution Context	6-2
Adjust the Plot Parameters	6-3
Plot the Current Density Distribution	6-4

Plot Torque and Current	6-5
Create a Torque vs. Time Plot	6-5
Create a Current vs. Time Plot	6-6
Close the Plot	6-7
7 - Including Motion in the Simulation	7-1
Add Motion to the Design	7-1
Add a Band Object to the Design	7-1
Assign Motion to the Band Object	7-2
Apply Meshing to the Band Object	7-3
Set Up the Transient Analysis	7-3
Run the Transient Analysis	7-4
Post Process the Transient Results	7-4
Create a Position vs. Time Plot	7-4
Current vs. Time Plot with Motion	7-5
Torque vs. Time Plot with Motion	7-6
Create a Power Loss vs. Time Plot	7-7
Close the Project and Exit Electronics Desktop	8-2
Index	Index-2

1 - Introduction

This Getting Started Guide is written for Maxwell beginners and experienced users who would like to quickly re-familiarize themselves with the capabilities of Maxwell. This guide leads you step-by-step through solving and analyzing the results of a rotational actuator magnetostatic problem with motion.

By following the steps in this guide, you will learn how to perform the following tasks:

- Modify a model's design parameters.
- Assign variables to a model's design parameters.
- Specify solution settings for a design.
- Validate a design's setup.
- Run a Maxwell simulation.
- Plot the magnetic flux density vector.
- Include motion in the simulation.

Note:

This guide assumes that you have already completed the magnetostatic example in *Getting Started with Maxwell: Designing a Rotational Actuator*. If you have not, you may use the project in the example directory; however, it is strongly recommended that you complete the magnetostatic example.

Maxwell Solution Types

Maxwell® is an interactive software package that uses finite element analysis (FEA) to simulate (solve) electromagnetic field problems. Maxwell integrates with other Ansys Electromagnetic software to perform complex tasks while remaining simple to use. Maxwell® incorporates a set of 2D solvers and 3D solvers in the Ansys Electronics Desktop integrated user interface. This guide will focus on 3D capabilities. 2D problem examples are covered in a separate 2D Getting Started Guide.

The following six types of stand-alone solutions are supported by Maxwell 3D:

- **Magnetostatic linear and nonlinear 3D fields** caused by a user-specified distribution of DC current density and permanent or externally applied magnetic fields. Materials can be non-linear and anisotropic. Additional quantities that can be computed include torque, force, and self and mutual inductances.
- **Harmonic (sinusoidal variation in time) steady-state magnetic fields** with pulsation-induced eddy currents in massive solid conductors caused by one of the following:
 - A user-specified distribution of AC currents (all with the same frequency but with possibly different initial phase angles).

- Externally applied magnetic fields.


This solution includes displacement currents for calculating near field electromagnetic wave radiation.

- **Transient (time domain) magnetic fields** caused by permanent magnets, conductors, and windings supplied by voltage and/or current sources with arbitrary variation as functions of time. Rotational or translational motion effects can be included in the simulation.
- **Electrostatic 3D fields** caused by a user-specified distribution of voltages and charges in non-conducting regions. Additional quantities that can be computed include torque, force, and capacitances.
- **Electric DC Conduction 3D fields** in conductors characterized by a spatial distribution of voltage, electric field, and current density. Power loss can also be computed. In addition, optional simulation of fields in insulating materials is supported.
- **Transient (time domain) 3D Electric fields** caused by time dependent voltage, current and charge distributions. All sources are arbitrary functions of time.

In addition, Maxwell may be coupled with other simulators to provide a greater range of solution capability. Couplings to Workbench for thermal and stress analysis, HFSS for ferrite analysis, and Twin Builder for Finite Element/Circuit co-simulation are all supported.

The Maxwell Desktop

The following graphic shows the different sections of the Maxwell desktop:

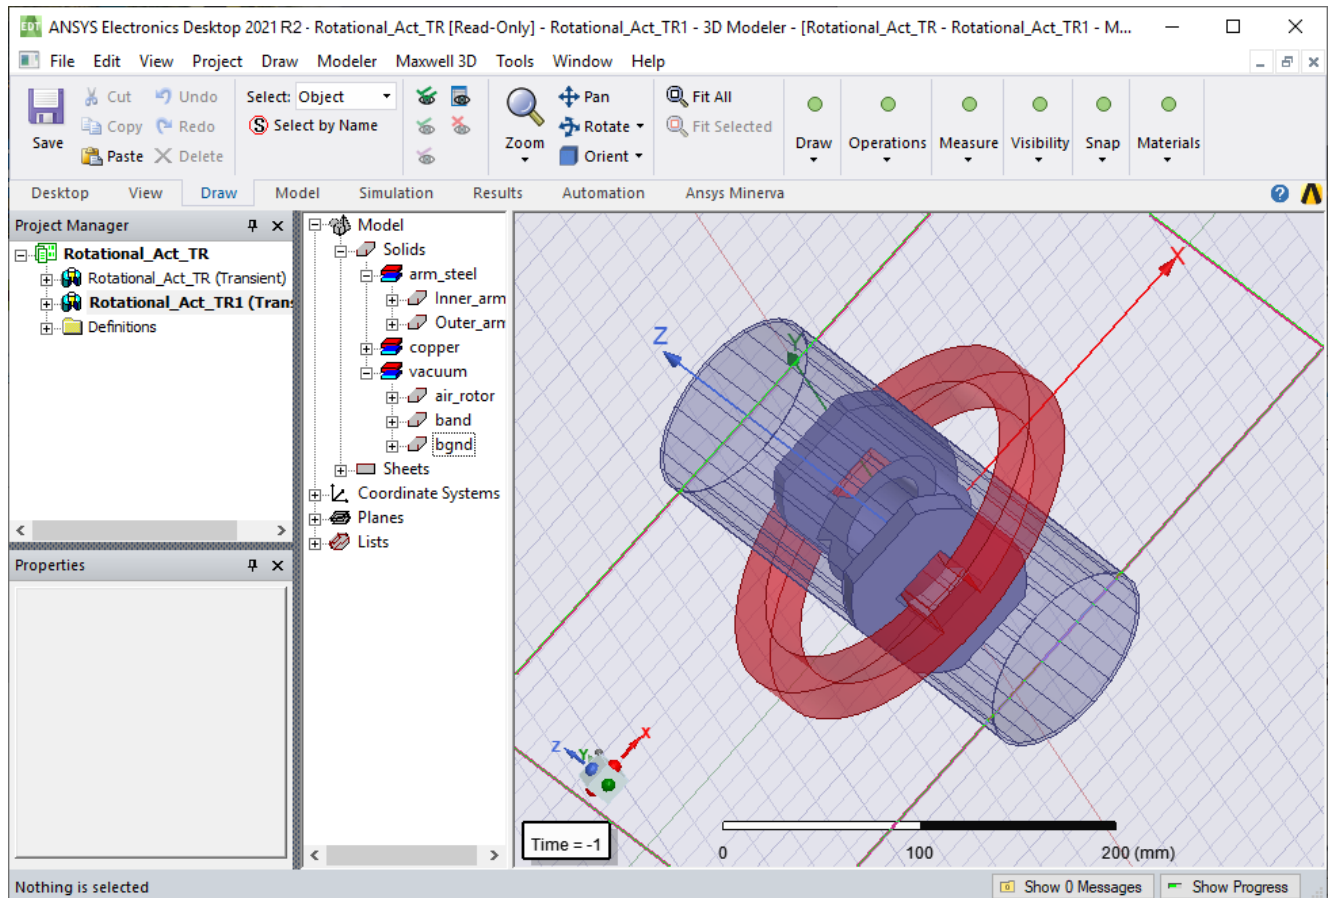

General Procedure for Setting Up Maxwell Designs


You are not required to follow a specific order when setting up your Maxwell design. However, the following order is recommended, particularly for new users:

1. Open Ansys Electronics Desktop by double-clicking the desktop icon or by clicking **Start>Programs>Ansys EM Suite [version]>Ansys Electronics Desktop [version]** from the Windows taskbar.
2. Add a Maxwell 3D design and save the new project.
3. Draw the geometry of the model.
4. Optionally, modify the model's design parameters.
5. Assign variables to design parameters.
6. Assign excitations and boundary conditions.
7. Specify solution settings.
8. Run a Maxwell simulation.
9. Create post-processing plots.

10. Create a parametric analysis.
11. Create a field animation of the parametric analysis results.
12. Include motion in the transient design.

About the Example Design

The application described in this Getting Started guide is an extension of the *TEAM Workshop Problem 24* rotational actuator design. The geometry is shown below:

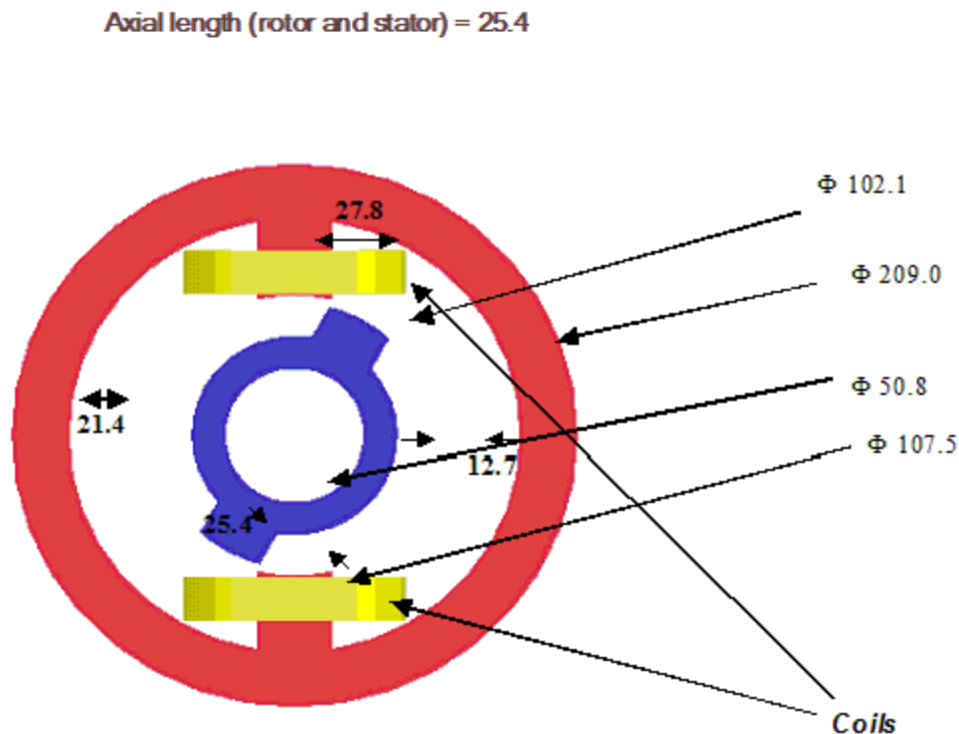

The outer part is a ferromagnetic nonlinear armature carrying two coils. The inner part is made of the same nonlinear material and can rotate around an axis. The inner and outer parts of the device are co-axial.

The field distribution will likely cause the flux density to concentrate in the two steel armatures in the regions where the distance between them is minimal. The expected edge effect will then further increase the field concentration.

In this example, we will compute the torque acting on the inner armature and the flux linkage of the two coils. Simulation results show a 3D electromagnetic time-transient problem with the effects of large motion included. Both the rotor and stator are made of solid ferromagnetic steel, creating significant eddy current effects. A nonlinear B-H curve is considered for the stator and rotor steel. The solution includes the estimated mechanical rotor inertia. For a presentation of

the results and the corresponding FEM code, see the *IEEE Transactions on Magnetics*, Vol 38, No. 2, March 2002, pp 609-612.

2 - Setting Up the Design

In this chapter you will complete the following tasks:

- Open and save a new project.
- Insert a new Maxwell design into the project.
- Select a solution type for the project.
- Set the drawing units for the design.

Open and Save a New Project

A project is a collection of one or more designs that is saved in a single *.aedt file. A new project is automatically created when Ansys Electronics Desktop is launched.

To open Ansys Electronics Desktop, add a new Maxwell 3D design, and save the default project with a new name:

1. Double-click the **Ansys Electronics Desktop** icon on your desktop to launch Ansys Electronics Desktop.
 - You can also start Ansys Electronics Desktop by clicking **Start>Programs>Ansys EM Suite [version]>Ansys Electronics Desktop [version]** from Windows.

2. Click **Project>Insert Maxwell 3D Design**.

The new design is listed in the project tree. By default, it is named **Maxwell3DDesign1**. The **Modeler** window appears to the right of the Project Manager.

3. Click **File>Save As**.

The **Save As** dialog box appears.

4. Locate and select the folder in which you want to save the project.
5. Type **Rotational_Act_TR** in the **File name** box, and click **Save**.

The project is saved in the specified folder under the name **Rotational_Act_TR.aedt**.

6. Rename the design:


- a. Right-click **Maxwell3DDesign1**.
A shortcut menu appears.

- b. Select **Rename**.
The design name becomes highlighted and editable.

c.

- c. Type **Rotational_Act_TR** as the name for the design, and press **Enter**. The pro-

ject and design are now both named **Rotational_Act_TR**.

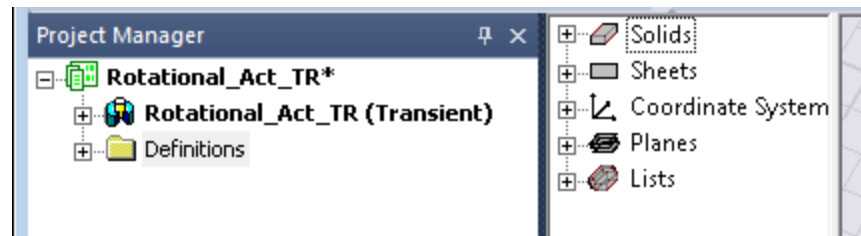

Specify a Solution Type

As mentioned in the introduction, multiple solution types are available, depending on the specific application. For this design, choose a **Transient** solution.

To specify the solution type:

1. Click **Maxwell3D>Solution Type**.
The **Solution Type** dialog box appears.
2. Select the **Transient** radio button.
3. Click **OK**.

Set the Drawing Units

To set the drawing units:

1. Click **Modeler>Units**.
The **Set Model Units** dialog box appears.
2. Select **mm** from the **Select units** pull-down menu.
3. Click **OK**.

3 - Importing the Geometric Model

In this chapter you will open the Magnetostatic Getting Started project, copy the objects definitions and material properties, and paste the objects and materials into the **Rotational_Act_TR** transient project.

If you have not completed the magnetostatic guide *Getting Started with Maxwell: Designing a Rotational Actuator*, it is strongly recommended that you do so to gain necessary knowledge of modeling and material assignment principles. You may, however, use the project in the example directory.

In this chapter you will complete the following tasks:

- Open the Magnetostatic Getting Started example.
- Copy and paste geometry and materials to the current project.


Open the Magnetostatic Project

The geometry and materials used in this project are identical to the magnetostatic guide **Rotational_Actuator** project.

To open the magnetostatic project:

1. Click **File>Open Examples**.
The Windows file browser opens to the Examples folder installed with your application.
2. Locate the **Maxwell\Actuators** folder containing the **Rotational_actuator.aedt** project from the magnetostatic guide, *Getting Started with Maxwell: Designing a Rotational Actuator*.
3. Select the file **Rotational_actuator.aedt** and click **Open**.

The project is opened and is now listed in the Project Manager Window as shown.

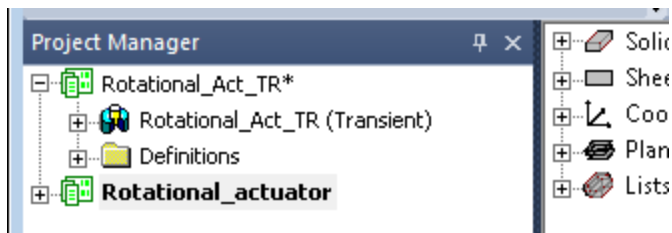


Copy and Paste Objects between Projects

The ability to copy and paste objects and their associated material assignments is a useful and time-saving function of the Ansys Electronics Desktop software.

In order to copy objects, all objects must be selected.

1. With the **Rotational_actuator** project in the modeler window, click in the modeler window and then click **Edit>Select All** to select all object regardless of their visibility status.
The History Tree will expand and highlight all objects in the design.
2. Click **Edit>Copy** to copy the object and material definitions to the clipboard.
3. Click on the **Rotational_Act_TR(Transient)** design in the **Project Manager** window to switch the **Modeler** window to the transient project.
4. Click **Edit>Paste** to paste all objects and material definitions into the transient project.
5. Click **View>Fit All>All Views** to fit the objects to the window. You may also use the keyboard shortcut **Ctrl-D**.
6. In the **Project Manager** window, select the magnetostatic project **Rotational_Actuator** and click **File>Close**.

Your screen should look approximately like the one below.

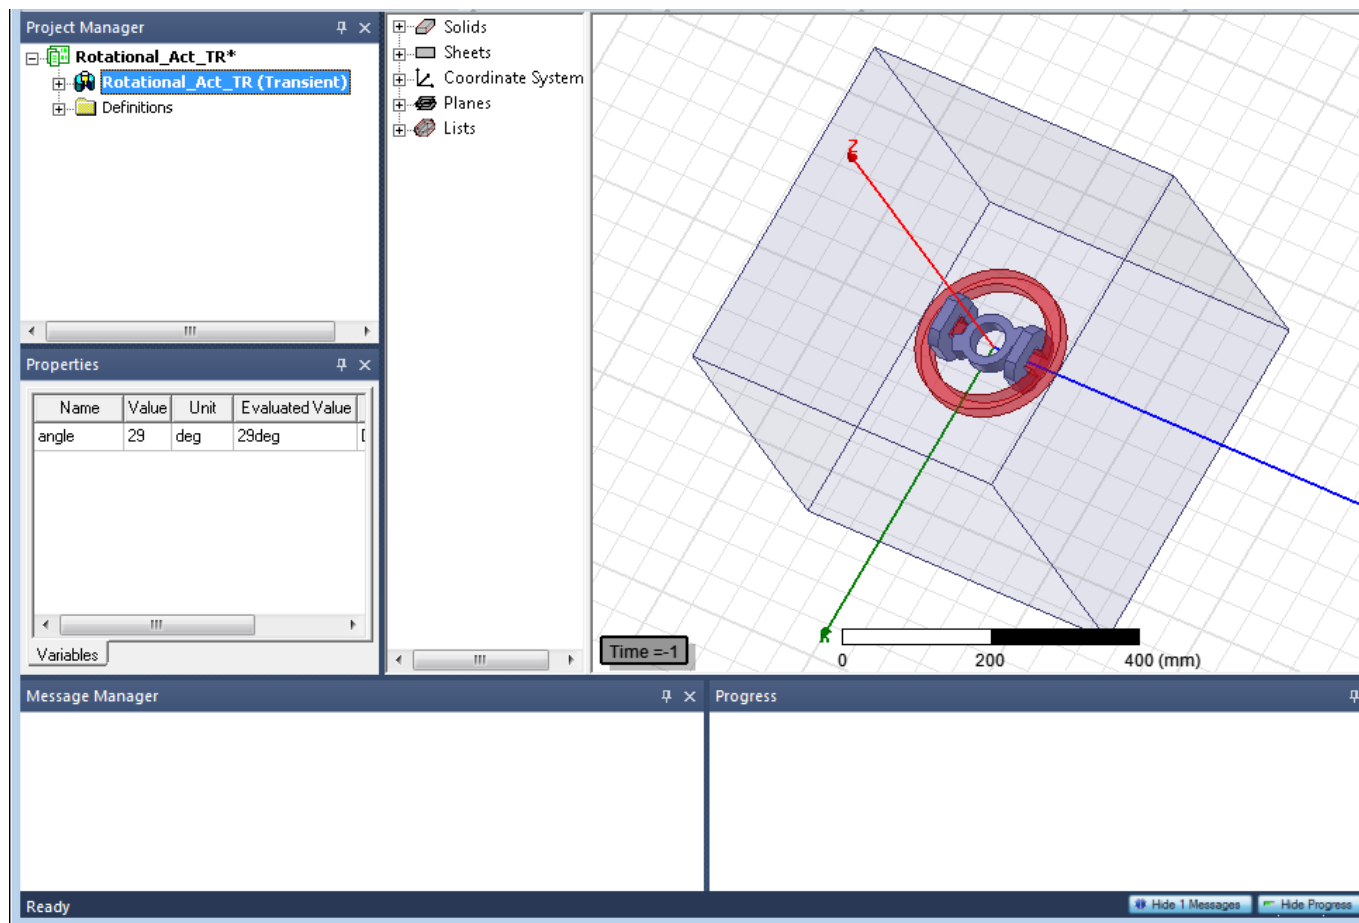

7. Click **File>Save** to save the model before moving on to the next chapter.

4 - Defining the Design Properties

For the transient problem, you want to use a pulse excitation to drive the coils. In order to accomplish this, you will assign an external current winding excitation to the coils and use the Maxwell Circuit Editor to create the external driving circuit including a pulse source. You will also allow the software to calculate the eddy currents in the solid metal objects in the model.

In this chapter you will complete the following tasks:


- Verify material properties.
- Assign excitations.
- Set up an external circuit for the current winding
- Set up the mesh operations.
- Specify the eddy effect.

Verify Material Properties

Material properties are automatically transferred when you copied the geometry objects. You can view these properties by viewing the **Attribute** tab of the **Properties** window.


To verify the nonlinear material for the armatures:

1. Expand the **History Tree** as shown.

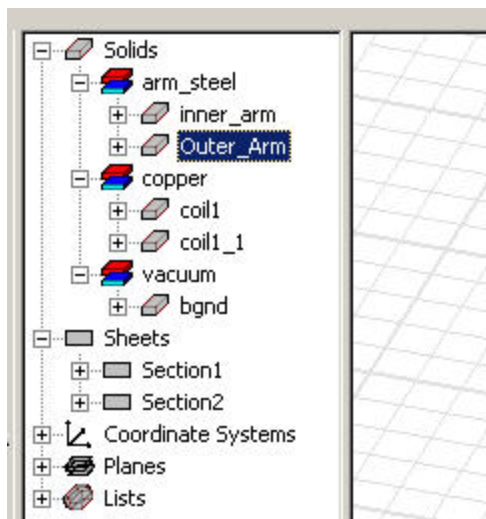

2. Double-click the **Outer_arm** object in the history tree.
The **Properties** window appears.
3. In the **Material** row, click the button in the **Value** column labeled **arm_steel**, then click **Edit**.
The **Select Definition** dialog box appears.

- Click the **View/Edit Material** button.
The **View/Edit Material** dialog box appears.
- In the **Relative Permeability** row, click the **B-H Curve** button.
The **BH Curve** dialog box appears as shown.

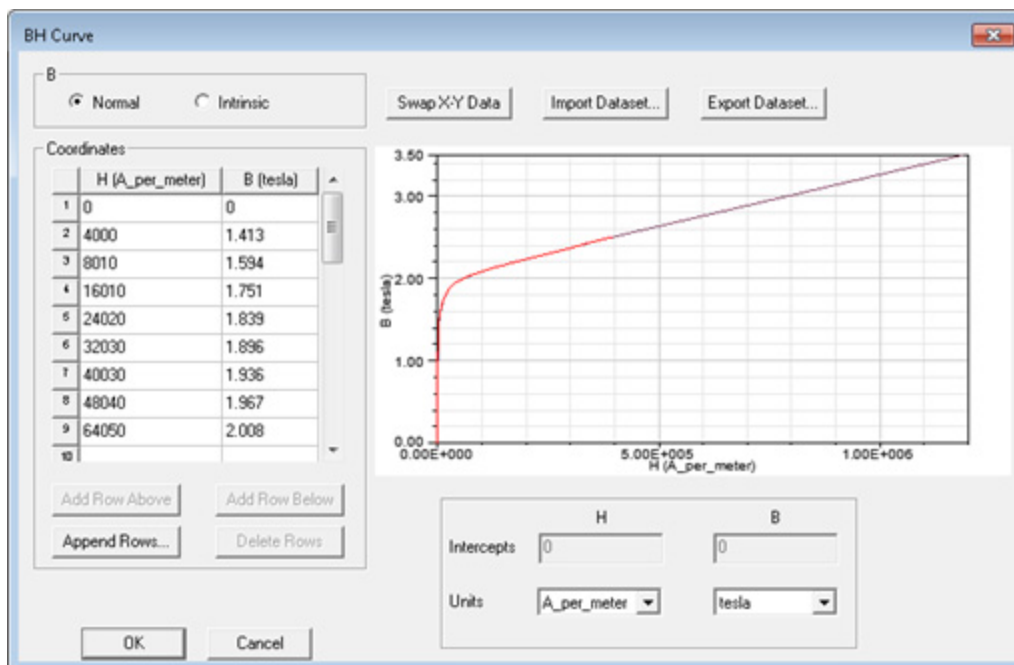

- Click **Cancel** in the **BH Curve** dialog.
The **BH Curve** dialog box closes.
- Continue dismissing dialogs until you have returned to the **Modeler** window.

Assign Excitations

Currents need to be defined and assigned as excitations for the two coil terminals.

Define the Currents

To define the currents:

- Select **Section1** and **Section 2** in the history tree under **Sheets**.
- Click **Maxwell3D>Excitations>Assign>Coil Terminal**.
The **Coil Terminal Excitation** dialog box appears.
- Type **350 n** in the **Number of Conductors** box.
- Click **OK**.

Add a Winding

To add a winding for the excitation:

1. Click **Maxwell3D>Excitations>Add Winding**.
The **Winding** dialog box appears.
2. Type **currentwinding** in the **Name** box (the default is **Winding1**).
3. Set the **Type** to **External**.
4. Select the **Stranded** radio button.
5. Leave the **Initial Current** set to the default value of **0** (zero).

Note:

We are using an external circuit to supply the excitation to the coil. For this example, we also could have used a voltage type of excitation.


6. Click **OK**.

Add a Winding Terminal

To add a terminal for the winding:

1. In the project tree, under **Excitations**, right-click **currentwinding**.
A shortcut menu appears.
2. Select **Add Terminals** from the shortcut menu.
The **Add Terminals** dialog box appears.
3. In the list, select **CoilTerminal_1**, press and hold down the **Shift** key, and select **CoilTerminal_2**.
4. Click **OK**.

In the project tree, the two terminals are moved beneath the winding as shown below.

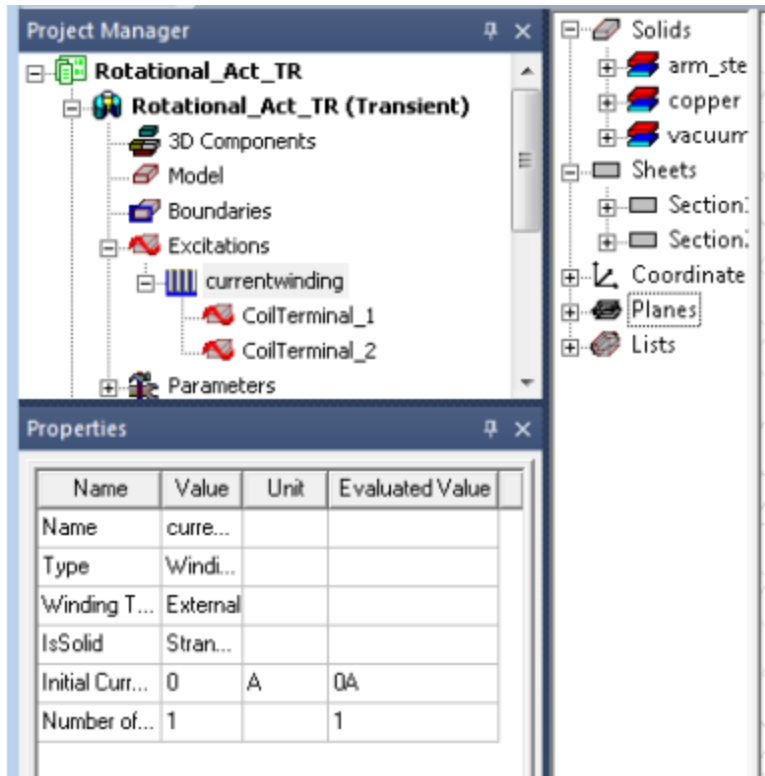


Boundary Conditions

The region box (**bgnd**) by default has all faces assigned with magnetic flux tangent boundary conditions. Thus, for this problem no additional boundary conditions are needed.

Set Up the External Circuit

The driving circuit for the winding in this design consists of a voltage source in series with a resistor and with the winding. When complete, the circuit should look similar to the following figure.

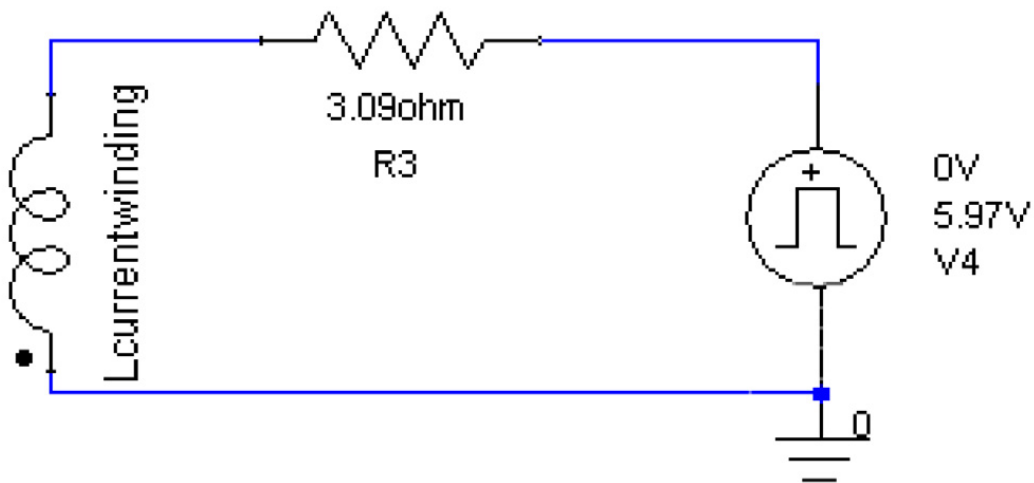


Add the Circuit Elements

To add the circuit elements in Maxwell Circuit Editor:

1. Click **Project>Insert Maxwell Circuit Design**.

The Maxwell Circuit Editor opens with a default circuit sheet as shown below.

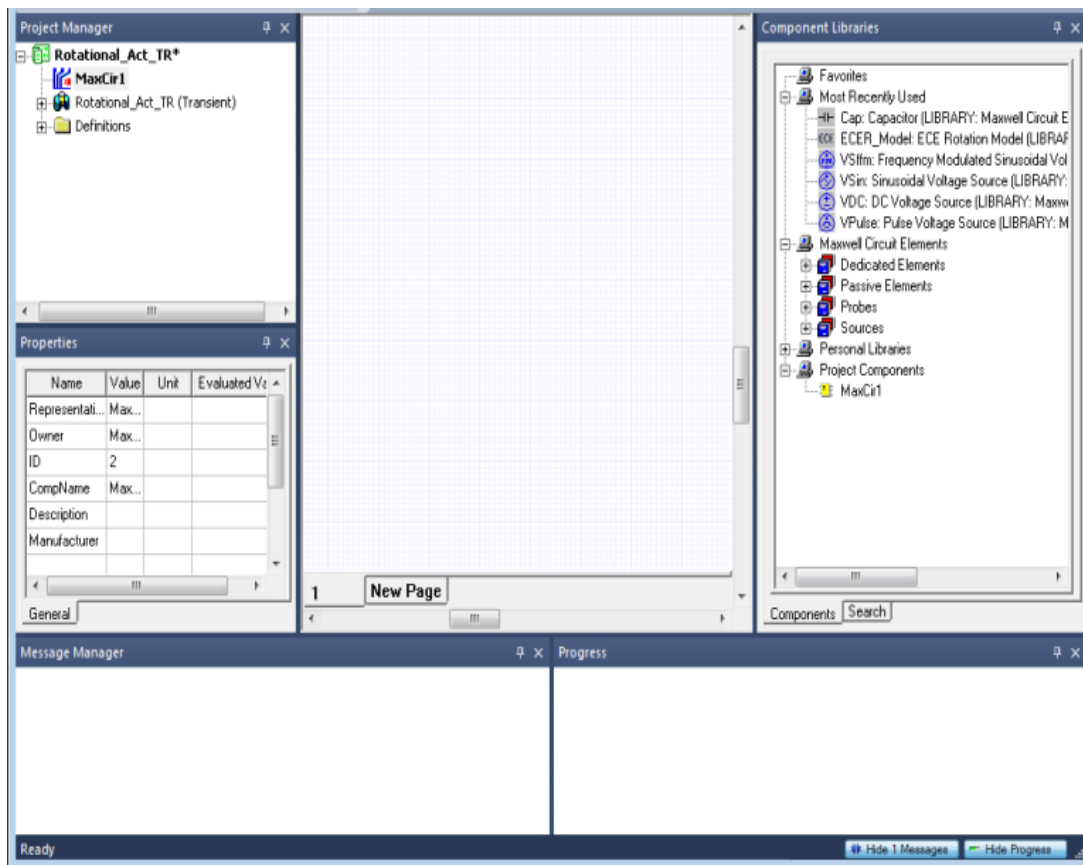

2. Click the **Components** tab in the Component libraries window.
3. Place the winding circuit element on the sheet:
 - a. In the component libraries tree, under **Maxwell Circuit Elements/Dedicated Elements**, select the **Winding** element.
 - b. Click on, and Drag the **Winding** element onto the sheet.
 - c. Right-click in the Schematic window, and select **Finish** to exit component placement mode.
 - d. To view the properties, double-click the component in the Schematic window. The **Properties** window appears.
 - e. Change the **Name** to **currentwinding**, the same name you used when defining the winding in the Maxwell design.
 - f. Click **OK**.
 - g. Click **Draw>Rotate**, and position the winding vertically.
4. Place a resistor on the sheet:

- a. In the component libraries tree, under **Passive Elements**, select **Res:Resistor**.
 - b. Drag the resistor onto the sheet.
 - c. Right-click, and select **Finish** to exit placement mode.
 - d. Double-click the symbol of the resistor, change the value of the resistor, **R**, to **3.09**, keep the **Unit** value set to **ohm**, and click **OK**.
5. Place a voltage pulse on the sheet:
- a. In the component libraries tree, under **Sources** select a **VPulse** element (Pulse Voltage Source).
 - b. Drag it to the sheet, and then right-click and select **Finish**.
 - c. Double-click the source element symbol on the sheet, and then specify the following source characteristics:


Parameter	Value	Description
V1	0	Initial voltage
V2	5.97	Peak voltage
Td	0	Initial delay time
Tr	0.001	Rise time
Tf	0.001	Fall time
Pw	1	Pulse width
Period	2	

- d. Leave the other fields set to the default values, and click **OK**.

Connect the Circuit Elements in Series

To connect the circuit elements in series:

1. From within the Maxwell Circuit Editor, click **Draw>Wire**.
2. Click one terminal of the inductor and draw the wire to one resistor terminal as shown.

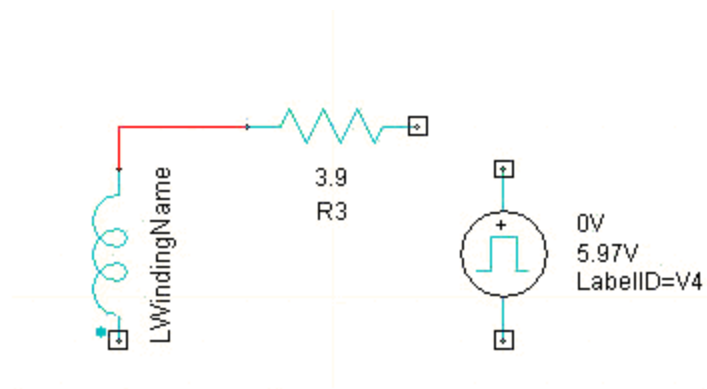


3. Repeat until a closed circuit is formed.

Note:

For the current winding, the “dotted” terminal is positive and current is positive when it flows from the “dotted” terminal to the “undotted” terminal. Connecting the winding as shown results in negative current in the plot in the **Create a Current vs Time Plot** in Chapter 6. You may reverse the winding orientation with no change to the problem except for the plot which would show positive current in that case.

4. When done, place the Ground symbol:
 - a. Click **Draw>Ground**,
 - b. Place the **Ground** symbol on the sheet as shown below, right-click, and select **Finish**.

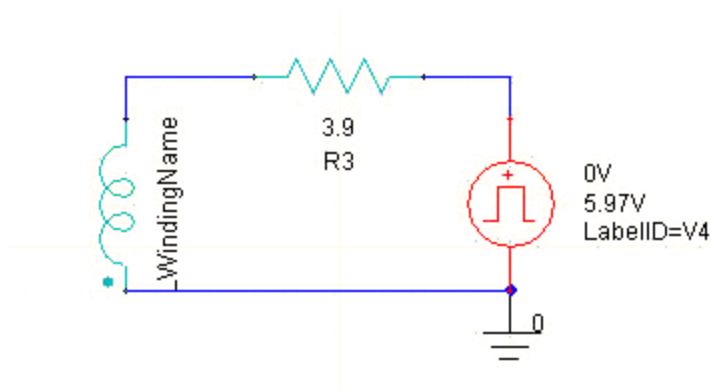

Export the Netlist

To export the netlist:

1. From within the Maxwell Circuit Editor, click **Maxwell Circuit>Export Netlist**. The **Netlist Export** dialog box appears.
2. Select the folder where you want to save the external circuit file.
3. Type **trans_circ** in the **File name** box.
4. Click **Save**.
The **Netlist Export** dialog box closes and the Maxwell Circuit Editor reappears.

Save the Maxwell Circuit Design

To save the Maxwell Circuit design:

1. Right-click the circuit design in the Project tree, select **Rename** on the context menu, and enter **ExternalCircuit** as the name.
2. Click **File>Save** to save the project with the new circuit design.

Assign the External Circuit

To assign the circuit in Maxwell:

1. Click **Maxwell3D>Excitations>External Circuit>Edit External Circuit**.
The **Edit External Circuit** dialog box appears.
2. Click **Import Circuit Netlist**.
The **Select File** dialog box appears.
3. Select **Maxwell Circuit Netlist Files (*.sph)** from the **Files of type** pull-down list.
4. Browse to the location where you saved the circuit, select **trans_circ.sph**, and click **Open** to import it.
5. Click **OK** to close the **Edit External Circuit** dialog box.

Set Up Mesh Operations

This example involves transient magnetic fields in the presence of massive (solid) conductors, creating eddy currents. To catch the effects with reasonable accuracy, a finer mesh is required in those objects because skin effects are part of an accurate transient solution.

To seed the mesh to the desired density in the **Outer_arm** and **Inner_arm** objects:

1. Select **Outer_arm** from the history tree, press and hold down **Ctrl**, and then select **Inner_arm**.
2. Click **Maxwell3D>Mesh>Assign Mesh Operation>Inside Selection>Length Based**.
The **Element Length Based Refinement** dialog box appears.
3. Type **10** in the **Maximum Length of Elements** box, and select **mm** as the units.
4. Leave the **Restrict the Number of Elements** check box unchecked.
5. Click **OK**.

This operation refines the mesh at run-time before the transient problem solution begins. This mesh will be used for all time steps; therefore, the mesh density should be appropriate for the anticipated field behavior for the entire transient analysis.

Specify the Eddy Effect Calculation

Eddy effects can be calculated in objects with non-zero electric conductivity.

To calculate eddy effects:

1. Click **Maxwell3D>Excitations>Set Eddy Effects**.
The **Set Eddy Effect** dialog box appears.

2. Select the check boxes for the **Inner_arm** and **Outer_arm** objects.
3. Click **OK**.

Specifying Torque Calculation

To set up the torque calculation:

1. Select the **Inner_arm** object by clicking its name in the history tree window.
2. In the project tree, right-click **Parameters** row.
A shortcut menu appears.
3. Select **Assign>Torque** from the shortcut menu.
The **Torque** dialog box appears.
4. Select **Global:Z** from the **Axis** pull-down list.
5. Select the **Positive** radio button for the axis orientation.
6. Click **OK**.

5 - Setting Up and Running the Analysis

In this chapter you will complete the following tasks:

- Set up the analysis.
- Run and solve the analysis.

Set Up the Analysis

To set up the analysis:

1. Right-click **Analysis** in the project tree.
A shortcut menu appears.
2. Select **Add Solution Setup**.
The **Solve Setup** dialog box appears.
3. Click the **General** tab.
4. Type **0.04** in the **Stop time** box, and select **s** as the unit.
5. Type **0.005** in the **Time step** box, and select **s** as the unit.
6. To save fields during the solution:
 - a. Click the **Save Fields** tab.
 - b. Select **Linear Step** from the **Type** pull-down list to identify the type of sweep.
 - c. Type **0.0** in the **Start** box.
 - d. Type **0.04** in the **Stop** box.
 - e. Type **0.005** in the **Step Size** box.
 - f. Click **Add to List**.
7. Click **OK**.
8. Click **File>Save** to save the model before running the analysis.

Run the Analysis

To run the analysis:

- Right-click **Analysis** in the **Project Manager** window, and select **Analyze in the shortcut menu**. The time required to complete the analysis depends upon the speed and memory capability of your machine and other applications that may be using machine resources. The status of the simulation is reported in the **Progress** bar.

6 - Post Processing the Results

In this chapter you will complete the following tasks:

- [Plot the magnetic flux density vector.](#)
- [Plot the current density distribution.](#)
- [Plot the torque versus time.](#)
- [Plot the current versus time.](#)

Plot the Magnetic Flux Density Vector

Plot the flux density vector on the mid-vertical symmetry plane of the device. You previously set up a relative coordinate system (CS1) containing the desired plot plane.

- [Create an Object List](#)
- [Plot the Quantity](#)

Create an Object List

Since we want to plot the results only in the two armatures, create a list of these two objects to prepare for the plot.

To create the list of objects:

1. Select the **Outer_arm** and **Inner_arm** objects.
2. Click **Modeler>List>Create>Object List**.


The list of selected objects (Objectlist1) is added under **Lists** in the history tree window.

Plot the Quantity

To create the plot:

1. Change the rendering of both **Outer_arm** and **Inner_arm** to wireframe by clicking **View>Render>Wire Frame**.
2. In the history tree, select the **RelativeCS1:XY** plane under **Planes**.
3. In the project tree, right-click **Field Overlays**, and select **Fields>B>B_Vector**.
The **Create Field Plot** dialog box appears.
4. Make sure **B_Vector** is selected in the **Quantity** list.
5. Select **Objectlist1** in the **In Volume** list.
6. Click **Done**.
7. The **B_Vector** plot is displayed as shown below. The vector values are zero at **0sec** as a

result of the pulse source used in the winding setup having zero initial voltage.

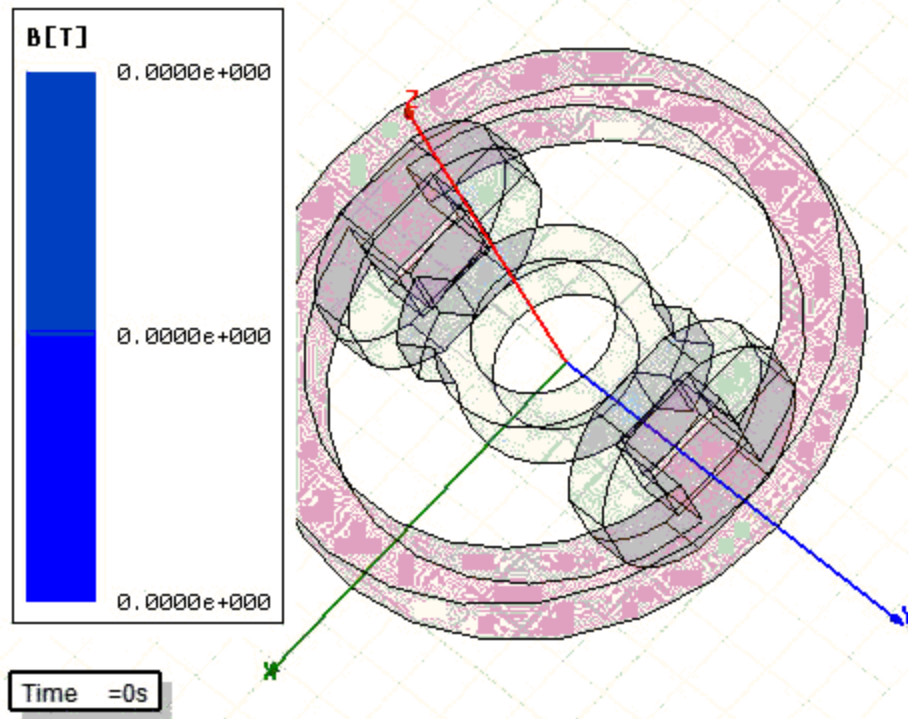

Set the Solution Context


To change the time step for post processing:

1. Click **View>Set Solution Context** or double click on the time context display in the modeler window.

The **Set View Context** dialog box appears.

2. Select the **Setup1** from the **Solution Name** pull-down list.
3. Set the time step from the **Time** pull-down to **0.04s**.

- Click **OK**. The plot automatically updates to the new time as shown.

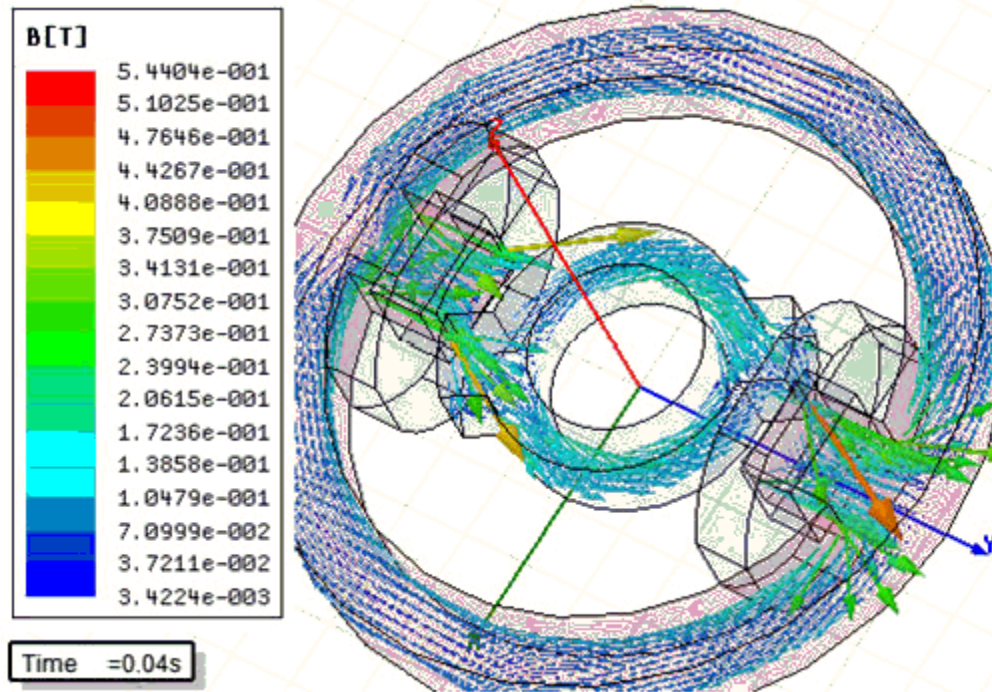

Adjust the Plot Parameters


- Click **Maxwell3D>Fields>Modify Plot Attributes**.
The **Select Plot Folder** dialog box appears.
- Select **B** from the list, and click **OK**.
A dialog box appears where you can modify the plot attributes.

Note:

You may Right-Click in the legend of any displayed plot to display a shortcut menu allowing you to hide or modify the plot.

- Click the **Scale** tab.
- Select the **Use Limits** check box.
- Type **2.0E-006** in the **Min** box, and type **7.5E-001** in the **Max** box.
- Click to **Plots** tab.
- In the Vector Plot section, set **Min** to **1** and **Max** to **5**.
- Click **Apply**, and then click **Close**.

The plot should look similar to the following figure:

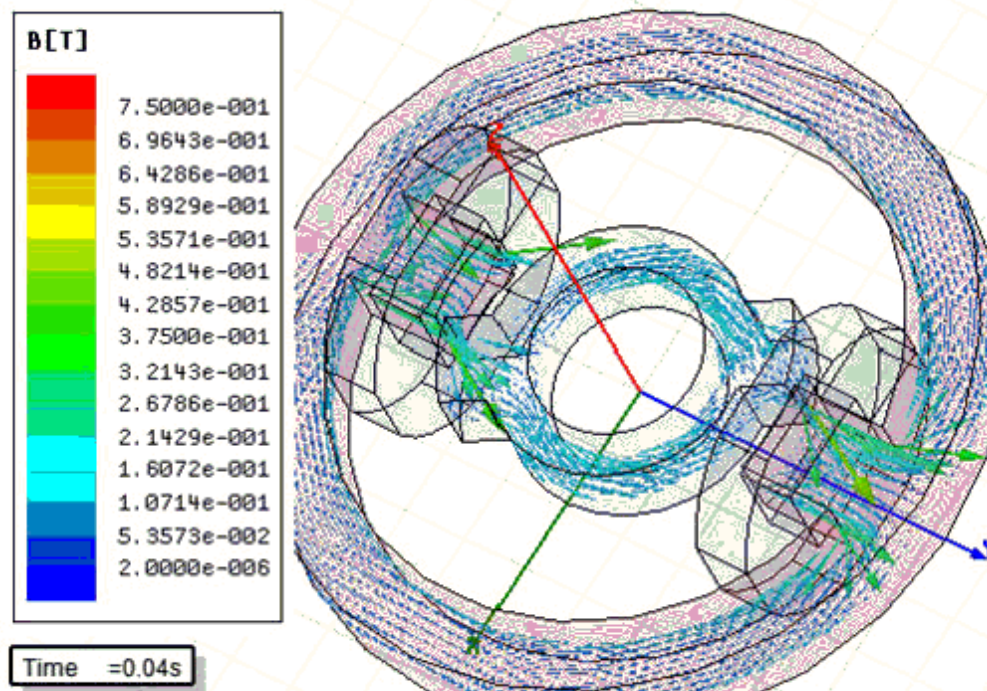

9. Right-click on **B_Vector1** in the Project Manager window and select **Plot Visibility** in the shortcut menu to turn off the plot.
10. Set the **Solution Context** back to **0s**

Plot the Current Density Distribution

To plot the current density distribution on the same XY plane of CS1 (**RelativeCS1:XY**):

1. Select the plane, and right-click in the modeler window.

A shortcut menu appears.


2. Select **Fields>J>Mag_J** from the shortcut menu.

The **Create Field Plot** dialog box appears.

3. Select **Outer_arm** from the **In Volume** List.
4. Click **Done** to plot.
5. Set the **Solution Context** to **0.04s**.

The field partially penetrates the stator, and the transient distribution of the current density

shows significant skin effects.

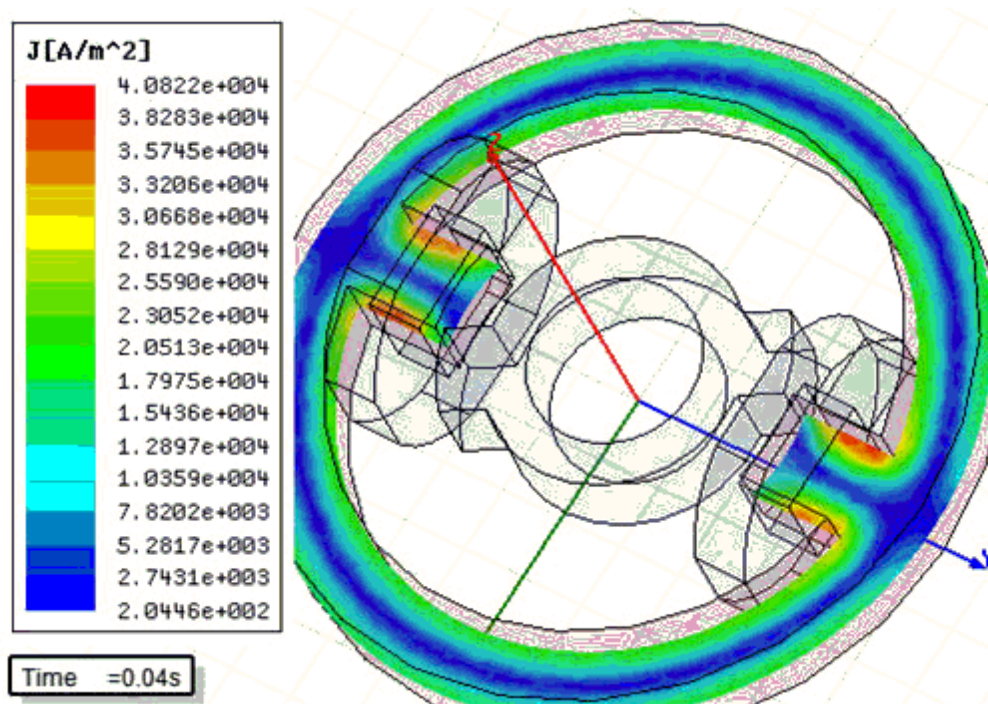

Plot Torque and Current

An important transient analysis feature is the ability to vary global quantities as a function of time. Examples of such quantities include currents and voltages, power loss, torque/force, flux linkage of windings, and induced voltages.

Create a Torque vs. Time Plot


To create a plot of the torque as a function of time:

1. Right-click **Results** in the project tree, and select **Create Transient Report>Rectangular Plot**.

The **Traces** dialog box appears.

2. From the **Solution** pull-down list, select the solution setup (**Setup1**).
3. From the **Category** list, select **Torque**.
4. Click the **New Report** button.

5. Click **Close** to dismiss the dialog box.

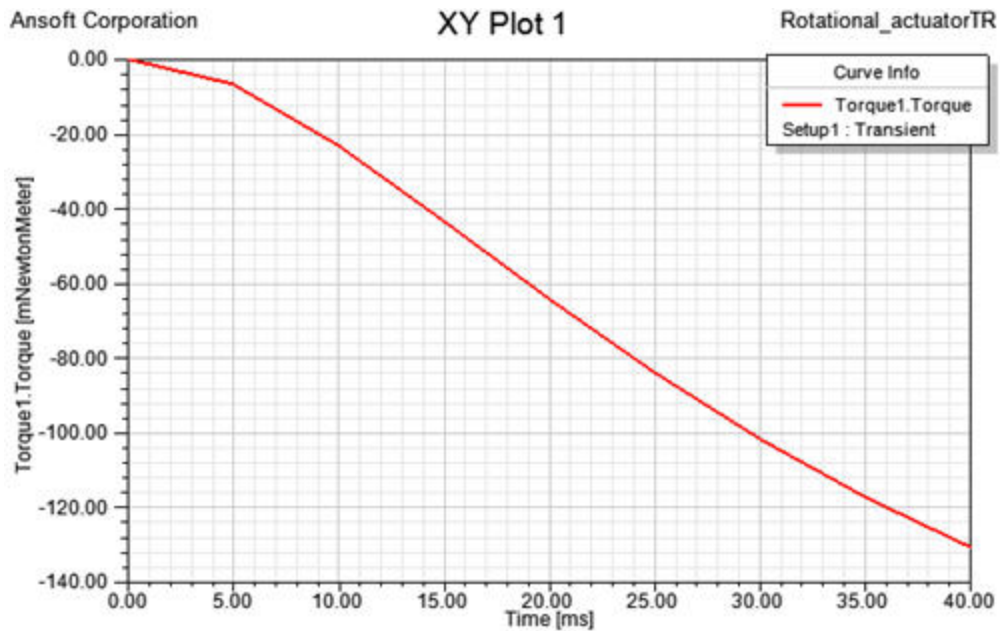

Create a Current vs. Time Plot


To create a plot of the current as a function of time:

1. Right-click **Results** in the project tree, and select **Create Transient Report>Rectangular Plot**.

The **Traces** dialog box appears.

2. From the **Solution** pull-down list, select the solution setup (**Setup1**).
3. From the **Category** list, select **Winding**.
4. From the **Quantity** list, select **Current**.
5. Click the **New Report** button.

- Click **Close** to display the dismiss the dialog box.

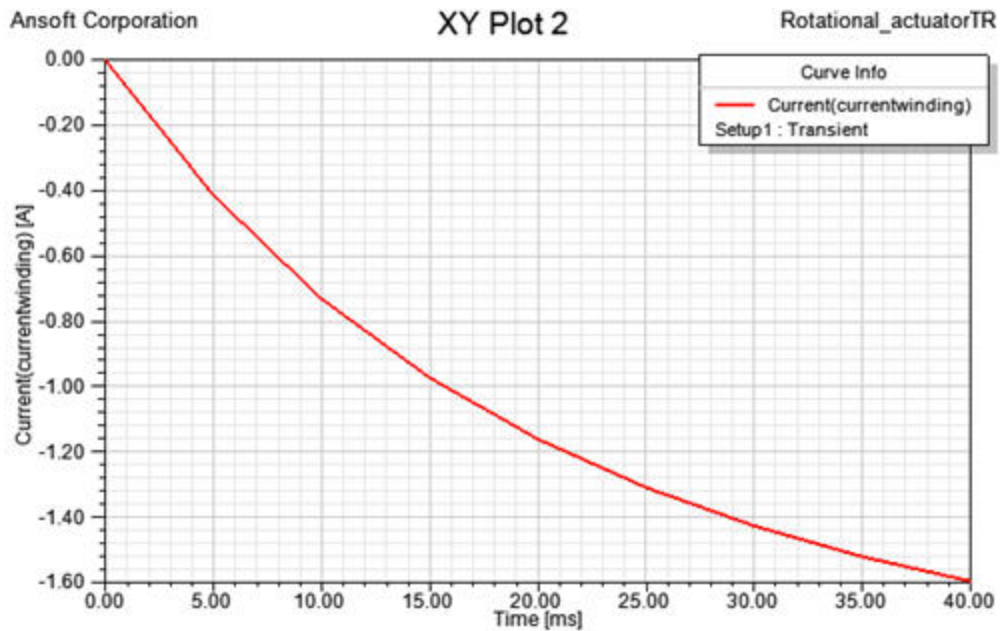

Close the Plot

To close the open plot:

- Click the **X** in the upper right corner of the plot window.

Note:

After you close a plot, it is still available to view later, listed under **Results** in the project tree.

7 - Including Motion in the Simulation

In order to include the effects of motion of the **Inner_arm** the object must be isolated from the rest of the model using a mesh band. In order to create this mesh band, you will add two objects, between the **Inner_arm** and **Outer_arm** objects.

In general, any moving object must be isolated from the stationary model using a mesh band. More information is available in the help under the topic *Maxwell 3D Technical Notes: Meshing and Band Setting Recommendations for 3D Transient Applications with Motion*.

In this chapter you will complete the following tasks:

- Add large motion to the simulation.
- Analyze the transient solution with motion.
- Post process the transient results.
- Close the project and exit Maxwell.

Add Motion to the Design

Before adding motion to the design, save the “without motion” (or non-transient) design and create a copy.

To save and copy the design:

1. Click **File>Save** to save the design.
2. In the project tree, right-click the **Rotational_Act_TR** design listed under the project, and select **Copy**.
3. In the project tree, right-click the name of the project (also **Rotational_Act_TR**), and select **Paste**.
A second copy of the same design appears under the single project; by default, the name of the new design is **Rotational_Act_TR1**.
4. Double-click **Rotational_Act_TR1** to make it active.

Add a Band Object to the Design

The band object is a regular polyhedron positioned so that it contains all rotating objects inside it.

To add the band object:

1. Set the working coordinate system to CS1:

Click **Modeler>Coordinate System>Set Working CS**, select **RelativeCS1**, and click **Select**.

2. Create a regular polyhedron around the Z axis named **band**:
 - a. Click **Draw>Regular Polyhedron**.
 - b. Type **(0, 0, -121)** in the **(X, Y, Z)** boxes, for the origin, and then press **Enter**.
 - c. Type **(52.5, 0, 0)** in the **(dX, dY, dZ)** boxes, for the radius, and press **Enter**.
 - d. Type **(0, 0, 242)** in the **(dX, dY, dZ)** boxes, for the height, and press **Enter**.
The **Segment number** dialog box appears.
 - e. Type **24** in the **Number of segments** text box.
 - f. Click **OK**.
The **Properties** window appears.
 - g. Click the **Attribute** tab.
 - h. Change the **Name** to **band**.
 - i. Verify that **band** is assigned the material property of **vacuum** (which should be the default).
 - j. Click **OK**. A polyhedron object named **band** is drawn.
 - k.
3. Create a cylinder named **air_rotor** with the following properties :
 - a. Click **Draw>Cylinder**.
The cursor changes to a small black box, indicating that you are in **Drawing** mode.
 - b. Enter the center of the cylinder base by typing **(0,0,-120)** in the **(X, Y, Z)** boxes at the bottom of the screen, and press **Enter**.
 - c. Type **51.05** for the radius in the **dX** box at the bottom of the screen, and press **Enter**.
 - d. Type **240** for the height in the **dZ** box, and press **Enter**.
The **Properties** window appears.
 - e. Click the **Attribute** tab.
 - f. Change the **Name** to **air_rotor**.
 - g. Verify that **air_rotor** is assigned the material property of **vacuum** (which should be the default).
 - h. Click **OK**.
A cylinder named **air_rotor** is drawn.

Assign Motion to the Band Object

The circumference of the **band** object falls between the inner armature and the outer armature and contains inside it the **air_rotor** and **Inner_arm** objects.

To set the band object:

1. Select **band** from the history tree.
2. Right-click **Model** in the project tree under **Rotational_Act_TR1**, and then select **Motion Setup>Assign Band**.
The **Motion Setup** dialog box appears.
3. Click the **Type** tab.
4. Select **Rotation** as the **Motion Type**.
5. Set the **Rotation Axis** to **Global:Z** and select the **negative** radio button.
6. Click the **Mechanical** tab.
7. Select the **Consider Mechanical Transient** check box.
8. Type **0.0024** in the **Moment of Inertia** text box and **0.015** in the **Damping** text box.
9. Click **OK**.

Apply Meshing to the Band Object

To apply the appropriate mesh operation to the band object:

1. Select the **band** object in the history tree.
2. Click **Maxwell3D>Mesh>Assign Mesh Operation>Inside Selection>Length Based**.
The **Element Length Based Refinement** dialog box appears.
3. Type **20** in the **Maximum Length of Elements** box, and select **mm** as the units.
4. Click **OK**.
5. To initialize the problem, right-click **Setup1** in the project tree, and select **Revert to Initial Mesh**.

Now you are ready to start the analysis with the effect of large motion included.

Set Up the Transient Analysis

To set up a second analysis:

1. Right-click **Analysis** in the project tree.
A shortcut menu appears.
2. Select **Add Solution Setup**.
The **Solve Setup** dialog box appears.
3. Click the **General** tab.
4. Type **0.9** in the **Stop time** box, and select **s** as the unit.
5. Type **0.005** in the **Time step** box, and select **s** as the unit.
6. Add a sweep
 - a. Click the **Save Fields** tab.
 - b. Select **Linear Step** from the **Type** pull-down list to identify the type of sweep.

- c. Type **0.0** in the **Start** box.
 - d. Type **0.9** in the **Stop** box.
 - e. Type **0.005** in the **Step Size** box.
 - f. Click **Add to List**.
7. Click **OK**.

Run the Transient Analysis

To run the analysis:

- Under **Analysis** in the project tree, right-click **Setup2**, and select **Analyze**.

Post Process the Transient Results

For the transient case, additional mechanical quantities are available (to represent as 2D plots as functions of time), which were not available before adding motion to the design. When you create a report for a solution that is set to **Transient**, these new quantities can be added as traces.

- [Create a Position vs. Time Plot](#)
- [Create a Current vs. Time Plot with Motion](#)
- [Create a Torque vs. Time Plot with Motion](#)
- [Create a Power Loss vs. Time Plot](#)


Create a Position vs. Time Plot

To create a plot of the position as a function of time:

1. Right-click **Results** in the project tree, and select **Create Transient Report>Rectangular Plot**.

The **Traces** dialog box appears.
2. From the **Solution** pull-down list, select the solution setup (**Setup2**).
3. From the **Category** list, select **Position**.
4. Click the **New Report** button.

- Click **Close** to dismiss the dialog.

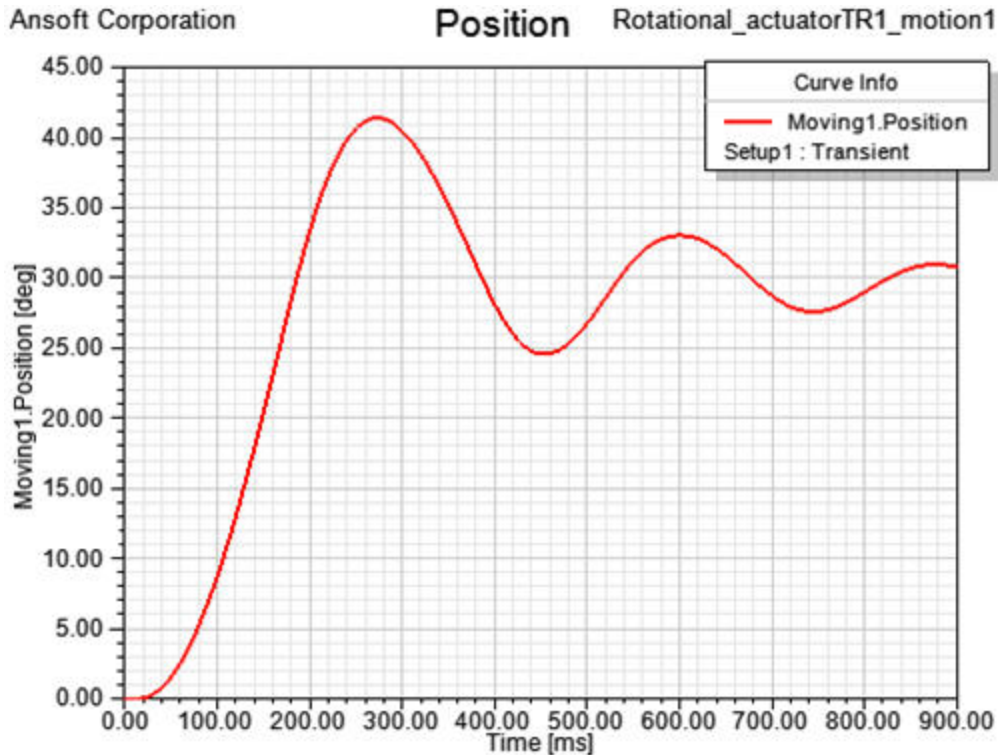

Current vs. Time Plot with Motion


To create a plot of the current as a function of time:

- Right-click **Results** in the project tree, and select **Create Transient Report>Rectangular Plot**.

The **Traces** dialog box appears.

- From the **Solution** pull-down list, select the solution setup (**Setup2**).
- From the **Category** list, select **Winding**.
- From the **Quantity** list, select **Current**.
- Click the **New Report** button.

- Click **Close** to dismiss the dialog.

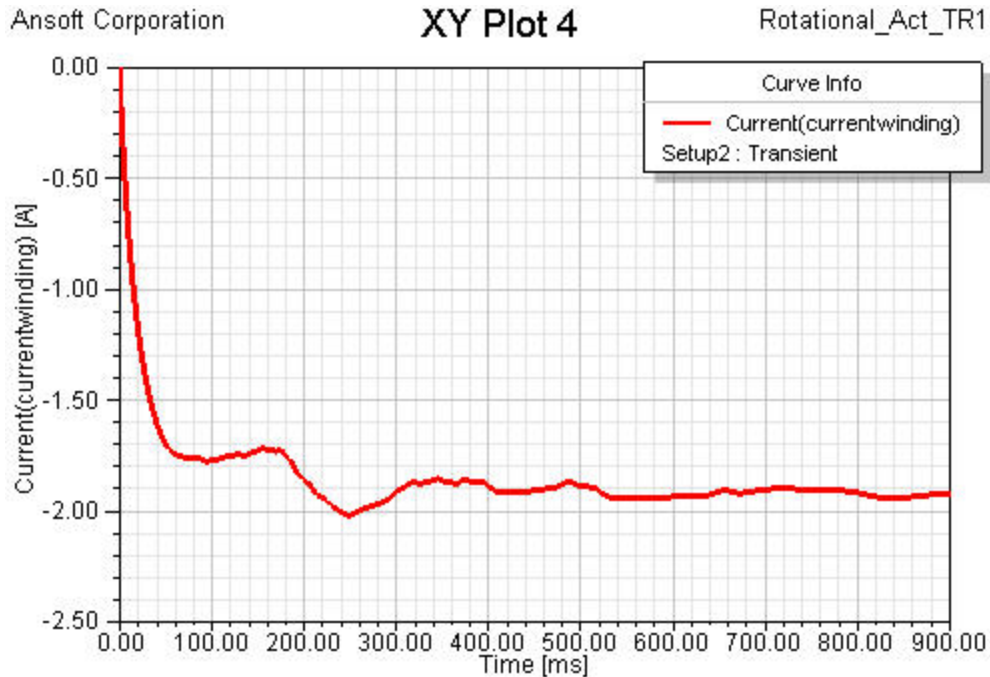

Torque vs. Time Plot with Motion


To create a plot of the torque as a function of time:

- Right-click **Results** in the project tree, and select **Create Report>Transient>Rectangular Plot**.

The **Traces** dialog box appears.

- From the **Solution** pull-down list, select the solution setup (**Setup2**).
- From the **Category** list, select **Torque**.
- From the **Quantity** list, select **Moving1.Torque**.
- Click the **New Report** button.

- Click **Close** to dismiss the dialog.

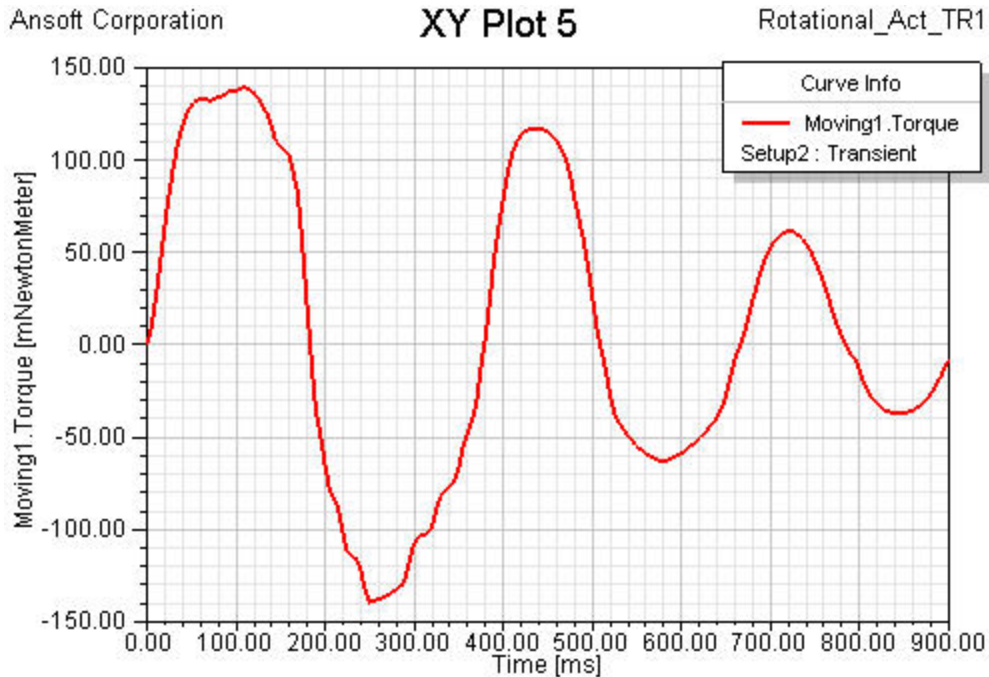

Create a Power Loss vs. Time Plot

To create a plot of the eddy current power loss in the **Inner_Arm** and **Outer_Arm** as a function of time:

- Right-click **Results** in the project tree, and select **Create Transient Report>Rectangular Plot**.

The **Traces** dialog box appears.

- From the **Solution** pull-down list, select the solution setup (**Setup2**).
- From the **Category** list, select **Loss**.
- From the **Quantity** list, select **Solid Loss**.
- Click the **New Report** button.

- Click **Close** to dismiss the dialog.



Close the Project and Exit Electronics Desktop

Congratulations! You have successfully completed his *Getting Started with Maxwell: Transient Problem*! You may close the project and exit the Ansys Electronics Desktop software.

1. Click **File>Save** to save the project.
2. Click **File>Close**.
3. Click **File>Exit** to exit Electronics Desktop.

Index

3

3D Modeler window 1-2

A

adding a band object 7-1

adding a solution setup 5-1, 7-3, 7-3

adding a trace 6-6

adding a winding 4-2

adding a winding terminal 4-3

adding motion to the design 7-1

analysis setup 5-1, 7-3, 7-3

Analyze command 5-1, 7-4

analyzing the solution 5-1

analyzing the transient solution 7-4

applying a mesh 7-3, 7-3

assigning excitations 4-1

assigning motion to the band 7-2

attributes, plot properties 6-1

B

B vector 6-1

background, boundary condition 4-4

band object

adding 7-1

applying meshing 7-3, 7-3

assigning motion 7-2

band object for motion 7-1

C

calculating the eddy effect 4-9

closing a plot 6-7

closing Maxwell 8-1

closing the project 8-1

coil terminal 4-2

coordinate system 7-1

Create Field Plot dialog box 6-4

Create Report dialog box 6-6

creating a report 7-4

creating an object list 6-1

current

assigning excitations 4-1

plotting 6-5

current density distribution 6-4

current vs. time plot 6-6, 7-5

D

desktop, Maxwell 1-2

driving circuit for winding 4-4

E

eddy current effect 4-9

editing an external circuit 4-8

electric 3D field solutions 1-1
 example Maxwell design 1-2
 excitations 4-1
 winding terminal 4-3
 exiting Maxwell 8-1
 exporting a netlist 4-8
 external circuit for winding 4-4

F

field overlays 6-1

G

general design procedure 1-2

H

harmonic steady-state solutions 1-1
 history tree 1-2

I

including motion in the simulation 7-1

L

length-based mesh refinement 4-9

M

Mag J, plotting the current density distribution 6-4
 magnetic flux density vector 6-1
 magnetostatic solutions 1-1

Maxwell

closing 8-1
 design diagram for example problem 1-2
 exiting 8-1, 8-1
 renaming a design 2-1
 renaming a project 2-1
 saving project 8-1

Maxwell Circuit Editor 4-4

Maxwell desktop 1-2

Maxwell solution types 1-1

mechanical quantities 7-4

menu bar 1-2

mesh operations 4-9

mesh, band object 7-3, 7-3

Message window 1-2

modifying plot attributes 6-1

motion

 adding to design 7-1

 band object 7-2

N

netlist, exporting 4-8

O

object list, creating 6-1

opening a project 2-1

P

plot attributes 6-1
plot, closing 6-7
plotting
 current density distribution 6-4
 current vs. time 6-6, 7-5
 magnetic flux density vector 6-1
 object list 6-1
 position vs. time 7-4
 power loss vs. time 7-7
 preparation 6-1
 torque vs. time 6-5, 7-6
plotting current 6-5
plotting torque 6-5
position vs. time plot 7-4
post processing 6-1, 7-4
power loss vs. time plot 7-7
preparing for a plot 6-1
Progress window 1-2
Project Manager window 1-2
project tree 1-2
project, closing 8-1
projects, opening and saving 2-1
properties, plot attributes 6-1

Q

quantity, plotting 6-1

R

refining the mesh 4-9
renaming
 a design 2-1
 a project 2-1, 2-1
report type 6-6, 7-4
reverting to the initial mesh 7-3, 7-3
rotational actuator example 1-2
running for transient case 7-4
running the transient analysis 7-4

S

saving a project 2-1
saving project 8-1
Set Solution Context command 6-2
Set View Context dialog box 6-2
setting a working coordinate system 7-1
setting drawing units 2-1
setting eddy effects 4-9
setting solution context 6-2
setting the time step 6-2
setting up an external circuit 4-4
setting up Maxwell designs 1-3
setting up mesh operations 4-9
setting up the analysis 5-1, 7-3, 7-3

simulation

transient 7-4

sinusoidal solutions 1-1

solution context 6-2

solution setup 5-1, 7-3

solution simulation 5-1

solution type 1-1

solution, transient 7-4

sources, assigning 4-1

specifying the eddy effect calculation 4-9

T

TEAM workshop problem 24 1-2

terminal, winding 4-3

time domain solution 1-1

time step, setting solution context 6-2

toolbars 1-2

torque vs. time plot 6-5, 7-6

transient design 7-1

transient electric fields 1-1

transient feature 6-5

transient results, post processing 7-4

transient simulation 7-4

transient solution type 2-1

transient solutions 1-1

V

varying global quantities as a function of time 6-5

verify materials 4-1

view context 6-2

W

winding

adding 4-2

external driving circuit 4-4

winding terminal, adding 4-3

windows in Maxwell desktop 1-2

working coordinate system (CS) 7-1