




Teensy components




NOTE: 1N5818 S Diode and cut trace needed on the teensy to allow it to be powered both by USB and the Cyclops 5V rail.

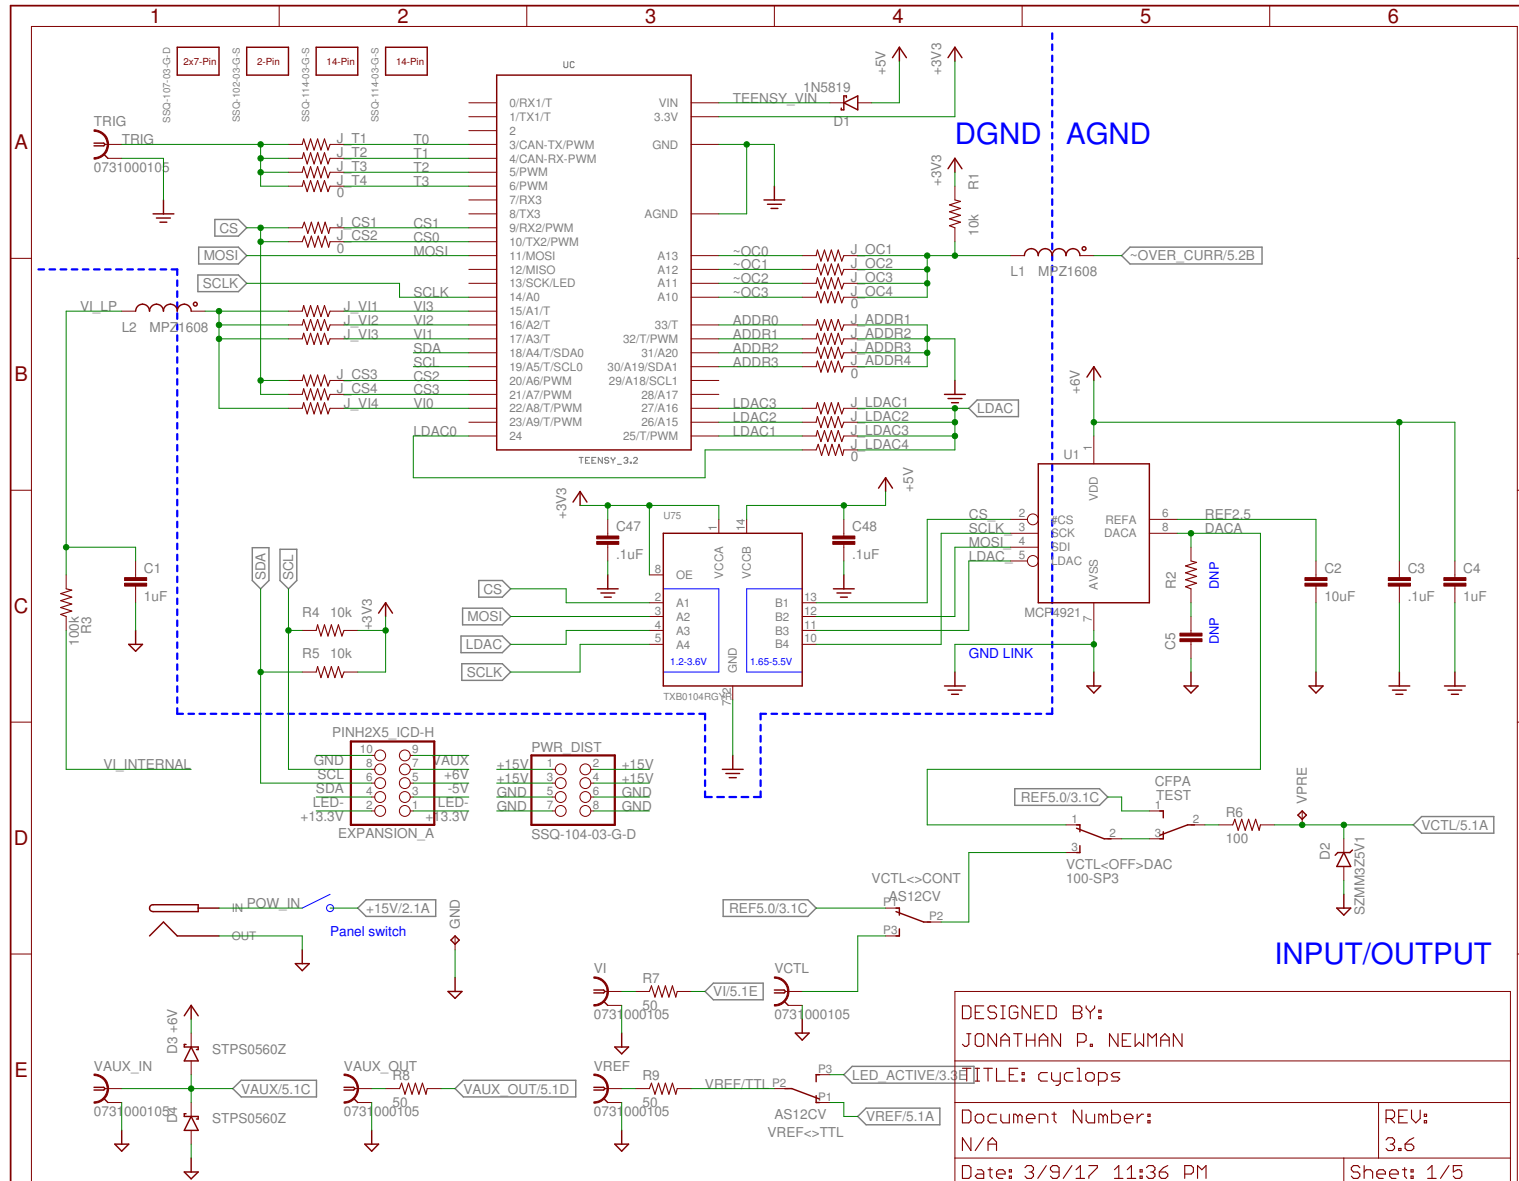

OVERCURRENT

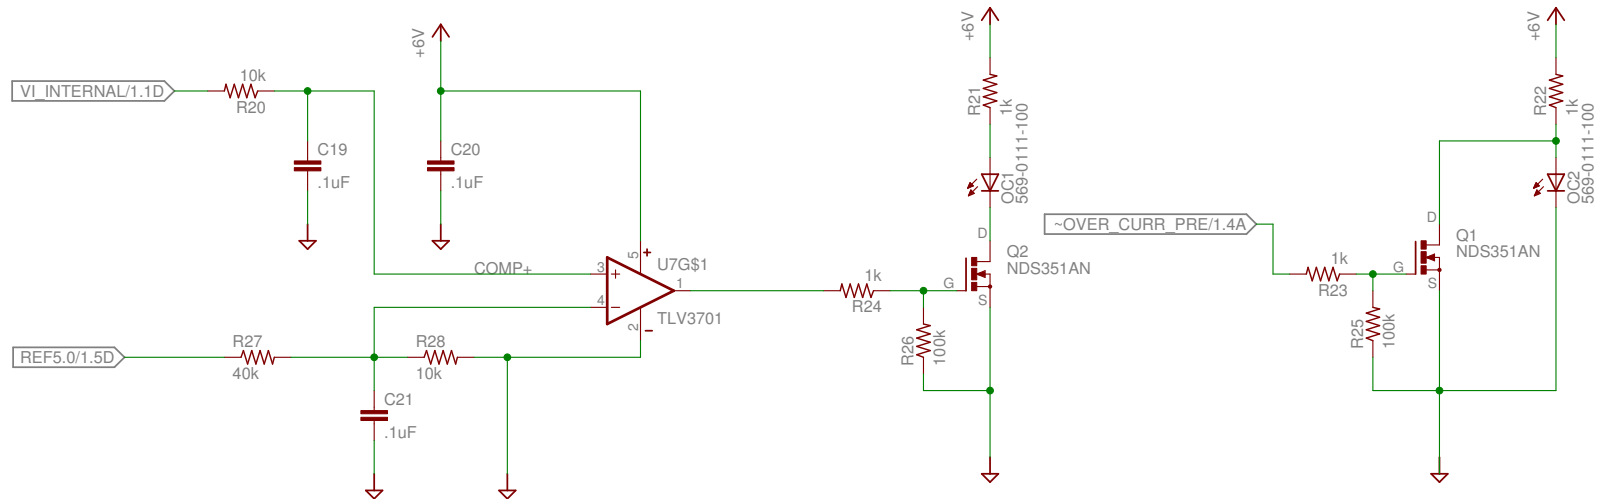

LED ACTIVE (I_LED >10 mA)

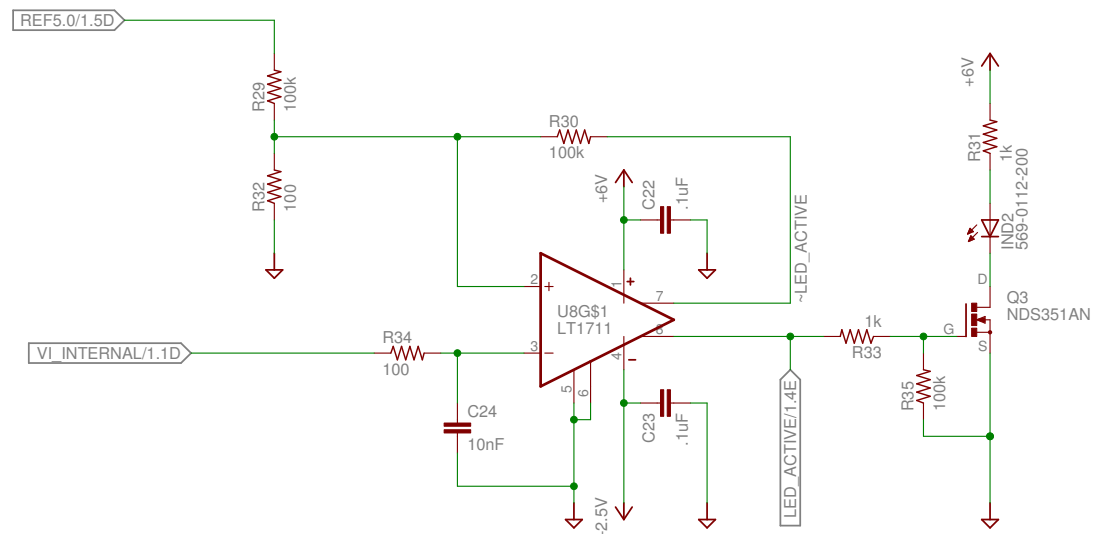

VOLTAGE REFERENCES

