

# Asynchronous Sliding Mode Control of Two-dimensional Markov Jump Systems in Roesser Model

**Abstract**—This paper is concerned with the problem of asynchronous sliding mode control (SMC) for two-dimensional (2D) discrete-time Markov jump systems, which is described by Roesser model. A hidden Markov model is introduced to describe the asynchronization which appears between the designed sliding model controller and the original system. Based on the constructed 2D sliding surface, an asynchronous 2D-SMC law is designed. The Lyapunov function and Linear matrix inequality technique are utilized to establish sufficient conditions of the asymptotic mean square stability with a prescribed  $H_\infty$  disturbance attenuation performance for the closed-loop 2D system. Moreover, the reachability of the constructed 2D sliding surface is ensured simultaneously. Then, the asynchronous 2D-SMC law can be obtained by solving a convex optimization problem. Finally, a numerical example is provided to demonstrate the effectiveness of the proposed asynchronous 2D-SMC law design method.

**Index Terms**—Markov jump systems, 2D systems, Sliding mode control, Hidden Markov model

## I. INTRODUCTION

Markov jump systems (MJSs), an important class of stochastic switching systems, have received considerable attentions for its powerful ability in modeling systems with abrupt change in parameters or system structures, for instance, environmental disturbances, actuator failures, and interconnection variations in subsystems, etc. Over the past decades, a large number of results on stability analysis and the design of controller/filter have been reported in [?].

However, the aforementioned works are generally based on the implicit assumption that the information of system modes can always be fully available for the controller/filter, so that the controller/filter modes can run synchronously with system modes. Unfortunately, in practical applications, it is rather difficult to satisfy this ideal assumption because of some unexpected factors, such as, time delays, data dropouts and quantization in networked control systems. In order to overcome the strict limitation, two research approaches were proposed, namely, mode-independent and asynchronous methods. In mode-independent methods, see [1] and [2], the controller/filter modes is independent of system modes, which means the information of system modes is not fully utilized and may result in some conservativeness. In [3], Wu proposed the hidden Markov model, a united asynchronous framework that covering synchronous and mode-independent cases. The hidden Markov model supposes that the controller/filter modes can be detected via a hidden Markov chain, such that controllers/filters can utilize more information of system modes.

Therefore, many problems of asynchronous control/filtering for MJSs have been studies in recent years [4]–[6].

Moreover, sliding mode control (SMC), an effective control method for its strong robustness against parameter variations, exogenous disturbances and model uncertainties, has been successfully applied to a variety of practical systems [7]–[9]. The main idea of SMC is to design a discontinuous control law to force the system state trajectories toward the sliding surface and remain within a neighbourhood of the sliding surface after reaching it [10]. In the last few decades, the SMC design problems have been extensively studied, and a large number of research results for MJSs have been published [11]–[13]. Recently, some researchers have investigated the asynchronous SMC design methods for MJSs based on hidden Markov model [14]–[16].

On the other hand, two-dimensional (2D) systems, a special class of multi-dimensional systems dating back to 1970s, have been used to describe a wide variety of practical applications, such as digital image processing, partial differential equations modeling and signal filtering [17]–[19], etc. Different from one dimensional (1D) systems, the key feature of 2D systems is that the system information are independent and propagated along two different directions, which will brought much complexity and difficulty in system analysis and synthesis. To describe the special properties of 2D systems, server different mathematical models presented in state-space framework, such as Roesser model [17] and Fornasini-Marchesini model [20], have been proposed. In Roesser model, the system state is composed of two independent states, horizontal state and vertical state, which are denoted by sub-vectors, the next horizontal state and vertical state in different directions can be deduced from current state, respectively. Different from the Roesser model, the system state in Fornasini-Marchesini model is represented by a vector which is a function with two independent variables, and the current system state is derived from the adjacent last two states. In most circumstances, the Roesser model can be considered as a special case of Fornasini-Marchesini model, but is much simpler and more intelligible than the latter. Based on 2D bounded real lemma, the  $H_\infty$  control theory for 2D systems was established by Du and Xie in [21] and [22]. This result was extended to control and filtering problems for 2D systems with time-varying delays [23], multiplicative noise [24] and uncertainty parameters [25]. Anh has studied the dissipative control and filtering problems for 2D systems in [26] by utilizing Linear

matrix inequalities technique. A number of preliminary results on sliding mode control of discrete-time 2D systems have been studied in [27]–[29]. In recent years, 2D systems with Markov jump parameters have attract more interests of researchers. For example, the  $H_\infty$  control,  $H_\infty$  filtering,  $H_\infty$  mode reduction and fault detection problems for 2D-MJSs have been investigated in [30]–[34], respectively. However, we have to notice that, the issue of SMC for 2D-MJSs has not been fully studied yet, which motivates us for current work.

Based on the aforementioned considerations, we will investigate the asynchronous SMC design problems for 2D-MJSs in this paper. The main contributions of this paper include the following three aspects:

- 1) For the concerned 2D-MJSs, the asymptotically mean square stability with  $H_\infty$  disturbance attenuation performance is analyzed and the reachability of the 2D sliding mode dynamics are ensured simultaneously. It is the first time that the asynchronous SMC is studies for 2D-MJSs, which shows the feasibility and effectiveness of 2D-SMC for 2D control systems.
- 2) Based on the constructed 2D sliding surface, an asynchronous 2D-SMC law is designed under the framework of hidden Markov model, which means it is more generalized than the synchronous and mode-independent ones.
- 3) The proposed asynchronous 2D-SMC law design method can be applied not only to the Roesser model, but also to the Fornasini-Marchesini model through some simple modifications.

## II. PRELIMINARIES

In this paper, we consider the following 2D-MJSs in Roesser model:

$$\begin{cases} \mathbf{x}(i, j) = A_{r(i, j)}x(i, j) + E_{r(i, j)}w(i, j) \\ \quad + B_{r(i, j)}[u(i, j) + f(x(i, j), r(i, j))] \\ y(i, j) = C_{r(i, j)}x(i, j) + D_{r(i, j)}w(i, j) \end{cases} \quad (1)$$

where

$$\mathbf{x}(i, j) = \begin{bmatrix} x^h(i+1, j) \\ x^v(i, j+1) \end{bmatrix}, \quad x(i, j) = \begin{bmatrix} x^h(i, j) \\ x^v(i, j) \end{bmatrix}$$

$x^h(i, h) \in \mathbb{R}^{n_h}$  and  $x^v(i, h) \in \mathbb{R}^{n_v}$  represent horizontal and vertical states respectively,  $u(i, j) \in \mathbb{R}^{n_u}$  and  $y(i, j) \in \mathbb{R}^{n_y}$  represent the controlled input and output respectively, and  $w(i, j) \in \mathbb{R}^{n_w}$  represents the exogenous disturbance which belongs to  $\ell_2\{[0, \infty), [0, \infty)\}$ .  $A_{r(i, j)}, B_{r(i, j)}, C_{r(i, j)}, D_{r(i, j)}$  and  $E_{r(i, j)}$  represent the time-varying system matrices, all of which are real known constant matrices with appropriate dimensions. Besides, we assume that the matrix  $B_{r(i, j)}$  is full column rank for each  $r(i, j) \in \mathcal{N}_1$ , that is,  $\text{rank}(B_{r(i, j)}) = n_u$ . The nonlinear function  $f(x(i, j), r(i, j))$  satisfying the following property:

$$\|f(x(i, j), r(i, j))\| \leq \delta_{r(i, j)} \|x(i, j)\| \quad (2)$$

where  $\delta_{r(i, j)}$  is a known scalar,  $\|\cdot\|$  denotes the Euclidean norm of a vector. The parameter  $r(i, j)$  takes values in a finite

set  $\mathcal{N}_1 = \{1, 2, \dots, N_1\}$  with transition probability matrix  $A = \{\lambda_{k\tau}\}$ , and the related transition probability from mode  $k$  to mode  $\tau$  is given by

$$\begin{aligned} \Pr\{r(i+1, j) = \tau | r(i, j) = k\} \\ = \Pr\{r(i, j+1) = \tau | r(i, j) = k\} = \lambda_{k\tau}, \quad \forall k, \tau \in \mathcal{N}_1 \end{aligned} \quad (3)$$

where  $\lambda_{k\tau} \in [0, 1]$ , for all  $k, \tau \in \mathcal{N}_1$ , and  $\sum_{\tau=1}^{N_1} \lambda_{k\tau} = 1$  for every mode  $k$ .

We define the boundary condition  $(X_0, \Gamma_0)$  of system (1), as follows:

$$\begin{cases} X_0 = \{x^h(0, j), x^v(i, 0) | i, j = 0, 1, 2, \dots\} \\ \Gamma_0 = \{r(0, j), r(i, 0) | i, j = 0, 1, 2, \dots\} \end{cases} \quad (4)$$

And the corresponding zero boundary condition is assumed as  $x^h(0, j) = 0, x^v(i, 0) = 0, i, j = 0, 1, 2, \dots$ . Besides, we further impose following assumption on  $X_0$ .

**Assumption 1.** The boundary condition  $X_0$  satisfies:

$$\lim_{L \rightarrow \infty} \mathbb{E} \left\{ \sum_{\ell=1}^L (\|x^h(0, \ell)\|^2 + \|x^v(\ell, 0)\|^2) \right\} < \infty \quad (5)$$

where  $\mathbb{E}\{\cdot\}$  stands for mathematical expectation.

In practical applications, the complete information of  $r(i, j)$  can not always be available to the controller. Hence, in this paper, the hidden Markov model  $(r(i, j), \sigma(i, j), \Lambda, \Psi)$  as in [refto] is introduced to characterize the asynchronous phenomenon between the controller and the system. The parameter  $\sigma(i, j)$ , refers to controller mode, takes values in another finite set  $\mathcal{N}_2 = \{1, 2, \dots, N_2\}$ , and satisfies the conditional probability matrix  $\Psi = \{\mu_{ks}\}$  with conditional mode transition probabilities

$$\Pr\{\sigma(i, j) = s | r(i, j) = k\} = \mu_{ks} \quad (6)$$

where  $\mu_{ks} \in [0, 1]$  for all  $k \in \mathcal{N}_1, s \in \mathcal{N}_2$ , and  $\sum_{s=1}^{N_2} \mu_{ks} = 1$  for any mode  $k$ .

**Remark 1.** The hidden Markov model is a united framework that covering synchronous and mode-independent cases. The controller belongs to which case is decided by the conditional probability matrix  $\Psi$ . The necessary and sufficient condition for synchronous case is as follows:

$$\mu(k, s) = \begin{cases} 1, & s = s_k \\ 0, & s \neq s_k \end{cases} \quad s_k \in \mathcal{N}_2$$

for every mode  $k \in \mathcal{N}_1$ . The controller becomes a mode-independent one when  $N_2 = \{1\}$ . This means the result derived in this work can be easily applied to synchronous or mode-independent cases.

Next, the definitions of asymptotically mean square stable and  $H_\infty$  performance for 2D systems will be given in Definition 1 and Definition 2, respectively.

**Definition 1.** The 2D Markov jump system (1) with  $w(i, j) \equiv 0$  is said to be asymptotically mean square stable if the following holds:

$$\lim_{i+j \rightarrow \infty} \mathbb{E}\{\|x(i, j)\|^2\} = 0 \quad (7)$$

for any boundary condition  $X_0$  with Assumption 1.

**Definition 2.** Given a scalar  $\gamma > 0$ , the 2D Markov jump system (1) is said to be asymptotically mean square stable with an  $H_\infty$  disturbance attenuation performance  $\gamma$  if the system satisfies (7), and under zero boundary condition, the following holds:

$$\sum_{i=0}^{\infty} \sum_{j=0}^{\infty} \{\|y(i, j)\|^2\} < \gamma^2 \sum_{i=0}^{\infty} \sum_{j=0}^{\infty} \{\|w(i, j)\|^2\} \quad (8)$$

for all  $w(i, j) \in \ell_2\{[0, \infty), [0, \infty)\}$ .

Now, we will make some notational simplification for convenience. The parameter  $r(i, j)$  is represented by  $k$ ,  $r(i+1, j)$  and  $r(i, j+1)$  are represented by  $\tau$ ,  $\sigma(i, j)$  is represented by  $s$ .

The objective of this work is to devise an asynchronous SMC law  $u(i, j)$ , such that the 2D Markov jump system (1) is asymptotically mean square stable with an  $H_\infty$  disturbance attenuation performance  $\gamma$ .

### III. MAIN RESULT

#### A. Sliding surface and sliding mode controller

In this paper, a novel Two-dimensional sliding surface function is constructed as follows:

$$s(i, j) = \begin{bmatrix} s^h(i, j) \\ s^v(i, j) \end{bmatrix} = Gx(i, j) \quad (9)$$

where  $G = \sum_{k=1}^{N_1} \beta_k B_k^T$ , and scalars  $\beta_k$  should be chosen such that  $GB_k$  is nonsingular for any  $k \in \mathcal{N}_1$ . Based on the the assumption that  $B_k$  is full column rank for any  $k \in \mathcal{N}_1$ , we can find that the above condition can be guaranteed easily with the properly selected parameter  $\beta_k$ .

An asynchronous 2D-SMC law is designed as follows:

$$u(i, j) = K_s x(i, j) - \rho(i, j) \frac{s(i, j)}{\|s(i, j)\|} \quad (10)$$

for any  $s \in \mathcal{N}_2$ , where the matrix  $K_s \in \mathbb{R}^{n_u \times n_x}$  with  $n_x = n_h + n_v$  will be determined later, and the parameter  $\rho(i, j)$  is given as

$$\rho(i, j) = \varrho_1 \|x(i, j)\| + \varrho_2 \|w(i, j)\| \quad (11)$$

with  $\varrho_1 = \max_{k \in \mathcal{N}_1} \{\delta_k\}$ ,  $\varrho_2 = \max_{k \in \mathcal{N}_1} \{\|(GB_k)^{-1}GE_k\|\}$ , and the parameter  $\delta_k$  is given in (2).

Combining system (1) and the asynchronous 2D-SMC law (9), the closed-loop 2D markov jump system can be obtained easily as follows:

$$\mathbf{x}(i, j) = \bar{A}_{ks} x(i, j) + B_k \bar{\rho}_k(i, j) + E_k w(i, j) \quad (12)$$

where  $\bar{A}_{ks} = A_k + B_k K_s$ , and  $\bar{\rho}_k(i, j)$  as follows

$$\bar{\rho}_k(i, j) = f_k(x(i, j)) - (\varrho_1 \|x(i, j)\| + \varrho_2 \|w(i, j)\|) \cdot \frac{s(i, j)}{\|s(i, j)\|}.$$

Then, based on the properties of norm, the following condition can be deduced easily

$$\|\bar{\rho}_k(i, j)\| \leq (\varrho_1 + \delta_k) \|x(i, j)\| + \varrho_2 \|w(i, j)\|. \quad (13)$$

**Remark 2.** As mentioned above, the SMC designed in this paper is asynchronous with the original system, and the phenomenon that lies between them is described by the hidden Markov model  $(r(i, j), \sigma(i, j), \Lambda, \Psi)$ . The model is consists of two Markov chain, the first Markov chain  $\{r(i, j), i, j = 1, 2 \dots\}$  governs the mode jumps of original system and the second  $\{\sigma(i, j), i, j = 1, 2 \dots\}$  governs the mode jumps of controller. Noting that, the second Markov chain is related to a conditional probability matrix  $\Psi$  which build a connection between the controller modes and the system modes, this mean the SMC can fully utilize the information of original system.

**Remark 3.** 2D-SMC discussed here.

#### B. Analysis of Stability and $H_\infty$ attenuation performance

In this subsection, we focus on the stability and  $H_\infty$  attenuation performance analysis for the closed-loop 2D system (12). A sufficient condition will be derived to guarantee the considered system is asymptotically mean square stable with an  $H_\infty$  attenuation performance  $\gamma$ .

**Theorem 1.** Consider the Markov jump system (1) under the Assumption (1) and with the asynchronous 2D-SMC law (10). For a given scalar  $\gamma > 0$ , if there exist matrices  $K_s \in \mathbb{R}^{n_u \times n_x}$ ,  $R_k = \text{diag}\{R_k^h, R_k^v\} > 0$ ,  $Q_{ks} > 0$ ,  $T_{ks} > 0$  and scalars  $\epsilon_k > 0$ , for any  $k \in \mathcal{N}_1, s \in \mathcal{N}_2$ , such that the following inequalities hold:

$$B_k^T \mathcal{R}_k B_k - \epsilon_k I \leq 0 \quad (14)$$

$$\mathcal{A} + 2 \left( \sum_{s=0}^{N_2} \mu_{ks} \text{diag}\{Q_{ks}, T_{ks}\} \right) < 0 \quad (15)$$

$$\hat{A}_{ks}^T \mathcal{R}_k \hat{A}_{ks} - \text{diag}\{Q_{ks}, T_{ks}\} < 0 \quad (16)$$

where

$$\mathcal{A} = \begin{bmatrix} \Pi_1 & \Pi_3 \\ * & \Pi_2 \end{bmatrix}$$

with

$$\begin{cases} \Pi_1 = -R_k + 4(\delta_k + \varrho_1)^2 \epsilon_k I + C_k^T C_k \\ \Pi_2 = -\gamma^2 I + D_k^T D_k + 4\varrho_2^2 \epsilon_k I \\ \Pi_3 = C_k^T D_k \end{cases}$$

and  $\mathcal{R}_k = \sum_{\tau=1}^{N_1} \lambda_{k\tau} R_\tau$ ,  $\hat{A}_{ks} = [\bar{A}_{ks} \ E_k]$ , then, the closed-loop system (12) is asymptotically mean square stable with an  $H_\infty$  disturbance attenuation performance  $\gamma$ .

*Proof.* Let's start the proof with the stability of system. We select the Lyapunov candidate as  $V_1(i, j) = x^T(i, j) R_k x(i, j)$ , then, define

$$\Delta V_1(i, j) = \mathbf{x}(i, j)^T R_\tau \mathbf{x}(i, j) - x^T(i, j) R_k x(i, j) \quad (17)$$

Based on the closed-loop system equation (12) with  $w(i, j) = 0$ , it is easy to find that

$$\begin{aligned} & \mathbb{E}\{\Delta V_1(i, j)\} \\ &= \sum_{s=0}^{N_2} \mu_{ks} \left\{ [\bar{A}_{ks}x(i, j) + B_k \bar{\rho}_k(i, j)]^T \mathcal{R}_k \right. \\ & \quad \times [\bar{A}_{ks}x(i, j) + B_k \bar{\rho}_k(i, j)] \left. \right\} \\ & \quad - x^T(i, j) R_k x(i, j) \\ & \leq x^T(i, j) \left\{ 2 \left( \sum_{s=1}^{N_2} \mu_{ks} \bar{A}_{ks}^T \mathcal{R}_k \bar{A}_{ks} \right) \right\} x(i, j) \\ & \quad + 2 \bar{\rho}_k^T(i, j) B_k^T \mathcal{R}_k B_k \bar{\rho}_k(i, j) \\ & \quad - x^T(i, j) R_k x(i, j) \end{aligned} \quad (18)$$

Recalling the conditions given in (13) and (14), the following inequality can be further obtained

$$\mathbb{E}\{\Delta V_1(i, j)\} \leq x^T(i, j) \mathcal{G}_{ks} x(i, j) \quad (19)$$

where  $\mathcal{G}_{ks} = 2 \left( \sum_{s=0}^{N_2} \mu_{ks} \bar{A}_{ks}^T \mathcal{R}_k \bar{A}_{ks} \right) + 2\epsilon_k(\delta_k + \varrho_1)^2 I - R_k$ . The following inequality can be deduced from (15) based on the properties of matrix quadratic

$$2 \left( \sum_{s=1}^{N_2} \mu_{ks} Q_{ks} \right) + 4\epsilon_k(\delta_k + \varrho_1)^2 I + C_k^T C_k - R_k < 0 \quad (20)$$

which will further deduce

$$2 \left( \sum_{s=1}^{N_2} \mu_{ks} Q_{ks} \right) + 2\epsilon_k(\delta_k + \varrho_1)^2 I - R_k < 0 \quad (21)$$

The following inequality can be inferred directly from condition (16)

$$\bar{A}_{ks}^T \mathcal{R}_k \bar{A}_{ks} - Q_{ks} < 0 \quad (22)$$

Combine (21) and (22), we can infer that  $\mathcal{G}_{ks} < 0$ , which is equivalent to

$$\mathcal{G}_{ks} \leq -\alpha I \quad (23)$$

with scalar  $\alpha > 0$ . Recalling (19), we can further infer that

$$\mathbb{E}\{\Delta V_1(i, j)\} \leq -\alpha \mathbb{E}\{\|x(i, j)\|^2\} \quad (24)$$

Summing up on the both side of (24), we have

$$\mathbb{E}\left\{ \sum_{i=0}^{\kappa_1} \sum_{j=0}^{\kappa_2} \|x(i, j)\|^2 \right\} \leq -\frac{1}{\alpha} \mathbb{E}\left\{ \sum_{i=0}^{\kappa_1} \sum_{j=0}^{\kappa_2} \Delta V_1(i, j) \right\} \quad (25)$$

where parameters  $\kappa_1, \kappa_2$  are any positive integers. By substituting  $\Delta V_1$  and  $R_k$  with (17) and  $R_k = \text{diag}\{R_k^h, R_k^v\}$  respectively, we obtain

$$\begin{aligned} & \sum_{i=0}^{\kappa_1} \sum_{j=0}^{\kappa_2} \Delta V_1(i, j) \\ &= \sum_{i=0}^{\kappa_1} \{V_1^v(i, \kappa_2 + 1) - V_1^v(i, 0)\} \\ & \quad - \sum_{j=0}^{\kappa_2} \{V_1^h(\kappa_1 + 1, j) - V_1^h(0, j)\} \\ & \leq - \left( \sum_{i=0}^{\kappa_1} V_1^v(i, 0) + \sum_{j=0}^{\kappa_2} V_1^h(0, j) \right) \end{aligned} \quad (26)$$

where  $V_1^h(i, j)$  and  $V_1^v(i, j)$  are defined as

$$\begin{cases} V_1^h(i, j) = x^{hT}(i, j) R_{r(i, j)}^h x^h(i, j) \\ V_1^v(i, j) = x^{vT}(i, j) R_{r(i, j)}^v x^v(i, j) \end{cases}$$

Recalling the boundary condition in Assumption 1, and let  $\kappa_1, \kappa_2$  tend to infinity, it follows from (25) and (26) that

$$\begin{aligned} & \mathbb{E}\left\{ \sum_{i=0}^{\kappa_1} \sum_{j=0}^{\kappa_2} \|x(i, j)\|^2 \right\} \\ & \leq -\frac{\beta}{\alpha} \sum_{\ell=0}^{\infty} (\|x^v(\ell, 0)\|^2 + \|x^h(0, \ell)\|^2) \\ & < \infty \end{aligned} \quad (27)$$

where  $\beta$  is the maximum eigenvalue of  $R^h(0, \ell)$  and  $R^v(\ell, 0)$ , for any  $\ell = 0, 1, 2, \dots$ , which implies that (7) holds. Thus, the asymptotically mean square stable of the considered system is proved.

Next, let's focus on the  $H_\infty$  attenuation performance under zero boundary condition. Based on the closed-loop system equation (12), it is easy to find that

$$\begin{aligned} & \mathbb{E}\{\Delta V_1(i, j)\} \\ &= \sum_{s=0}^{N_2} \mu_{ks} \left\{ [\bar{A}_{ks}x(i, j) + B_k \bar{\rho}_k(i, j) + E_p w(i, j)]^T \right. \\ & \quad \times \mathcal{R}_k [\bar{A}_{ks}x(i, j) + B_k \bar{\rho}_k(i, j) + E_p w(i, j)] \left. \right\} \\ & \quad - x^T(i, j) R_k x(i, j) \\ & \leq \hat{x}^T(i, j) \left\{ 2 \left( \sum_{s=1}^{N_2} \mu_{ks} \hat{A}_{ks}^T \mathcal{R}_k \hat{A}_{ks} \right) \right\} \hat{x}(i, j) \\ & \quad + 2 \bar{\rho}_k^T(i, j) B_k^T \mathcal{R}_k B_k \bar{\rho}_k(i, j) \\ & \quad - x^T(i, j) R_k x(i, j) \end{aligned} \quad (28)$$

where

$$\hat{x}(i, j) = \begin{bmatrix} x(i, j) \\ w(i, j) \end{bmatrix}, \quad \hat{A}_{ks}(i, j) = [\bar{A}_{ks} \quad E_k]$$

Notice that from (13) and (14), we have

$$\begin{aligned} & \bar{\rho}_k^T(i, j) B_k^T \mathcal{R}_k B_k \bar{\rho}_k(i, j) \\ & \leq 2\epsilon_k((\delta_k + \varrho_1)^2 \|x(i, j)\|^2 + \varrho_2^2 \|w(i, j)\|^2) \end{aligned} \quad (29)$$

The following condition can be deduced easily from (15) and (16)

$$\Xi_{ks} < 0 \quad (30)$$

where  $\Xi_{ks} \equiv \mathcal{A} + 2 \sum_{s=1}^{N_2} \mu_{ks} \hat{A}_{ks}^T \mathcal{R}_k \hat{A}_{ks}$ . Recalling the system (1), and substituting (29) into (28) yields

$$\begin{aligned} & \mathbb{E}\{\Delta V_1(i, j) + \|y(i, j)\|^2 - \gamma^2 \|w(i, j)\|^2\} \\ & \leq \hat{x}^T(i, j) \Xi_{ks} \hat{x}(i, j) < 0 \end{aligned} \quad (31)$$

Noting (26) with the zero boundary condition, we can infer that

$$\begin{aligned} & \sum_{i=0}^{\kappa_1} \sum_{j=0}^{\kappa_2} \Delta V_1(i, j) \\ & = \sum_{i=0}^{\kappa_1} V_1^v(i, \kappa_2 + 1) + \sum_{j=0}^{\kappa_2} V_1^h(\kappa_1 + 1, j) \\ & \geq 0 \quad \forall \kappa_1, \kappa_2 = 1, 2, 3, \dots \end{aligned} \quad (32)$$

Then, we can further deduce from (31) and (32) that

$$\begin{aligned} & \sum_{i=0}^{\infty} \sum_{j=0}^{\infty} \mathbb{E}\{\|y(i, j)\|^2 - \gamma^2 \|w(i, j)\|^2\} \\ & \leq \sum_{i=0}^{\infty} \sum_{j=0}^{\infty} \mathbb{E}\{\Delta V_1(i, j) + \|y(i, j)\|^2 - \gamma^2 \|w(i, j)\|^2\} \\ & < 0 \end{aligned} \quad (33)$$

which implies (8) holds. And this completes the proof of Theorem 1.  $\square$

**Remark 4.** As we mentioned above, the hidden Markov model is consists of two Markov chain and will result in some difficulties in SMC design. Follow the method imposed in [3], the matrix  $Q_{ks}$  is introduced to separate those two Markov chains.

### C. Analysis of reachability

The reachability of the designed asynchronous 2D-SMC law for the closed-loop system (12) will be discussed in this subsection. By using a stochastic Lyapunov method, we provide a sufficient condition which will confirm that the designed asynchronous 2D-SMC law (10) can force the state trajectories of the closed-loop system (12) into a time-varying sliding region around the specified 2D sliding surface (9).

**Theorem 2.** Consider the closed-loop 2D-MJSs (12) with asynchronous 2D-SMC law (10). If there exists matrices  $K_s \in \mathbb{R}^{n_u \times n_x}$ ,  $R_k > 0$ ,  $F_k > 0$ , and scalars  $\epsilon_k > 0$ , for any  $k \in \mathcal{N}_1$ ,  $s \in \mathcal{N}_2$ , such that the condition (14) and the following inequality hold

$$2 \sum_{s=1}^{N_2} \bar{A}_{ks}^T (\mathcal{R}_k + G^T \mathcal{F}_k G) \bar{A}_{ks} - R_k < 0 \quad (34)$$

where  $\mathcal{R}_k$  is defined in Theorem 1, and  $\mathcal{F}_k = \sum_{\tau=1}^{N_1} \lambda_{k\tau} F_\tau$ . Then, the state trajectories of the considered closed-loop

system will be driven into the following sliding region  $\mathcal{O}$ , around the predefined sliding surface (9):

$$\mathcal{O} \equiv \left\{ \|s(i, j)\| \leq \rho^*(i, j) \right\} \quad (35)$$

where  $\rho^*(i, j) = \max_{k \in \mathcal{N}_1} \sqrt{\hat{\rho}_k(i, j) / \lambda_{\min}(F_k)}$  with

$$\begin{aligned} \hat{\rho}_k(i, j) = & 4(\|E_k^T \mathcal{R}_k E_k\| + \|E_k^T G^T \mathcal{R}_k G E_k\| \\ & + 2\varrho_2^2(\|B_k^T \mathcal{F}_k B_k\| + \|B_k^T G^T \mathcal{F}_k G B_k\|)) \|w(i, j)\|^2 \\ & + 8(\|B_k^T \mathcal{R}_T B_k\| + \|B_k^T G^T \mathcal{R}_T G B_k\|) \\ & \times (\varrho_1 + \delta_k)^2 \|x(i, j)\|^2. \end{aligned}$$

and  $\lambda_{\min}(F_k)$  here denotes the minimum eigenvalue of  $F_k$ .

*Proof.* First, let's define  $s(i, j) = \begin{bmatrix} s^h(i+1, j) \\ s^v(i, j+1) \end{bmatrix}$ , it is easy find that  $s(i, j) = Gx(i, j)$ . Then, we select the Lyapunov candidate as

$$V(i, j) = V_1(i, j) + V_2(i, j) \quad (36)$$

where  $V_1(i, j)$  is defined in Theorem 1,  $V_2(i, j) = s^T(i, j) F_k s(i, j)$ . Similar with the proof in Theorem 1, it is easy to find that

$$\begin{aligned} & \mathbb{E}\{\Delta V_1(i, j)\} \\ & = \mathbb{E}\left\{x(i, j)^T R_\tau x(i, j) - x^T(i, j) R_k x(i, j)\right\} \\ & = \sum_{s=0}^{N_2} \mu_{ks} \left\{ [\bar{A}_{ks} x(i, j) + B_k \bar{\rho}_k(i, j) + E_k w(i, j)]^T \right. \\ & \quad \times \mathcal{R}_k [\bar{A}_{ks} x(i, j) + B_k \bar{\rho}_k(i, j) + E_k w(i, j)] \\ & \quad \left. - x^T(i, j) R_k x(i, j) \right\} \\ & \leq 2x^T(i, j) \sum_{s=1}^{N_2} \mu_{ks} \bar{A}_{ks}^T \mathcal{R}_k \bar{A}_{ks} x(i, j) \\ & \quad + 2[B_k \bar{\rho}_k(i, j) + E_k w(i, j)]^T \mathcal{R}_k \\ & \quad \times [B_k \bar{\rho}_k(i, j) + E_k w(i, j)] \\ & \quad - x^T(i, j) R_k x(i, j) \\ & \leq 2x^T(i, j) \sum_{s=1}^{N_2} \mu_{ks} \bar{A}_{ks}^T \mathcal{R}_k \bar{A}_{ks} x(i, j) \\ & \quad + \bar{\rho}_k^T(i, j) B_k^T \mathcal{R}_k B_k \bar{\rho}_k(i, j) \\ & \quad + w^T(i, j) E_k^T \mathcal{R}_k E_k w(i, j) \\ & \quad - x^T(i, j) R_k x(i, j) \end{aligned} \quad (37)$$



Along with the sliding function in (9), we have

$$\begin{aligned}
& \mathbb{E}\{\Delta V_2(i, j)\} \\
&= \mathbb{E}\left\{s(i, j)^T F_\tau s(i, j) - s^T(i, j) F_k s(i, j)\right\} \\
&= \sum_{s=0}^{N_2} \mu_{ks} \left\{ [\bar{A}_{ks} x(i, j) + B_k \bar{\rho}_k(i, j) + E_k w(i, j)]^T \right. \\
&\quad \times G^T \mathcal{F}_k G [\bar{A}_{ks} x(i, j) + B_k \bar{\rho}_k(i, j) + E_k w(i, j)] \\
&\quad \left. - s^T(i, j) F_k s(i, j) \right\} \\
&\leq 2x^T(i, j) \sum_{s=1}^{N_2} \mu_{ks} \bar{A}_{ks}^T G^T \mathcal{F}_k G \bar{A}_{ks} x(i, j) \\
&\quad + 2[B_k \bar{\rho}_k(i, j) + E_k w(i, j)]^T G^T \mathcal{F}_k \\
&\quad \times G [B_k \bar{\rho}_k(i, j) + E_k w(i, j)] \\
&\quad - s^T(i, j) F_k s(i, j) \\
&\leq 2x^T(i, j) \sum_{s=1}^{N_2} \mu_{ks} \bar{A}_{ks}^T G^T \mathcal{F}_k G \bar{A}_{ks} x(i, j) \\
&\quad + \bar{\rho}_k^T(i, j) B_k^T G^T \mathcal{F}_k G B_k \bar{\rho}_k(i, j) \\
&\quad + w^T(i, j) E_k^T G^T \mathcal{F}_k G E_k w(i, j) \\
&\quad - s^T(i, j) F_k s(i, j)
\end{aligned} \tag{38}$$

Combing (37) and (38), we can infer that

$$\begin{aligned}
& \mathbb{E}\{\Delta V(i, j)\} \\
&= \mathbb{E}\left\{\Delta_1(i, j) + \Delta V_2(i, j)\right\} \\
&\leq x^T(i, j) \left\{ 2 \sum_{s=1}^{N_2} \mu_{ks} \bar{A}_{ks}^T (\mathcal{R}_k + G^T \mathcal{F}_k G) \bar{A}_{ks} \right\} x(i, j) \\
&\quad + \bar{\rho}_k^T(i, j) - x^T(i, j) R_k x(i, j) - \lambda_{\min}(F_k) \|s(i, j)\|^2
\end{aligned} \tag{39}$$

where

$$\begin{aligned}
& \bar{\rho}_k(i, j) \\
&= 4(\|B_k^T \mathcal{F}_k B_k\| + \|B_k^T G^T \mathcal{F}_k G B_k\|) \|\bar{\rho}_k(i, j)\|^2 \\
&\quad + 4(\|E_k^T \mathcal{R}_k E_k\| + \|E_k^T G^T \mathcal{R}_k G E_k\|) \|w(i, j)\|^2
\end{aligned}$$

Recalling the condition (13), we can get an inequality as follows

$$\|\bar{\rho}_k(i, j)\|^2 \leq 2(\varrho_1 + \delta_k)^2 \|x(i, j)\|^2 + 2\varrho_2^2 \|w(i, j)\|^2 \tag{40}$$

It is obvious that  $\bar{\rho}_k(i, j) < \hat{\rho}_k(i, j)$  for any  $k \in \mathcal{N}_1$  after substitute (40) into  $\bar{\rho}_k(i, j)$ . Then, based on the condition (15), when the state trajectories is out of the region  $\mathcal{O}$  around the specified siding surface (9), we can infer that

$$-\lambda_{\min}(F_k) \|s(i, j)\|^2 + \bar{\rho}_k(i, j) < 0 \tag{41}$$

It yields from (34), (37), (39) and (41) that

$$\begin{aligned}
& \mathbb{E}\{\Delta V(i, j)\} \\
&\leq x^T(i, j) \left\{ 2 \sum_{s=1}^{N_2} \mu_{ks} \bar{A}_{ks}^T (\mathcal{R}_k + G^T \mathcal{F}_k G) \bar{A}_{ks} \right. \\
&\quad \left. - R_k \right\} x(i, j) < 0
\end{aligned} \tag{42}$$

which means the state trajectories of the close-loop (12) are strictly decreasing (with mean square) outside the region  $\mathcal{O}$  defined in (35). Now, the proof is complete.  $\square$

**Remark 5.** Remark.

#### D. Synthesis of Asynchronous 2D-SMC Law

It is obvious that, if the theorem 1 and the theorem 2 hold simultaneously, then, the asymptotically mean square stability with an  $H_\infty$  disturbance attenuation performance  $\gamma$  of the closed-loop 2D system (12) and the reachability of the predefined sliding function (9) can be guaranteed simultaneously. That is, the to be determined matrix  $K_s$  in 2D-SMC law (10) should ensure that theorem 1, 2 are established at the same time. Now, in this subsection, we will continue our study with this idea.

**Theorem 3.** Consider the Markov jump system (1) under the Assumption (1) and with the asynchronous 2D-SMC law (10). For a given scalar  $\gamma > 0$ , if there exist matrices  $\tilde{K}_s \in \mathbb{R}^{n_u \times n_x}$ ,  $L_s \in \mathbb{R}^{n_x \times n_x}$ ,  $\tilde{R}_k = \text{diag}\{\tilde{R}_k^h, \tilde{R}_k^v\} > 0$ ,  $\tilde{F}_k > 0$ ,  $\tilde{Q}_{ks} > 0$ ,  $\tilde{T}_{ks} > 0$  and scalars  $\tilde{\epsilon}_k > 0$ , for any  $k \in \mathcal{N}_1, s \in \mathcal{N}_2$ , such that the following inequalities hold:

$$\begin{bmatrix} -\tilde{\epsilon}_k I & \mathcal{B}_k \\ * & \mathcal{R}_k \end{bmatrix} < 0 \tag{43}$$

$$\begin{bmatrix} \mathcal{L}_{ks} & \mathcal{A}_{ks} & \mathcal{G}_{ks} \\ * & \mathcal{R}_k & 0 \\ * & * & \mathcal{F}_k \end{bmatrix} < 0 \tag{44}$$

$$\begin{bmatrix} \mathcal{H}_k & \mathcal{D}_k & \mathcal{P}_{ks} & \mathcal{Y}_{ks} \\ * & \mathcal{I}_k & 0 & 0 \\ * & * & \mathcal{Q}_{ks} & 0 \\ * & * & * & \mathcal{T}_{ks} \end{bmatrix} < 0 \tag{45}$$

where

$$\begin{aligned}
\mathcal{B}_k &= [\sqrt{\lambda_{k1}}\tilde{\epsilon}_k B_k^T \quad \sqrt{\lambda_{k2}}\tilde{\epsilon}_k B_k^T \quad \cdots \quad \sqrt{\lambda_{kN_1}}\tilde{\epsilon}_k B_k^T] \\
\mathcal{R}_k &= \text{diag}\{-\tilde{R}_1, -\tilde{R}_2, \dots, -\tilde{R}_{N_1}\} \\
\mathcal{F}_k &= \text{diag}\{-\tilde{F}_1, -\tilde{F}_2, \dots, -\tilde{F}_{N_1}\} \\
\mathcal{J}_k &= \text{diag}\{-\tilde{\epsilon}_k, -I, -I, -\tilde{\epsilon}_k\} \\
\mathcal{Q}_{ks} &= \text{diag}\{-\tilde{Q}_{k1}, -\tilde{Q}_{k2}, \dots, -\tilde{Q}_{kN_2}\} \\
\mathcal{T}_{ks} &= \text{diag}\{-\tilde{T}_{k1}, -\tilde{T}_{k2}, \dots, -\tilde{T}_{kN_2}\} \\
\mathcal{L}_{ks} &= \text{diag}\{\tilde{Q}_{ks} - L_s^T - L_s, -\tilde{T}_{ks}\} \\
\mathcal{H}_k &= \begin{bmatrix} -\tilde{R}_k & \tilde{R}_k^T D_k^T \\ * & -\gamma^2 I \end{bmatrix} \\
\mathcal{A}_{ks} &= \begin{bmatrix} \sqrt{\lambda_{k1}}\tilde{A}_{ks}^T & \cdots & \sqrt{\lambda_{kN_1}}\tilde{A}_{ks}^T \\ \sqrt{\lambda_{k1}}\tilde{T}_{ks} B_k^T & \cdots & \sqrt{\lambda_{kN_1}}\tilde{T}_{ks} B_k^T \end{bmatrix} \\
\mathcal{G}_{ks} &= \begin{bmatrix} \sqrt{\lambda_{k1}}\tilde{A}_{ks}^T G^T & \cdots & \sqrt{\lambda_{kN_1}}\tilde{A}_{ks}^T G^T \\ 0 & \cdots & 0 \end{bmatrix} \\
\mathcal{D}_{ks} &= \begin{bmatrix} 2(\varrho_1 + \delta_k)\tilde{R}_k & \tilde{R}_k C_k^T & 0 & 0 \\ 0 & 0 & D_k^T & 2\varrho_2 \end{bmatrix} \\
\mathcal{P}_{ks} &= \begin{bmatrix} \sqrt{2\mu_{k1}}\tilde{R}_k & \cdots & \sqrt{2\mu_{kN_2}}\tilde{R}_k \\ 0 & \cdots & 0 \end{bmatrix} \\
\mathcal{Y}_{ks} &= \begin{bmatrix} 0 & \cdots & 0 \\ \sqrt{2\mu_{k1}}I & \cdots & \sqrt{2\mu_{kN_2}}I \end{bmatrix}
\end{aligned}$$

and  $\tilde{A}_{ks} = A_k L_s + B_k \tilde{K}_s$ . Then, the closed-loop system (12) is asymptotically mean square stable with an  $H_\infty$  disturbance attenuation performance  $\gamma$ , and the state trajectories of the considered closed-loop system will be driven into a sliding region  $\mathcal{O}$ , around the predefined sliding surface (9). Moreover, the to be determined matrix  $K_s$  in 2D-SMC law (10) can be chosen as

$$K_s = \tilde{K}_s L_s^{-1} \quad (46)$$

if the LMIs (43)-(45) have feasible solutions.

*Proof.* As we discussed above, the objective is to testify that, the conditions (14)-(16) in Theorem 1 and (34) in Theorem 2 can be guaranteed simultaneously by (43)-(45). Before that, let's make some notations as  $\tilde{K}_s = K_s L_s$ ,  $\tilde{R}_k = R_k^{-1}$ ,  $\tilde{F}_k = F_k^{-1}$ ,  $\tilde{Q}_{ks} = Q_{ks}^{-1}$ ,  $\tilde{T}_{ks} = T_{ks}^{-1}$  and  $\tilde{\epsilon} = \epsilon_k^{-1}$ . Firstly, we will prove that (14) and (43) are equivalent. Pre- and post- multiplying the inequalities given in (43) by  $\text{diag}\{\epsilon_k I, I, I, \dots, I\}$ , respectively, and applying Schur complement after that, then, we can see (14) satisfied. Next, we will verify that (44)-(45) are sufficient to ensure (15)-(16) and (34) hold simultaneously. Using  $\text{diag}\{R_k, I, I, \dots, I\}$  to pre- and post-multiply the inequality given in (45), and applying Schur complement after that, then we will have (15) satisfied. It follows from (44) that  $\tilde{Q}_{ps} - L_s^T - L_s < 0$ , that is  $L_s^T + L_s$  is positive definite, which guarantees that the matrix  $L_s$  is invertible. We can infer the following formulation based on  $Q_{ps} > 0$

$$(\tilde{Q}_{ps} - L_s)^T \tilde{Q}_{ks}^{-1} (\tilde{Q}_{ps} - L_s) \geq 0 \quad (47)$$

which means

$$-L_s^T \tilde{Q}_{ks} L_s \leq \tilde{Q}_{ps} - L_s^T - L_s \quad (48)$$

Recalling the condition give in (45), then we can infer that

$$\begin{bmatrix} \tilde{\mathcal{L}}_{ks} & \mathcal{A}_{ks} & \mathcal{G}_{ks} \\ * & \mathcal{R}_k & 0 \\ * & * & \mathcal{F}_k \end{bmatrix} < 0 \quad (49)$$

where  $\tilde{\mathcal{L}}_{ks} = \text{diag}\{-L_s^T \tilde{Q}_{ks} L_s, -\tilde{T}_{ks}\}$ .

Noting that the slack matrix  $L_s$  is invertible, we denote  $h_{ks} = \text{diag}\{L_s^{-1}, T_{ks}, I, I, \dots, I\}$ . Using  $h_{ks}$  to pre- and post-multiply the inequality given in (49), and applying Schur complement after that, then the following inequality will be obtained

$$\hat{A}_{ks}^T \mathcal{R}_k \hat{A}_{ks} + \check{A}_{ks}^T \mathcal{F}_k \check{A}_{ks} - \text{diag}\{Q_{ks}, T_{ks}\} < 0 \quad (50)$$

where  $\check{A}_{ks} = [\bar{A}_{ks} \quad 0]$ . Combing (15) and (50), we will have

$$\mathcal{A} + 2 \sum_{s=0}^{N_2} \mu_{ks} \left\{ \hat{A}_{ks}^T \mathcal{R}_k \hat{A}_{ks} + \check{A}_{ks}^T \mathcal{F}_k \check{A}_{ks} \right\} < 0 \quad (51)$$

which further implies (34) holds based on the property of positive definite matrix. It is clear that, the gain matrix  $K_s$  can not obtained directly from LMIs in Theorem 3 while  $\tilde{K}_s$  is obtained. Thanks to the matrix  $L_s$  is invertible,  $K_s$  can be calculated indirectly with  $K_s = \tilde{K}_s L_s^{-1}$ . Now, the proof is finished.  $\square$

It is clear that, the conditions in Theorem 3 are presented in the form of Linear matrix inequality, which can be easily solved with the help of Matlab LMI toolbox. Next, we are going to propose an algorithm to obtain the asynchronous 2D-SMC law with the minimum disturbance attenuation performance  $\gamma^*$ . The design procedures of the algorithm are summarized as follows.

1. Select the parameters  $\beta_k$  properly and compute matrix  $G$ , such that the matrix  $GB_k$  is nonsingular for any  $k \in \mathcal{N}_1$ .
2. Compute the scalars  $\varrho_1$  and  $\varrho_2$  in (11).
3. Get the matrices  $\tilde{K}_s$  and  $L_s$  by solving the following optimization problem

$$\min \tilde{\sigma} \text{ subject to (43)-(45) with } \tilde{\sigma} = \gamma^2. \quad (52)$$

4. Then, the sliding mode controller matrix  $K_s$  can be obtained with  $K_s = \tilde{K}_s L_s^{-1}$ .

**Remark 6.** Noting that, the conditions (43)-(45) is presented in the form of linear matrix inequalities, so, the related parameters can be easily computed via Matlab tool box.

#### IV. NUMERICAL EXAMPLE

In this section, we provide an example to verify the effectiveness of the proposed asynchronous 2D-SMC law design method. It is known that some dynamical processes, for instance, gas absorption, air drying and water stream heating can be described by the Darboux equation [18]. It is generally described in the form of partial differential equation, and can be easily converted into a 2D Markov jump system in Roesser model with a similar approach applied in [21]. The considered 2D Markov jump system and the asynchronous 2D-SMC law both consist of two operation modes, that is,  $\mathcal{N}_1 = \{1, 2\}$ ,

$\mathcal{N}_2 = \{1, 2\}$ , and the corresponding system matrices are listed as follows:

Mode 1:

$$A_1 = \begin{bmatrix} -1.0 & 0.4 \\ 0.2 & -1.0 \end{bmatrix}, B_1 = \begin{bmatrix} 0.2 & 0.1 \\ -0.2 & -0.3 \end{bmatrix}, D_1 = \begin{bmatrix} -0.1 \\ 0 \end{bmatrix}$$

$$C_1 = \begin{bmatrix} 0.1 & -0.1 \\ -0.2 & 0.1 \end{bmatrix}, E_1 = \begin{bmatrix} -0.1 \\ 0.1 \end{bmatrix}$$

Mode 2:

$$A_2 = \begin{bmatrix} -0.8 & 0.6 \\ 0.2 & -1.2 \end{bmatrix}, B_2 = \begin{bmatrix} 0.2 & -0.2 \\ -0.1 & -0.2 \end{bmatrix}, D_2 = \begin{bmatrix} -0.1 \\ 0.2 \end{bmatrix}$$

$$C_2 = \begin{bmatrix} -0.2 & -0.1 \\ 0.1 & 0.2 \end{bmatrix}, E_2 = E_1$$

The nonlinear function  $f(x(i, j), r(i, j))$  is set as

$$f((x(i, j), r(i, j))) = \begin{cases} 0.2 \sin \|x(i, j)\|, & r(i, j) = 1 \\ 0.3 \sin \|x(i, j)\|, & r(i, j) = 2 \end{cases}$$

Thus, the parameter  $\delta_k$  can be selected as first mode with  $\delta_1 = 0.2$  and second mode with  $\delta_2 = 0.3$ .

The mode jumps of the considered 2D system and 2D-SMC law are governed by the transition probability matrix  $\Lambda$  and  $\Psi$ , respectively, which are set as follows:

$$\Lambda = \begin{bmatrix} 0.8 & 0.2 \\ 0.3 & 0.7 \end{bmatrix}, \Psi = \begin{bmatrix} 0.6 & 0.4 \\ 0.4 & 0.6 \end{bmatrix}$$

A possible time sequences with two different directions of

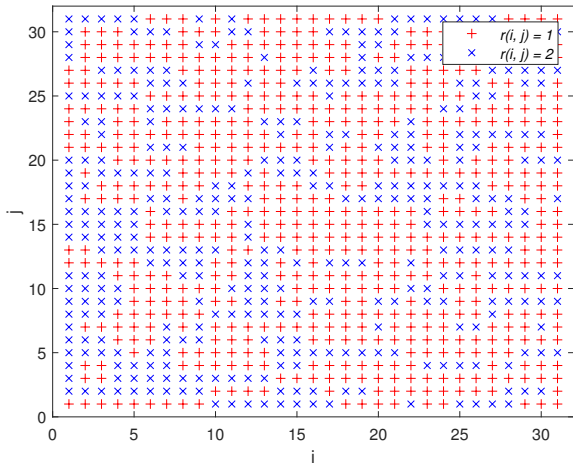


Fig. 1. Modes of the considered 2D system

the system modes and the asynchronous 2D-SMC law modes are depicted in Fig.1 and Fig.2, respectively. By comparison, it is clear that the designed 2D-SMC law run asynchronously with the original 2D system.

Based on the corresponding assumptions, the boundary con-

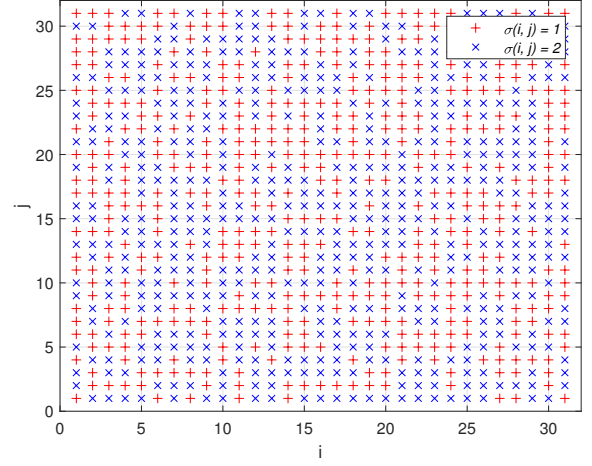


Fig. 2. Modes of the 2D-SMC law

dition  $X_0$  and the exogenous disturbance  $w(i, j)$  are assumed to be

$$x^h(0, j) = \begin{cases} 0.1, & 0 \leq j \leq 10 \\ 0, & \text{elsewhere} \end{cases}$$

$$x^v(i, 0) = \begin{cases} 0.1, & 0 \leq i \leq 10 \\ 0, & \text{elsewhere} \end{cases}$$

$$w(i, j) = \begin{cases} 0.2, & 0 \leq i, j \leq 10 \\ 0, & \text{elsewhere} \end{cases}$$

The horizontal and vertical state responses of the open-loop

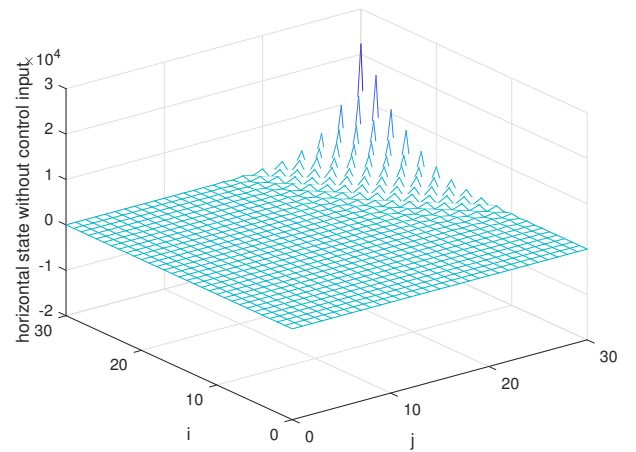


Fig. 3. Horizontal state  $x^h(i, j)$  with control input  $u(i, j) = 0$

system in (1) under  $u(i, j) = 0$  are depicted in Fig.3 and Fig.4, respectively. The obtained result implies the considered 2D system is unstable under zero control input. Next, let's follow the procedures of asynchronous 2D-SMC law design algorithm, and obtain the sliding model controller gain. Letting



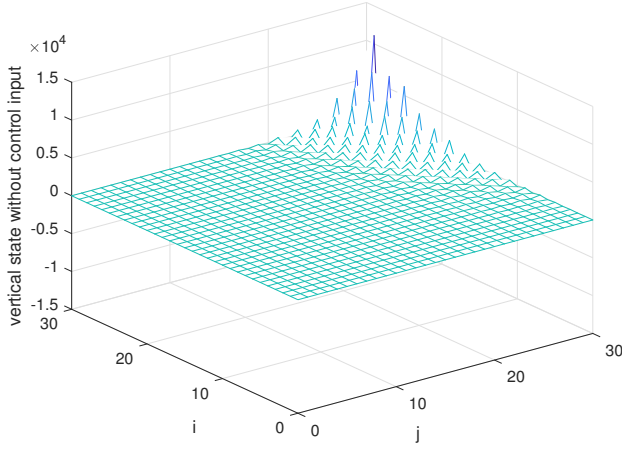


Fig. 4. Vertical state  $x^v(i, j)$  without control input  $u(i, j) = 0$

$\beta_1 = 0.6$  and  $\beta_2 = 0.4$ , and the matrix  $G$  can be calculated as follows:

$$G = \begin{bmatrix} 0.2 & -0.16 \\ -0.02 & -0.26 \end{bmatrix}$$

It's easy to verify that the non-singularity of the matrix  $GB_k$  is satisfied for any  $k \in \mathcal{N}_1$ . The parameters  $\varrho_1$  and  $\varrho_2$  can be calculated as  $\varrho_1 = 0.3$  and  $\varrho_2 = 0.6872$ , respectively. By solving optimization problem (52), we can obtain the following sliding mode controller gains

Model1

$$K_1 = \begin{bmatrix} 4.4147 & -4.3512 \\ -0.6827 & -2.1886 \end{bmatrix}$$

Mode2

$$K_2 = \begin{bmatrix} 4.3706 & -3.8453 \\ -0.6826 & -2.3252 \end{bmatrix}$$

with the minimum  $H_\infty$  disturbance attenuation performance  $\gamma^* = 0.3164$ .

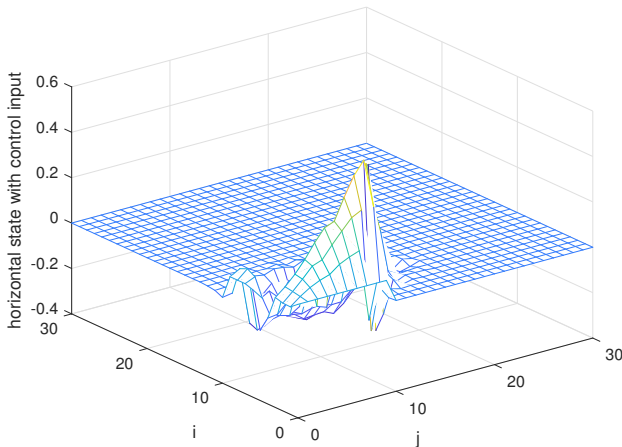


Fig. 5. Horizontal state  $x^h(i, j)$  with asynchronous 2D-SMC law

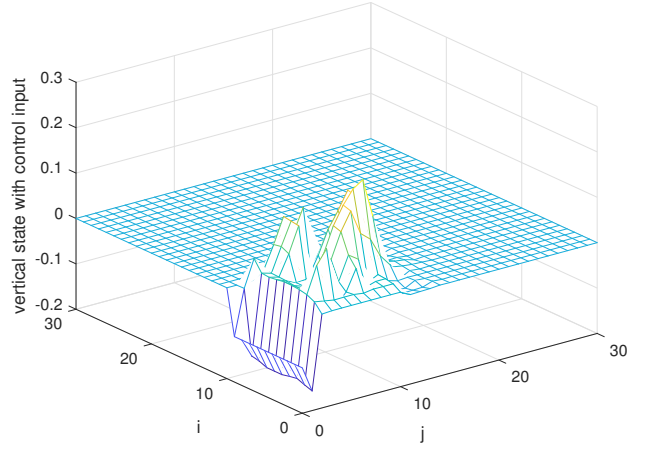


Fig. 6. Vertical state  $x^v(i, j)$  with asynchronous 2D-SMC law

The horizontal and vertical state response of the closed-loop system (12) with asynchronous 2D-SMC law are depicted in Fig.5-6. It is clear that both horizontal and vertical system state converge to zero within finite steps. The sliding surface  $s(i, j)$  and the asynchronous 2D-SMC law can be obtained based on the conditions given in (9) and (10). Then, the horizontal 2D-SMC input, vertical 2D-SMC input, horizontal sliding surface and vertical sliding surface are depicted in Fig.7-reffig10, respectively. Clearly, the observed simulation results imply that the proposed asynchronous 2D-SMC law is effective for the considered 2D system.

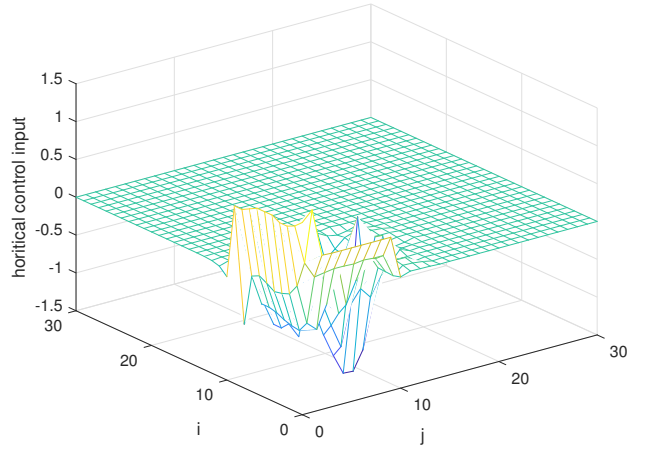


Fig. 7. Horizontal asynchronous 2D-SMC input  $u^h(i, j)$

## V. CONCLUSIONS

This work has investigate the problem of asynchronous SMC for 2D-MJSs on Roesser model. In consideration of the system modes is is not always accessible to the controller, an asynchronous 2D-SMC design method is explored with

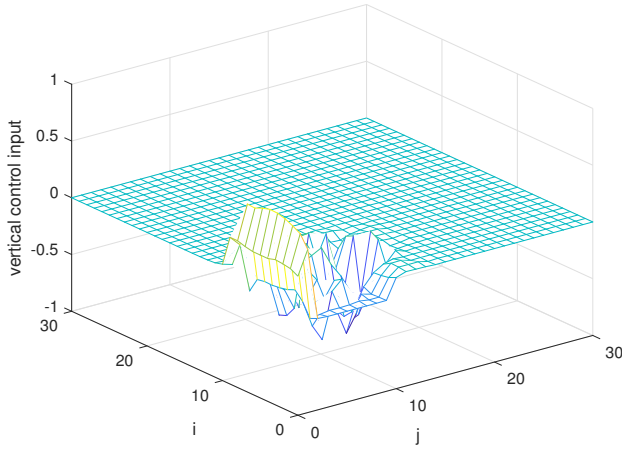


Fig. 8. Vertical asynchronous 2D-SMC input  $u^v(i, j)$

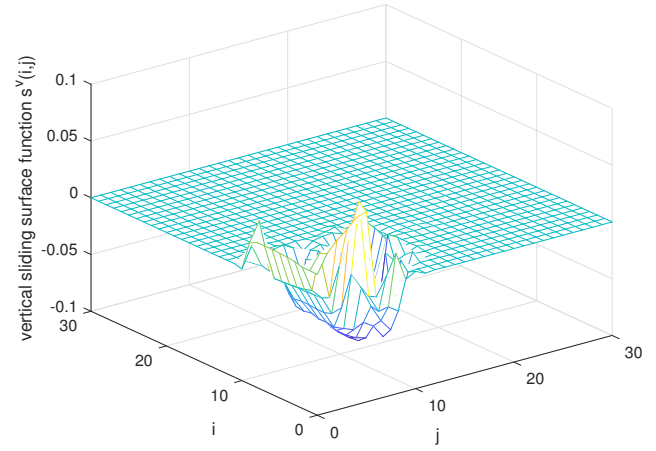


Fig. 10. Vertical sliding surface  $s^v(i, j)$

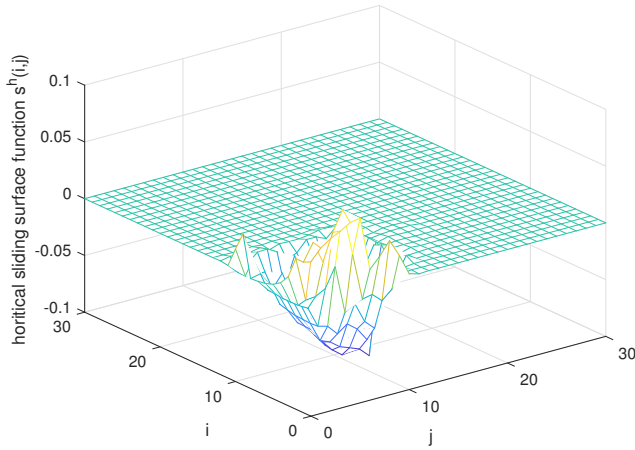


Fig. 9. Horizontal sliding surface  $s^h(i, j)$

hidden Markov model. By utilizing Lyapunov function, the asymptotic mean square stability for the concerned 2D-MJSs and the reachability of the sliding mode dynamics are analyzed, respectively. A sufficient condition is derived that can guarantee the asymptotic mean square stability for the closed-loop system with  $H_\infty$  disturbance attenuation performance and the reachability of the 2D sliding mode dynamics, simultaneously. Finally, the asynchronous 2D-SMC design procedures are summarized as an algorithm whose effectiveness is verified by an numerical example.

#### REFERENCES

- [1] Todorov, Marcos G., and Marcelo D. Fragoso. "New methods for mode-independent robust control of Markov jump linear systems." *Systems & Control Letters* 90 (2016): 38-44.
- [2] Wu, Huai-Ning, and Kai-Yuan Cai. "Mode-independent robust stabilization for uncertain Markovian jump nonlinear systems via fuzzy control." *IEEE Transactions on Systems, Man, and Cybernetics, Part B (Cybernetics)* 36.3 (2005): 509-519.
- [3] Wu, Zheng Guang, et al. "Passivity-Based Asynchronous Control for Markov Jump Systems." *IEEE Transactions on Automatic Control* 62.4(2017):2020-2025.
- [4] Shen, Ying, et al. " $H_\infty$  control of Markov jump time-delay systems under asynchronous controller and quantizer." *Automatica* 99 (2019): 352-360.
- [5] Zhang M, Shi P, Liu Z, et al. Fuzzy Model-based Asynchronous  $H_\infty$  Filter Design of Discrete-Time Markov Jump Systems[J]. *Journal of the Franklin Institute*, 2017, 354(18).
- [6] Dong, Shanling, et al. "Hidden-Markov-Model-Based Asynchronous Filter Design of Nonlinear Markov Jump Systems in Continuous-Time Domain." *IEEE Transactions on Cybernetics* PP.99:1-11.
- [7] Du, Haibo, et al. "Discrete-time fast terminal sliding mode control for permanent magnet linear motor." *IEEE Transactions on Industrial Electronics* 65.12 (2018): 9916-9927.
- [8] Wang, Yueying, et al. "Sliding mode control of fuzzy singularly perturbed systems with application to electric circuit." *IEEE Transactions on Systems, Man, and Cybernetics: Systems* 48.10 (2017): 1667-1675.
- [9] Baek, Jaemin, Maolin Jin, and Soohee Han. "A new adaptive sliding-mode control scheme for application to robot manipulators." *IEEE Transactions on Industrial Electronics* 63.6 (2016): 3628-3637.
- [10] Edwards, Christopher, and Sarah Spurgeon. *Sliding mode control: theory and applications*. Crc Press, 1998.
- [11] Li, Fanbiao, et al. "State estimation and sliding mode control for semi-Markovian jump systems with mismatched uncertainties." *Automatica* 51 (2015): 385-393.
- [12] Li, Hongyi, Peng Shi, and Deyin Yao. "Adaptive sliding-mode control of Markov jump nonlinear systems with actuator faults." *IEEE Transactions on Automatic Control* 62.4 (2016): 1933-1939.
- [13] Wang, Yueying, et al. "SMC design for robust stabilization of nonlinear Markovian jump singular systems." *IEEE Transactions on Automatic Control* 63.1 (2017): 219-224.
- [14] Song, Jun, Yugang Niu, and Yuanyuan Zou. "Asynchronous sliding mode control of Markovian jump systems with time-varying delays and partly accessible mode detection probabilities." *Automatica* 93 (2018): 33-41.
- [15] Li, Fanbiao, et al. "Passivity-based asynchronous sliding mode control for delayed singular Markovian jump systems." *IEEE Transactions on Automatic Control* 63.8 (2017): 2715-2721.
- [16] Qi, Wenhai, Guangdeng Zong, and Hamid Reza Karim. "Observer-based adaptive SMC for nonlinear uncertain singular semi-Markov jump systems with applications to DC motor." *IEEE Transactions on Circuits and Systems I: Regular Papers* 65.9 (2018): 2951-2960.
- [17] Roesser, Robert. "A discrete state-space model for linear image processing." *IEEE Transactions on Automatic Control* 20.1 (1975): 1-10.
- [18] Marszalek, Wieslaw. "Two-dimensional state-space discrete models for hyperbolic partial differential equations." *Applied Mathematical Modelling* 8.1 (1984): 11-14.

- [19] E. Rogers, K. Galkowski, W. Paszke, K. L. Moore, P. H. Bauer, L. Hladowski, and P. Dabkowski, Multidimensional control systems: case studies in design and evaluation, Multidimensional Systems and Signal Processing, vol. 26, no. 4, pp. 895-939, 2015.
- [20] Fornasini, Ettore, and Giovanni Marchesini. "Doubly-indexed dynamical systems: State-space models and structural properties." Mathematical systems theory 12.1 (1978): 59-72.
- [21] Du, Chunling, L. Xie, and C. Zhang. " $H_\infty$  control and robust stabilization of two-dimensional systems in Roesser models." Automatica 37.2(2001):205-211.
- [22] Du, Chungling, and Lihua Xie.  $H_\infty$  Control and Filtering of Two-Dimensional Systems. Vol. 278. Springer Science & Business Media, 2002.
- [23] Trinh, Hieu. "Stability of two-dimensional Roesser systems with time-varying delays via novel 2D finite-sum inequalities." IET Control Theory & Applications 10.14 (2016): 1665-1674.
- [24] Ahn, Choon Ki, Ligang Wu, and Peng Shi. "Stochastic stability analysis for 2-D Roesser systems with multiplicative noise." Automatica 69 (2016): 356-363.
- [25] Chesi, Graziano, and Richard H. Middleton. "Robust stability and performance analysis of 2D mixed continuous-discrete-time systems with uncertainty." Automatica 67 (2016): 233-243.
- [26] Ahn, Choon Ki, Peng Shi, and Michael V. Basin. "Two-dimensional dissipative control and filtering for Roesser model." IEEE Transactions on Automatic Control 60.7 (2015): 1745-1759.
- [27] Liu, Diantong, et al. "Adaptive sliding mode fuzzy control for a two-dimensional overhead crane." Mechatronics 15.5 (2005): 505-522.
- [28] Wu, Ligang, and Huijun Gao. "Sliding mode control of two-dimensional systems in Roesser model." IET Control Theory & Applications 2.4 (2008): 352-364.
- [29] Yang, Rongni, and Wei Xing Zheng. "Two-dimensional Sliding Mode Control of Discrete-Time Fornasini-Marchesini Systems." IEEE Transactions on Automatic Control (2019).
- [30] Gao, Huijun, et al. "Stabilization and  $H_\infty$  control of two-dimensional Markovian jump systems." IMA Journal of Mathematical Control and Information 21.4 (2004): 377-392.
- [31] Wu, Zheng-Guang, et al. " $H_\infty$  Control for 2-D Markov Jump Systems in Roesser Model." IEEE Transactions on Automatic Control 64.1 (2018): 427-432.
- [32] Wu, Ligang, et al. " $H_\infty$  filtering for 2D Markovian jump systems." Automatica 44.7 (2008): 1849-1858.
- [33] Wu, Ligang, et al. " $H_\infty$  mode reduction for two-dimensional discrete state-delayed systems." IEEE Proceedings-Vision, Image and Signal Processing 153.6 (2006): 769-784.
- [34] Shen, Ying, et al. "Dissipativity based fault detection for 2D Markov jump systems with asynchronous modes." Automatica 106 (2019): 8-17.