

1

2

3

4

D

D

C





C

B

B

A

A

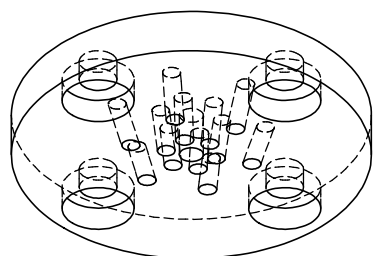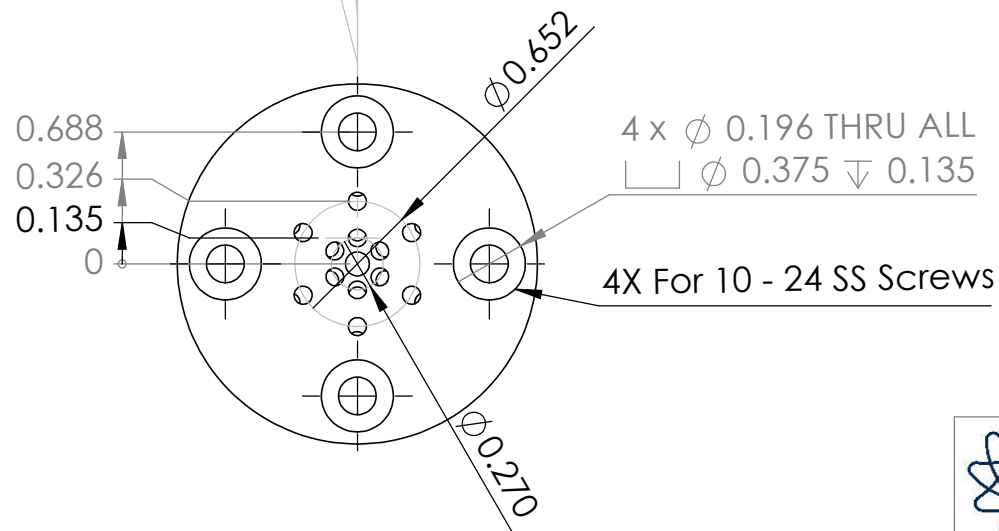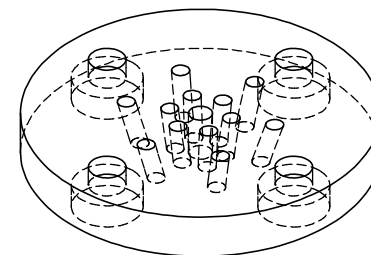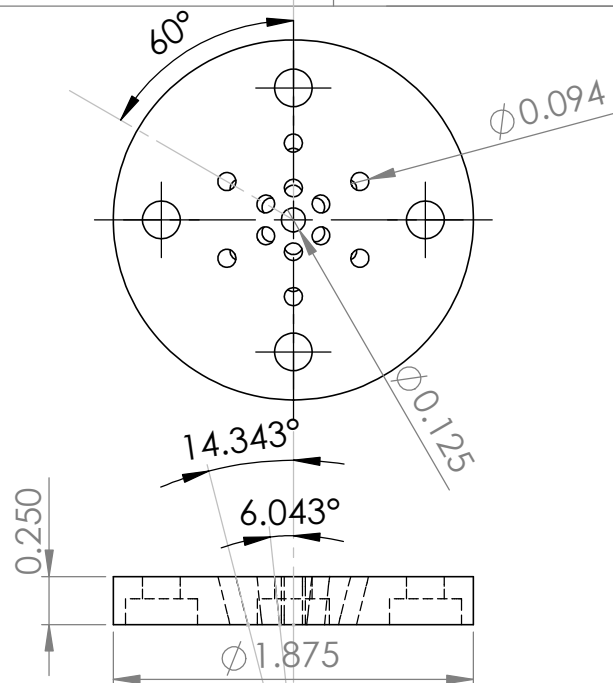

COMMENTS:
UNH rocket team first build.
EXP9A uses 1.010" gas chamber and requires 10-24 screws to allow for good sealing of gas director to injector housing.

GD&T: ASME Y14.5 2009

UNCONTROLLED
COPY WHEN PRINTED



UNLESS OTHERWISE SPECIFIED:

ALL DIMENSIONS IN INCHES
X.XX ±0.01
X.XXX ±0.005
X.XXXX ±0.0005
ANGLES ±1°
SURFACE FINISH 63 µin RA

MATERIAL: Stainless Steel

DRAWN BY
PSS
CHECKED BY

DIVISION

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF **TURBOCAM INC.** ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF **TURBOCAM INC** IS PROHIBITED.

NAME
PSS
DATE
1/23/2019

TITLE:
Injector EXP9A Gas Director

DESCRIPTION: ***

DWG NO: Injector EXP9A Gas Director

REV:

SCALE: 1:1

SHEET 1 OF 1

3

4