# Digital Signal Processing – Assignment 1
# Fourier Transform: Voice Analysis, Enhancement and Aural Exciter

William Chambers (GUID: 2906463C)
Saad Aziz (GUID: 2917444A)

University of Glasgow, School of Engineering

October 19, 2026

## 1 Recordings

Will spoke one English sentence, "*Saad and Will are electrowizards*", recorded at 5 cm and 1 m as uncompressed mono WAV files (48 kHz, 24-bit). The full spectrum up to 20 kHz (the human audible spectrum) is available, and neither recording is clipped (peaks at −22.5 dBFS and −44.5 dBFS).

## 2 Task 1: Time and Frequency Analysis

The samples are normalised by $2^{31}$, the full scale of the 32-bit signed integers used to store the 24-bit audio. The spectrum is $X = \frac{1}{N}\,\mathrm{FFT}(x)$, plotted as $20\log_{10}|X|$ in decibels relative to full scale (dBFS): the loudest level possible in a digital system is 0 dBFS. Only the positive half is shown, because the spectrum of a real signal is mirrored.

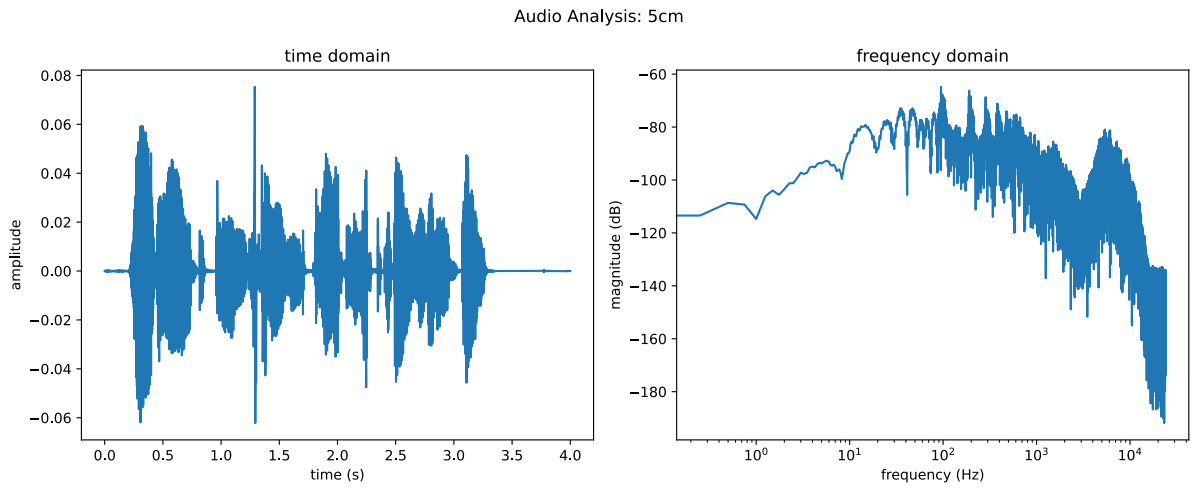



**Figure 1:** Voice recorded at 5 cm: (left) time domain, (right) frequency domain.

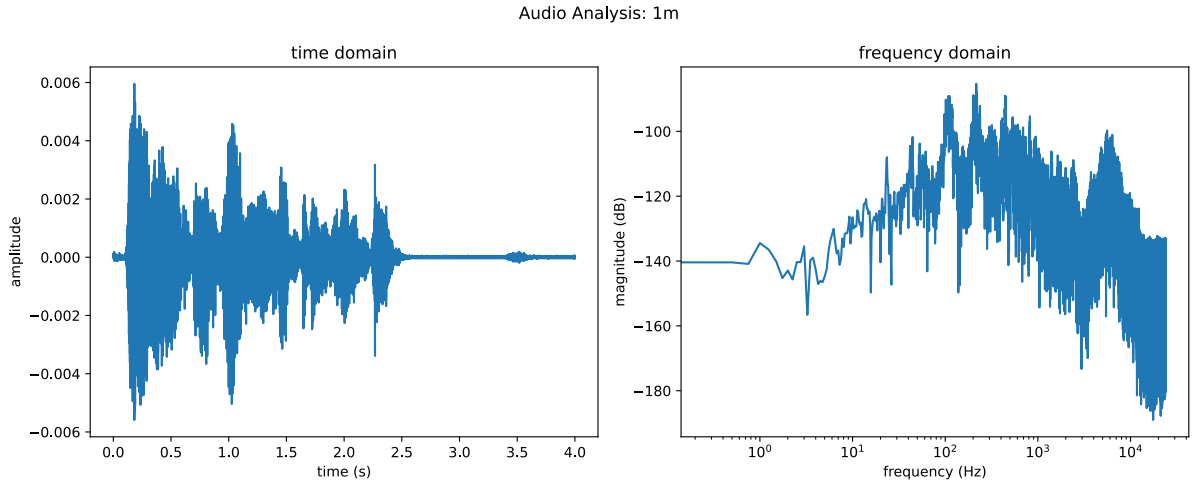



**Figure 2:** Voice recorded at 1 m: (left) time domain, (right) frequency domain.

**Fundamentals.** In both recordings the vowels appear as series of evenly spaced peaks. The lowest peak of each series was taken as the fundamental, because the peaks above it sit at integer multiples of it (e.g. 95, 190, 285 and 380 Hz at 5 cm), which identifies a harmonic series rather than noise. The fundamentals lie between about 94 and 103 Hz at 5 cm and 101 and 112 Hz at 1 m, as expected for an adult male voice. They vary between recordings because these are separate takes. Peaks below about 80 Hz have no harmonic series and were not chosen; these are low-frequency rumble from pop energy and room noise. [MENTION THE PEAKS OF OTHER VOWELS?] The main identification is done by looking at the bundled peaks identified figures 3 & 4, but individual peaks are indicative of specific vowel sounds (any vowel may have more than one sound in the english language)

**Consonants.** Above about 2 kHz the harmonic series fades and a broad hump without harmonic structure appears, peaking at 5 kHz to 6 kHz: the energy of consonants such as /s/ and /z/. It is present on the frequency spectrum up to about 14.5 kHz at 5 cm but only 12.5 kHz at 1 m, where the weaker consonant energy is lost in the noise floor sooner. [THERE IS A GAP BETWEEN THE NOISE AND THE CONSONANTS!!!: do you want the graph re-annotated to change this?]

**Noise.** Above 16 kHz at 5 cm and 14 kHz at 1 m, the spectrum is flat. The level is the same in both recordings even though the voice is about 20 dB quieter at 1 m, so it cannot come from the voice: it is most likely electronic noise.

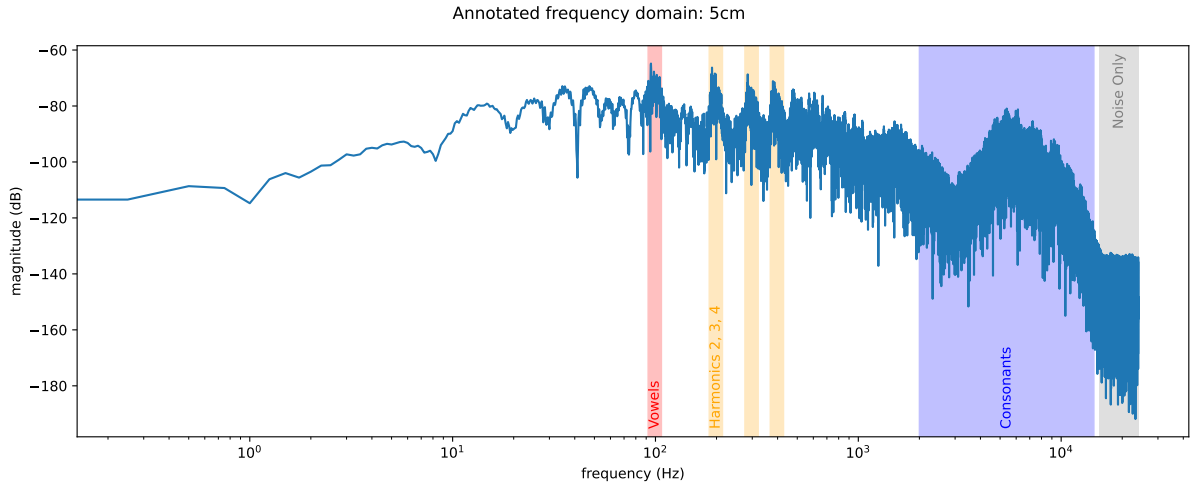



**Figure 3:** Annotated spectrum at 5 cm: vowel fundamentals, harmonics, consonant range and noise-only region.


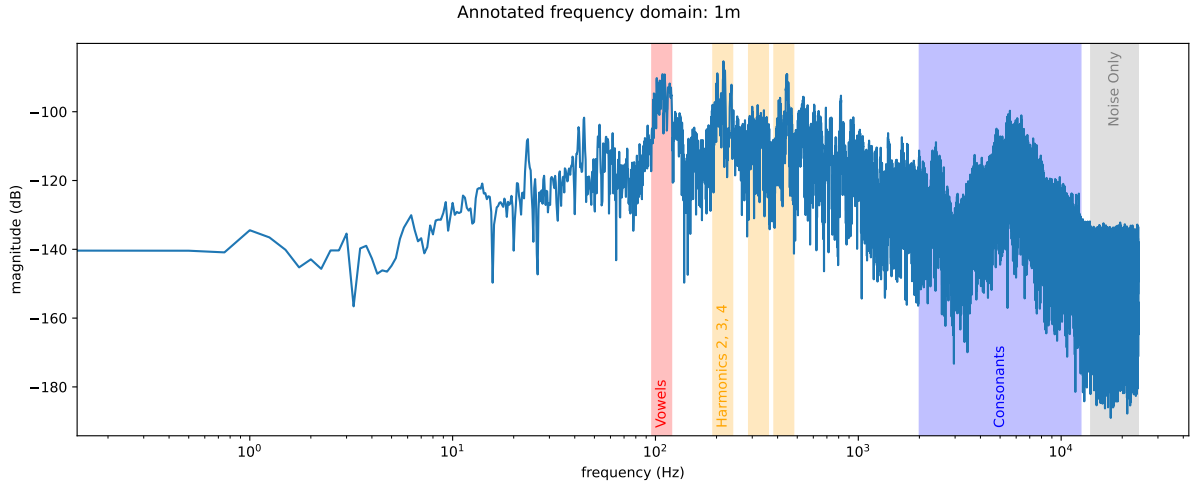



**Figure 4:** Annotated spectrum at 1 m: vowel fundamentals, harmonics, consonant range and noise-only region.

## 3 Task 2: Speech Enhancement

**Method.** Each recording is transformed with the FFT, then every frequency bin is multiplied by a gain array (an array of ones), and the result is transformed back with the IFFT. `gain_ctrl(low, high, dB, q)` adds one band to the array: a trapezoid over the selected frequencies, converted to linear gain with $10^{\mathrm{dB}/20}$ and mirrored onto the negative frequencies so that the IFFT output is real (`np.real` only removes rounding residue). Hard band edges caused audible ringing (Gibbs phenomenon), so each edge ramps over a fraction $q$ of the band width, with the nominal edge at the middle of the ramp. An identity test (gain array at default values) confirmed that the pipeline alone does not change the signal at all. The outputs are scaled by $2^{31} - 1$ and saved as 32-bit integer WAV.

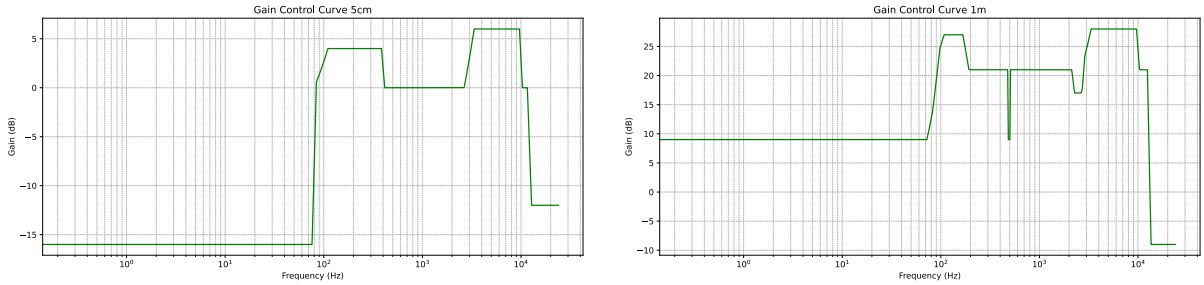


**(a)** 5 cm **(b)** 1 m

**Figure 5:** Gain control curves applied to each recording (net gain per frequency, including the 21 dB level match at 1 m).

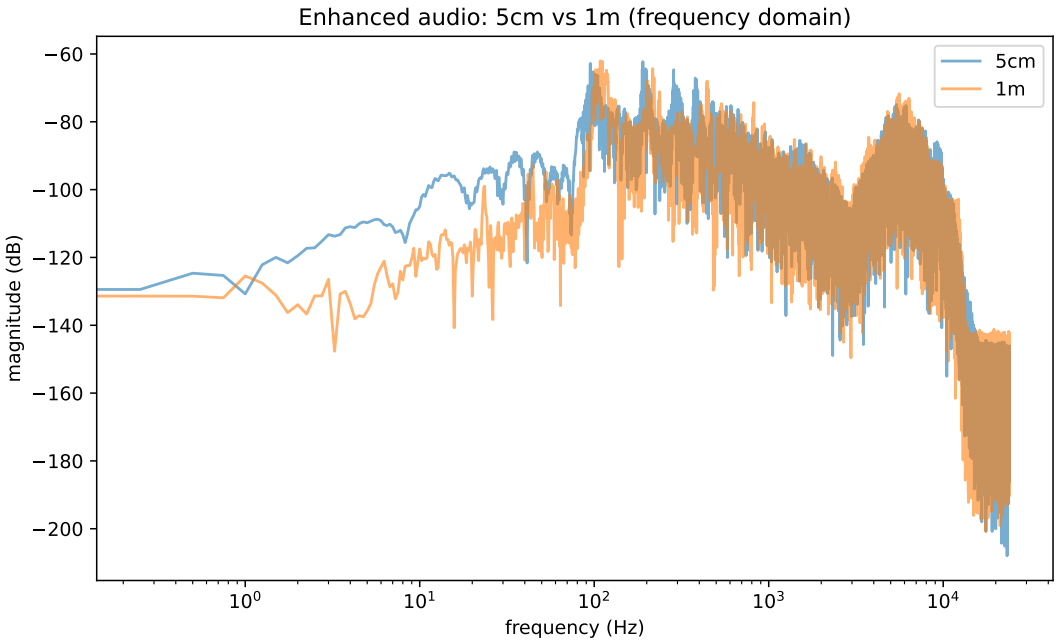



**Figure 6:** Enhanced spectra, 5 cm vs 1 m.

**5 cm.** A low cut of −16 dB below 80 Hz removes rumble and part of the pop energy (the pop at 1.28 s to 1.30 s lies mostly below 150 Hz). It stops at 80 Hz to keep the ≈95 Hz fundamental, so the pop is slightly reduced but not removed. The low end is already strong at this proximity, so the bass boost is small: 4 dB between 95 Hz to 400 Hz; this range covers the first few harmonics for depth. The consonant region (3 kHz to 10 kHz) is boosted by 6 dB for clarity and 'brightness'. A high cut of −12 dB above 12.2 kHz reduces hiss. It is kept moderate because consonant energy extends to 14.5 kHz at this distance. [Make into a table?]

**Table 1:** EQ Settings for 5 cm Recording

| Band (Hz) | Gain (dB) | $q$ | Purpose |
|---|---|---|---|
| 0–80 | −16 | 0.1 | Low cut: rumble and pop energy |
| 95–400 | +4 | 0.1 | Bass boost: first harmonics |
| 3000–10000 | +6 | 0.1 | Brightness: consonant region |
| 12200–Nyq | −12 | 0.1 | High cut: hiss |

[CHECK REASONS]

**1 m.** The whole spectrum is raised by 21 dB to match the volume of both recordings. A low cut of −12 dB below 85 Hz removes room rumble. Bass is lost with distance, so the gain is larger to compensate: 6 dB between 95 Hz to 180 Hz, around the fundamental. The low cut and bass boost edges meet at 85 Hz to 95 Hz and initially rang with $q = 0.1$, so both use $q = 0.3$, which removed the ringing at about 95 Hz. A −12 dB notch at 480 Hz to 505 Hz removes a 483 Hz tone visible in the noise floor after the voice ends. A −4 dB cut at 2.2 kHz to 2.8 kHz reduces the room resonance around 2.5 kHz. The consonant region is boosted by 7 dB, slightly more than at 5 cm, because the distant recording is duller. A −30 dB high cut above 13 kHz, just above where the consonants end, removes the hiss raised by the level match. There was no pop at this distance; however, since the volume was increased so much, the SNR was reduced to the point that the signal sounds noisy. [Tabulate?]

**Table 2:** EQ Settings for 1 m Recording

| Band (Hz) | Gain (dB) | $q$ | Purpose |
|---|---|---|---|
| 0–Nyq | +21 | 0 | Volume match to 5 cm peaks |
| 0–85 | −12 | 0.3 | Low cut: room rumble |
| 95–180 | +6 | 0.3 | Bass boost: restore depth |
| 480–505 | −12 | 0.25 | Notch: 500 Hz spike |
| 2200–2800 | −4 | 0.25 | Room resonance |
| 3000–10000 | +7 | 0.1 | Brightness |
| 13000–Nyq | −30 | 0.1 | High cut: hiss |

[CHECK REASONS]

## 4 Task 3: Aural Exciter

**Design.** The exciter follows the Aphex sidechain (Figure 7), ignoring the Big Bottom sidechain, and runs on the raw 5 cm recording. A band-pass filter is created by zeroing all FFT bins outside a specified region (two `gain_ctrl` cuts). A band-pass was used instead of the tunable high-pass, so that less of the voice enters the non-linearity and fewer unwanted harmonics are created. The band is normalised to a peak of 1, so that the drive does not depend on the recording level, and passed through $\tanh(\text{drive} \cdot x)$. This is almost linear for small inputs and compresses progressively as they grow. Because tanh is an odd function, it creates only odd-order harmonics. A second band-pass keeps the wanted products further up the spectrum, which are scaled by the mix value and added to the dry signal. The pop was not removed before processing; however, since it lies mostly below the sidechain band, the pop is barely amplified.

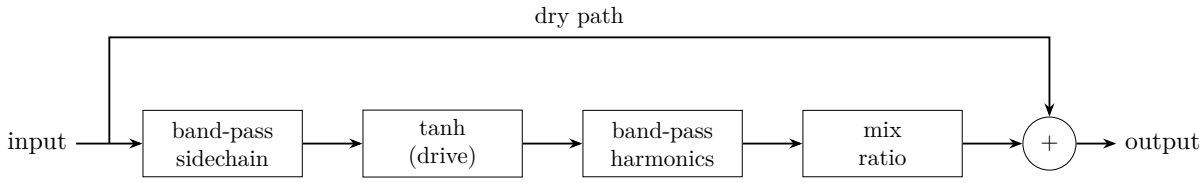



**Figure 7:** Block diagram of the implemented exciter.

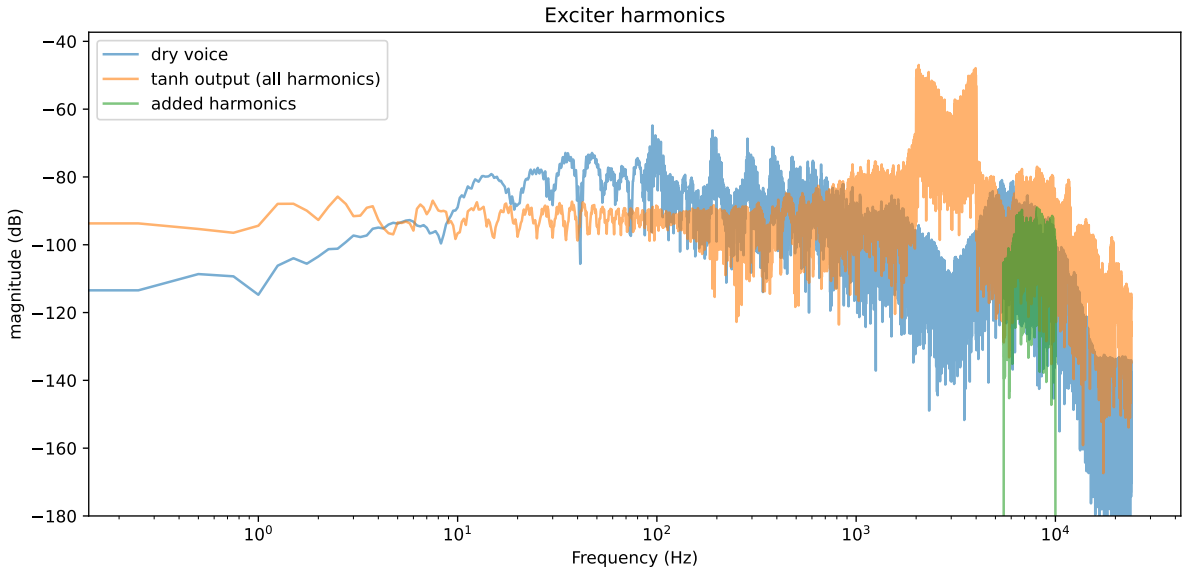



**Figure 8:** Final design: dry voice, full tanh output and the added harmonics. The tanh output contains only odd harmonics of the sidechain band.

**Iterations.** The versions are summarised in Table 3.

**Table 3:** Exciter versions (dry recording: peak 0.0753, RMS 0.00822).

| Version | Sidechain (Hz) | Keep band (Hz) | Drive | Mix | Output peak | RMS |
|---|---|---|---|---|---|---|
| V1 | 1750–2250 | 5000–7000 | 10 | 0.5 | 0.242 | 0.02523 |
| V2 | 1750–2250 | 5000–7000 | 3 | 0.1 | 0.075 | 0.00830 |
| V3 | 2000–4000 | 4000–12000 | 3 | 0.25 | 0.130 | 0.00835 |
| V4 | 2000–4000 | 5500–12000 | 6 | 0.15 | 0.099 | 0.00857 |
| V5 (final) | 2000–4000 | 5500–10000 | 4 | 0.25 | 0.116 | 0.00845 |

**V1:** sidechain 1750 Hz to 2250 Hz, centred on 2 kHz so that its 3rd harmonic lands at 6 kHz, where the ear is most sensitive; keep band 5 kHz to 7 kHz; drive 10, mix 0.5. The plot confirms that only odd harmonics appear (6, 10 and 14 kHz), but the voice sounds robotic and metallic, and the output peak is very large, so the drive and mix were reduced.

**V2:** drive 3, mix 0.1. The peak is unchanged and the “k” and click sounds are clearer, but the effect is confined to one narrow region, so the bands were widened.

**V3:** sidechain 2 kHz to 4 kHz (3rd harmonics now span 6 kHz to 12 kHz), keep band 4 kHz to 12 kHz, mix 0.25. The effect is broader but rings, and the peak rises to 1.7 times the dry peak.

**V4:** the keep band starts at 5.5 kHz, just below the lowest 3rd harmonic, and ends at 12 kHz; mix 0.15; drive raised in steps to 6. The effect is clearly audible, but the consonants become too prominent (a lisp effect).

**V5 (final):** drive back to 4, keep band ending at 10 kHz to remove the content behind the lisp, and the mix tuned by ear to 0.25.

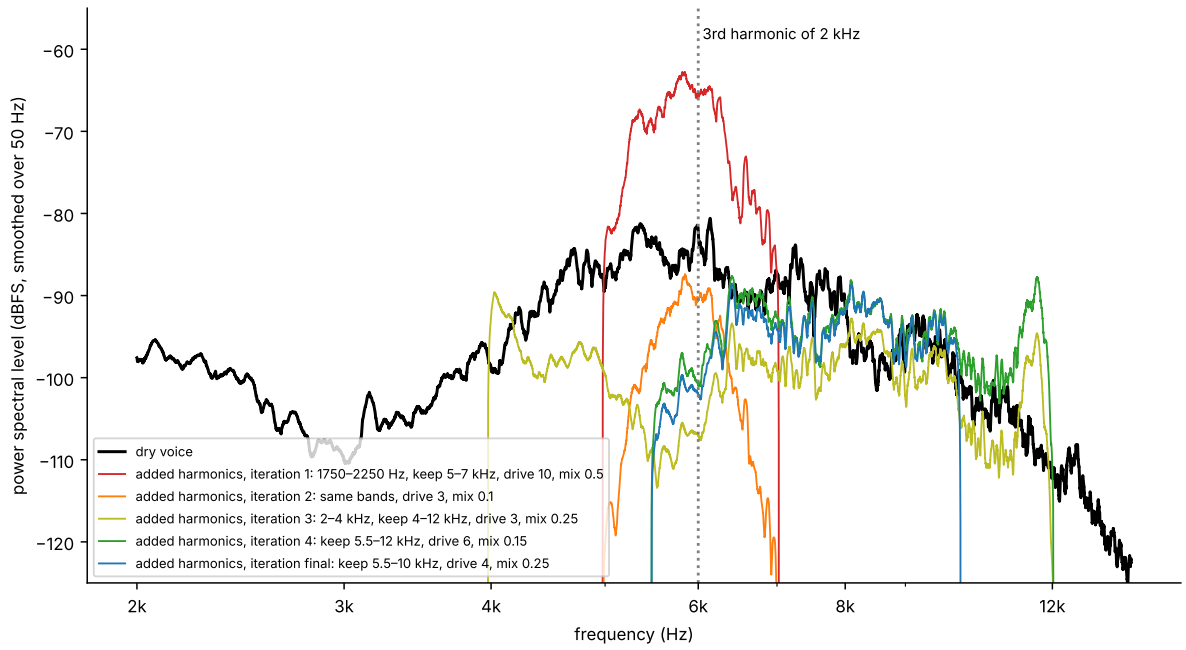



**Figure 9:** Dry voice and the products added by each version, 2 kHz to 14 kHz (power level smoothed over 50 Hz). The dotted line marks 6 kHz, the third harmonic of the 2 kHz sidechain; the products added by V1 exceed the voice by 15 dB there.

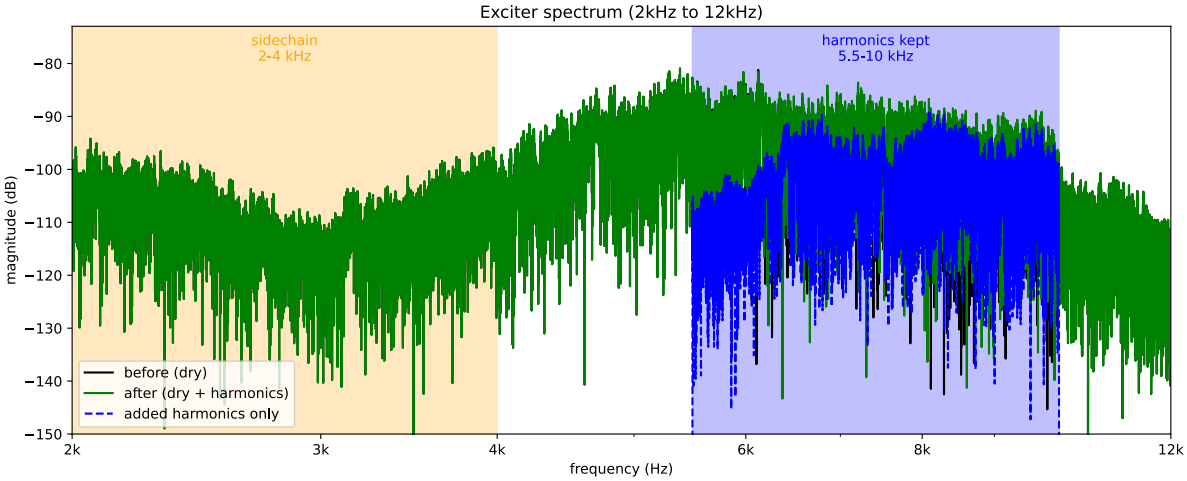



**Figure 10:** Final design, 2 kHz to 12 kHz: spectrum before (dry) and after the exciter, and the added harmonics only, with the sidechain band (2 kHz to 4 kHz) and the harmonics kept (5.5 kHz to 10 kHz) marked.

**Final design.** Sidechain 2 kHz to 4 kHz, drive 4, keep band 5.5 kHz to 10 kHz, mix 0.25. The keep band holds the 3rd harmonics of 2 kHz to 3.3 kHz and excludes both the sidechain band itself and the content above 10 kHz. The output volume is roughly the same RMS and the peak rises by 3.7 dB. With $\mathrm{RMS} = \sqrt{\frac{1}{N}\sum_n x[n]^2}$ over the whole recording, the level changes are

$$\Delta L_{\mathrm{RMS}} = 20\log_{10}\frac{\mathrm{RMS}_{\mathrm{out}}}{\mathrm{RMS}_{\mathrm{dry}}} = 20\log_{10}\frac{0.00845}{0.00822} = 0.24\,\mathrm{dB},$$

$$\Delta L_{\mathrm{peak}} = 20\log_{10}\frac{0.1157}{0.0753} = 3.73\,\mathrm{dB}.$$

The k and s sounds are more pronounced and the voice sounds closer, while its level barely changes, which is the intended effect of an exciter.

# A Acknowledgement of GenAI Use

**Tools:** Claude Opus 5.5 (Anthropic); Claude Sonnet 5.5 (Anthropic); Gemini 3.1 Pro (Google), plus various other Gemini versions for AI overviews (Google); GitHub Copilot (Microsoft).
**Use:** Claude Opus 5.5 was used to debug code syntax and logic and to suggest ways of making the code more efficient; to suggest the dBFS scale for the frequency-domain magnitude; to suggest an optimised pipeline for Task 2; to check the Task 1 readings against our own analysis; to explain the exciter and how a non-linearity creates harmonics; to fix a gain curve that rose at both ends of the spectrum; and to plot the overlay of both enhanced recordings and the harmonics for Task 3. Gemini 3.1 Pro was used for debugging, building LaTEX framework for the report, helping plot graphs, and checking the report. Gemini AI overviews for general lookups, and GitHub Copilot for inline autocomplete.
**Own contribution:** The recordings; the visual analysis of the spectra in Task 1; the choice of every gain setting in Task 2 and of every parameter in the iterative Task 3 design, judged by listening and by the spectrum plots; the code structure; and writing, checking and editing this report.

# B Usage instructions

From a terminal, while in the project folder, run:

`python3 run_tasks.py`

The scripts need `numpy`, `scipy` and `matplotlib`. The plots of Tasks 1–3 are opened with `plt.show()`. The files `enhanced_5cm.wav`, `enhanced_1m.wav` and `exciter_5cm_5.wav` are written to the working directory. `run_tasks.py` imports `task1_plot.py`, `task2_enhance.py` and `task3_exciter.py`, which must be in the same folder.

# C Python Code

## C.1 run_tasks.py

```python
import os
import matplotlib.pyplot as plt
from scipy.io import wavfile
import numpy as np
# IFNDEF type statements not required in python, it wont try to import a file twice.

os.chdir(os.path.dirname(os.path.abspath(__file__))) # run from any folder: wav/ inputs and .wav outputs are relative to this file

# Assignmnet files
from task1_plot import plot_audio
from task2_enhance import gain_ctrl, enhancer, plot_gain_array
from task3_exciter import exciter, plot_harmonics

# --- Recommended: 48kHz | Signed 24-bit PCM | Mono (imperative) ---

# Load audio files and normalise (32 bit int)
sample_rate_5cm, audio_5cm = wavfile.read("wav/5cm.wav")
audio_5cm = audio_5cm / (2**31)  # NORMALISE (32bits to store 24bit audio, bitwise shift?)

sample_rate_1m, audio_1m = wavfile.read("wav/1m.wav")
audio_1m = audio_1m / (2**31)


# ------ TASK 1 ------
```

```
25
26  # Plot audio files
27  plot_audio("5cm", sample_rate_5cm, audio_5cm)
28  plot_audio("1m", sample_rate_1m, audio_1m)
29
30  # ------ TASK 2 ------
31
32  #array of n ones (floats). Each value is a multiplier for the corresponding bin
33  gain_array_5cm = np.ones(len(audio_5cm))
34  gain_array_1m = np.ones(len(audio_1m))
35
36  #PUT IN ANOTHER FUNCTION: build gain -> enhance -> save -> plot
37
38  # --- 5cm ---
39  #gain curve - gain_ctrl(Low freq, High freq, Gain change, ..., ..., q=0)
40  gain_ctrl(0, 80, -16, sample_rate_5cm, gain_array_5cm, q=0.1) #LOW CUT: Remove rumble and some
        POP energy
41  gain_ctrl(95, 400, 4, sample_rate_5cm, gain_array_5cm, q=0.1) #BASS BOOST: The first couple
        harmonics for depth
42  gain_ctrl(3000, 10000, 6, sample_rate_5cm, gain_array_5cm, q=0.1) #BRIGHTNESS: The noisy
        consonant region + extra for clarity
43  gain_ctrl(12200, sample_rate_5cm //2 - 1, -12, sample_rate_5cm, gain_array_5cm, q=0.1) #HIGH CUT
        : Remove any hiss
44
45  #apply gain + save
46  plot_gain_array(gain_array_5cm,sample_rate_5cm,"5cm")
47  enhanced_5cm = enhancer(audio_5cm, gain_array_5cm)
48  wavfile.write("enhanced_5cm.wav", sample_rate_5cm, ((2**31-1)*enhanced_5cm).astype(np.int32))
49
50  # --- 1m ---
51  #gain curve
52  gain_ctrl(0, sample_rate_1m//2 - 1, 21, sample_rate_1m, gain_array_1m) #VOLUME: Match to 5cm
        recording (raw RMS is 21dB quieter)
53  gain_ctrl(0, 85, -12, sample_rate_1m, gain_array_1m, q=0.3) #LOW CUT: trim room rumble (less '
        boxy')
54  gain_ctrl(95, 180, 6, sample_rate_1m, gain_array_1m, q=0.3)  #BASS BOOST: fundamental higher @1m
         + restoring depth to voice
55  gain_ctrl(480, 505, -12, sample_rate_1m, gain_array_1m, q=0.25)  #Reduce the ~483Hz whine in the
         noise floor (not mains: no 50Hz hum)
56  gain_ctrl(2200, 2800, -4, sample_rate_1m, gain_array_1m, q=0.25)  #ROOM RESONANCE: 1m bump ~2.5
        kHz vs 5cm
57  gain_ctrl(3000, 10000, 7, sample_rate_1m, gain_array_1m, q=0.1) #BRIGHTNESS
58  gain_ctrl(13000, sample_rate_1m//2 - 1, -30, sample_rate_1m, gain_array_1m, q=0.1) #HIGH CUT
        consonants end lower
59
60  #apply gain + save
61  plot_gain_array(gain_array_1m,sample_rate_1m,"1m")
62  enhanced_1m = enhancer(audio_1m, gain_array_1m)
63  wavfile.write("enhanced_1m.wav", sample_rate_1m, ((2**31-1)*enhanced_1m).astype(np.int32)) #
        int32 scaled up (mention in report)
64
65  # --- AUDIO OVERLAY ---
66  def plot_overlay(signals):
67      # signals: list of (label, sample_rate, audio)
68      plt.figure(figsize=(8, 5))
69
70      for label, fs, audio in signals:
71          n = len(audio)
72          mag_fft = 20 * np.log10(np.abs((1/n) * np.fft.fft(audio)) + 1e-12)  # +1e-12 avoids log
        (0)
73          freqs = np.arange(n // 2) * fs / n
74
75          plt.plot(freqs, mag_fft[: n // 2], alpha=0.6, label=label)
```

```
76
77      plt.title("Enhanced audio: 5cm vs 1m (frequency domain)")
78      plt.xlabel("frequency (Hz)")
79      plt.xscale("log")
80      plt.ylabel("magnitude (dB)")
81      plt.legend()
82
83      plt.tight_layout()
84
85  plot_overlay([("5cm", sample_rate_5cm, enhanced_5cm),
86                ("1m", sample_rate_1m, enhanced_1m)])
87  # --- END OF OVERLAY ---
88
89  # ------ TASK 3 ------
90
91  #exciter(.., .., in_low, in_high, keep_lo, keep_hi, drive, mix)
92  #apply exciter + save
93  # --- ATTEMPT1: f = 2kHz (3F = 6kHz). WIDTH = 500Hz
94  #exciter_5cm, nonlin_5cm, harmonics_5cm = exciter(audio_5cm, sample_rate_5cm, 1750, 2250, 5000,
        7000, drive=10, mix=0.5)
95  # --- ATTEMPT2:
96  #exciter_5cm, nonlin_5cm, harmonics_5cm = exciter(audio_5cm, sample_rate_5cm, 1750, 2250, 5000,
        7000, drive=3, mix=0.1)
97  # --- ATTEMPT3:
98  #exciter_5cm, nonlin_5cm, harmonics_5cm = exciter(audio_5cm, sample_rate_5cm, 2000, 4000, 4000,
        12000, drive=3, mix=0.25)
99  # --- ATTEMPT4:
100 #exciter_5cm, nonlin_5cm, harmonics_5cm = exciter(audio_5cm, sample_rate_5cm, 2000, 4000, 5500,
        12000, drive= 6, mix=0.15)
101 # --- ATTEMPT5:
102 #exciter_5cm, nonlin_5cm, harmonics_5cm = exciter(audio_5cm, sample_rate_5cm, 2000, 4000, 5500,
        12000, drive= 6, mix=0.15)
103 # --- ATTEMPT5+:
104 exciter_5cm, nonlin_5cm, harmonics_5cm = exciter(audio_5cm, sample_rate_5cm, 2000, 4000, 5500,
        10000, drive=4, mix=0.25)
105
106 plot_harmonics(audio_5cm, nonlin_5cm, harmonics_5cm, sample_rate_5cm)
107 wavfile.write("exciter_5cm.wav", sample_rate_5cm, ((2**31-1)*exciter_5cm).astype(np.int32))
108
109 # Show audio plots
110 plt.show()
```

## C.2 task1_plot.py

```
1  import numpy as np
2  import matplotlib.pyplot as plt
3  from scipy.fft import fft
4
5  # Function to plot audio data in time and frequency domain
6  def plot_audio(name, sample_rate, audio):
7      plt.figure(figsize=(12, 5))
8
9      # Time domain
10     n = len(audio)
11     time = np.linspace(0, n / sample_rate, num=n)  # array of times
12
13     # Frequency domain
14     audio_fft = (1/n) * fft(audio)
15
16     # decibels relative to full scale (dBFS) - the loudest level possible in a digital system.
17     mag_fft = 20 * np.log10(np.abs(audio_fft))
18     freqs = (np.arange(n // 2) * sample_rate / n)  # frequency bins for plotting (//2 returns
       integer not float)
```

```
19
20      print(f"File: {name}, Sample Rate: {sample_rate}")
21
22      # time domain plot
23      plt.suptitle(f"Audio Analysis: {name}")
24      plt.subplot(1, 2, 1)
25      plt.title("time domain")
26      plt.plot(time, audio)
27      plt.xlabel("time (s)")
28      plt.ylabel("amplitude")
29
30      # frequency domain plot
31      plt.subplot(1, 2, 2)
32      plt.title("frequency domain")
33      plt.plot(freqs, mag_fft[: n // 2])
34      plt.xlabel("frequency (Hz)")
35      plt.xscale("log")  # make logarithmic scale like standard EQ's/visualisers
36      plt.ylabel("magnitude (dB)")
37
38      plt.tight_layout()  # stop axes overlapping
39
40      return None
```

## C.3 task2_enhance.py

```
1   import numpy as np
2   import matplotlib.pyplot as plt #plot the envelope/EQ visualisation?
3   from scipy.fft import fft, ifft
4
5
6   # GAIN CONTROL
7   #function that describes gain adjustments to specific frequency ranges.
8   def gain_ctrl(low, high, amp_dB, sample_rate, gain_array, q=0):
9       """
10      q = 0    -> ramps one FFT bin wide (default) (rectangular)
11      q = 0.25 -> each edge ramps over 25% of the bandwidth (trapazoidal)
12      q = 1    -> ramps meet in the middle (triangular)
13      """
14      n = len(gain_array)
15      half = n // 2
16      bin_hz = sample_rate / n
17      freqs = np.arange(half + 1) * bin_hz
18
19      q = np.clip(q, 0.0, 1.0)                  # >1 would make the ramps cross
20      ramp_hz = max(q * (high - low), bin_hz)   # never narrower than one bin
21      r = ramp_hz / 2
22
23      # bands that start at DC or end at Nyquist: push that ramp outside the spectrum so the ends
        get the full gain
24      if low <= 0:
25          low = -ramp_hz
26      if high >= sample_rate // 2 - 1:
27          high = sample_rate / 2 + ramp_hz
28
29      xp = [low - r, low + r, high - r, high + r]
30      fp = [0.0,     amp_dB,  amp_dB,   0.0]
31      profile_dB = np.interp(freqs, xp, fp, left=0.0, right=0.0)
32
33      gain_array[:half + 1] *= 10.0 ** (profile_dB / 20.0)
34      gain_array[half + 1:] = gain_array[1:n - half][::-1]   # mirror to the negative frequencies
35      return gain_array
36
37  # PLOT GAIN
```

```
def plot_gain_array(gain_array, sample_rate, name):
    n = len(gain_array)
    freqs = (np.arange(n // 2) * sample_rate / n)  # frequency bins for plotting

    plt.figure(figsize=(10, 5))
    plt.title("Gain Control Curve " + name)
    plt.plot(freqs, 20 * np.log10(np.abs(gain_array[:n // 2])), color='green')
    plt.xscale("log")
    plt.xlabel("Frequency (Hz)")
    plt.ylabel("Gain (dB)")
    plt.grid(which='both', linestyle='--', linewidth=0.5)
    plt.tight_layout()  # plt.show() is called once at the end of run_tasks.py

    return None

# --- ENHANCER ---
#takes gain array and applies it to audio
def enhancer(audio, gain_array):

    #FFT the full signal (all (n) bins)
    audio_fft = fft(audio)

    #multiply the bins by gain_array
    audio_enhanced = audio_fft * gain_array

    #IFFT gives back all (n) samples, then keep the real part
    audio_ifft = ifft(audio_enhanced)
    audio_ifft_real = np.real(audio_ifft) #extract the real part (IM part should be ~0 since
    gain array is mirrored)

    return audio_ifft_real
```

## C.4 task3_exciter.py

```
import numpy as np
import matplotlib.pyplot as plt
from scipy.fft import fft

from task2_enhance import gain_ctrl, enhancer

    #Dry path

    #Exciter sidechain (HPF: 800-6kHz)

    # Big bottom sidechain (LPF: 50-190Hz)

    #Plot spectrum zoomed between 2-12kHz before and after each change (report: annotated graphs
    )

#Band selection (used for both the sidechain and the harmonic selection)
def band_pass(audio, sample_rate, lo, hi):
    gain_array = np.ones(len(audio))
    gain_ctrl(0, lo, -np.inf, sample_rate, gain_array) #low cut (0-lo)
    gain_ctrl(hi, sample_rate//2 -1, -np.inf, sample_rate, gain_array) #high cut (hi+)
    return enhancer(audio, gain_array)

def exciter(audio, sample_rate, in_lo, in_hi, keep_lo, keep_hi, drive, mix):
    #isolate the band
    sidechain_exciter = band_pass(audio, sample_rate, in_lo, in_hi)
    sidechain_exciter = sidechain_exciter / np.max(np.abs(sidechain_exciter)) #peak of 1, so
    drive is always effective

    #introduce non-linearity
```

```
    nonlin = np.tanh(drive * sidechain_exciter)

    #isolate the band around 6kHZ (5-7kHz? [TUNE]) - this rejetcs 5th harmonics since they lie outside the region
    target_band = band_pass(nonlin, sample_rate, keep_lo, keep_hi)

    #MIXER
    harmonics = mix * target_band
    return audio + harmonics, nonlin, harmonics #output, all harmonics from tanh, harmonics actually added

#Plot the harmonics on their own (for report)
def plot_harmonics(audio, nonlin, harmonics, sample_rate):
    n = len(audio)
    freqs = (np.arange(n // 2) * sample_rate / n)  # frequency bins for plotting

    plt.figure(figsize=(10, 5))
    plt.title("Exciter harmonics")
    for label, x in (("dry voice", audio), ("tanh output (all harmonics)", nonlin), ("added harmonics", harmonics)):
        mag_fft = 20 * np.log10(np.abs((1/n) * fft(x)[:n // 2]) + 1e-12)  # +1e-12 avoids log(0)
        plt.plot(freqs, mag_fft, alpha=0.6, label=label)
    plt.xscale("log")
    plt.xlabel("Frequency (Hz)")
    plt.ylabel("magnitude (dB)")
    plt.ylim(bottom=-180)
    plt.legend()
    plt.tight_layout()

#ALSO PLOT COMPARISONS OF DIFFERENT DRIVE LEVELS
#TUNE THE SYSTEM AND RECORD IT TO SHOWCASE ITERATIVE DEVELOPMENT (REPORT)
```