

Multi-Unit Battery Charger

PMPN4686_ User Guide

JULY 2025

© 2025 Motorola Solutions, Inc. All Rights Reserved.



MN010838A01-AA

Contents

- Safety and Legal..... 3**
- Contact Us..... 7**
- Icon Conventions..... 8**
- Style Conventions..... 9**
- Chapter 1: Charger Overview..... 10**
 - 1.1 Charger Accessories Overview..... 11
 - 1.2 Authorized Batteries, Power Cords, and Power Supplies..... 11
- Chapter 2: Charger Operations..... 12**
 - 2.1 Charging the Batteries..... 12
 - 2.2 Charging Indications..... 13
 - 2.3 Combining the Multi-Unit Chargers..... 13
 - 2.4 Separating the Multi-Unit Chargers..... 15
 - 2.5 Mounting the Mounting Bracket to the Wall..... 16
 - 2.6 Preparing Chargers for Desktop Charging..... 18
 - 2.7 Preparing Chargers for Vertical Charging Position..... 19

Safety and Legal

This section provides the safety and legal information for this product.

Certification Markings



Contact Address

European Union Contact

Motorola Solutions,
Czerwone Maki 82,
30-392 Krakow, Poland

UK Contact

Motorola Solutions UK Ltd.,
Nova South, 160 Victoria Street,
London, SW1E 5LB,
United Kingdom

Intellectual Property and Regulatory Notices

Copyrights

The Motorola Solutions products described in this document may include copyrighted Motorola Solutions computer programs. Laws in the United States and other countries preserve for Motorola Solutions certain exclusive rights for copyrighted computer programs. Accordingly, any copyrighted Motorola Solutions computer programs contained in the Motorola Solutions products described in this document may not be copied or reproduced in any manner without the express written permission of Motorola Solutions.

No part of this document may be reproduced, transmitted, stored in a retrieval system, or translated into any language or computer language, in any form or by any means, without the prior written permission of Motorola Solutions, Inc.

Trademarks

MOTOROLA, MOTO, MOTOROLA SOLUTIONS, and the Stylized M Logo are trademarks or registered trademarks of Motorola Trademark Holdings, LLC and are used under license. All other trademarks are the property of their respective owners.

License Rights

The purchase of Motorola Solutions products shall not be deemed to grant either directly or by implication, estoppel or otherwise, any license under the copyrights, patents or patent applications of Motorola Solutions, except for the normal nonexclusive, royalty-free license to use that arises by operation of law in the sale of a product.

Open Source Content

This product may contain Open Source software used under license. Refer to the product installation media for full Open Source Legal Notices and Attribution content.

European Union (EU) and United Kingdom (UK) Waste of Electrical and Electronic Equipment (WEEE) Directive



The European Union's WEEE directive and the UK's WEEE regulation require that products sold into EU countries and the UK must have the crossed-out wheeled bin label on the product (or the package in some cases). As defined by the WEEE directive, this crossed-out wheeled bin label means that customers and end users in EU and UK countries should not dispose of electronic and electrical equipment or accessories in household waste.

Customers or end users in EU and UK countries should contact their local equipment supplier representative or service center for information about the waste collection system in their country.

Disclaimer

Please note that certain features, facilities, and capabilities described in this document may not be applicable to or licensed for use on a specific system, or may be dependent upon the characteristics of a specific mobile subscriber unit or configuration of certain parameters. Please refer to your Motorola Solutions contact for further information.

© 2025 Motorola Solutions, Inc. All Rights Reserved

Supplier's Declaration of Conformity

Supplier's Declaration of Conformity

Per FCC CFR 47 Part 2 Section 2.1077(a)



Responsible Party

Name: Motorola Solutions, Inc.

Address: 2000 Progress Pkwy, Schaumburg, IL. 60196

Phone Number: 1-800-927-2744

Hereby declares that the product:

Model Name: **Multi-Unit Charger**

conforms to the following regulations:

Class B Digital Device

1. This device may not cause harmful interference, and

2. This device must accept any interference received, including interference that may cause undesired operation.



NOTE:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio or TV technician for help.

For Australia Only

This provision applies to products and services supplied by Motorola Solutions to consumers within the meaning of the Australian Consumer Law. This warranty is given by Motorola Solutions Australia Pty Limited (ABN16 004 742 312) of Tally Ho Business Park, 10 Wesley Court, Burwood East, Victoria. Our goods come with guarantees that cannot be excluded under the Australia Consumer Law. For major failures with the service, you are entitled:

- To cancel your service contract with us: and
- To a refund for the unused portion, or to compensation for its reduced value.

You are entitled to choose a replacement or refund for a major failure with goods. If a failure with the goods or service does not amount to a major failure, you are entitled to have the failure rectified in a reasonable time. If this is not done, you are entitled to a refund for the goods, and to cancel the contract for the service and obtain a refund of any unused portion. You are also entitled to be compensated for any other reasonably foreseeable loss or damage from a failure in the goods or service. If you have any queries, please call Motorola Solutions Australia at 1800 457 439. You may also visit our website: https://www.motorolasolutions.com/en_xa/support.html for current warranty terms.

Important Safety Instructions

This document contains important safety and operating instructions.

Before using the battery charger, read all the instructions and cautionary markings on the charger and the battery.



WARNING: Read these instructions carefully and save them for future reference.

- To reduce the risk of damage to the power cord, pull the plug rather than the cord when disconnecting the power cord from the AC outlet or the charger.
- To reduce the risk of fire or electric shock, avoid using an extension cord. If an extension cord must be used, ensure that the cord size is 18 AWG for lengths of up to 6.5 feet (2 m), and 16 AWG for lengths up to 9.8 feet (3 m).
- To reduce the risk of fire, electric shock, or injury, do not operate the charger if it is broken or damaged in any way. Take it to a qualified Motorola Solutions service representative.
- To reduce the risk of fire or electric shock, do not disassemble the charger. It is not repairable and replacement parts are not available.
- To reduce the risk of electric shock, unplug the charger power adapter from the AC outlet before attempting any maintenance or cleaning.
- To reduce the risk of injury, charge only the rechargeable authorized batteries. Other batteries may explode, causing personal injury and damage.
- To reduce the risk of fire, electric shock, or injury, only use the accessories recommended by Motorola Solutions.
- Changes or modifications made to this device, not expressly approved by Motorola Solutions, could void the authority of the user to operate this equipment.

Operational Safety Guidelines

- This equipment is not suitable for outdoor use. Use only in dry locations and condition.
- Maximum ambient temperature around the charger must not exceed 40 °C (104 °F).
- Connect the charger only to an appropriate power cord listed in *Motorola Solutions Authorized Power Cord List*.
- The AC outlet to which the power cord is connected should be close and easily accessible.
- Make sure the power cord is located where it is not be stepped on, tripped over, or subjected to water, damage, or stress.
- Connect the power cord only to an appropriately fused and wired AC outlet with the correct voltage, as specified on the product.
- Disconnect from line voltage by removing the power cord from the AC outlet.
- Multi-Unit Charger charges the batteries listed in Motorola Solutions Authorized Batteries table.
- The equipment shall be connected to a nearby and easily accessible socket outlet.

Disclaimer

The information in this document is carefully examined, and is believed to be entirely reliable. However, no responsibility is assumed for inaccuracies.

Furthermore, Motorola Solutions reserves the right to change any products to improve readability, function, or design. Motorola Solutions does not assume any liability arising out of the applications or use of any product or circuit described herein; nor does it cover any license under its patent rights, nor the rights of others.

Contact Us

The Solutions Support Center (SSC) is the primary contact for technical support included in your organization's service agreement with Motorola Solutions.

Service agreement customers should be sure to call the SSC in all situations listed under Customer Responsibilities in their agreement, such as:

- Before reloading software
- To confirm troubleshooting results and analysis before taking action

Your organization received support phone numbers and other contact information appropriate for your geographic region and service agreement. Use that contact information for the most efficient response. However, if needed, you can also find general support contact information on the Motorola Solutions website, by following these steps:

1. Enter motorolasolutions.com in your browser.
2. Ensure that your organization's country or region is displayed on the page. Clicking or tapping the name of the region provides a way to change it.
3. Select "Support" on the motorolasolutions.com page.

Comments

Send questions and comments regarding user documentation to documentation@motorolasolutions.com.

Provide the following information when reporting a documentation error:

- The document title and part number
- The page number or title of the section with the error
- A description of the error

Motorola Solutions offers various courses designed to assist in learning about the system. For information, go to <https://learning.motorolasolutions.com> to view the current course offerings and technology paths.

A/S ☎: 00798-14-800-9674

Icon Conventions

The documentation set is designed to give the reader more visual clues. The following graphic icons are used throughout the documentation set.



DANGER: The signal word DANGER with the associated safety icon implies information that, if disregarded, will result in death or serious injury.



WARNING: The signal word WARNING with the associated safety icon implies information that, if disregarded, could result in death or serious injury, or serious product damage.



CAUTION: The signal word CAUTION with the associated safety icon implies information that, if disregarded, may result in minor or moderate injury, or serious product damage.

CAUTION: The signal word CAUTION may be used without the safety icon to state potential damage or injury that is not related to the product.



IMPORTANT: IMPORTANT statements contain information that is crucial to the discussion at hand, but is not a CAUTION or WARNING. There is no warning level associated with the IMPORTANT statement.



NOTE: NOTICE contains information more important than the surrounding text, such as exceptions or preconditions. They also refer the reader elsewhere for additional information, remind the reader how to complete an action (when it is not part of the current procedure, for instance), or tell the reader where something is on the screen. There is no warning level associated with a notice.

Style Conventions

The following style conventions are used:

Convention	Description
Bold	This typeface is used for names of, for instance, windows, buttons, and labels when these names appear on the screen (example: the Alarms Browser window). When it is clear that we are referring to, for instance, a button, the name is used alone (example: Click OK).
Monospacing font in bold	This typeface is used for words to be typed in exactly as they are shown in the text (example: In the Address field, type http://ucs01.ucs:9080/).
Monospacing font	This typeface is used for messages, prompts, and other text displayed on the computer screen (example: A new trap destination has been added).
<i><Monospacing font in bold italic></i>	This typeface is used with angle brackets as placeholders for a specific member of the group that the words represent (example: <i><router number></i>).  NOTE: In sequences to be typed in, the angle brackets are omitted to avoid confusion whether to include the angle brackets in the text to be typed.
CAPITAL LETTERS	This typeface is used for keyboard keys (example: Press Y, and then press ENTER).
<i>Italic</i>	This typeface is used for citations. A citation usually is the name of a document or a phrase from another document (example: <i>Dimetra IP System Overview</i>).
→	An → (arrow pointing right) is used for indicating the menu or tab structure in instructions on how to select a certain menu item (example: File → Save) or a certain subtab.

Chapter 1

Charger Overview

Figure 1: Charger Overview

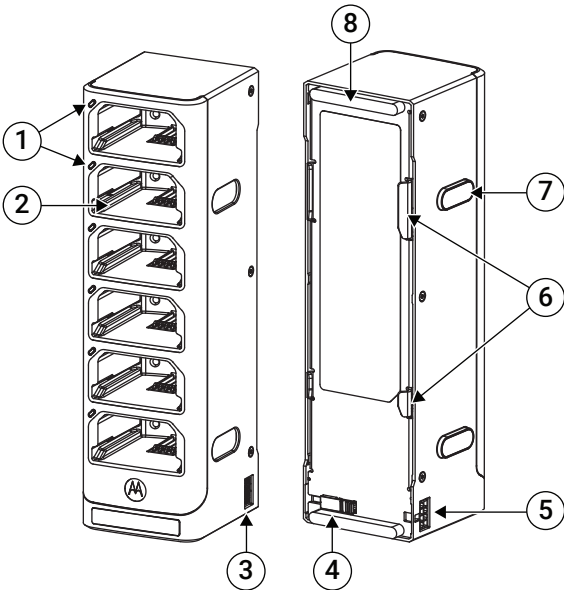


Table 1: Charger Overview

Label	Description
1	LED Indicator
2	Charging Pocket
3	Male Connector
4	Male Connector Latch
5	Female Connector
6	Mounting Bracket Rails
7	Magnet
8	Rubber Foot


Table 2: Charger Specification

INPUT	OUTPUT
15 V  , 7 A (Up to 2 Multi-Unit Chargers)	4.40 V  , 1.25 A x 6 pockets

1.1

Charger Accessories Overview

Figure 2: Mounting Bracket (Part Number: BR000628A01) Overview

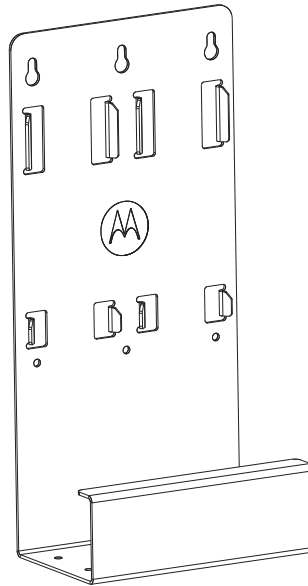

1.2

Authorized Batteries, Power Cords, and Power Supplies

Table 3: Motorola Solutions Authorized Batteries

Part Number	Description	Series
PMNN4893	Lithium-ion Battery, IP68, 4300 mAh	SVX
PMNN4905	Lithium-ion Battery, UL DIV2 IP68, 4300 mAh	SVX

Table 4: Motorola Solutions Authorized Power Cords

Part Number	Description
3087791G01	Power Cord, United States
3087791G10	Power Cord, Australia/New Zealand
3087791G04	Power Cord, Europe

Table 5: Motorola Solutions Authorized Power Supply

Charger Kit	Power Supply	Description	Module
PMPN4686	PS000524A03	External 105 W, 100–240 V	Up to two multi-unit chargers

Chapter 2

Charger Operations

This section contains the charging information of your charger.

2.1

Charging the Batteries

Prerequisites: Use only Motorola Solutions authorized batteries. Charge the batteries at room temperature. Use only the assigned charger when charging the supported batteries.

Procedure:

1. Place the multi-unit charger horizontally on a flat surface.



NOTE: If you have more than one multi-unit charger, it is recommended to place the multi-unit charger in a vertical position mounted to the mounting bracket.




NOTE: The charger automatically enters Power Saver mode when inactive.

2. Insert the power supply adapter to the female connector of the multi-unit charger.
3. Plug the power supply adapter to the power outlet.

If powering up the multi-unit charger is successful, the LED shows green for one second.

If powering up the multi-unit charger is unsuccessful, check the power cord connection.

4. Align and insert the batteries into the charger pocket

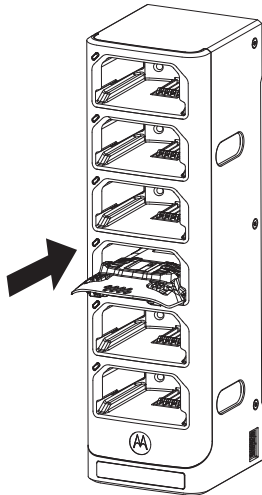


NOTE: Inserting a battery into any charger pocket after inactivity wakes the charger. This is indicated with a solid green LED for one second.

5. Make sure that the battery is in contact with the charger contact.

If the battery is inserted correctly and the battery is being charged in the rapid charge mode, the LED indicator shows solid red.

6. To remove the battery from the charger pocket, pull the battery out from the charger pocket.

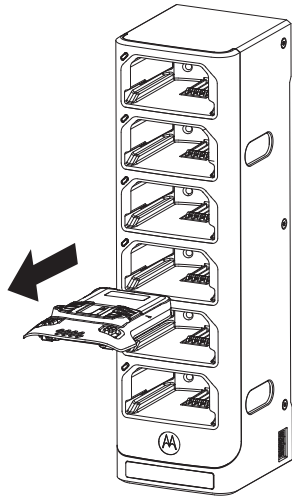

2.2

Charging Indications

Table 6: Charging Indications

Charger Indication		Description
Solid green for 1 second		Charger power up or wake up successfully.
Solid red		Battery is charging rapidly.
Blinking green		Battery is charged up to 90% or greater capacity.
Solid green		Battery is charged up to 95% or greater capacity.
Blinking red		Battery is at fault.  NOTE: Remove and re-insert the battery to the charger pocket.
Blinking amber		Battery is in standby mode waiting to be charged.  NOTE: Battery might be too hot, too cold, or low voltage.


2.3

Combining the Multi-Unit Chargers


Prerequisites: The maximum number of multi-unit charger that can be combined is two.

Procedure:

1. Place the chargers on the table for support before combining them.
2. To extend the connector, press and push the male connector latch to the left.

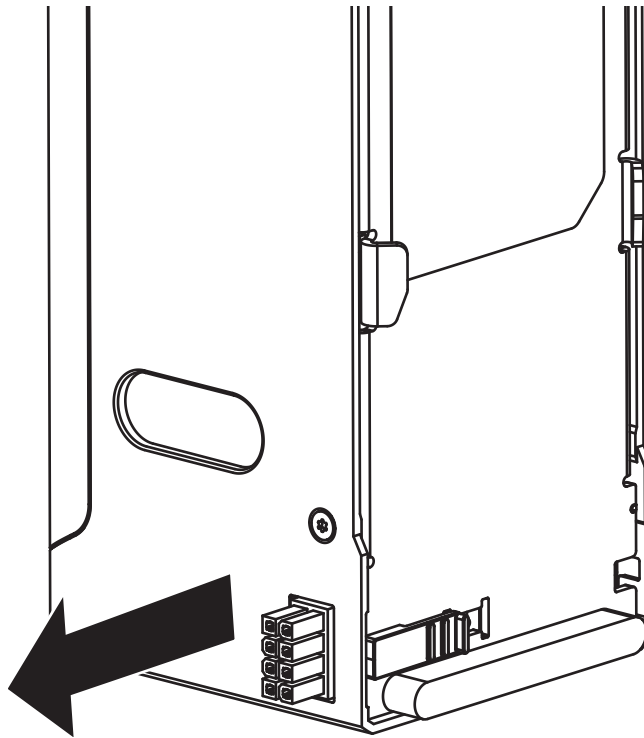


3. To combine the chargers, connect the male connector to the female connector.

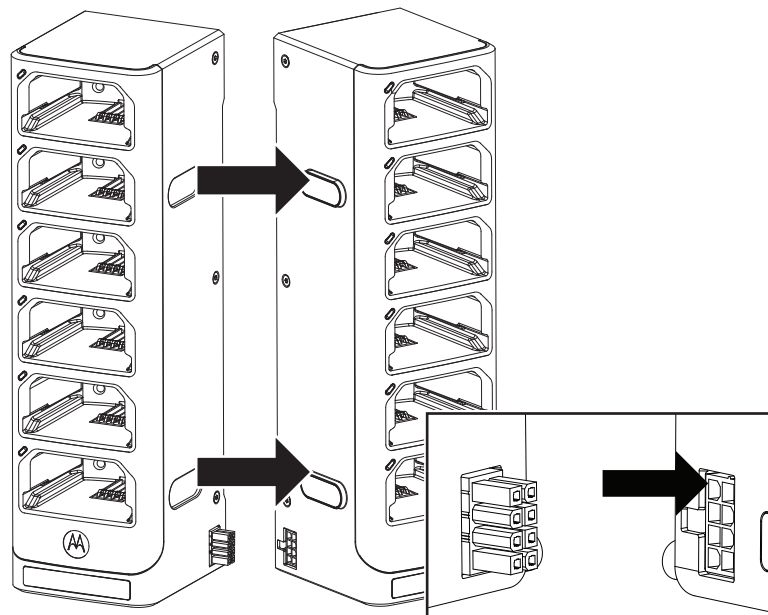

The magnets of the chargers hold them together when connected.

4. Hold the sides of the combined chargers when moving to another location.

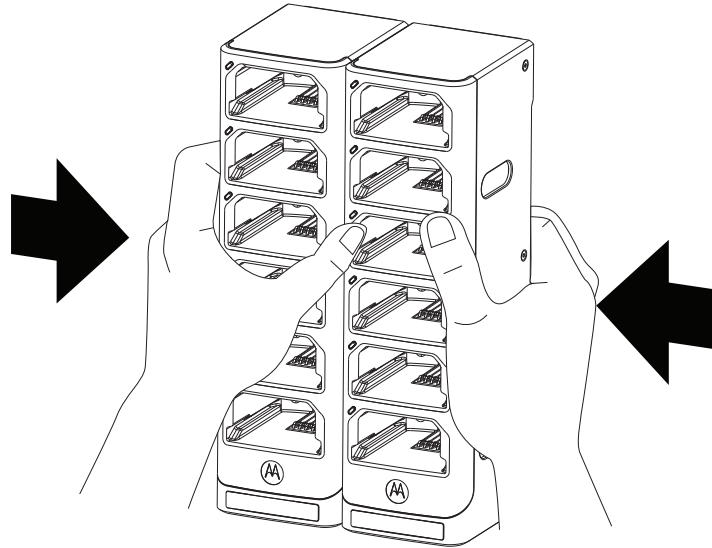


2.4


Separating the Multi-Unit Chargers

Procedure:

1. Place the combined chargers on the table.
2. To separate the combined chargers, pull each of the chargers apart.

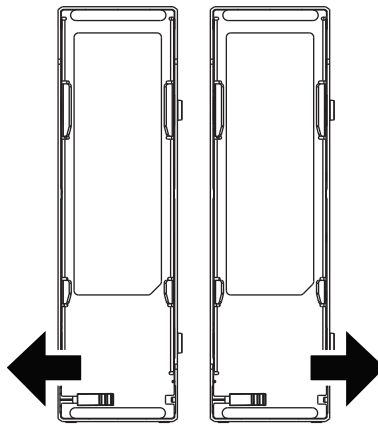

NOTE: Do not twist the charger while pulling them apart to avoid damaging the connectors.

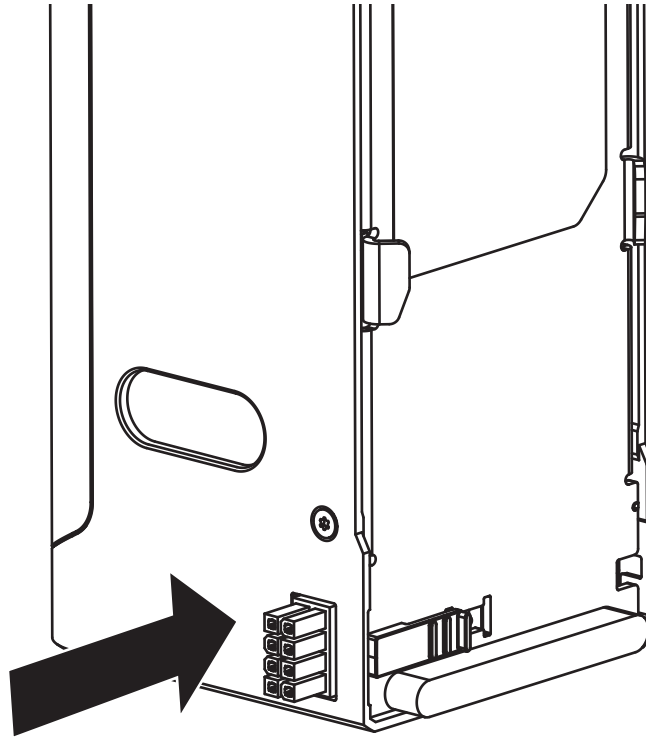

3. To retract the male connector back into the charger, press the male connector latch and push to the right.

2.5

Mounting the Mounting Bracket to the Wall



WARNING:

- The mounting bracket should be installed by a trained and experienced technician. Having the mounting bracket installed by a non-specialized technician is dangerous, and can cause damage or injury.
- Do not install the mounting bracket where the weight cannot be supported. If the strength of the location where the mounting bracket is installed is not strong enough, it can fall off and cause an injury.
- Do not install the mounting bracket on a structure that is prone to vibration, movement, or chance of impact.


Procedure:

1. Position the bracket and mark the location of the mounting holes on the wall surface.




CAUTION: Ensure that the area behind the mounting surface is free from electrical wires, cables, or pipes before cutting, drilling, or installing the mounting screws.

2. Mount the bracket to the wall using appropriate mounting hardware such as drywall anchors. The top mounting holes have a sliding feature for easier mounting.
3. Drill based on the mounting holes markings on the wall.
4. To secure the bracket, install the mounting hardware over the mounting holes on the bracket tightly.

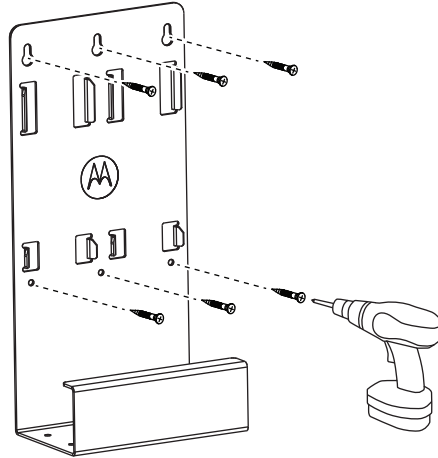

 **NOTE:** It is recommended to use a 10–16 x 1.5 inch. tapping screw and washer (not included) on the wood stud and solid-flat concrete or brick wall.

5. Mount any additional brackets with a minimum distance of 50 mm vertically and 140 mm horizontally from each other.


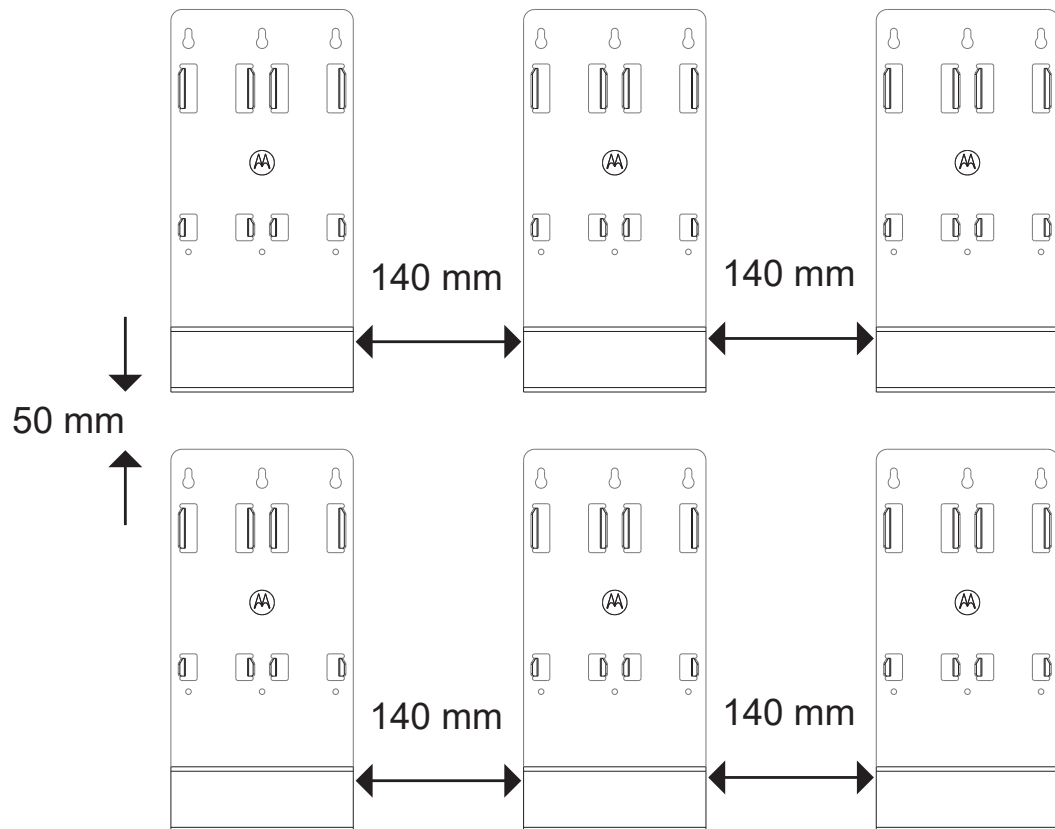



2.6

Preparing Chargers for Desktop Charging

Procedure:

Prepare charger for desktop charging by performing one of the following actions:

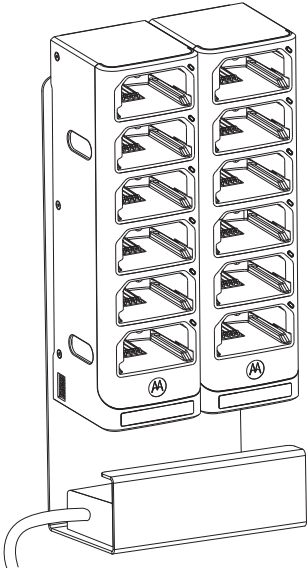Option	Action
Charging with mounting bracket	NOTE: ● If the charger is placed in a vertical position, it is recommended to place the charger on the mounting bracket to prevent it from toppling. ● It is recommended to use 10–16x1.5 inch. tapping screw to mount the bracket onto table top. ● Ensure that the screws do not penetrate through the table. a. Screw the wall bracket to the table.  b. Place the power supply inside the wall bracket. 

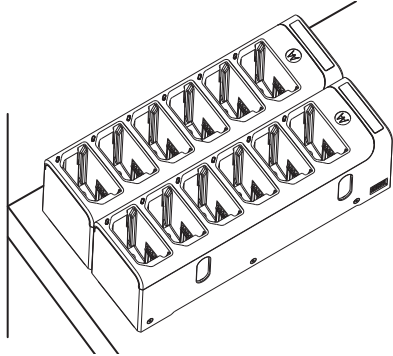Option	Action
Charging without metal bracket	a. Place the charger horizontally. 


2.7

Preparing Chargers for Vertical Charging Position


Prerequisites: Ensure that the mounting bracket is mounted to the wall, and chargers are combined before mounting into the mounting bracket.

Procedure:


1. Place the power supply adapter into the mounting bracket.

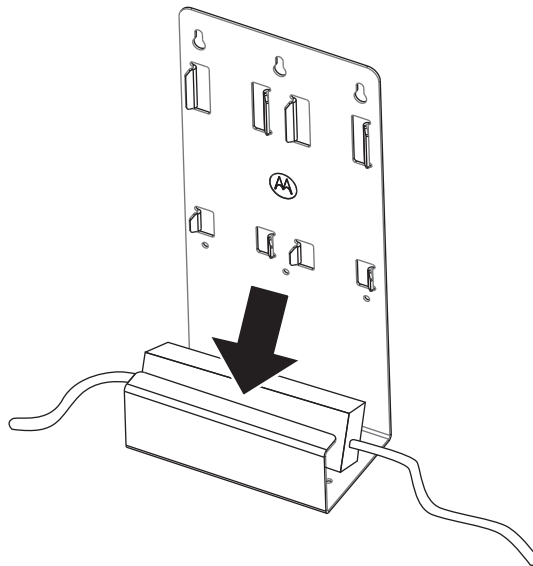


2. Place and lean the charger to the bracket.

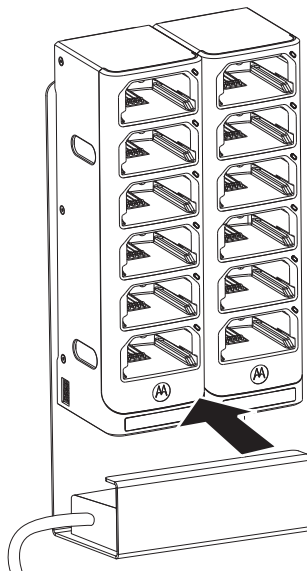

3. Align the back rails on the charger with the rails on the mounting bracket.
4. Slide the charger downwards to attach with both rails.

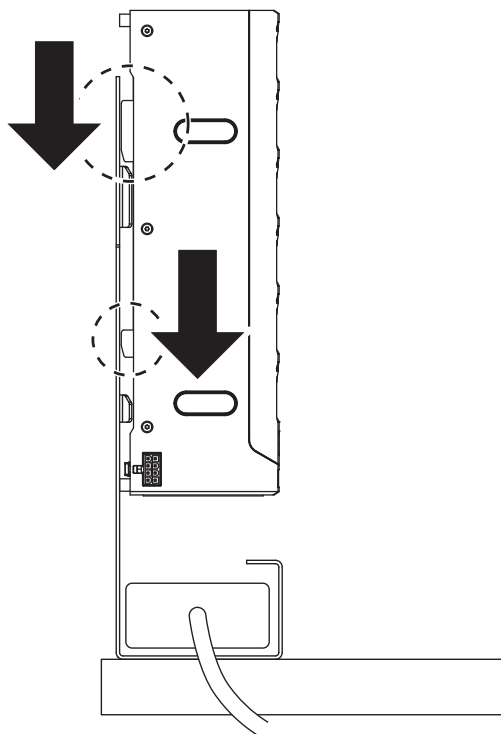

5. Ensure that both rails are attached before releasing the charger.

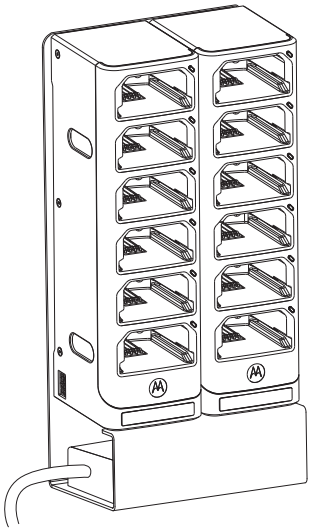

Guide d'utilisation du multichargeur de batterie PMPN4686

JUILLET 2025

© 2025 Motorola Solutions, Inc. All Rights Reserved.



MN010838A01-AA

Table des matières

Sécurité et renseignements juridiques.....	3
Communiquer avec nous.....	8
Chapitre 1 : Présentation du chargeur.....	9
1.1 Présentation des accessoires du chargeur.....	10
1.2 Batteries, cordons d'alimentation et blocs d'alimentation approuvés.....	10
Chapitre 2 : Fonctionnement du chargeur.....	11
2.1 Charge des batteries.....	11
2.2 Indications de charge.....	12
2.3 Combinaison de multichargeurs.....	13
2.4 Séparation des multichargeurs.....	14
2.5 Montage du support de fixation au mur.....	16
2.6 Préparation des chargeurs pour la charge sur table.....	18
2.7 Préparation des chargeurs pour la charge en position verticale.....	19

Sécurité et renseignements juridiques

Cette section fournit des renseignements sur la sécurité et l'aspect juridique pour ce produit.

Marques de certification



Adresse de communication

European Union Contact

Motorola Solutions,
Czerwone Maki 82,
30-392 Krakow, Poland

UK Contact

Motorola Solutions UK Ltd.,
Nova South, 160 Victoria Street,
London, SW1E 5LB,
United Kingdom

Propriété intellectuelle et avis réglementaires

Droits d'auteur

Les produits Motorola Solutions décrits dans ce document peuvent inclure des programmes informatiques Motorola Solutions protégés par des droits d'auteur. Les lois des États-Unis et d'autres pays garantissent certains droits exclusifs à Motorola Solutions pour ces programmes informatiques protégés par des droits d'auteur. En conséquence, il est interdit de copier ou de reproduire, de quelque manière que ce soit, les programmes informatiques Motorola Solutions protégés par des droits d'auteur contenus dans les produits Motorola Solutions décrits dans ce document sans l'autorisation expresse et écrite de Motorola Solutions.

Aucune partie du présent document ne peut être reproduite, transmise, stockée dans un système de récupération ou traduite dans toute autre langue ou tout autre langage informatique, sous quelque forme ou par quelque moyen que ce soit, sans l'autorisation écrite préalable de Motorola Solutions, Inc.

Marques de commerce

MOTOROLA, MOTO, MOTOROLA SOLUTIONS, and the Stylized M Logo are trademarks or registered trademarks of Motorola Trademark Holdings, LLC and are used under license. All other trademarks are the property of their respective owners.

Droits de licence

L'acquisition de produits Motorola Solutions ne saurait en aucun cas conférer de licence, directement, indirectement ou de toute autre manière, en vertu des droits d'auteur, brevets ou demandes de brevet appartenant à Motorola Solutions, autres que la licence habituelle d'utilisation non exclusive et libre de droits qui découle légalement de la vente du produit.

Contenu libre

Ce produit peut contenir des logiciels libres utilisés sous licence. Reportez-vous au support d'installation du produit pour obtenir tous les avis juridiques relatifs aux logiciels libres et aux contenus d'attribution.

Directive relative aux déchets d'équipements électriques et électroniques (DEEE) de l'Union européenne et du Royaume-Uni (RU)



La directive DEEE de l'Union européenne et les réglementations DEEE du Royaume-Uni exigent que les produits (ou leur emballage, dans certains cas) vendus dans les pays de l'UE ou au Royaume-Uni portent l'étiquette de la poubelle barrée. Comme le définit la directive DEEE, cette étiquette de poubelle barrée signifie que les clients et les utilisateurs finaux dans les pays de l'UE et du Royaume-Uni ne doivent pas jeter les équipements électriques et électroniques ou leurs accessoires dans les ordures domestiques.

Les clients ou les utilisateurs finaux au sein de l'UE et du Royaume-Uni doivent prendre contact avec le représentant local du fournisseur de leur équipement ou le centre de service pour obtenir des informations sur le système de collecte des déchets dans leur pays.

Avis de non-responsabilité

Veuillez noter que certaines fonctionnalités, installations et capacités décrites dans ce document pourraient ne pas s'appliquer ou être accordées sous licence pour l'utilisation sur un système particulier, ou pourraient dépendre des caractéristiques d'une unité d'abonné mobile particulière ou d'une configuration de certains paramètres. Communiquez avec votre représentant Motorola Solutions pour en savoir plus.

© 2025 Motorola Solutions, Inc. All Rights Reserved

Déclaration de conformité du fournisseur

Déclaration de conformité du fournisseur

Règlement CFR 47, partie 2, article 2.1077(a) de la FCC



Partie responsable

Nom : Motorola Solutions, Inc.

Adresse : 2000 Progress Pkwy, Schaumburg, IL. 60196

Numéro de téléphone : 1-800-927-2744

déclare par les présentes que le produit :

Nom du modèle : **Multichargeur**

est conforme aux réglementations suivantes :

Appareil numérique de classe B

1. Cet appareil ne doit pas causer d'interférence nuisible; et

2. Cet appareil doit accepter toute interférence reçue, y compris les interférences pouvant entraîner un fonctionnement indésirable.



REMARQUE :

Cet équipement a fait l'objet de tests et a été déclaré conforme aux limites établies pour un appareil numérique de classe B, conformément à la section 15 des règlements de la FCC. Ces limites sont fixées afin d'offrir une protection suffisante contre des interférences nuisibles dans une installation résidentielle. Cet équipement génère, utilise et peut émettre de l'énergie de radiofréquence et, s'il n'est pas installé ou utilisé conformément aux instructions, il peut provoquer des interférences nuisibles aux communications radio. Cependant, il est impossible de garantir qu'il n'y aura aucune interférence dans une installation particulière.

Si cet appareil cause une interférence nuisible à la réception de la radio ou de la télévision, ce qui peut être déterminé en éteignant et en allumant l'appareil, vous êtes encouragé à remédier à la situation en prenant une ou plusieurs des mesures suivantes :

- Réorienter ou déplacer l'antenne réceptrice.
- Augmenter la distance entre l'équipement et le récepteur.
- Brancher l'appareil dans une autre prise sur un circuit différent de celui du récepteur.
- Consulter le distributeur ou un technicien de radio ou de télévision chevronné pour obtenir de l'aide.

Pour l'Australie seulement

Cette disposition s'applique aux produits et services fournis par Motorola Solutions aux consommateurs au sens de l'Australian Consumer Law. Cette garantie est fournie par Motorola Solutions Australia Pty Limited (ABN16 004 742 312) of Tally Ho Business Park, 10 Wesley Court, Burwood East, Victoria. Nos produits comprennent des garanties qui ne peuvent pas être exclues en vertu de l'Australian Consumer Law. En cas de défaillance majeure du service, vous avez le droit :

- d'annuler votre contrat de service avec nous; et
- d'obtenir un remboursement de la partie inutilisée ou un dédommagement pour sa valeur réduite.

Vous avez le droit de choisir un remplacement ou un remboursement en cas de défaillance majeure des biens. Si le montant total de la défaillance des biens ou des services ne correspond pas à celui d'une défaillance majeure, vous avez le droit de faire corriger cette défaillance dans un délai raisonnable. Si ce n'est pas fait, vous avez droit à un remboursement pour les biens, à la résiliation du contrat pour le service et au remboursement de toute partie inutilisée. Vous avez également le droit d'être indemnisé pour toute autre perte ou tout dommage raisonnablement prévisible résultant d'une défaillance des biens ou des services. Si vous avez des questions, veuillez communiquer avec Motorola Solutions Australia au 1 800 457-439. Vous pouvez également visiter notre site Web : pour connaître les modalités de la garantie en vigueur, accédez à https://www.motorolasolutions.com/fr_ca/support.html.

Instructions importantes sur la sécurité

Ce document contient des instructions d'utilisation et de sécurité importantes.

Avant d'utiliser le chargeur de batterie, lisez toutes les directives et les marques d'avertissement sur le chargeur et la batterie.



AVERTISSEMENT :

Veillez lire attentivement ces instructions et les conserver pour vous y reporter ultérieurement.

- Lorsque vous déconnectez le cordon d'alimentation de la prise secteur ou du chargeur, tirez sur la prise et non sur le cordon afin d'éviter de l'endommager.
- Pour réduire les risques d'incendie ou de décharge électrique, évitez d'utiliser une rallonge. Si vous devez utiliser une rallonge, veillez à utiliser un câble 18 AWG pour les longueurs de 2 mètres (6,5 pi) maximum et un câble 16 AWG pour les longueurs de 3 mètres (9,8 pi) maximum.
- Pour éviter tout risque d'incendie, de décharge électrique ou de blessure, n'utilisez pas le chargeur s'il est cassé ou endommagé. Apportez-le à un représentant de service qualifié de Motorola Solutions.
- Pour éviter tout risque d'incendie ou de décharge électrique, ne démontez pas le chargeur. Il ne peut pas être réparé et aucune pièce de rechange n'est disponible.
- Pour réduire les risques de décharge électrique, débranchez l'adaptateur d'alimentation du chargeur de la prise secteur avant de procéder à un entretien ou à un nettoyage.
- Pour éviter tout risque de blessure, chargez uniquement des batteries rechargeables autorisées. D'autres batteries peuvent exploser, ce qui peut causer des blessures et des dommages.
- Pour éviter tout risque d'incendie, de décharge électrique ou de blessure, utilisez uniquement les accessoires recommandés par Motorola Solutions.
- Toute modification apportée à cet appareil sans l'autorisation explicite de Motorola Solutions peut annuler l'autorisation d'utiliser cet appareil.

Directives d'utilisation sécuritaire

- Cet appareil n'est pas adapté à une utilisation à l'extérieur. Utiliser exclusivement dans un endroit sec et sans risque d'humidité.
- La température ambiante maximale autour du chargeur ne doit pas dépasser 40 °C (104 °F).
- Branchez le chargeur uniquement au moyen du cordon d'alimentation approprié indiqué dans la *liste des cordons d'alimentation approuvés par Motorola Solutions*.
- La prise de courant sur laquelle le cordon d'alimentation est branché doit se trouver à proximité et être facilement accessible.
- Assurez-vous que le cordon d'alimentation est placé à un endroit où il ne sera pas piétiné ou endommagé, ne gênera pas le passage et ne sera pas exposé à une source d'humidité ou de stress.
- Connectez le cordon d'alimentation uniquement à une prise secteur correctement câblée, protégée par un fusible et dont la tension est correcte, comme indiqué sur le produit.
- Débranchez le chargeur de la tension de secteur en retirant le cordon d'alimentation de la prise de courant.
- Le multichargeur charge les batteries indiquées dans le tableau des batteries approuvées par Motorola Solutions.
- L'appareil doit être branché sur une prise située à proximité et facilement accessible.

Avis de non-responsabilité

L'information contenue dans le présent document a été examinée avec soin et est considérée comme étant entièrement fiable. Cependant, nous n'assumons aucune responsabilité en cas d'inexactitude.

De plus, Motorola Solutions se réserve le droit d'apporter des modifications à tout produit afin d'en améliorer la lisibilité, la fonctionnalité ou la conception. Motorola Solutions n'assume aucune responsabilité quant aux applications ou à l'utilisation des produits et circuits décrits dans le présent document, pas plus qu'elle ne se porte garante des licences exploitées en vertu de ses droits de brevet ou des droits d'un tiers.

Communiquer avec nous

Le centre de soutien et de solutions (SSC) est le point de contact principal pour le soutien technique compris dans l'entente de service de votre organisation avec Motorola Solutions.

Les clients disposant d'ententes de service doivent s'assurer d'appeler le SSC dans toutes les situations énumérées dans la section Responsabilités du client de leur entente de service, notamment :

- Avant le rechargement du logiciel
- Pour confirmer les résultats du dépannage et de l'analyse avant de prendre des mesures

Votre entreprise a reçu les numéros de téléphone du soutien et d'autres coordonnées appropriées pour votre région géographique et votre entente de service. Utilisez ces informations pour obtenir la meilleure réponse possible. Cependant, si nécessaire, vous pouvez également trouver les coordonnées du soutien général sur le site Web de Motorola Solutions, en suivant ces étapes :

1. Entrez motorolasolutions.com dans votre navigateur.
2. Vous devez vous assurer que le pays ou la région de votre organisation se trouve sur la page. Cliquez ou appuyez sur le nom de la région pour la changer.
3. Sélectionnez « Support » à la page motorolasolutions.com.

Commentaires

Envoyez vos questions et commentaires sur la documentation destinée aux utilisateurs à l'adresse documentation@motorolasolutions.com.

Pour signaler une erreur dans la documentation, veuillez fournir les renseignements suivants :

- Le titre et le numéro de référence du document
- Le numéro de la page ou le titre de la section contenant l'erreur
- Une description de l'erreur

Motorola Solutions offre plusieurs cours conçus pour vous aider à apprendre à utiliser le système. Pour en savoir davantage et consulter la liste des cours actuellement offerts et des parcours technologiques, accédez à <https://learning.motorolasolutions.com>.

A/S ☎: 00798-14-800-9674

Chapitre 1

Présentation du chargeur

Figure 1 : Présentation du chargeur

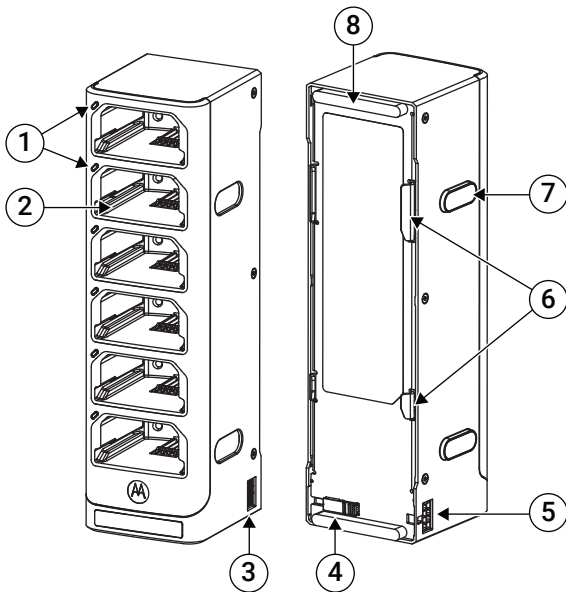


Tableau 1 : Présentation du chargeur

Étiquette	Description
1	Indicateur à DEL
2	Compartiment de charge
3	Connecteur mâle
4	Loquet du connecteur mâle
5	Connecteur femelle
6	Rails de support de montage
7	Aimant
8	Pied en caoutchouc


Tableau 2 : Caractéristiques du chargeur

ENTRÉE	SORTIE
15 V  , 7 A (jusqu'à 2 multichargeurs)	4,40 V  , 1,25 A x 6 logements

1.1

Présentation des accessoires du chargeur

Figure 2 : Présentation du support de fixation (numéro de pièce : BR000628A01)

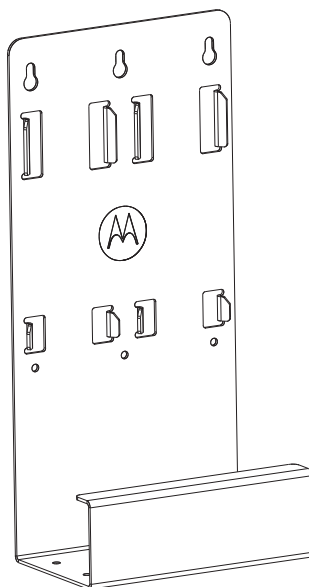

1.2

Batteries, cordons d'alimentation et blocs d'alimentation approuvés

Tableau 3 : Batteries approuvées par Motorola Solutions

Numéro de pièce	Description	Séries
PMNN4893	Batterie au lithium-ion IP68 de 4 300 mAh	SVX
PMNN4905	Batterie au lithium-ion UL DIV2 IP68 de 4 300 mAh	SVX

Tableau 4 : Cordons d'alimentation approuvés par Motorola Solutions

Numéro de pièce	Description
3087791G01	Cordon d'alimentation, États-Unis
3087791G10	Cordon d'alimentation, Australie/Nouvelle-Zélande
3087791G04	Cordon d'alimentation, Europe

Tableau 5 : Bloc d'alimentation approuvé par Motorola Solutions

Trousse du chargeur	Bloc d'alimentation	Description	Module
PMPN4686	PS000524A03	Externe, 105 W, 100 à 240 V	Jusqu'à deux multichargeurs

Chapitre 2

Fonctionnement du chargeur

Cette section contient les informations de charge de votre chargeur.

2.1

Charge des batteries

Préalables :

Utilisez uniquement des batteries Motorola Solutions autorisées. Chargez vos batteries à température ambiante. Utilisez uniquement le chargeur attribué lorsque vous chargez les batteries prises en charge.

Procédure :

1. Posez le multichargeur horizontalement sur une surface plane.



REMARQUE :

Si vous avez plus d'un multichargeur, il est recommandé de placer le multichargeur en position verticale et monté sur le support de montage.




REMARQUE :

Le chargeur passe automatiquement en mode d'économie d'énergie lorsqu'il est inactif.

2. Insérez l'adaptateur du bloc d'alimentation dans le connecteur femelle du multichargeur.
3. Branchez l'adaptateur du bloc d'alimentation à la prise de courant.
Lorsque le multichargeur est allumé, le voyant lumineux s'allume en vert pendant une seconde.
Si le multichargeur ne s'allume pas, vérifiez le branchement du cordon d'alimentation.


4. Alignez les batteries et insérez-les dans le compartiment du chargeur.

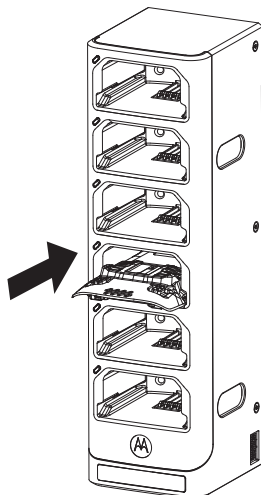

REMARQUE :

L'insertion d'une batterie dans le compartiment du chargeur après l'inactivité active le chargeur. Cette activation sera indiquée par un voyant DEL vert qui sera allumé en continu pendant une seconde.

5. Assurez-vous que la batterie est en contact avec la borne du chargeur.
Si la batterie est correctement insérée et qu'elle est en cours de charge en mode de charge rapide, le voyant DEL s'allume en rouge.
6. Pour retirer la batterie du chargeur, retirez-la du compartiment.

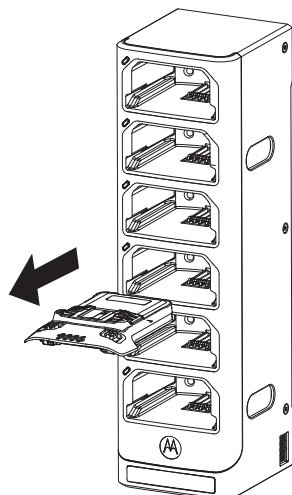

2.2 Indications de charge

Tableau 6 : Indications de charge

Indication du chargeur

Vert fixe pendant une seconde



Rouge fixe



Vert clignotant



Vert fixe



Rouge clignotant



Orange clignotant



Description

Le chargeur est mis sous tension ou se réveille avec succès.

La batterie se charge rapidement.

La batterie est chargée à 90 % ou plus.

La batterie est chargée à 95 % ou plus.

La batterie est défectueuse.



REMARQUE :

Retirez et réinsérez la batterie dans le logement du chargeur.

La batterie est en mode veille et attend d'être chargée.



REMARQUE :

La batterie est peut-être trop chaude ou trop froide, ou sa tension est faible.

2.3


Combinaison de multichargeurs

Préalables :


Il est possible de combiner deux multichargeurs au maximum.

Procédure :

1. Placez les chargeurs sur la table avant de les combiner.
2. Pour étendre le connecteur, appuyez sur le loquet du connecteur mâle et poussez-le vers la gauche.

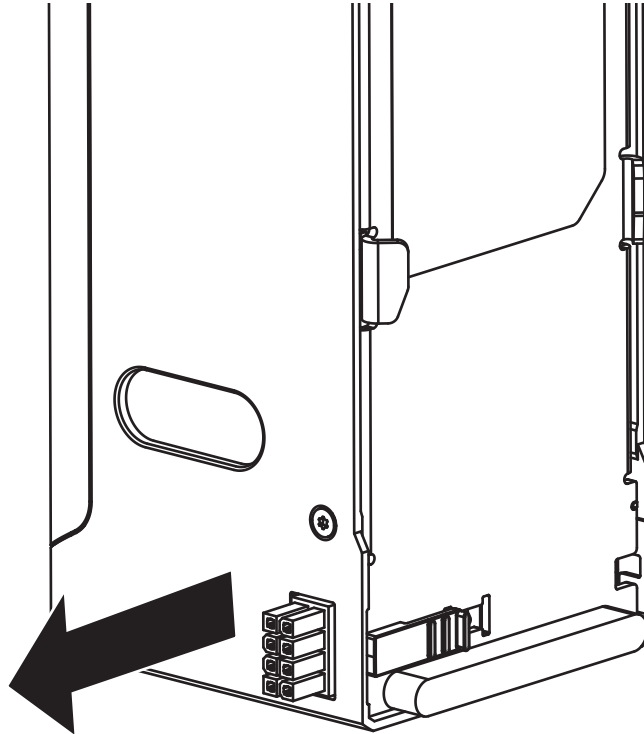


3. Pour combiner les chargeurs, branchez le connecteur mâle au connecteur femelle.

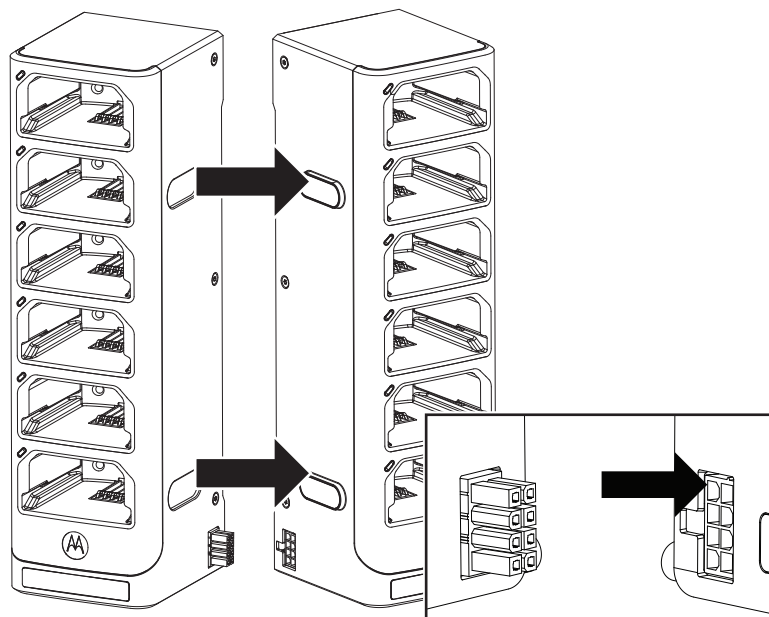

Les aimants des chargeurs les maintiennent accolés lorsqu'ils sont connectés.

4. Tenez les côtés des chargeurs combinés lorsque vous les déplacez vers un autre endroit.

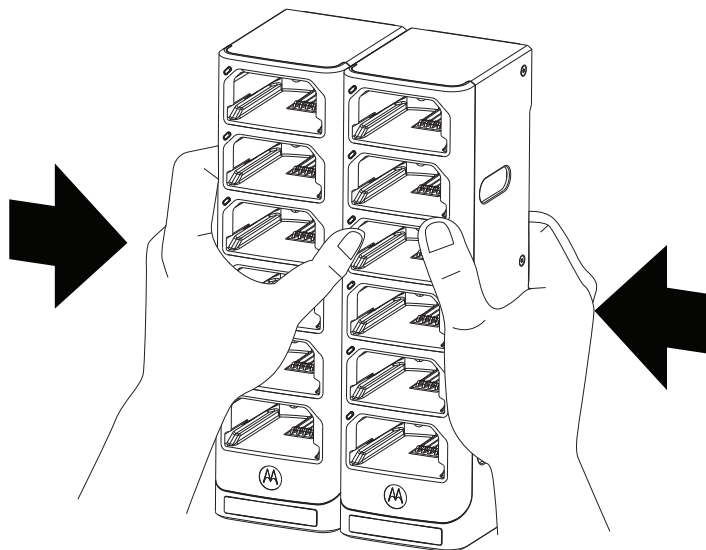


2.4

Séparation des multichargeurs


Procédure :

1. Placez les chargeurs combinés sur la table.
2. Pour séparer les chargeurs combinés, tirez sur les chargeurs pour les écarter l'un de l'autre.

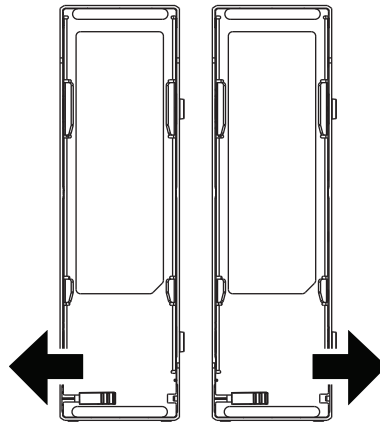

REMARQUE :

N'exercez pas de torsion sur les chargeurs lorsque vous les séparez afin de ne pas endommager les connecteurs.

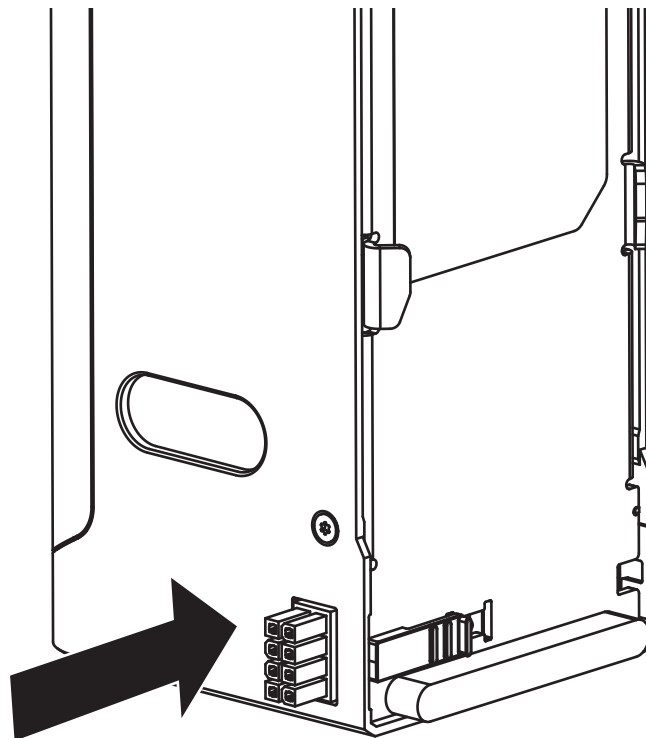

3. Pour insérer le connecteur mâle dans le chargeur, appuyez sur le loquet du connecteur mâle et poussez vers la droite.

2.5

Montage du support de fixation au mur



AVERTISSEMENT :

- Ce support de fixation doit être installé par un technicien formé et expérimenté. Faire installer le produit par un technicien non spécialisé est dangereux et peut mener à des dommages ou à des blessures.
- Ne pas installer le produit là où son poids ne peut pas être supporté. Si la surface d'installation du support n'est pas assez solide, le support peut tomber et causer des blessures.
- N'installez pas le support mural sur une structure sujette à des vibrations ou au mouvement, ou encore qui risque de subir des impacts.

Procédure :


1. Positionnez le support et marquez l'emplacement des trous de montage sur le mur.



ATTENTION :

Assurez-vous que l'espace situé derrière la surface de montage est bien libre de fils électriques, de câbles et de tuyaux avant de couper la surface, la percer ou y installer les vis de montage.


2. Montez le support au mur en utilisant du matériel de montage approprié (p. ex. des chevilles). Les trous de montage supérieurs sont coulissants afin de faciliter le montage.
3. Percez les trous vis-à-vis des marques tracées sur le mur.
4. Pour fixer le support, installez fermement le matériel de fixation sur les trous de montage du support.

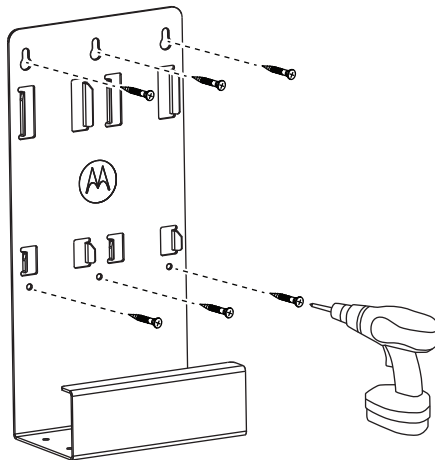

REMARQUE :

Il est recommandé d'utiliser une vis taraudeuse et une rondelle (non comprises) de 10-16 x 1,5 po sur le montant en bois et le mur de béton ou de brique massif plat.

5. Montez les supports supplémentaires avec une distance minimale de 50 mm verticalement et 140 mm horizontalement.


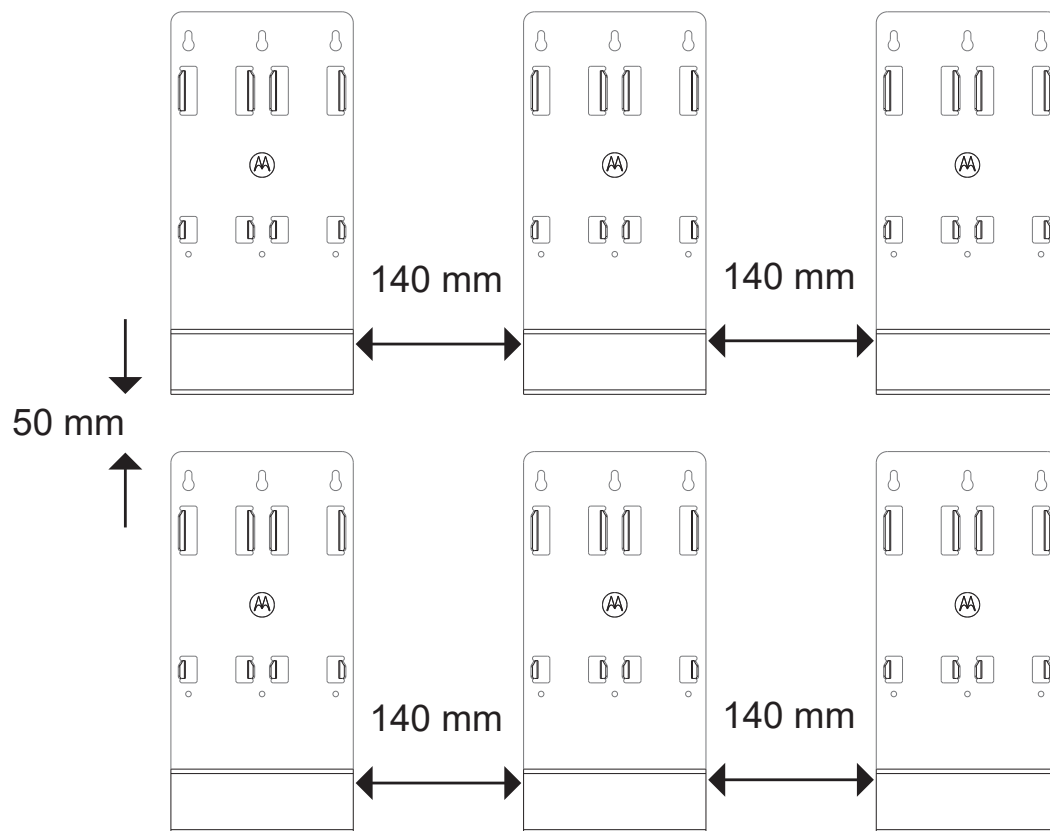



2.6

Préparation des chargeurs pour la charge sur table

Procédure :

Préparez le chargeur pour la charge sur table en effectuant l'une des actions suivantes :

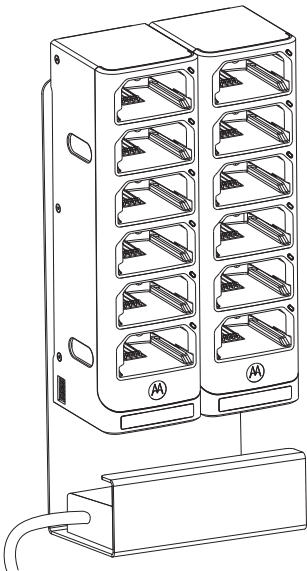Option	Action
Charge avec support de fixation	 REMARQUE : • Si le chargeur est placé à la verticale, il est recommandé de le placer sur le support de fixation pour éviter qu'il bascule. • Il est recommandé d'utiliser une vis taraudeuse de 10-16 x 1,5 po pour fixer le support sur la surface de la table. • Assurez-vous que les vis ne pénètrent pas dans la table. a. Vissez le support mural à la table.  b. Placez le bloc d'alimentation à l'intérieur du support mural. 

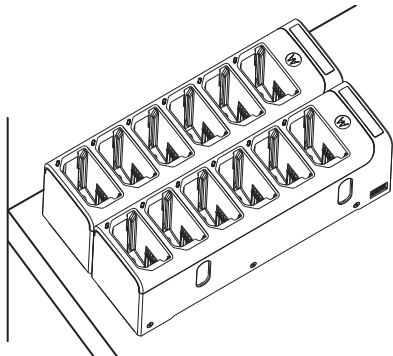Option	Action
Charge sans support métallique	a. Placez le chargeur à l'horizontale. 

2.7


Préparation des chargeurs pour la charge en position verticale

Préalables :


Assurez-vous que le support de fixation est fixé au mur et que les chargeurs sont combinés avant de les positionner dans le support de fixation.

Procédure :


1. Placez l'adaptateur du bloc d'alimentation dans le support de montage.

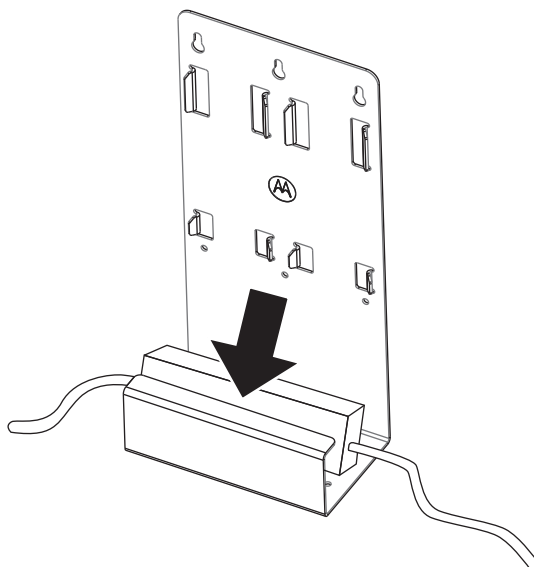

2. Placez et inclinez le chargeur sur le support.

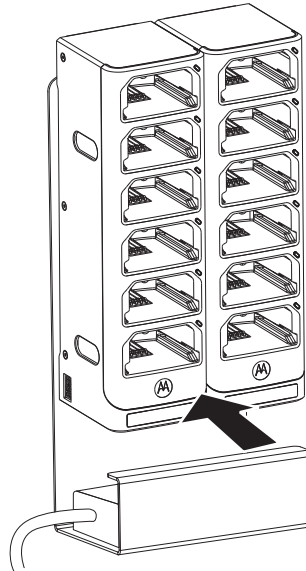

3. Alignez les rails arrière du chargeur avec les rails du support de fixation.
4. Faites glisser le chargeur vers le bas pour le fixer aux deux rails.

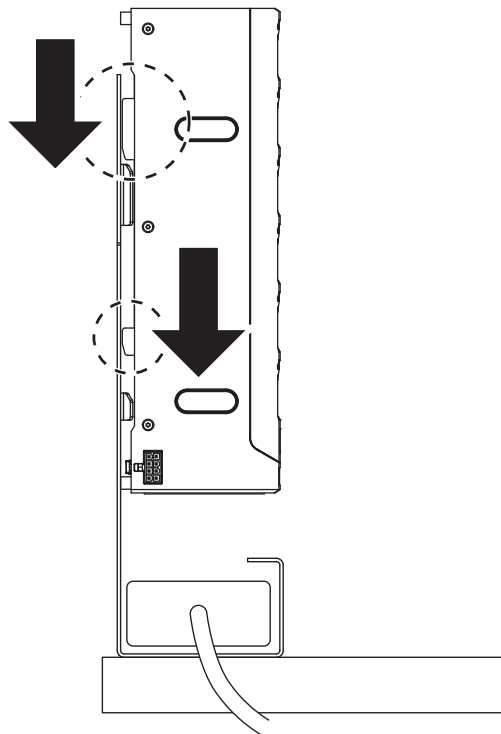

5. Assurez-vous que les deux rails sont fixés avant de relâcher le chargeur.

