
NET LINES: each colored line below is one net, named at its left end. Every pin wire runs up to its net line.

COLORS: red = 220 V live, blue = neutral, green = earth, orange = 24 V, purple = 5 V, dark grey = GND, green dashed = safety interlock, gold = motor phases, teal = Hall sensors, grey = signals.

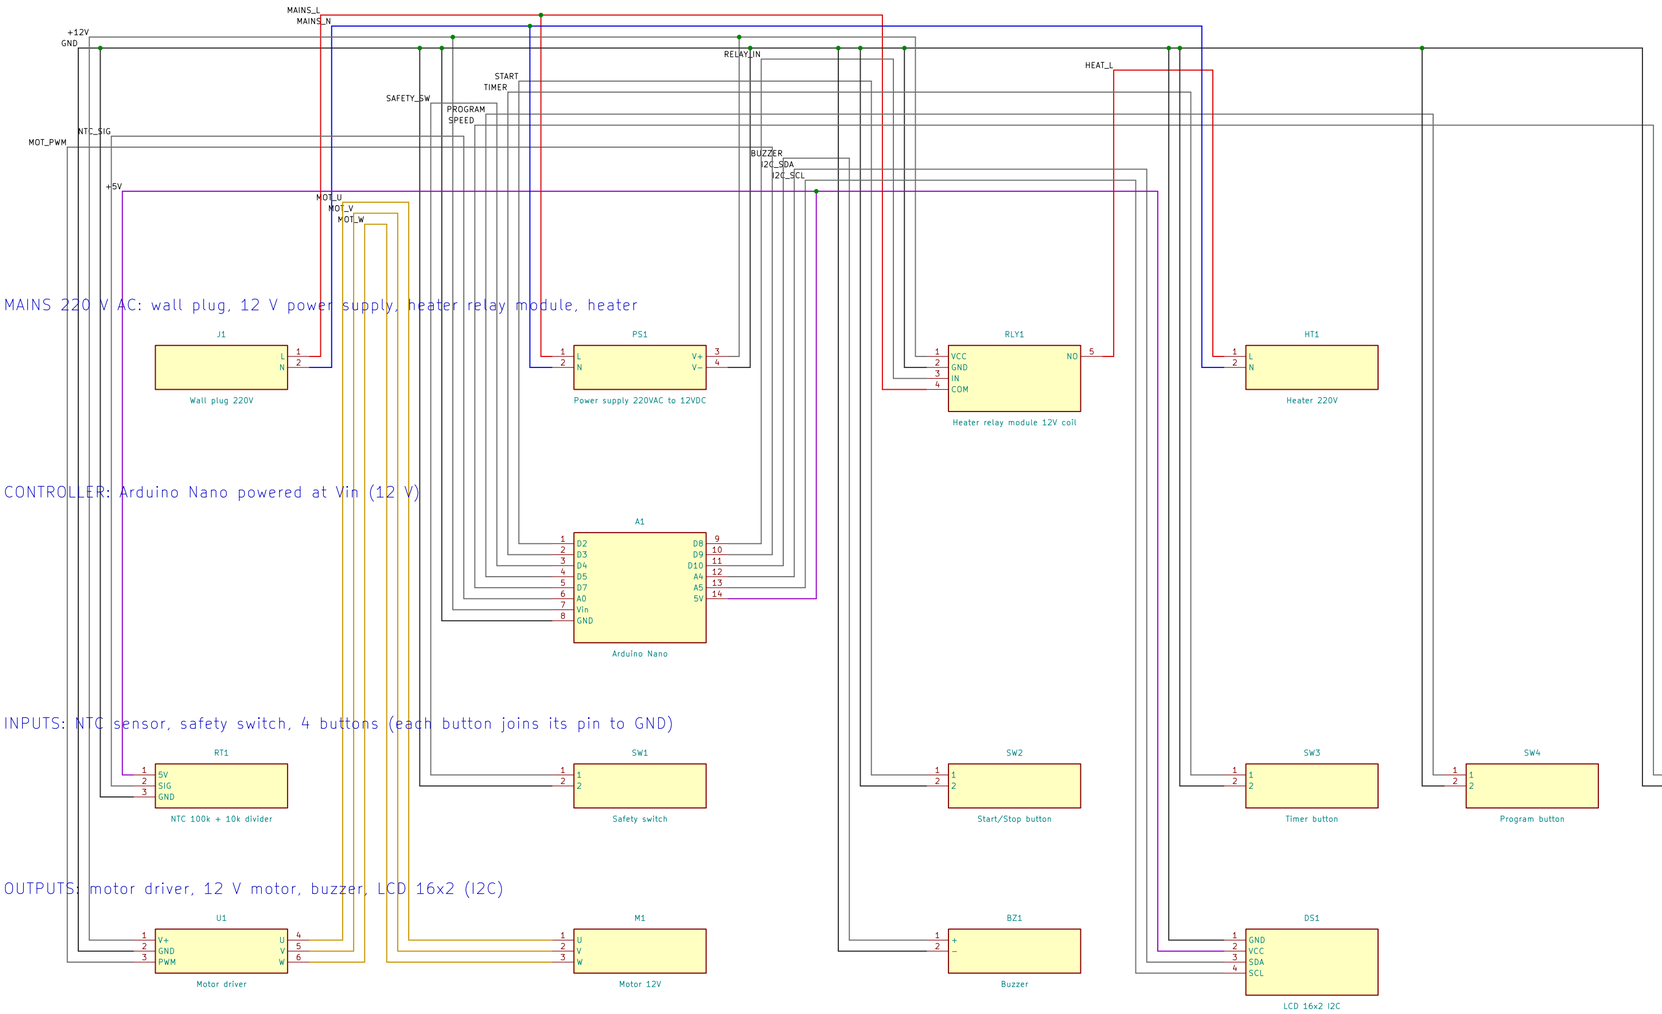

NOTE: GND is the 0 V of the DC side only. It must never join MAINS_L, MAINS_N or HEAT_L.
NOTE: mains parts (band 1) need a qualified engineer review (creepage, fuse, earth).
NOTE: motor driver DIR, BRAKE and Hall wires are not drawn yet (open item).

Vietnam 220 V 50 Hz, Class I (earthed)

SeedLoop open source

Sheet: /
File: SeedLoop.kicad_sch

Title: SeedLoop wiring (system level, wired)

Size: A2	Date: 2026-10-18	**Rev: B**
KiCad E.D.A. 10.0.7		Id: 1/1