PREVENTING ROAD ACCIDENTS USING CLOUD COMPUTING

Team Members:
   1)Suryabhaskar
   2)Tazeem
   3)Gowtham

ABSTRACT

As innovation and traffic developed, road accidents and road hazards have increased, causing more deaths due to the lack of timely support bureaus. This document aims to respond to timely malicious warning, car burglary monitoring and vehicle contamination alarms. The document that is being submitted registers the limits of the car over time, using a wonderful gadget inserted into the car, and transfers these characteristics to the cloud, car owners or externals. Based on the data, adjustment calculations are performed to give warnings and action. In the event that a malaise occurs after the vehicle and disturbing the car remotely and last, but not least, by watching sensor esteems to convey air contaminating alerts produced by the automobiles, the structure will work with the customers in various ways as a guarantee of fire assistance. The framework is developed using the . Cloud advantages and associated administrations are network systems, MS Access and Microsoft Azzure. The segments of equipment include the vehicle's "shrewd gadget" and a mobile phone for customer cooperation. The so-called "keen gadget" inside the vehicle does not interfere with normal operation or cause overheads.

Keywords: GPS, GSM, REVERSE GEOLOCATION API, TWILIO MESSAGE API, Accident Monitoring, GPS, Accident Detection, Google Docs API, MEMS.

This can thus not be denied, for example, a clear increase in road disasters, air pollutants caused by automobiles and vehicle infractions classified as burglars. This may, on the one hand, be regarded as an improvement to the way people live. It is intended that a framework be developed which functions in the case of robbery and the management of air pollution to the installation offices and follows the vehicle. In this arena, cloud administrators have not done much effort. In finding a resolution to the above scenarios, the suggested framework applies to cloud administrations. The primary goals of the proposed project framework are:

1) To empower mishap notice to suitable organizations.
2) To give a framework to controlling the usefulness of vehicle in the event of robbery.
3) To alarm against contamination levels brought about by the vehicle.

The paper has been arranged: The related result for the inventive new movement to VANET is examined in Segment 2. Segment 3 gives an overview of all of our equipment and programming devices. Area 4 provides a system for: controlling death rate from malfunctions via optimum notification of malfunctions. Monitoring and handling of the vehicle in case of robbery and Contamination control by regularly monitoring the sensor estimates. Segment 5 discusses how the suggested strategy would be designed and worked out. Finally, areas 6, 7 and 8 complete the work recommended by restrictions and future bearings.

2. RELATED WORK

Smart transport systems for many objectives, such as traffic administration, vehicle safety, emergency services etc were developed and designed to utilise computers and communications technologies. Since the 1990s, scientists have been interested by the prospect of using wireless communication in cars. In recent years, the use of the concepts of vehicle correspondence has recognised more intelligent cars, more secure and less upsetting driving interactions. Some issues such as large appropriations, big traffic opportunities, poorer efficiency for the worker, more fuel usage (and consequently a decrease in costs) led to this turn of events, using IEEE 802.11 mainly A new analysis by Abid et al. has found that, due to car collisions in the United States, there were 33,000 causalities and 2 million unique injuries in 2018. These incidents affect the general population in monetary terms and result in an annual cost estimated at $230 billion. $750 is spent on Everyone in the USA. Furthermore, every year the road obstruction cost $78 billion. The idea of adding Mobile Ad hoc Networks (MANET) for roads and interstate crossings using the bleeding edge novel Headways known as vehicle ad-hoc networks was presented by Olariu and Eltowissy etc (VANET). In order to provide driver with advanced traffic warning, VANET uses the interchange between Vehicle-to-Vehicle (V2V) and Vehicleto-Infrastructure (V2I) interchanges. Each vehicle should be accountable in V2V frameworks for the occurrence of an incident based on reports from various cars. This framework can provoke effective security attacks by verifying faulty derivatives, resulting in more blockages and a more prominent risk of severe dangers. Hitherto, to take care of this security issue, quite a bit of work had been closed by Aijaz et al, Lochert et al., Lochert et al., Yan et al. what's more, Yan et al.

S. Bilal et al. closed the important application zones for crisis warning, pleasant driving, reporting on traffic status, impact avoidance and various applications in the VANET. The new rapid installation of intelligent transport systems (ITS) and VANET, which will provide a strong and all-pervasive atmosphere for intelligent vehicle networks, can eventually revolutionise our drive.

Olariu et al. classified vehicle cloud computing as " a collection of cars typically governed by itself that may coordinate and dynamically assign to authorised users their corporate registration, detection, correspondence and physical resources." A further step towards developing the calculative and situational awareness of public drivers and the bigger percentage of the populace

is the Vehicle Cloud (VC) idea. The VC's ultimate objective is to proactively provide answers to demand for unanticipated situations.

ARM and GPS mishap caution framework were discussed by Haisong Chen et al.t. The suggested system dispatches and transmits cars to the nearest treatment areas and other needed customers with an inexhaustible supply of malaises. In the initial run the framework concentrates to get to the malfunction location and gain treatment time for the malfunction. This reduces the malfunction mortality and further decreases events impacting traffic time. A Nericell, a framework that provides a rich detection of advanced cells that are translated by customers, was proposed by Prashanath Mohan et al.. The sensor portion is used to distinguish potholes, knocks, slowdowns and blasting using the accelerometer, mouthpiece, GSM Radio, or perhaps GPS sensors. The report also covers a few challenges such as self-assertion, sound location and energy-productive restrictions. In order to monitor the vehicle speed and to identify malfunction by using a GPS recipient, Sangeita N Gujar et al. devised an alert management system. It screens a vehicle speed, contrasts and past speed every second using the microcontroller framework and awaits a malaise when a vehicle's speed is below the speed set. Mishap area is procured from GPS alongside time and subsequently opportune assistance to significant human existence can be given.

3. PRELIMINARIES
3.1.Hardware Devices
1. **Vibration Sensors**- A piezo electrical sensor is the piezoelectric device used to monitor changes in pressure, acceleration, temperature, pressure or force by converting them, as illustrated in figure 1, to an electric charge. Greek meaning 'push' or 'squeeze,' prefix piezo A gadget that monitors appropriate acceleration is an accelerometer ("g-force"). In rotating machines, accelerometers are utilized for vibration detection and monitoring. Pairs of accelerometers spread throughout the space region can be used to identify discrepancies (gradients) in the correct acceleration of reference frames. These gadgets are known as gravity gradiometers, which measure paths in the field of gravity. In principle, such accelerometer matching may also be able to recognize gravitational waves.

Figure 1: Piezoelectric Sensor

2.Worldwide Positioning System (GPS) -The Global Positioning System (GPS) as indicated in Figure 2 is a space-based system for satellite traffic providing land and time information in any environment, whenever on or near the Earth four GPS satellites are viewed in an unaffected way.
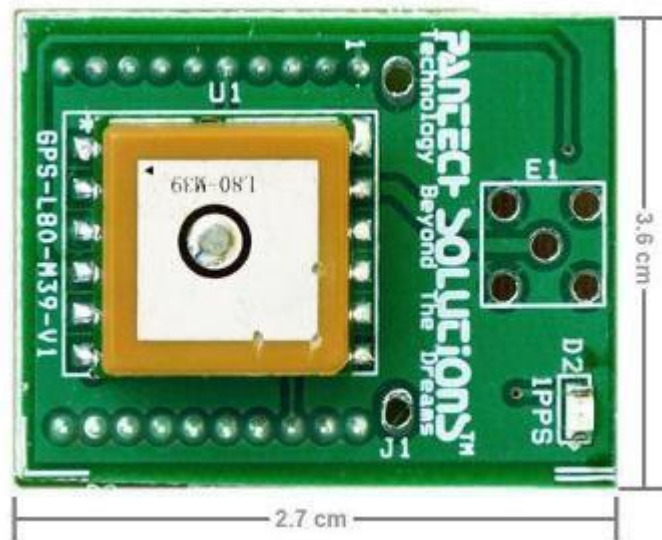

Figure 2: GPS

3.Arduino MEGA/UNO/PROMINI - The Arduino Mega is an ATmega1280 (datasheet) microcontroller board shown in Figure 3. It contains 54 advanced pins (including 14 for PWM output), 16 easy sources, 4 UARTs (included in a series of gear ports), a 16 MHz oscillator, a USB affiliate, a power connector, an ICSP header and the reset button. It has everything the microcontroller needs to help; it effectively supports it on a PC with a USB connection and it can be powered by an AC-to-DC adapter or battery. The Mega is ideal for the Arduino Duemilanove or Diecimila with the most defenders expected.

Figure 3: Arduino MEGA

4.Raspberry pi B+ board - The Raspberry Pi is a movement developed in UK by the Raspberri Pi Foundation using Mastercard's estimated one-board computers, which are intended to promote the teaching of basic computer programming in schools. The last remedy for the basic Raspberry Pi is the B+ model. Model B has been displaced.

Figure 4: Raspberry Pi B+

3.2.Software component and their uses

The Raspberri Pi moves to promote basic programming in schools in the UK, established by the Raspberry Pi Foundation with the use of estimated oneboard computers of Mastercard. The B+ Model is the last solution for the basic Raspberry Pi. The Model B was moved.

3.2.1. Cloud

S Hodgson and S Olariu's diffused treatment or "the cloud" in less complex terms relies on increasing the scope of fundamental resources. Their results are more complex. Cloud resources are routinely shared by many customers and reconfigured equally efficiently in response to popular demand.

There are three pieces of cloud:

1.   IaaS (Service Infrastructure): This layer contains many types of virtualization. Different buildings, building contraptions and equipment are virtualised and used to illustrate the functional structure and programming applications. Amazon Web Services are models (AWS).

2.   Couples (Platform as a Service) PaaS action courses are stages of improvement for which the progressive gadget itself is worked via a programme and on the cloud. With PaaS, architects may build web applications without presenting tools on their PC and thereafter deliver apps

without the association capabilities of certain structures.Models are Google App Engine and Microsoft Azure.

3. Saas (Software as a Service): A supplier authorises a customer application as help on request, by registering for the "pay-all-as-expenses" model. This licence allows customers to utilise pricey programming regardless of how much their application needs and no persuasive reason to spend a lot of money, or even inscribe additional managers to present and maintain this item. Pattern: IBM.

3.2.2.GOOGLE REVERSE GEOLOCATION API
A geocoding of an area with an intelligible area or a name is the pattern for coding the back (switch), a point territory (scope, longitude). This enables the identification of neighboring area(s), sites or districts such as territories, territory, state or nation to be conceived.

3.2.3.TWILIO
Twilio is an association based in San Francisco, California for cloud exchanges (IaaS). To produce natural telephone selections and transmit and obtain text over the APIs in your online organization, Twilio licenses programming designers. Twilio's organizations are charged on the basis of HTTP.

4. PROPOSED APPROACH
The suggested solution includes the creation of vehicle cloud enlistment to reduce the overhead computer. This allows car consumers to access a variety of resources, including processors, amassment, memory, apps, etc.

This work utilises two characteristics of the PaaS and IaaS cloud, IaaS, to manage data from the equipment via Google Docs into the cloud. PaaS provides the environment for operating the application (including its code to perform the work) in the event of a vehicle theft for three situations called accident disclosure and prepared information, and for making vehicle defilement precautionary notifications. The suggested system records the limitations of (for our case), by means of a "cycling contraction" in the car, at standard time intervals, and communicates these characteristics on the cloud (for further preparation), on the owner (when necessary) of the car or on the untouchable. The contraction contains several sensors, modules and chips and is safe for the cars, because it does not interfere with the vehicle's hardware or routine operation. The system is built with the . Net design, Ms Access and Azzure cloud organisations and much more. A PDA is also utilised for the relation between the owner and the car's device, so that if the owner wants to keep track of or start/stop the handling of the vehicle, he or she may do so. Figure 6 and Figure 7 depict the design and gear execution of the suggested system. This task is done by the employment of a piezoelectric sensor to sense the vibration during an accident, and by the accellometer, the speed expansion is recognised in different centres in order to detect the vehicle's toppling situation. The united output of the piezo sensor and accelerometer is likely an engagement

with the microcontroller on the plate. The degree and longitude of the GPS module mounted into the contraction is motivating to the car. The GSM module on the contraction will be used to send messages to the holder's number at the time of the device securing, which will save the phone number on the gadget's memory. Computer applications using Nimbits are shown on device and cloud to permanently log cloud data. The data include an accelerometer, gyro views. The time, grade and longitude is sporadically reported. If an accident occurs, the sensor regard must be sent on to the cloud. An endless programme is running in the background, which takes a standard value into account the sensor field for each car. The last updated length and extension area using Google Reverse Geolocation API is recovering a departure from the standard value.

The mishap event is generally ideal to shutter clinics and police by means of the management of Twilio message. The aforesaid module is shown in Figure 8 in Stream Graph type. Figure 10 shows the identification of the problem. With the introduction of the GSM and GPS module, the consistent area of the car that helps police recovery of the car seized may be followed. By a STOP notification, the confirmed customer can stop the car. The car will thus be restarted physically by transmitting the owner's message. In the event of message stoppage, the car would not start physically. At the time the car stops, it will provide the owner its area in a message. The framework presented also provides cautionary measures for the control of vehicle pollution. Test characteristics are taken and those characteristics are signed in the cloud (a sensor that recognises contaminations delivered via the automobile).
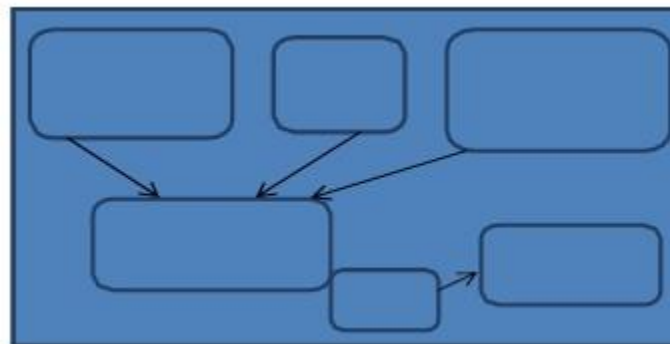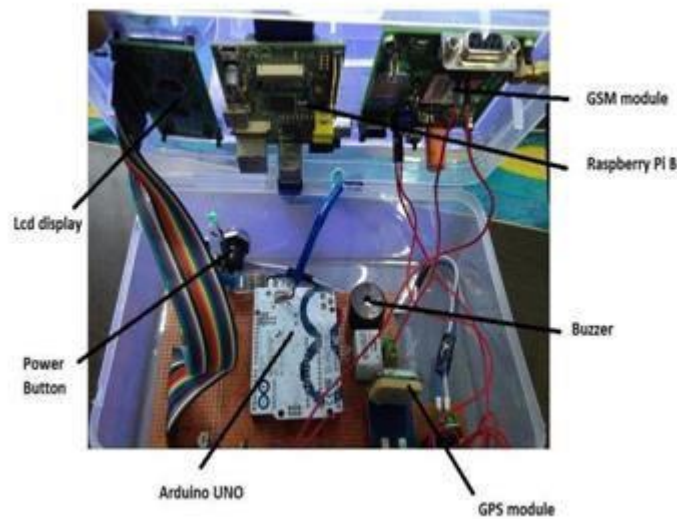
Figure 6: Layout of proposed approach

Figure 7: Hardware Implementation of proposed approach

5. Working of the system

The sensors are used to recognise upgrades and the chip evaluates the sensor reactions in the activity, e.g. the commencing message movement. The device also gives the external interface to the internet, wifi and SMS.

- GPS innovation is used to develop vehicle dynamic and area data (scope and length), GPS innovation

- The GSM module is used to send the car owner/outsider communications whenever necessary

- The accelerometer is used to record the vehicle's rise in speed in various planes. This is proof of odd driving.

- The pi+ board Raspberry is used to interface the device with the cloud. A wireless beneficiary module connects the board with the Internet. ☐ For signing information on cloud workers, Google API programming is used. Information handling is transmitted to the cloud. Figure 9 depicts, once the gadget was associated, the underlying screen of the suggested technique.
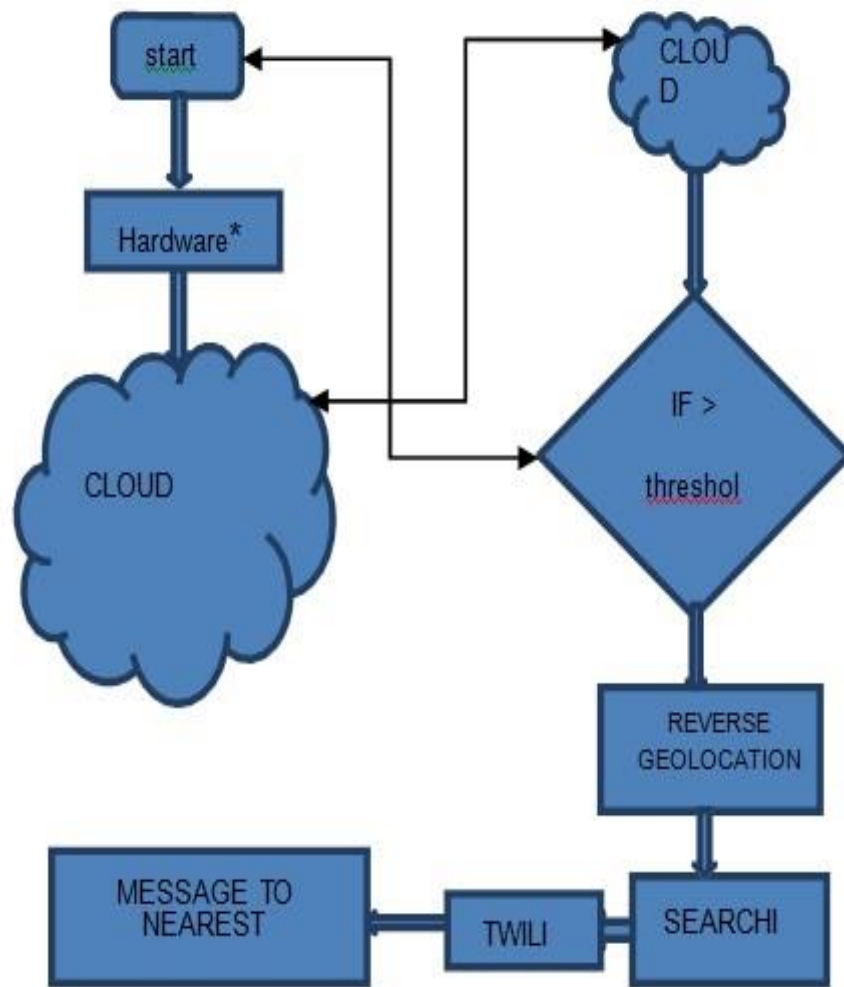
Figure 8: Working Model

Figure 10:Accident detection &information alert

6. CONCLUSION

This suggested approach uses distributed computing IaaS and SaaS features coupled with mishap identification and data ready for the ongoing follow-up of vehicles and pollution monitoring. The Web interface between the car and the cloud and SMS management between the customer and the cloud.

7. LIMITATIONS

The technology delivers just an alert service to the authorities instead of a remedy to the disaster. During its function, the system requires permanent Internet connections.

The framework provides assistance to disrupt the professionals instead of providing a response to the disaster. The framework requires a permanent web network. If, under any conditions, the adaptable organisation is upset, security for its resident cannot be guaranteed, the methodology studied above is entirely vulnerable to cell phones.

8. FUTURE SCOPE

The solution suggested is based on GPS and GSM to manage the car burglary. Continuous traffic information and inspection that allow the framework to monitor traffic conditions in the various districts will be conducted. The car owner may get different wellness notifications if a vehicle exceeds particular speed restrictions. The unauthorised development of vehicles and other exemptions using the advancement of geographic areas, as well as time sensitive restrictions can also be used as cautionary precautions.

REFERENCES

[1]   Gongjun Yan , S. Olariu , M. Weigle, Providing location security in vehicular Ad Hoc networks, IEEE Wireless Communications, v.16 n.6, p.48-55, December 2009.

[2]   Fan Li; Yu Wang;, Routing in vehicular ad hoc networks: A survey, Vehicular Technology Magazine, IEEE, vol.2, no.2, June 2007,pp.12-22,

[3]   Gongjun Yan , Stephan Olariu , Michele C. Weigle, Providing VANET security through active position detection, Computer Communications, v.3 July 2008

[4]   Dinh. HT, Lee C, Niyato D, Wang P, A survey of mobile cloud computing: architecture, applications, and approaches in :Proceedings of the wireless communications and mobile computing;2011.
http://developer.android.com/guide/topics/sensors/sen sors_overview.html

[5]   Dedicated Short Range Communication Standard (DSC), Intelligent Transportation System ITS http://www.standards.its.dot.gov/

[6]   Abid H, Phuong LTT, Wang J, Lee S, Qaisar S, V-Cloud: vehicular cyber-physical systems and cloud computing, In Proceedings of the 4th International Symposium on Applied Sciences in Biomedical and Communication Technologies, Barcelona, Spain: ACM:2011.

[7]   Dr Deysi Rodriguez, KR 69D No. 40-27 INT, 17 APTO 502 (Urbanizacion los arrayanes de Sausalito) Bogota, Colombia, South America.

[9]. Calculate distance, bearing and more between latitude/longitude points. http://www.movable-type.co.uk/scripts/latlong.html.

[10] Mohan D. Road traffic injuries—a neglected pandemic. Bull World Health Organ 2003.

[11] Dinesh Mohan,(2011). Analysis of Road Traffic Fatality Data for Asia. J. of the Eastern Asia Society for Trans. Studies.

[12] Lascher, Edward L. and Michael R. Powers. "The economics and politics of choice no-fault insurance." Springer, 2001

[13] T. El Gamal, A public key cryptosystem and a signature scheme based on discrete logarithms, IEEE Transactions on Information Theory.

[14] H. A. Najada and I. Mahgoub, "Big vehicular traffic data mining:Towards accident and congestion prevention," in 2016.

[15] M. S. Amin, J. Jalil, and M. B. I. Reaz, "Accident detection and reporting system using GPS, GPRS and GSM technology," in International Conference on Informatics, Electronics & Vision

(ICIEV), Dhaka,

Bangladesh, 2012

[16] Mohan D.,(2002) "Traffic Safety and Health in Indian Cities", Journal of Transport & amp; Infrastructure, p,NewDelhi.

[17] Global status report on road safety: time for action. Geneva,(2009) World Health Organization.

[18] Begg S, Tomijima N. Global burden of injury in the year 2000: an overview of methods. Geneva, World Health Organization, 2003.

[19] International statistical classification of diseases and related health problems. Tenth revision. Volume 1: Tabular list; Volume 2: Instruction manual; Volume 3: Index. Geneva, World Health Organization.

[20] Hultkrantz, L., Lindberg, G., Andersson, C., (2006). The value of improved road safety.

[21] M. Amin, M. Bin IbneReaz and S. Sheikh Nasir, "Integrated Vehicle Accident Detection and Location System", 2014.

[22]Mahony R, Hamel T, Pflimlin JM. Nonlinear complementary filters on the special orthogonal group. 2008.

[23]Centers for Disease Control. CDC Surveillance Update. Atlanta:Centers for Disease Control and Prevention; 1988.

[24]B. Tang, R. Sandhu, and Q. Li, "Multi-tenancy authorization models for collaborative cloud services," in Collaboration Technologies and Systems (CTS), 2013.