

A477213



EV PORTABLE CHARGER

User Manual

English



A464571



CAUTION:

- Before operation, please read the operation guide in detail to understand the correct use of the equipment. After reading, please keep it properly for future reference.
- Use the power source with external upstream Circuit Breaker.
- Make sure the charger is used in a safe, secure place and well out of the reach of young children or pets.
- Please use the charger in a dry, well ventilated and secure place. Keep well out of reach of young children or pets. Avoid water pouring directly onto the power plug .
- Do not open the enclosure while charging or with the power on.
- Do not maliciously damage the product.
- Never use with an adapter. Shall only be plugged directly into a fixed/wall socket.



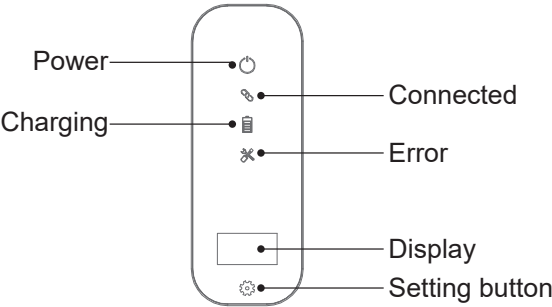
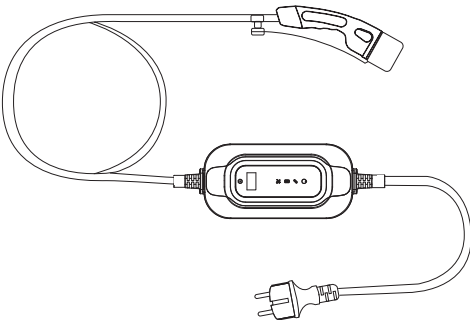
Repair or maintenance work not described in this manual may only be performed by an authorized dealer.

Contents

1. Introduction	10
2. Technical parameters	11
3. Explanation of the operating display	11
4. Use of the charger	12
Start charging	12
Stop charging	12
5. Function	13
Switch Current	13
Timer function	13
6. Light Status	14

Introduction

Introduction to the Portable EV Charger(Mode 2)



Specifications

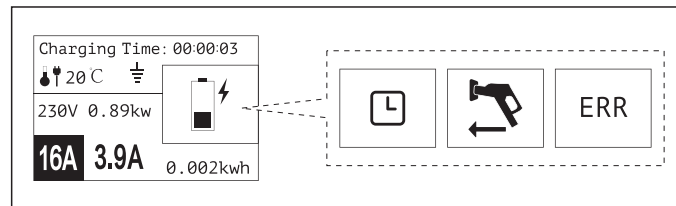
Model	Power Supply Type	Cable Total Length	Voltage	Current	Connector Type
A464571	1 Phase	3M	220-250V AC	8/10/13/16A	T2

Technical parameters



Explanation of the operating display




S/N	Item	Parameters
1	Rated voltage	230V AC $\pm 15\%$ 1ph TN/TT/IT
2	Grid frequency	50/60 Hz
3	IP protection class	IP54
4	Operating temperature	-25°C~+45°C
5	Storage temperature	-40°C~+85°C
6	Humidity	Up to 75%, Maximum value at 40°C
7	Altitude	2000m
8	Protection	Over-voltage protection Under-voltage protection Over-current protection Short-circuit protection Ungrounded protection Over-temperature protection Leakage protection AC 30mA+DC 6mA
9	Operating instruction	LED & Display
10	Dimensions	200 (L) x 100 (W) x 55 (H) mm
11	Weight	Net weight 1.56kg; Gross weight 2.33kg
12	Standards	EN 62752:2016 EN IEC 61851-1:2019 IEC 62196-1:2014 IEC 62196-2:2016



00:00:03	Charging time	3.9A	Constant current
20°C	Temperature	⌚	Countdown
⏻	Grounding	🔌↔️	Standby
230V	Voltage	🔋⚡	Charging
0.89kw	Power	ERR	Error
16A	Rated current	0.002kwh	Electricity consumption

Use of the charger




Start charging

Step	Illustration	Operation
1		Insert the plug into the correct power supply socket.
2		Remove the protective cap and fully insert the charging connector into the EV charging port.
3		Start charging

DANGER

Do not use the product if it appears to be damaged or the cable is broken.
Do not disassemble or assemble the connector and change the internal parts.
Do not clean the products using chemicals or cleaning the EV while charging.

Stop charging

Step	Illustration	Operation
1		Insert the plug into the correct power supply socket.
2		Disconnect the charging connector from the EV.
3		Close the protective shell of EV charging port, then cover the protective cap of the charging connector.
4		Put the portable charger into the package.

Function

Switch current

Step	Illustration	Operation
1		Insert the plug into the correct power supply socket.
2		Press the Setting button for 2 seconds, no more than 4 seconds. Then release it, to enter setting the switch current mode.
3		Continue to press the button briefly. The current will be changed (switch between 8-10-13-16A). Setting the current as User's request.
4		Press the button for 2S again. Setting successfully.

CAUTION

In order to switch charging current, please make sure the power plug is firmly inserted into the socket and plug for the EV is disconnected. Please complete setting within 4 seconds at each step, otherwise the feature setting will fail.

Timer function

Step	Illustration	Operation
1		Insert the plug into the correct power supply socket.
2		Press the Setting button for 2 seconds, no more than 4 seconds. Then release it, to enter setting the switch current mode.
3		Continue to press the button briefly. The time will be changed (switch between 1H-2H-4H-6H-8H-10H). Setting the time as User's request.
4		Press the button for 2S again. Setting successfully.

NOTICE

In case you want to cancel the time setting, you can use one of the two options below:

1. Directly disconnect the plug from the outlet socket.
2. Press the Time button for more than 4 seconds.

Light status

Operation

1	Power off				
2	Check				
3	Standby				
4	Connected				
5	Charging				
6	Charge complete				

Display Light Status

Status Light	Off	Blink	On
Power			
Connect			
Charging			
Error			

Troubleshooting

7	CP Error				
8	Over/under voltage				
9	Over current protection				
10	Electric leakage protection				
11	No ground connection				
12	Temperature warning				
13	Persistent high temperature				



Importer: BAT.POWER OY

