Arduino Motor Shield (L298N) (SKU:DRI0009)

From Robot Wiki

Contents

Introduction

This motor shield allows Arduino to drive two channel DC motors. It uses a L298N chip which deliveries output current up to 2A each c
speed control is achieved through conventional PWM which can be obtained from Arduino's PWM output Pin 5 and 6. The enable/disab
motor control is signalled by Arduino Digital Pin 4 and 7.

The Motor shield can be powered directly from Arduino or from external power source. It is strongly encouraged to use external power s
the motor shield.

⚠️ **IOREF pin** for Version 1.2:

The board's IOREF pin is connected with pin 5V! So when adding the DRI0009 to the stack of board(controller), the controller
voltage would changed to 5V! So it only can be compatible with the controller working at 5V. If you need to use controller worl
voltage, e.g. 3.3V, you need **CUT OFF** the IOREF pin of DRI0009.

We are deeply sorry about the mistake! We will revise the design in the next version.

Specification

- Logic Control Voltage：5V (From Arduino)
- Motor Driven Voltage：4.8～35V (From Arduino or External Power Source)
- Logic supply current Iss：≤36mA
- Motor Driven current Io：≤2A
- Maximum power consumption：25W（T=75℃）
- PWM、PLL Speed control mode
- Control signal level:
    - High：2.3V≤Vin≤5V
    - Low：-0.3V≤Vin≤1.5V

PinOut

Control Mode Selection Jumpers: The shield supports PWM and PLL(Phased Locked Loop) control Modes. The PWM mode uses E1
generate PWM signal. The PLL mode uses M1 and M2 to generate phase control signal.
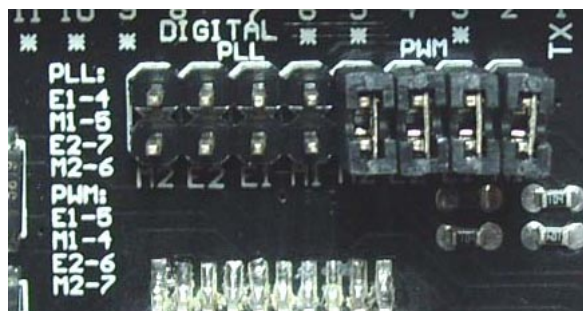
Motor Terminal: Two DC motors are connected to blue motor terminals. The male header behide the terminals are the same as the moto
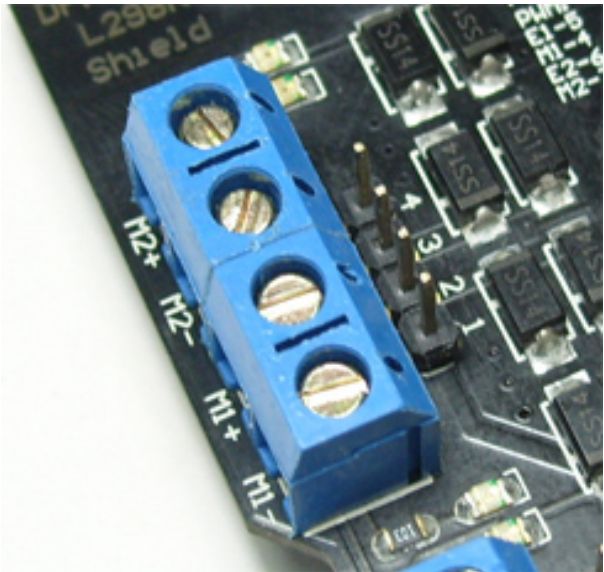
PWRIN： The motors can be powered by external power supply when the motor current exceeds the limits provided from the Arduino. between external and Arduino power is implemented by two jumpers.

- PWRIN: External Power
- VIN: Arduino Power
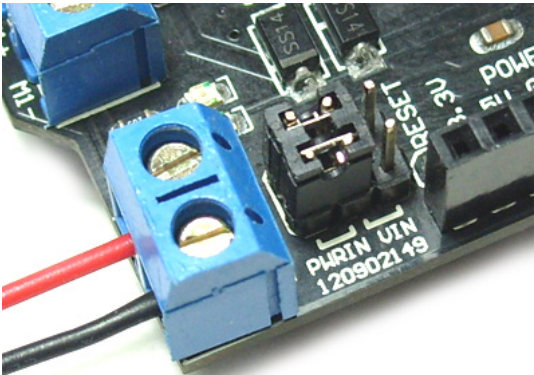
NOTE: When the motor shield is powered by external power source, make sure the external power source and Arduino have the same GND.

Control Signal Truth Table:

E1	M1		E2	M2	
L	X	Motor 1 Disabled	L	X	Motor 2 Disabled
H	H	Motor 1 Backward	H	H	Motor 2 Backward
PWM	X	PWM Speed control	PWM	X	PWM Speed control

Note: H is High level ;L is Low level ;PWM is Pulse Width Modulation signal; X is any voltage level

"PWM Mode"

Pin	Function
Digital 4	Motor 1 Direction control
Digital 5	Motor 1 PWM control
Digital 6	Motor 2 PWM control
Digital 7	Motor 2 Direction control

"PLL Mode"

Pin	Function
Digital 4	Motor 1 Enable control
Digital 5	Motor 1 Direction control
Digital 6	Motor 2 Direction control
Digital 7	Motor 2 Enable control

Tutorial

Connection Diagram

Speed Control Mode

Power source selection jumpers
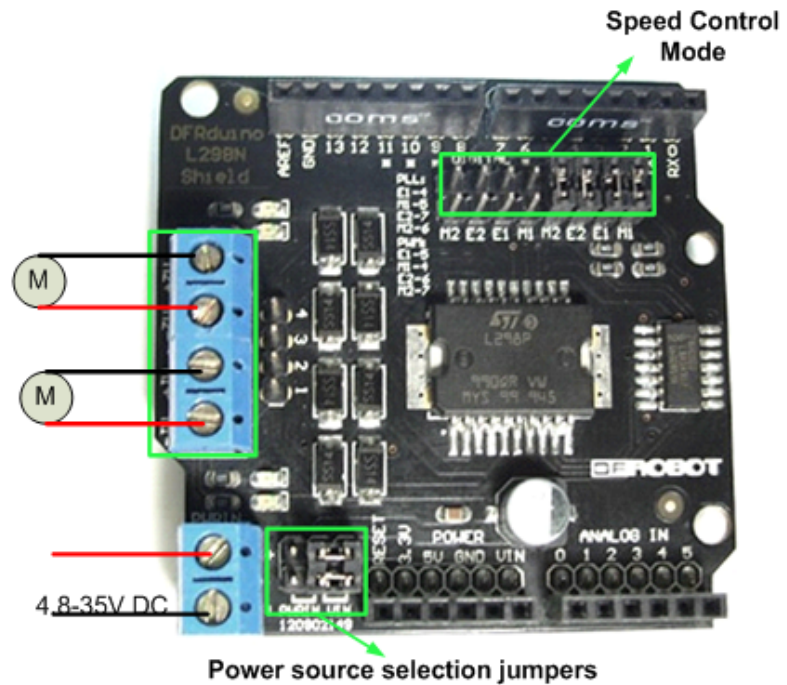
Sample Code

PWM Speed Control

```
?
1  //Arduino PWM Speed Control:
2  int E1 = 5;
3  int M1 = 4;
4  int E2 = 6;
5  int M2 = 7;
6
7  void setup()
8  {
9      pinMode(M1, OUTPUT);
10     pinMode(M2, OUTPUT);
11 }
12
13 void loop()
14 {
15   int value;
16   for(value = 0 ; value <= 255; value+=5)
17   {
18     digitalWrite(M1,HIGH);
19     digitalWrite(M2, HIGH);
20     analogWrite(E1, value);   //PWM Speed Control
21     analogWrite(E2, value);   //PWM Speed Control
22     delay(30);
23   }
24 }
```

PLL Speed Control

```
?
1  //Arduino PLL Speed Control:
2  int E1 = 4;
3  int M1 = 5;
4  int E2 = 7;
5  int M2 = 6;
6
7  void setup()
8  {
9      pinMode(M1, OUTPUT);
10     pinMode(M2, OUTPUT);
11     pinMode(E1, OUTPUT);
12     pinMode(E2, OUTPUT);
13 }
14
15 void loop()
16 {
```

```
17  int value;
18  for(value = 0 ; value <= 255; value+=5)
19  {
20    digitalWrite(E1,HIGH);
21    digitalWrite(E2, HIGH);
22    analogWrite(M1, value);   //PLL Speed Control
23    analogWrite(M2, value);   //PLL Speed Control
24    delay(30);
25  }
26}
```

Trouble shooting

PWM speed control is used to simulate different voltage value accounted for by adjusting the air to control the voltage applied across the motor leve

$$output\_voltage = (on\_time\ /\ off\_time) * max\_voltage$$
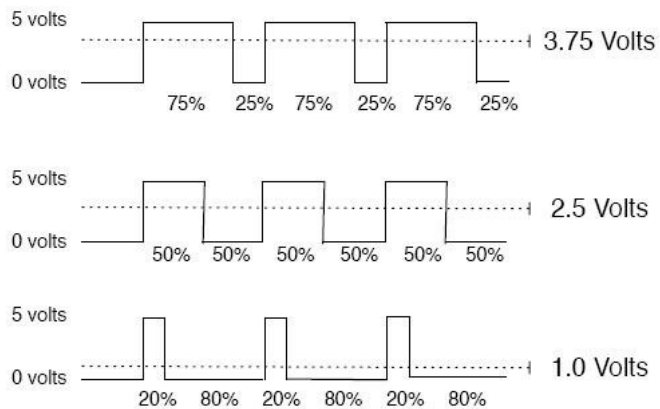
More question and cool idea,visit DFRobot Forum (http://www.dfrobot.com/index.php?route=DFblog/blogs)

More

Shield diagram (http://www.shieldlist.org/dfrobot/2a-motor)
Library installation (https://www.arduino.cc/en/Guide/Libraries#.UxU8mdzF9H0)

→　Click to buy on DFRobot Store (http://www.dfrobot.com/index.php?
route=product/product&keyword=DRI0009&category_id=0&description=1&model=1&product_id=69)
→　DFRobot Distributor List (http://www.dfrobot.com/index.php?route=information/distributorslogo)

Retrieved from "http://www.dfrobot.com/wiki/index.php?title=Arduino_Motor_Shield_(L298N)_(SKU:DRI0009)&oldid=32126"
Categories: Product Manual │ DRI Series │ Motor Controllers │ Shields

- This page was last modified on 11 November 2015, at 16:02.
- This page has been accessed 191,270 times.