


REQUIRED UTILITIES (PER ROOM):
12 GPH OF CLEAN DEMINERALIZED WATER @ 40 PSIG.
1/2” NPT CONNECTION. FOR HUMIDIFIER
STEAM BOILER WATER QUALITY: DEIONIZED, BETWEEN
50,000–100,000 OHMS/CM

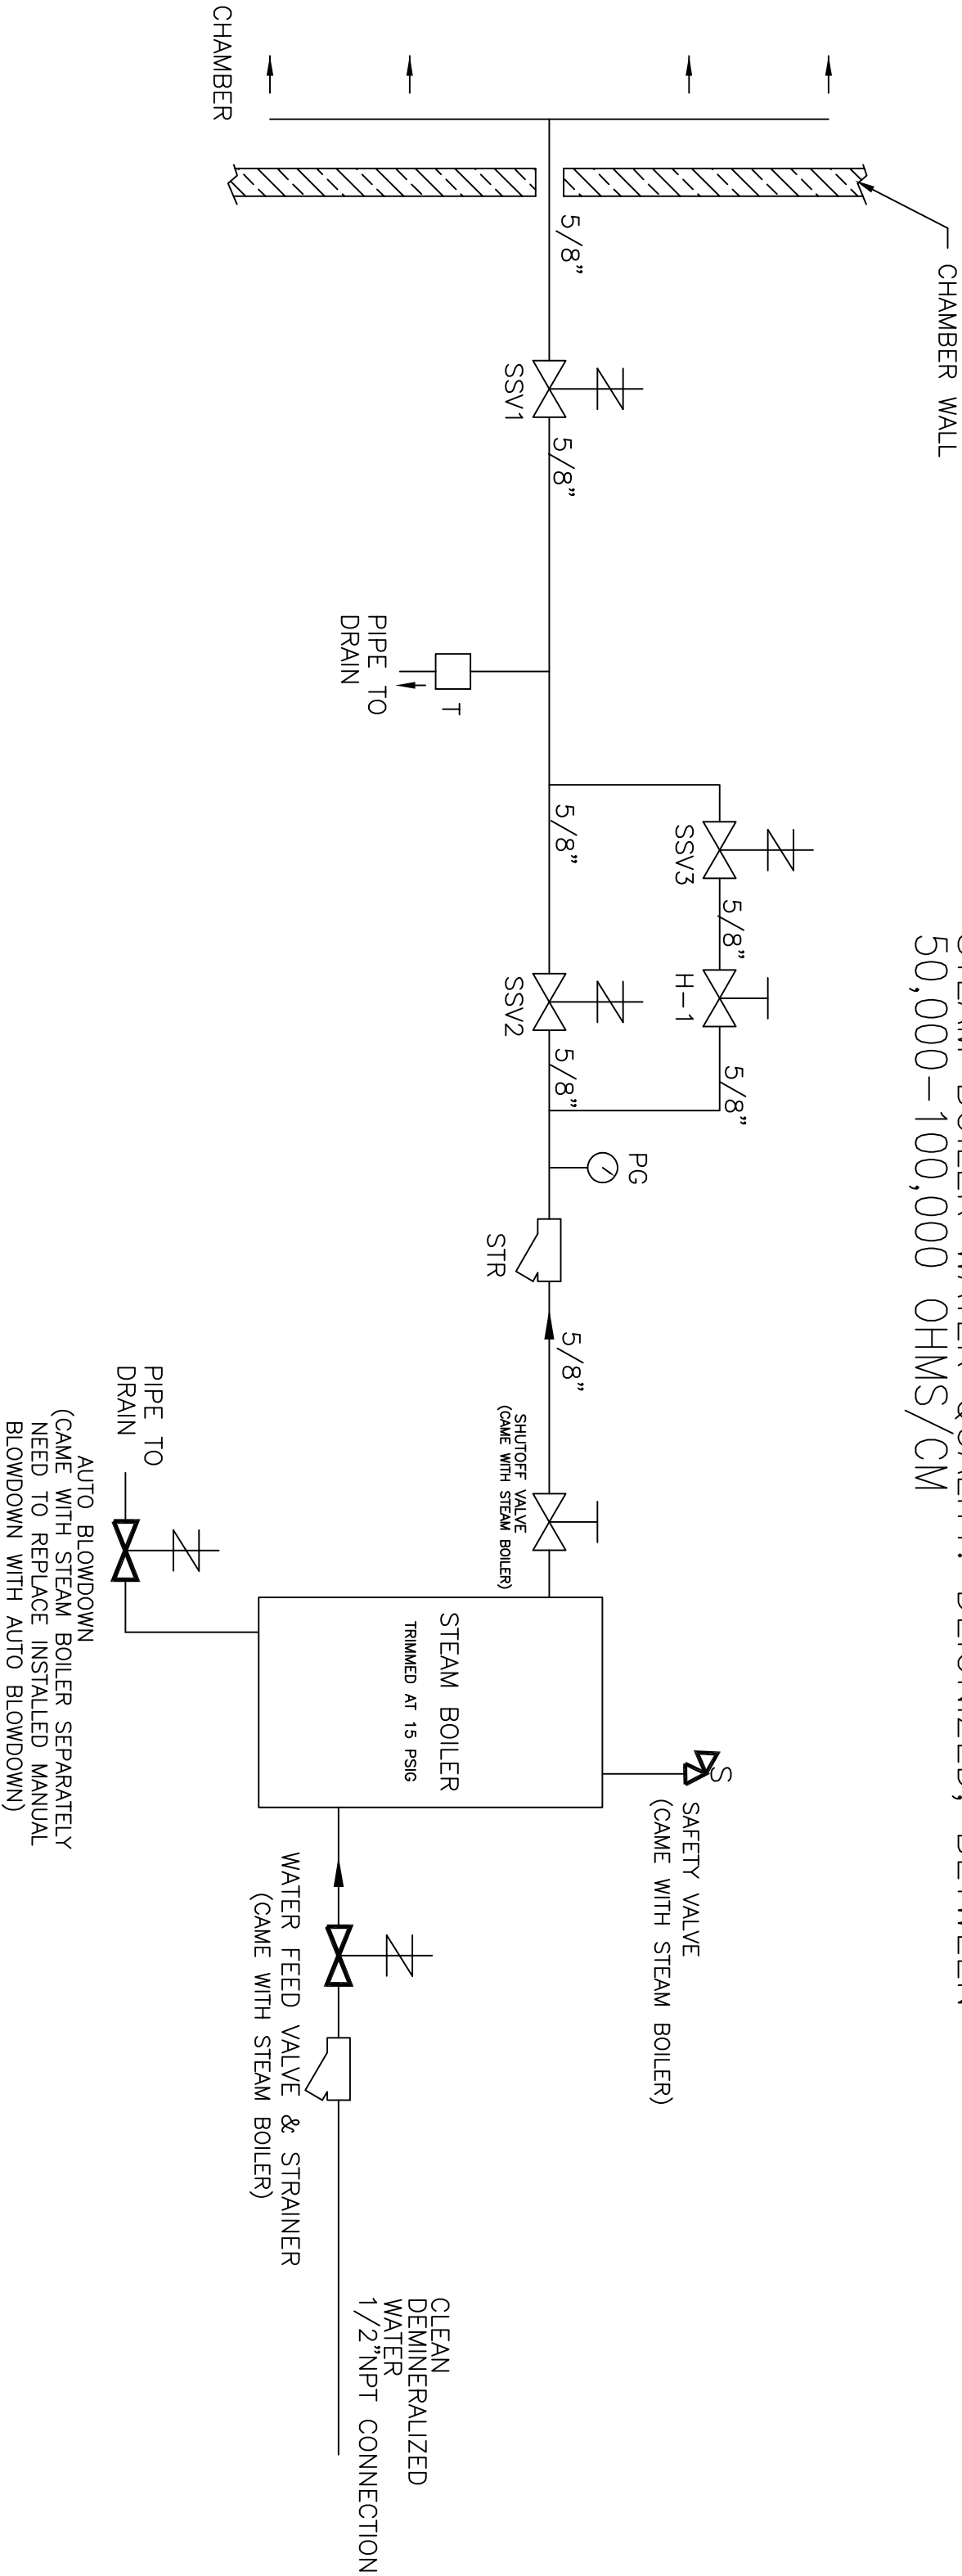

TOLERANCE: +/- .25"				
NOTICE: THIS DRAWING IS THE PROPERTY OF THERMAL PRODUCT SOLUTIONS AND IS LOANED TO THE CUSTOMER. IT SHALL NOT BE REPRODUCED, COPIED, LOANED, OR SUBMITTED FOR EXAMINATION WITHOUT OUR CONSENT.				
DATE	9/21/2010	DATE	9/21/2010	
CZT		CZT		