

## Indoor Helium Hotspot Overview

The Nebra Indoor Helium Hotspot is a compact & elegant solution to provide Helium LongFi coverage and start mining HNT with ease.

### Quick Specifications

Specification	Nebra Indoor Hotspot
<b>RRP</b>	£250 ex VAT
<b>Case</b>	Plastic (ABS)
<b>Ingress Protection</b>	IP40
<b>Dimensions</b>	150x150x50 mm (Excluding Antenna)
<b>Weight</b>	0.4 Kg
<b>Power Requirement</b>	9-16V DC @ 15W
<b>Average Power Consumption</b>	~8W*
<b>Annual Power Consumption</b>	~70kWh
<b>Maximum TX Power</b>	24-27dBm**
<b>Network Connectivity</b>	10/100 Ethernet, 2.4Ghz 802.11N Wi-Fi
<b>Antenna Connection</b>	RP-SMA Female
<b>Rated Ambient Temperature</b>	20-30C
<b>Base SOM</b>	Raspberry Pi CM3+
<b>CPU Specification</b>	Broadcom BCM2837B0, Quad Core Cortex-A53 (ARMv8) 64-bit SoC @ 1.2GHz
<b>High Endurance Storage</b>	32GB
<b>RAM</b>	1GB LPDDR2 SDRAM
<b>Internal PCB Dimensions</b>	~ 139x139x30 mm

\* Average Power Consumption Measured At Mains,

\*\* Maximum TX Power may be capped to a lower amount in some regions.

### Package Contents

- The Nebra Helium Indoor Hotspot
- RP-SMA LoRa Antenna
- Worldwide 12V 1.5A Power Adapter + Adaptors
- 1M CAT5 Ethernet Cable

*Please note the above image is for illustrative purposes only, colours of some parts may change.*

### Supported Regions

The Nebra Indoor Hotspot comes in three hardware versions:



Figure 1: Indoor Hotspot Included

Frequency	Supported Regions
<b>470 Mhz</b>	CN470
<b>868 Mhz</b>	EU868, IN865, RU864
<b>915 Mhz</b>	US915, AU915, AS923, KR920

The frequency is set upon initialisation by the Helium Network.

### Antenna Specifications

Specification	470Mhz Model	868 & 915Mhz Models
<b>Frequency Range</b>	420-480	860-930 Mhz
<b>Peak Gain</b>	3 dBi	3 dBi
<b>VSWR</b>	< 2.3	< 1.8
<b>Input Impedance</b>	50 Ohms	50 Ohms
<b>Length</b>	17.2CM	20.7CM

### Dimensions

The Nebra Indoor Hotspot is 150x150x50MM In size when nothing is connected.

Approximatley 175x150x50MM space is required when accounting in space required for connectors.

### Interfaces

#### Connectors

1. 9-16V @ 15W DC 6.5MMx2.0MM Barrel Jack
2. LED Indicator.
3. Interface Button
4. RP-SMA LoRa Connector
5. Ethernet Connector

#### Status Indicator

The Nebra Indoor Hotspot has a status indicator as shown above.

The Top LED will act accordingly:

- Off - Software has not started yet.
- On - Operating as normal
- Slow Blinking - Bluetooth Pairing is enabled
- Fast Blinking - There is potentially a fault. Please check diagnostics page.

The Bottom LED acts accordingly:



Figure 2: Indoor Hotspot Connectors

- Off - Unit is receiving no power.
- On - Unit is powered up.

### Button

The Nebra Indoor Hotspot has a button on the back of the unit.

This is used to re-enable bluetooth pairing on the hotspot, hold the button in for approximately 15 seconds then release to start pairing. The top light should start blinking slowly if successful.

### Firmware

The Nebra Hotspots run a customised software to provide high reliability and ensure your units are as up to date as they can be.

Approximately your hotspot will update once a week in an automatic process, we will announce updates via various social media platforms when they happen.

The software is open source at <https://github.com/nebraltd/helium-miner-software>

### Unit Information

Each unit has a sticker located on the base of the unit.

This includes important Information including:



Figure 3: Indoor Hotspot Base

- Frequency of the Unit
- Ethernet MAC address
- Nebra Serial Number
- Raspberry Pi Serial Number

You will require some of this information when linking your unit to our Dashboard.

### Certifications

We are working on getting the Nebra Indoor Hotspot certified in multiple regions. As we have results from the certification process we will post them here.

#### Certification List

Approval	Countries Covered	Hardware Frequency	Status	Frequency Plans
CE	European Economic Area	868 Mhz	In Progress	EU 868
UKCA	United Kingdom	868 Mhz	In Progress	EU 868
FCC	United States of America	915 Mhz	In Progress	US 915
ISED	Canada	915 Mhz	In Progress	US 915
RCM	Australia & New Zealand	915 Mhz	In Progress	AU 915
MIC	Japan	915 Mhz	In Progress	AS920 (AS1)
SRRC	China	470 Mhz	In Progress	CN 470
EAC	Russia	868 Mhz	In Progress	RU 864
WPC	India	868 Mhz	In Progress	IN 865

### Block Diagram

Below is a block diagram showing the key components of the Nebra Indoor Hotspot.

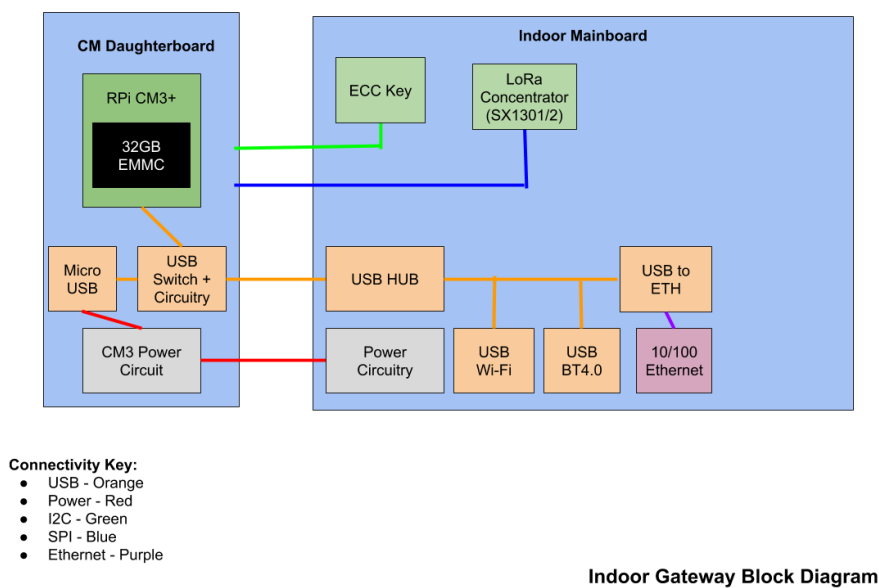


Figure 4: Indoor Hotspot Block Diagram