CASHMATIC DEVICE INSTALLATION GUIDE

EVALUATING DEVICE POSITIONING....page 2
ELECTRICAL NETWORK TEST....page 3

WITH STORE MANAGER
POSITIONING AND CONNECTING THE DEVICE....page 4
DEVICE SETTINGS CONFIGURATION....page 5
MAXIMUM LEVELS....page 5
FLOAT LEVELS....page 5
ACCEPTED DENOMINATIONS....page 7
EMAIL SERVER NOTIFICATIONS....page 9
GENERAL DEVICE SETTINGS....page 10
DEVICE USERS CONFIGURATION....page 11
DEVICE ACTIVATION....page 12

WITH STORE MANAGER AND EMPLOYEES (all employees)
FIRST REFILL....page 13

WITH STORE MANAGER AND EMPLOYEES (who can do withdrawals and cash collection)
EXPLANATION OF DEVICE'S MENU....page 14
SOLVING JAMMED COINS/BANKNOTES AND BASIC CLEANING....page 14
INSTALLATION COMPLETED, TESTING....page 14

EVALUATING DEVICE POSITIONING

Remember that the device is powered from the rear and that it is ALWAYS necessary to be able to access the power switch, in case of "embedded" placement it will be advisable to warn the customer of the need to leave a technical opening behind the cabinet/desk.

If the drawer is placed inside a cabinet, in addition to the overall dimensions you will have to consider the need of the same to be able to have an opening space on the left of at least 7 cm and key insertion on the right of at least 7 cm. as shown in the photographs below.







ELECTRICAL NETWORK TEST

It is very important to carry out a 220v power line test.

The test and the eventual corrective operation that will ensue in case of a bad outcome will ensure the avoidance of a number of malfunctions in the future that might be wrongly attributed to the machine.




Scan the QR code to watch the video about the electrical network test.

POSITIONING AND CONNECTING THE DEVICE

After the device has been powered on and connected to the ethernet cable, press the CASHMATIC button until the menu opens.

Click on SETTINGS-> IP ADDRESS



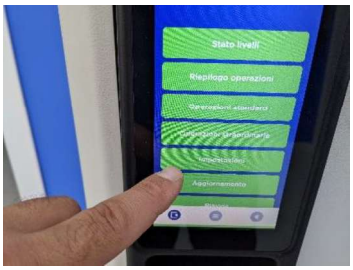





At this point you know the IP address that the router has assigned to the device. You can change it and make it static.

The drawer now responds to commands using the browser via a pc or mobile phone/tablet. (We recommend the use of Google Chrome).

To access the WEB PANEL, you need to type the IP address of the device in the browser's address bar.

DEVICE SETTINGS CONFIGURATION

The settings menu allows us to configure the machine:

MAXIMUM LEVELS:

Maximum levels are pre-set for devices 660, 860 and 1060

In the 460 model you will have to choose the maximum level of banknotes (70 pcs maximum usable between 5€ - 10€ - 20€ - 50€).

If you don't want to recycle the 50€ banknote, set its maximum level to 0.

Example with 70 pieces:

30 x 5€
20 x 10€
15 x 20€
5 x 50€

CASH FUND/FLOAT LEVELS:

The cash fund level is the number of coins and bills the machine needs to start every morning and every time we refill the device there will be a menu that indicates the number of coins and bills that the drawer can accept. Here are some examples:

Small business - model 460:

- 40 coins per type
- 15pcs of 5€
- 12pcs of 10€
- 5pcs of 20€
- (2pcs of 50€ in restaurants or if needed)

Medium activities - model 660:


- 60 coins per type
- 20pcs of 5€
- 15pcs of 10€
- 10pcs of 20€

Medium/high number of receipts activities such as busy pharmacies and supermarkets:

- 80 coins per type
- 30pcs of 5€
- 20pcs of 10€
- 10pcs of 20€
- 2pcs of 50€ (only in 1060)

!! SET THE CASH FUND LEVEL OF COINS WITH DIFFERENCES OF +/- 10%

AS PER THE FOLLOWING EXAMPLE !!

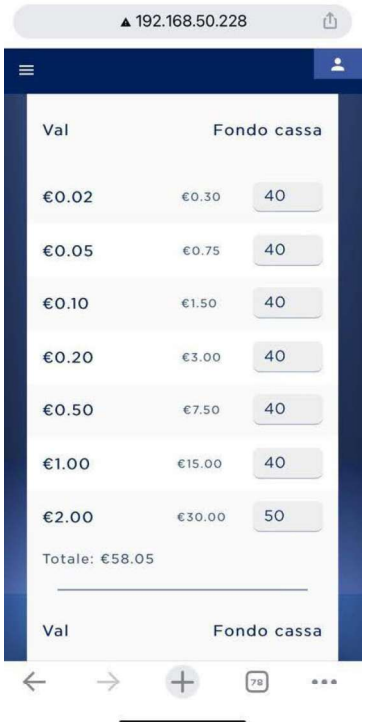

It is critical to remember that all coins are contained in a single container, and that if the number of coins is not similar across denominations, coin payments will likely become more complex and slower to execute!

For example, if we were to dispense €1.20 change and there were 800pcs €1.00 coins and only 30 €0.20 coins, the machine would be very likely to dispense €1.00 right away and then struggle to find the remaining coins!




When programming the number of banknotes needed for the cash fund, always remember that €20 banknotes are the most entered by the final customers, so there will be no need to overflow, they are unlikely to run out.

In the case of installation of a 660, the €50 bill is not handled, however, it should still be unlikely to see €20 easily run out.

ACCEPTED DENOMINATIONS

If the customer does not wish to accept low denomination coins such as 0.02 cents it is possible to inhibit their acceptance in this menu.

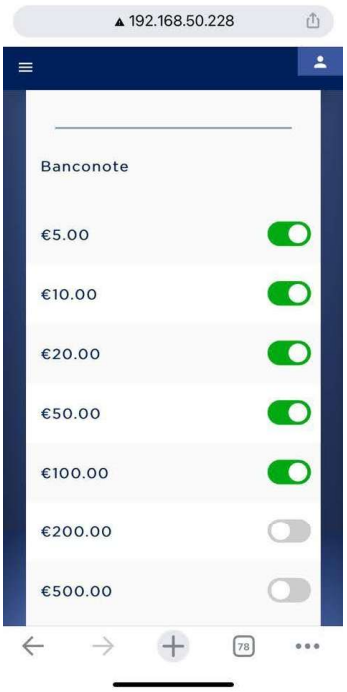


Whenever possible always advise the customer to avoid accepting 2 cents, such a small coin could in fact cause more frequent jams.

ALWAYS inhibit the acceptance of €500 and €200 bills on drawers that do not have €50.00 bills as change

EMAIL SERVER NOTIFICATIONS

You can now program a mail server to send email notifications. If you have a personal mail server you can use it, otherwise you can use a free service like gmail.com and create a dedicated email account.

The machine will send email notifications to the accounts created in the device. We will then go on to create them in the next steps.

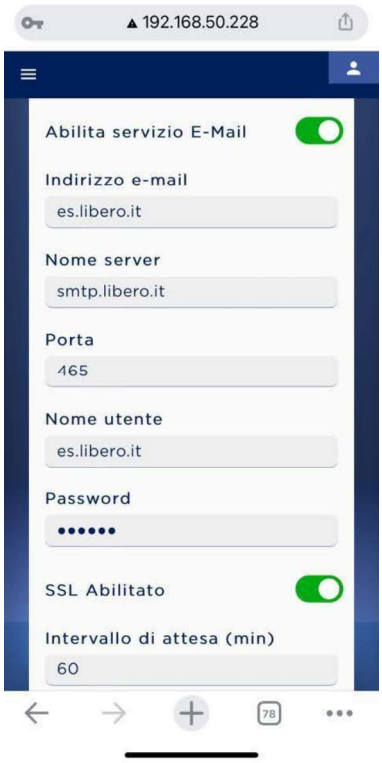

To fill the email server form you can take a hint from the example using LIBERO.IT service.

If you intend to use Gmail instead, remember that it will be necessary to authorize 2-factor authentication and generate a password for the email app from the google account settings.


PRINTED NOTIFICATIONS

Using a non-fiscal printer to print notifications can be very useful for the customer to keep track of activities.

Setting it up is easy, all we need to do is enter the IP address and enable the wanted notifications. We will get the printout at the end of the specified operations.

Let's remember to indicate a waiting time between notifications to avoid printing every time a condition such as low or high cash fund level is realized.

We recommend programming as below:

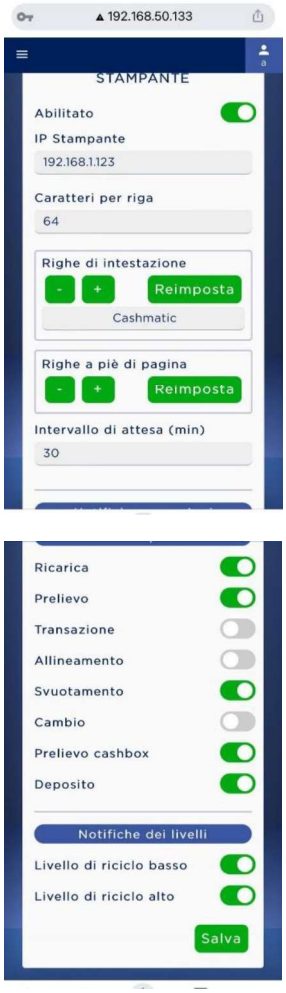

GENERAL DEVICE SETTINGS

This menu allows you to change the name and the language of the device, doing so will allow the customer to figure out which device is printing or sending email notifications if you have multiple Cashmatic devices.



DEVICE USERS CONFIGURATION

In order for the drawer to be activated, you will need to have created at least one account first.

You may need other accounts, but these 3 are always needed!

Begin by creating the 1st system administrator/technician account.

Remember to not create it using the mail already used by the technical account/activator provided by Cashmatic. Create it using a custom username/password.

1st Technician admin account.

Select all permissions so you can give all-around assistance (ask customer for permission to do so).

2nd Business manager's account

Select all the permissions except those that the manager does not intend to use and it's advised not to give the LEVELS CORRECTION operation permission. It's also good to avoid giving the SETTINGS permissions, keeping them exclusively for the use of the technician.

3rd Account for daily refill

An account that can only do REFILL and POWER-OFF/RESTART is always needed in any activity.

We recommend creating it with a simple username/password combination so as to simplify access via display.

Example: username "refill", password "refill".

4th Account to be connected to the cash management software.

An account that can do only TRANSACTIONS and other operations (only if handled by the software) is always needed in any business. This account will be used by the software to access our API.

DEVICE ACTIVATION

Requirements


- Technician account provided by CASHMATIC (email and password)

- Drawer properly connected to the network with INTERNET access

If you do not have a maintainer/activator account but have attended CASHMATIC training courses, you can request credentials by writing to pietro.mambelli@cashmatic.it

To activate the drawer, operate as follows:

1. Open the reserved area on cashmatic.eu/my-cashmatic
2. Create a new account for your customer and Login
3. Click on "REGISTRY DATA" -> "All companies" -> "NEW" and create the customer's activity

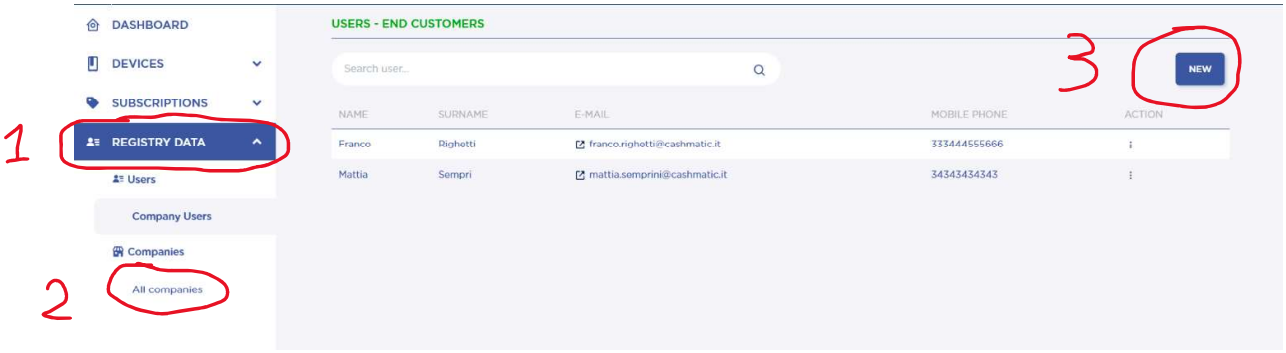

4. After creating the company, click on the 3 dots and select "PAIR DEVICES", it will generate a code.
5. Log in to the web panel of the device with the technician account (NOT the one you just created)
6. Press on the DEVICE MANAGEMENT button in the side menu
7. Insert the pairing code given by the reserved area and click INSTALL. You should receive a notification on the reserved area where you can finish the installation.

Watch a video for this:

https://cashmatic.eu/installation

BY ACTIVATING THE DRAWER YOU WILL EXIT DEMO MODE.

YOU WILL BE ABLE TO PROPERLY EXECUTE TRANSACTIONS FOR AMOUNTS OVER 10.00€

THE 12 MONTH WARRANTY STARTS FROM THE INSTANT THE DRAWER IS INSTALLED FOR THE FIRST TIME

FIRST REFILL



The first refill is the first operation that is taught to the manager and employees.

This step is of critical importance to reduce future technical interventions

MODELS 460 and 660

1. COINS REFILL must be done exclusively by the "REFILL" operation inserting max 10/15 coins at a time.
2. Reloading of BANKNOTES must be done in "MIXED" order.



If reloads are performed incorrectly, the system may not be able to quickly issue change bills and may dispense coins instead of the bill.

MODELS 860 and 1060

Proceed in the same way as for the previously described models for coin insertion

Banknote loading does not require following the "Mixed banknotes" rule.

After refilling, the device is ready to work, at this point we need to take the business manager aside to teach him how to use the functions he has in the web panel.

EXPLANATION OF DEVICE'S MENU

It is mandatory to explain the device's functions to the store manager and the employees who will work with the device. This will ensure less calls and technical intervetions.

- Levels management (mandatory)
- Standard operations (mandatory)
- Extraordinary operations (recommended)
- Report (mandatory)
- User management (recommended)
- Update (recommended)
- Shut down and restart (mandatory)

SOLVING JAMMED COINS/BANKNOTES AND BASIC CLEANING

You can follow with the explanation of jam resolution also with the help of the following videos:

Scan the following QR code to load the video playlist.

It is advisable to save this in the customer's PC as a browser's favorite or with a desktop shortcut.

INSTALLATION COMPLETED, TESTING

- Device activation test with amount and actual receipt issuance when payment is started from management software
- Device activation and deactivation test using the "Cancel payment" option with issuance of the partial amount entered before the receipt total is reached.