

# GATE 2023 BM 33

EE23BTECH11213 - MUTHYALA NIKHITHA SRI

**Question:** A continuous time, band-limited signal  $x(t)$  has its Fourier transform described by:

$$X(f) = \begin{cases} 1 - \frac{|f|}{200} & \text{if } |f| \leq 200 \\ 0 & \text{if } |f| > 200 \end{cases} \quad (1)$$

The signal is uniformly sampled at a sampling rate of 600 Hz. The Fourier transform of the signal is  $X_s(f)$ . What is the value of  $\frac{X_s(600)}{X_s(500)}$ ?

**Solution:**

Parameter	Description	Value
$X(f)$	Fourier transform of $x(t)$	$\begin{cases} 1 - \frac{ f }{200} & \text{if }  f  \leq 200 \\ 0 & \text{if }  f  > 200 \end{cases}$
$X_s(f)$	Fourier transform of sampled signal	?

TABLE I  
INPUT PARAMETERS

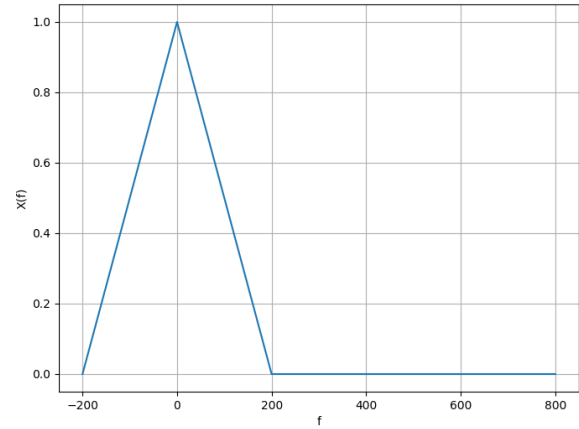


Fig. 1. Plot of  $X(f)$

$$X_s(f) = \frac{1}{600} \sum_{k=-\infty}^{\infty} X(f - 600k) \quad (2)$$

$$\Rightarrow X_s(f + 600) = \frac{X(f)}{600} \quad (3)$$

Using (1)

$$X_s(600) = \frac{X(0)}{600} \quad (4)$$

$$\Rightarrow X_s(600) = \frac{1}{600} \quad (5)$$

$$X_s(500) = \frac{X(-100)}{600} \quad (6)$$

$$\Rightarrow X_s(500) = \frac{1}{2 \cdot 600} \quad (7)$$

$$\frac{X_s(600)}{X_s(500)} = 2 \quad (8)$$

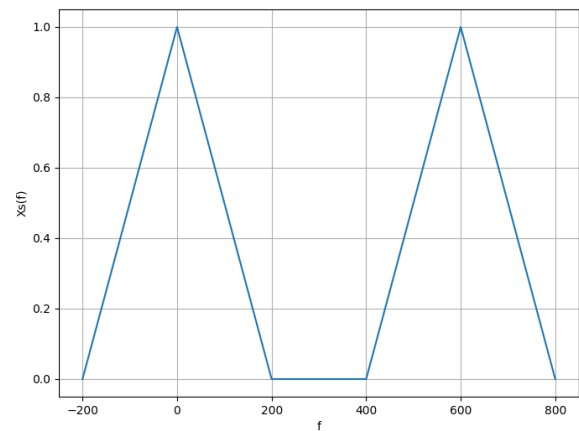


Fig. 2. Plot of  $X_s(f)$