1. Description

1.1. Project

Project Name	stm32f103c8t6
Board Name	stm32f103c8t6
Generated with:	STM32CubeMX 4.14.0
Date	04/24/2016

1.2. MCU

MCU Series	STM32F1
MCU Line	STM32F103
MCU name	STM32F103C8Tx
MCU Package	LQFP48
MCU Pin number	48

2. Pinout Configuration
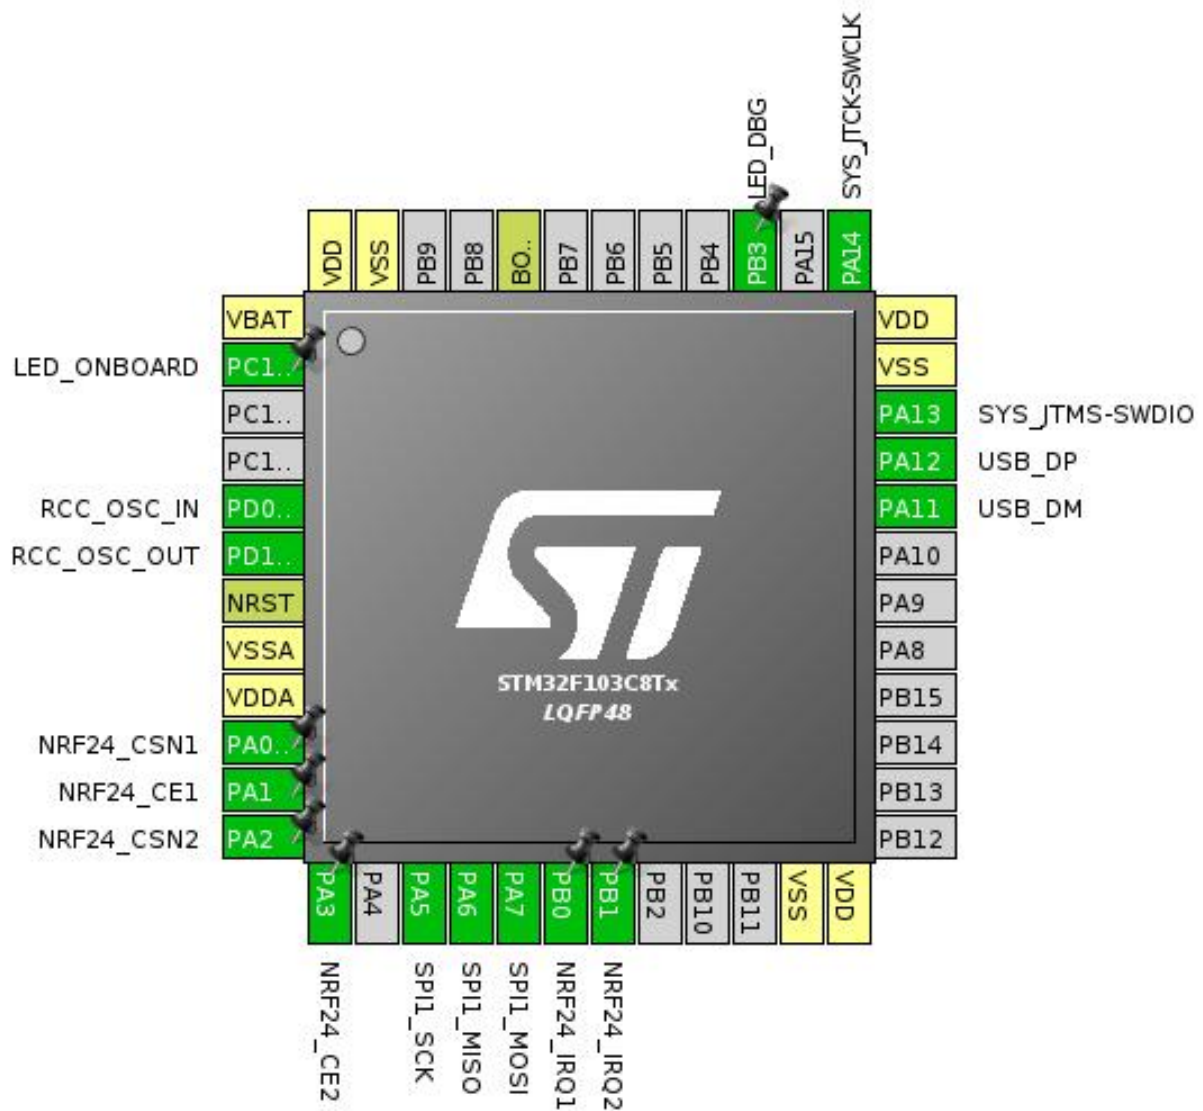
3. Pins Configuration

Pin Number LQFP48	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	VBAT	Power		
2	PC13-TAMPER-RTC *	I/O	GPIO_Output	LED_ONBOARD
5	PD0-OSC_IN	I/O	RCC_OSC_IN	
6	PD1-OSC_OUT	I/O	RCC_OSC_OUT	
7	NRST	Reset		
8	VSSA	Power		
9	VDDA	Power		
10	PA0-WKUP *	I/O	GPIO_Output	NRF24_CSN1
11	PA1 *	I/O	GPIO_Output	NRF24_CE1
12	PA2 *	I/O	GPIO_Output	NRF24_CSN2
13	PA3 *	I/O	GPIO_Output	NRF24_CE2
15	PA5	I/O	SPI1_SCK	
16	PA6	I/O	SPI1_MISO	
17	PA7	I/O	SPI1_MOSI	
18	PB0 *	I/O	GPIO_Input	NRF24_IRQ1
19	PB1 *	I/O	GPIO_Input	NRF24_IRQ2
23	VSS	Power		
24	VDD	Power		
32	PA11	I/O	USB_DM	
33	PA12	I/O	USB_DP	
34	PA13	I/O	SYS_JTMS-SWDIO	
35	VSS	Power		
36	VDD	Power		
37	PA14	I/O	SYS_JTCK-SWCLK	
39	PB3 *	I/O	GPIO_Output	LED_DBG
44	BOOT0	Boot		
47	VSS	Power		
48	VDD	Power		

* The pin is affected with an I/O function

4. Clock Tree Configuration
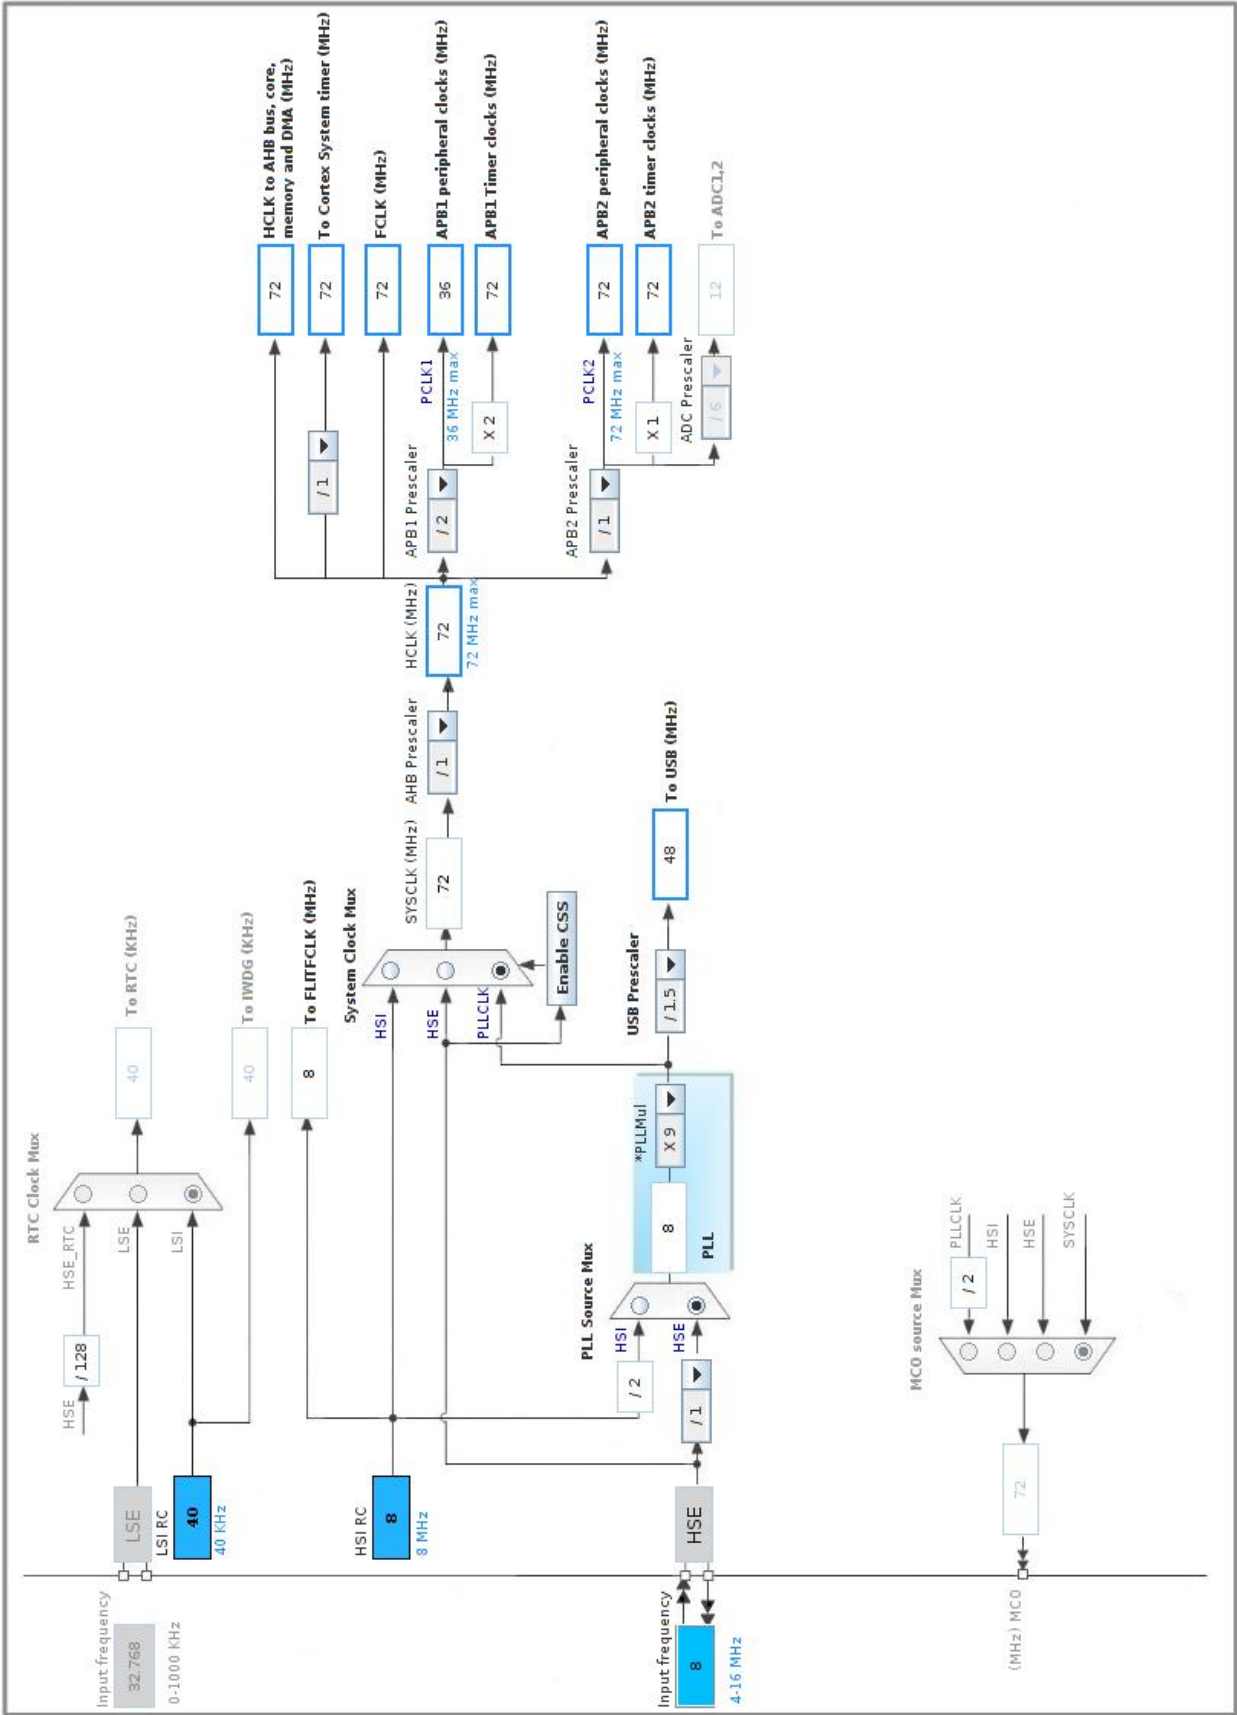
5. IPs and Middleware Configuration

5.1. RCC

High Speed Clock (HSE): Crystal/Ceramic Resonator

5.1.1. Parameter Settings:

System Parameters:

VDD voltage (V)	3.3
Prefetch Buffer	Enabled
Flash Latency(WS)	2 WS (3 CPU cycle)

RCC Parameters:

HSI Calibration Value	16

5.2. SPI1

Mode: Full-Duplex Master

5.2.1. Parameter Settings:

Basic Parameters:

Frame Format	Motorola
Data Size	8 Bits
First Bit	MSB First

Clock Parameters:

Prescaler (for Baud Rate)	**32 ***
Baud Rate	**2.25 MBits/s ***
Clock Polarity (CPOL)	Low
Clock Phase (CPHA)	1 Edge

Advanced Parameters:

CRC Calculation	Disabled
NSS Signal Type	Software

5.3. SYS

Debug: Serial-Wire

Timebase Source: SysTick

5.4. TIM2

Clock Source   : Internal Clock

5.4.1. Parameter Settings:

Counter Settings:

Prescaler (PSC - 16 bits value)	0
Counter Mode	Up
Counter Period (AutoReload Register - 16 bits value)	0
Internal Clock Division (CKD)	No Division

Trigger Output (TRGO) Parameters:

Master/Slave Mode	Disable (no sync between this TIM (Master) and its Slaves
Trigger Event Selection	Reset (UG bit from TIMx_EGR)

5.5. USB

mode: Device (FS)

5.5.1. Parameter Settings:

Basic Parameters:

Speed	Full Speed 12MBit/s
Endpoint 0 Max Packet size	8 Bytes

Power Parameters:

Low Power	Disabled
Link Power Management	Disabled
Battery Charging	Disabled

5.6. USB_DEVICE

Class For FS IP: Communication Device Class (Virtual Port Com)

5.6.1. Parameter Settings:

Basic Parameters:

USBD_MAX_NUM_INTERFACES (Maximum number of supported interfaces)	1
USBD_MAX_NUM_CONFIGURATION (Maximum number of supported configuration)	1
USBD_MAX_STR_DESC_SIZ (Maximum size for the string descriptors)	512
USBD_SUPPORT_USER_STRING (Enable user string descriptor)	Disabled
USBD_SELF_POWERED (Enabled self power)	Enabled
USBD_DEBUG_LEVEL (USBD Debug Level)	0: No debug message

Class Parameters:

USBD_CDC_INTERVAL (Number of micro-frames interval)	1000

5.6.2. Device Descriptor:

Device Descriptor:

VID (Vendor IDentifier)	1155
LANGID_STRING (Language Identifier)	English(United States)
MANUFACTURER_STRING (Manufacturer Identifier)	STMicroelectronics

Device Descriptor FS:

PID (Product IDentifier)	22336
PRODUCT_STRING (Product Identifier)	STM32 Virtual ComPort
SERIALNUMBER_STRING (Serial number)	00000000001A
CONFIGURATION_STRING (Configuration Identifier)	CDC Config
INTERFACE_STRING (Interface Identifier)	CDC Interface

* User modified value

6. System Configuration

6.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
RCC	PD0-OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	
	PD1-OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	
SPI1	PA5	SPI1_SCK	Alternate Function Push Pull	n/a	**High ***	
	PA6	SPI1_MISO	Input mode	No pull-up and no pull-down	**n/a**	
	PA7	SPI1_MOSI	Alternate Function Push Pull	n/a	**High ***	
SYS	PA13	SYS_JTMS-SWDIO	n/a	n/a	n/a	
	PA14	SYS_JTCK-SWCLK	n/a	n/a	n/a	
USB	PA11	USB_DM	n/a	n/a	n/a	
	PA12	USB_DP	n/a	n/a	n/a	
GPIO	PC13-TAMPER-RTC	GPIO_Output	Output Push Pull	n/a	Low	LED_ONBOARD
	PA0-WKUP	GPIO_Output	Output Push Pull	n/a	Low	NRF24_CSN1
	PA1	GPIO_Output	Output Push Pull	n/a	Low	NRF24_CE1
	PA2	GPIO_Output	Output Push Pull	n/a	Low	NRF24_CSN2
	PA3	GPIO_Output	Output Push Pull	n/a	Low	NRF24_CE2
	PB0	GPIO_Input	Input mode	**Pull-up ***	n/a	NRF24_IRQ1
	PB1	GPIO_Input	Input mode	**Pull-up ***	n/a	NRF24_IRQ2
	PB3	GPIO_Output	Output Push Pull	**n/a**	**High ***	LED_DBG

6.2. DMA configuration

nothing configured in DMA service

6.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Prefetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
Debug monitor	true	0	0
System tick timer	true	0	0
USB low priority or CAN RX0 interrupts	true	0	0
SPI1 global interrupt	true	0	0
PVD interrupt through EXTI line 16	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
USB high priority or CAN TX interrupts	unused		
TIM2 global interrupt	unused		

* User modified value

7. Power Plugin report

7.1. Microcontroller Selection

Series	STM32F1
Line	STM32F103
MCU	STM32F103C8Tx
Datasheet	13587_Rev17

7.2. Parameter Selection

Temperature	25
Vdd	3.3

8. Software Project

8.1. Project Settings

Name	Value
Project Name	stm32f103c8t6
Project Folder	/home/wasteomind/work/dev/auvir/auvir_embed/mocap/usbdevice/stm32f103
Toolchain / IDE	SW4STM32
Firmware Package Name and Version	STM32Cube FW_F1 V1.3.1

8.2. Code Generation Settings

Name	Value
STM32Cube Firmware Library Package	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	No
Backup previously generated files when re-generating	No
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No