

## 1. Description


### 1.1. Project

Project Name	stm32-barograph
Board Name	NUCLEO-F303RE
Generated with:	STM32CubeMX 5.6.0
Date	04/22/2020

### 1.2. MCU

MCU Series	STM32F3
MCU Line	STM32F303
MCU name	STM32F303RETx
MCU Package	LQFP64
MCU Pin number	64

## 2. Pinout Configuration

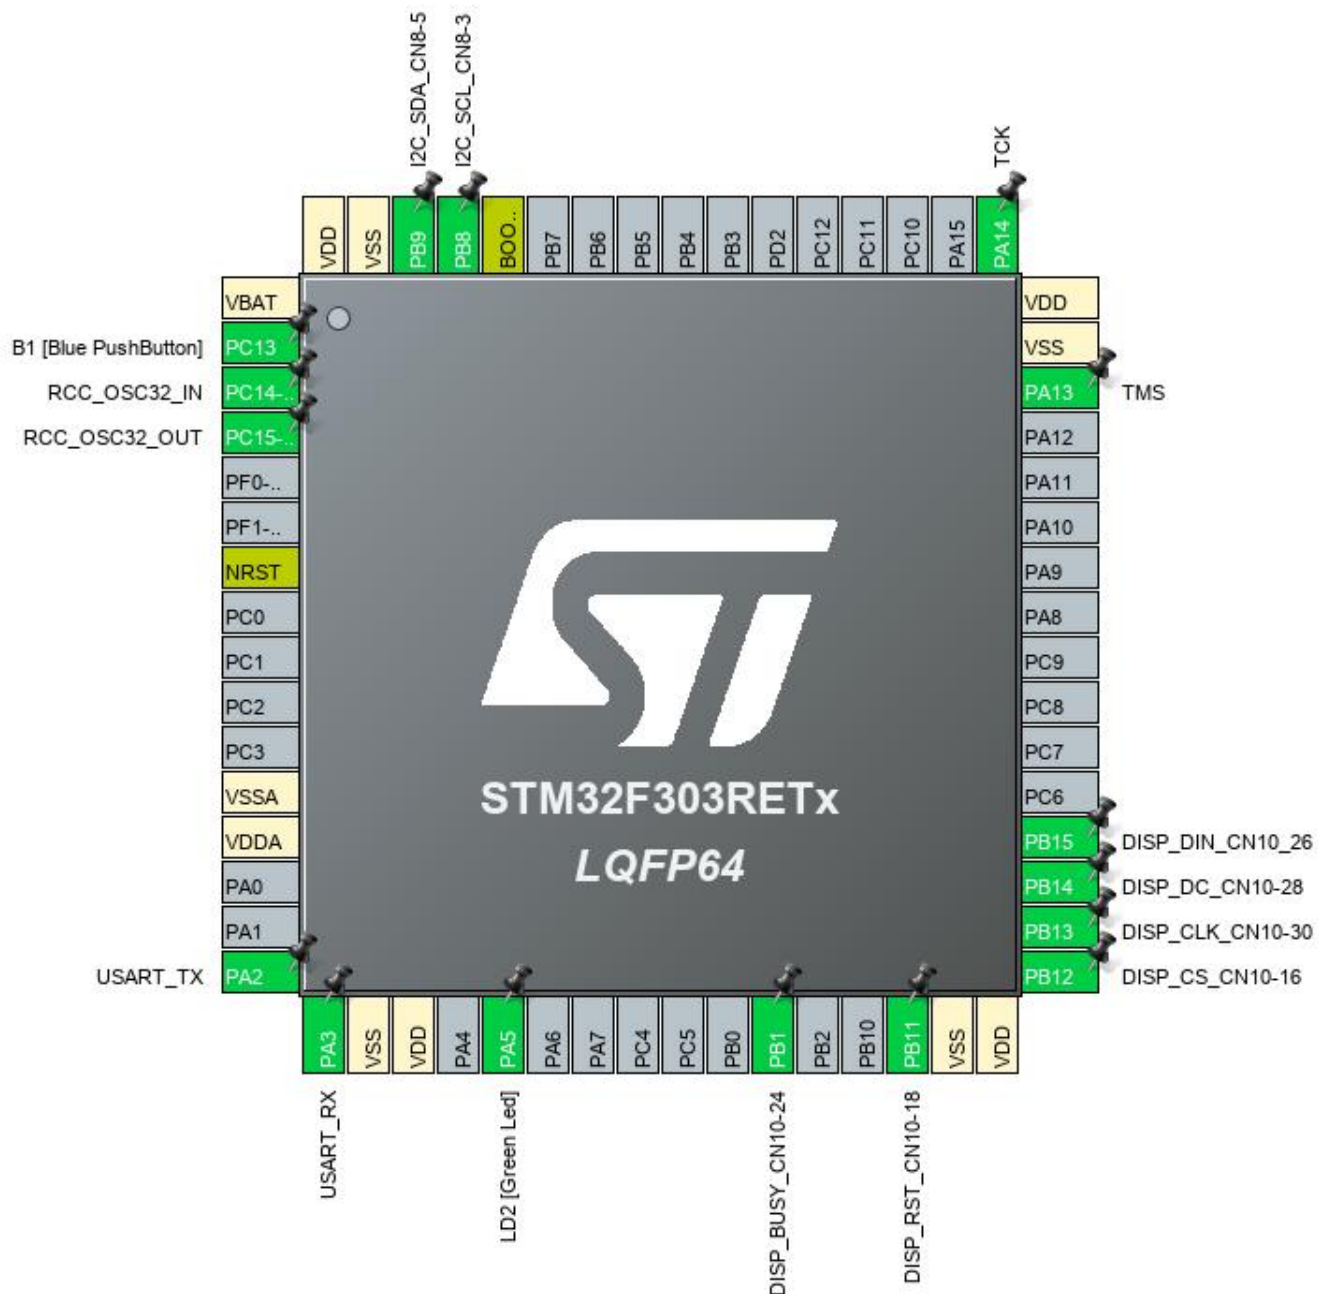


### 3. Pins Configuration

Pin Number LQFP64	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	VBAT	Power		
2	PC13	I/O	GPIO_EXTI13	B1 [Blue PushButton]
3	PC14-OSC32_IN	I/O	RCC_OSC32_IN	
4	PC15-OSC32_OUT	I/O	RCC_OSC32_OUT	
7	NRST	Reset		
12	VSSA	Power		
13	VDDA	Power		
16	PA2	I/O	USART2_TX	USART_TX
17	PA3	I/O	USART2_RX	USART_RX
18	VSS	Power		
19	VDD	Power		
21	PA5 *	I/O	GPIO_Output	LD2 [Green Led]
27	PB1 *	I/O	GPIO_Input	DISP_BUSY_CN10-24
30	PB11 *	I/O	GPIO_Output	DISP_RST_CN10-18
31	VSS	Power		
32	VDD	Power		
33	PB12 *	I/O	GPIO_Output	DISP_CS_CN10-16
34	PB13	I/O	SPI2_SCK	DISP_CLK_CN10-30
35	PB14 *	I/O	GPIO_Output	DISP_DC_CN10-28
36	PB15	I/O	SPI2_MOSI	DISP_DIN_CN10_26
46	PA13	I/O	SYS_JTMS-SWDIO	TMS
47	VSS	Power		
48	VDD	Power		
49	PA14	I/O	SYS_JTCK-SWCLK	TCK
60	BOOT0	Boot		
61	PB8	I/O	I2C1_SCL	I2C_SCL_CN8-3
62	PB9	I/O	I2C1_SDA	I2C_SDA_CN8-5
63	VSS	Power		
64	VDD	Power		

\* The pin is affected with an I/O function

## 4. Clock Tree Configuration

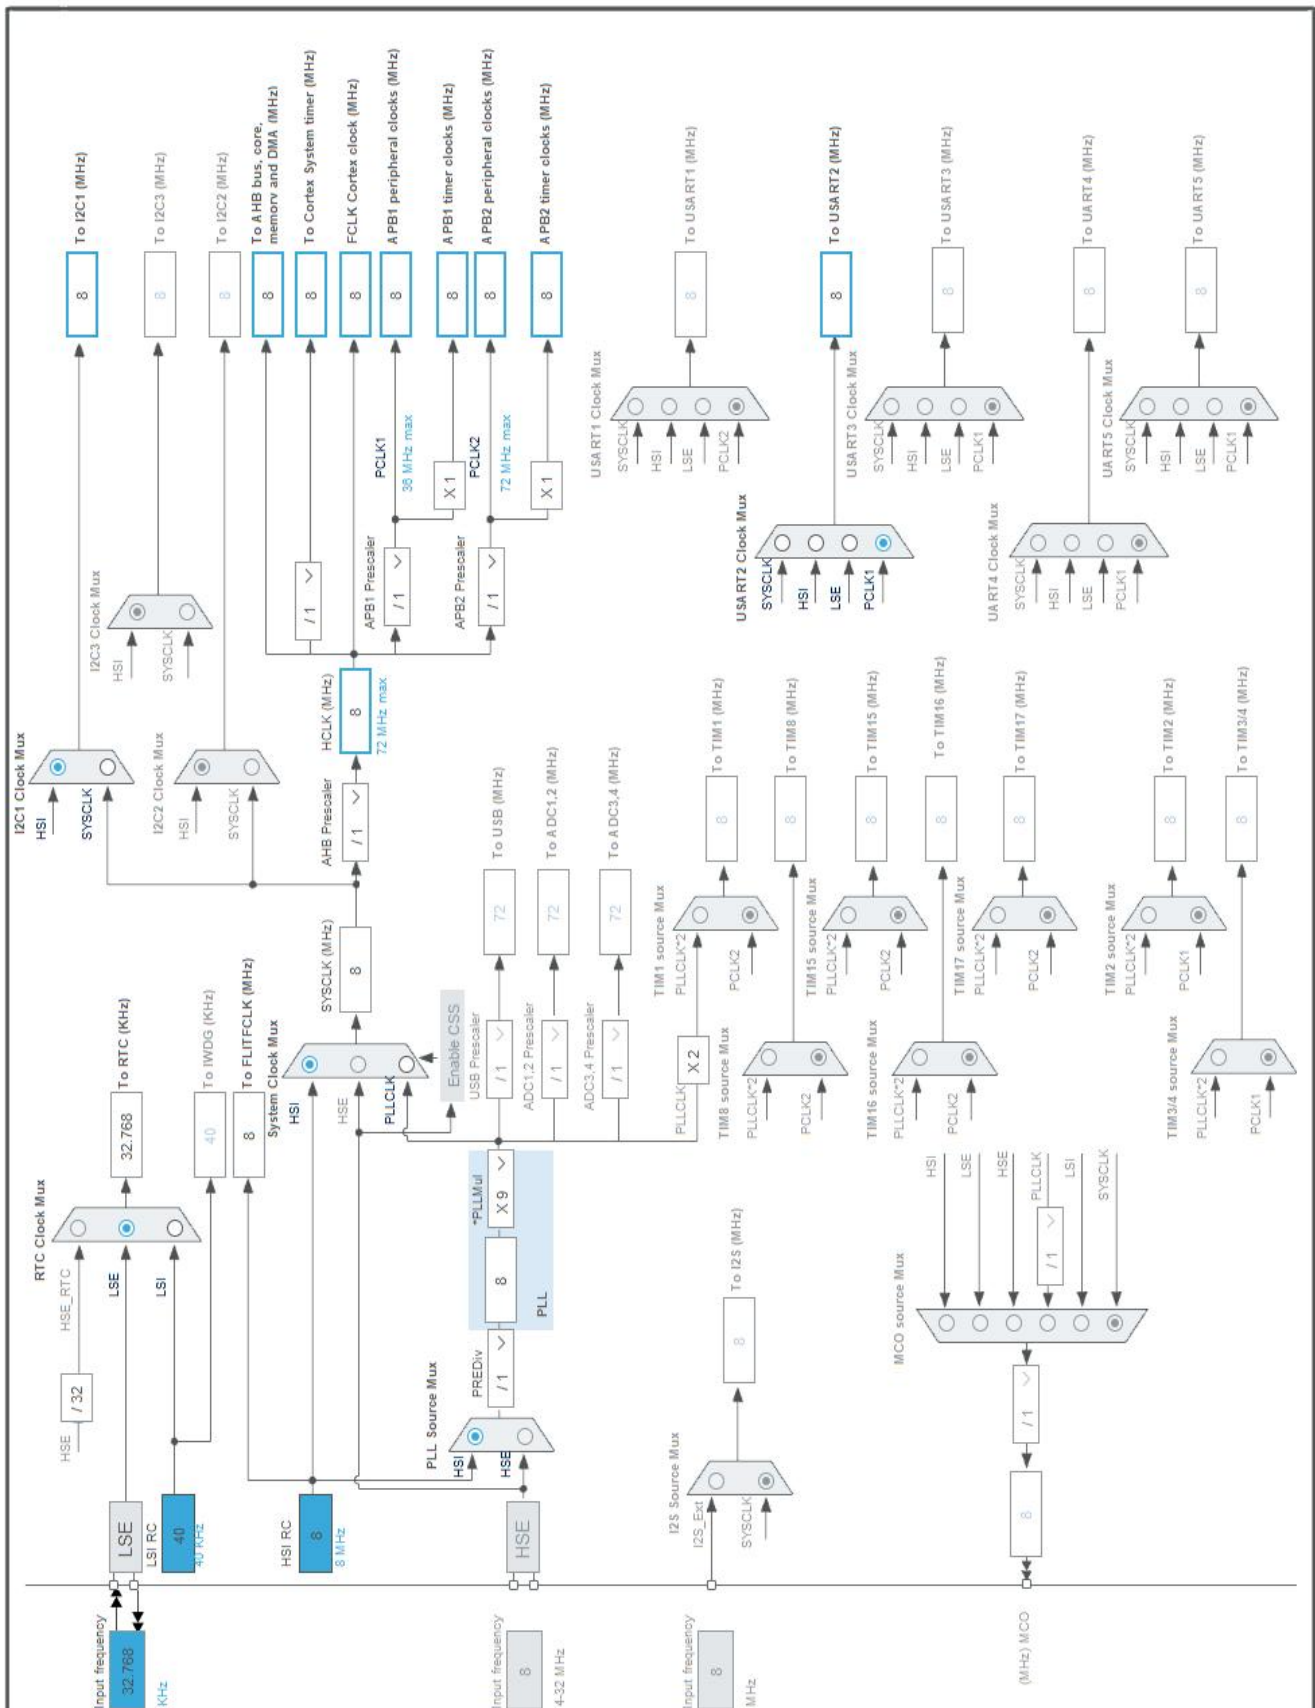

## 5. Software Project

### 5.1. Project Settings

Name	Value
Project Name	stm32-barograph
Project Folder	C:\work\arduino-to-clion\stm32-barograph
Toolchain / IDE	STM32CubeIDE
Firmware Package Name and Version	STM32Cube FW_F3 V1.11.0

### 5.2. Code Generation Settings

Name	Value
STM32Cube MCU packages and embedded software	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	Yes
Backup previously generated files when re-generating	No
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	Yes

## 6. Power Consumption Calculator report

### 6.1. Microcontroller Selection

Series	STM32F3
Line	STM32F303
MCU	STM32F303RETx
Datasheet	026415_Rev5

### 6.2. Parameter Selection

Temperature	25
Vdd	3.6

### 6.3. Battery Selection

Battery	Li-SOCL2(A3400)
Capacity	3400.0 mAh
Self Discharge	0.08 %/month
Nominal Voltage	3.6 V
Max Cont Current	100.0 mA
Max Pulse Current	200.0 mA
Cells in series	1
Cells in parallel	1


### 6.4. Sequence

<b>Step</b>	Step1	Step2
<b>Mode</b>	RUN	STOP
<b>Vdd</b>	3.6	3.6
<b>Voltage Source</b>	Battery	Battery
<b>Range</b>	No Scale	No Scale
<b>Fetch Type</b>	FLASH	n/a
<b>CPU Frequency</b>	72 MHz	0 Hz
<b>Clock Configuration</b>	HSEBYP PLL	Regulator LP
<b>Clock Source Frequency</b>	8 MHz	0 Hz
<b>Peripherals</b>		
<b>Additional Cons.</b>	0 mA	0 mA
<b>Average Current</b>	33.24 mA	9.8 $\mu$ A
<b>Duration</b>	0.1 ms	0.9 ms
<b>DMIPS</b>	63.0	0.0
<b>Ta Max</b>	99.5	105
<b>Category</b>	In DS Table	In DS Table

## 6.5. RESULTS

Sequence Time	1 ms	Average Current	3.33 mA
Battery Life	1 month, 12 days, 1 hour	Average DMIPS	63.0 DMIPS

## 6.6. Chart

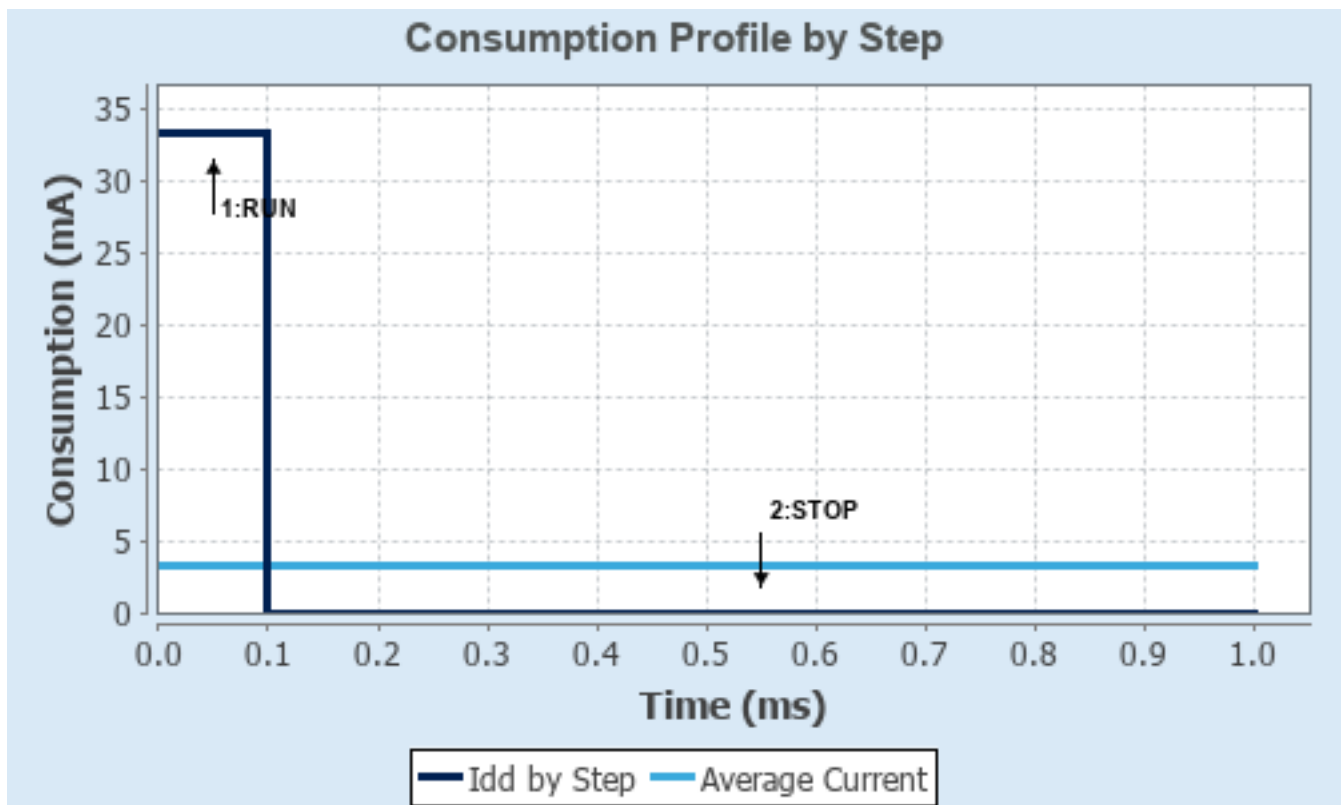



## 7. IPs and Middleware Configuration

### 7.1. ADC1

**mode: Vrefint Channel**

#### 7.1.1. Parameter Settings:

##### ADCs\_Common\_Settings:

Mode Independent mode

##### ADC\_Settings:

Clock Prescaler

**Synchronous clock mode divided by 4 \***

Resolution

**ADC 8-bit resolution \***

Data Alignment

Right alignment

Scan Conversion Mode

Disabled

Continuous Conversion Mode

**Enabled \***

Discontinuous Conversion Mode

Disabled

DMA Continuous Requests

Disabled

End Of Conversion Selection

End of single conversion

Overrun behaviour

**Overrun data preserved \***

Low Power Auto Wait

Disabled

##### ADC\_Regular\_ConversionMode:

Enable Regular Conversions

Enable

Number Of Conversion

1

External Trigger Conversion Source

Regular Conversion launched by software

External Trigger Conversion Edge

None

Rank

1

Channel

Channel Vrefint

Sampling Time

**601.5 Cycles \***

Offset Number

No offset

Offset

0

##### ADC\_Injected\_ConversionMode:

Enable Injected Conversions

Enable

Number Of Conversions

0

##### Analog Watchdog 1:

Enable Analog WatchDog1 Mode

**true \***

Watchdog Mode

Single regular channel

Analog WatchDog Channel

Channel Vrefint

High Threshold

**120 \***

Low Threshold

0

Interrupt Mode

Disabled

##### Analog Watchdog 2:

Enable Analog WatchDog2 Mode false

**Analog Watchdog 3:**

Enable Analog WatchDog3 Mode false

## 7.2. GPIO

## 7.3. I2C1

### I2C: I2C

#### 7.3.1. Parameter Settings:

**Timing configuration:**

I2C Speed Mode	Standard Mode
I2C Speed Frequency (KHz)	100
Rise Time (ns)	0
Fall Time (ns)	0
Coefficient of Digital Filter	0
Analog Filter	Enabled
Timing	0x2000090E

**Slave Features:**

Clock No Stretch Mode	Disabled
General Call Address Detection	Disabled
Primary Address Length selection	7-bit
Dual Address Acknowledged	Disabled
Primary slave address	0

## 7.4. RCC

### Low Speed Clock (LSE) : Crystal/Ceramic Resonator

#### 7.4.1. Parameter Settings:

**System Parameters:**

VDD voltage (V)	3.3
Prefetch Buffer	Enabled
Flash Latency(WS)	0 WS (1 CPU cycle)

**RCC Parameters:**

HSI Calibration Value	16
HSE Startup Timeout Value (ms)	100
LSE Startup Timeout Value (ms)	5000

LSE Drive Capability

LSE oscillator low drive capability

## 7.5. RTC

**mode: Activate Clock Source**

**mode: Activate Calendar**

**WakeUp: Internal WakeUp**

### 7.5.1. Parameter Settings:

#### General:

Hour Format Hourformat 24

Asynchronous Predivider value 127

Synchronous Predivider value 255

#### Calendar Time:

Data Format BCD data format

Hours 0

Minutes 0

Seconds 0

Day Light Saving: value of hour adjustment Daylightsaving None

Store Operation Storeoperation Reset

#### Calendar Date:

Week Day **Wednesday \***

Month **April \***

Date 1

Year **20 \***

#### Wake UP:

Wake Up Clock **1 Hz with 1 bit added to Wake Up Counter \***

Wake Up Counter **120 \***

## 7.6. SPI2

**Mode: Transmit Only Master**

### 7.6.1. Parameter Settings:

#### Basic Parameters:

Frame Format Motorola

Data Size **8 Bits \***

First Bit MSB First

**Clock Parameters:**

Prescaler (for Baud Rate)	2
Baud Rate	<b>4.0 MBits/s *</b>
Clock Polarity (CPOL)	Low
Clock Phase (CPHA)	1 Edge

**Advanced Parameters:**

CRC Calculation	Disabled
NSSP Mode	Enabled
NSS Signal Type	Software

## 7.7. SYS

**Debug: Serial Wire**

**Timebase Source: SysTick**

## 7.8. USART2

**Mode: Asynchronous****7.8.1. Parameter Settings:****Basic Parameters:**

Baud Rate	<b>115200 *</b>
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

**Advanced Parameters:**

Data Direction	Receive and Transmit
Over Sampling	16 Samples
Single Sample	Disable

**Advanced Features:**

Auto Baudrate	Disable
TX Pin Active Level Inversion	Disable
RX Pin Active Level Inversion	Disable
Data Inversion	Disable
TX and RX Pins Swapping	Disable
Overrun	Enable
DMA on RX Error	Enable
MSB First	Disable

**\* User modified value**

## 8. System Configuration

### 8.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
I2C1	PB8	I2C1_SCL	Alternate Function Open Drain	Pull up	High *	I2C_SCL_CN8-3
	PB9	I2C1_SDA	Alternate Function Open Drain	Pull up	High *	I2C_SDA_CN8-5
RCC	PC14-OSC32_IN	RCC_OSC32_IN	n/a	n/a	n/a	
	PC15-OSC32_OUT	RCC_OSC32_OUT	n/a	n/a	n/a	
SPI2	PB13	SPI2_SCK	Alternate Function Push Pull	No pull up pull down	High *	DISP_CLK_CN10-30
	PB15	SPI2_MOSI	Alternate Function Push Pull	No pull up pull down	High *	DISP_DIN_CN10-26
SYS	PA13	SYS_JTMS-SWDIO	n/a	n/a	n/a	TMS
	PA14	SYS_JTCK-SWCLK	n/a	n/a	n/a	TCK
USART2	PA2	USART2_TX	Alternate Function Push Pull	No pull up pull down	Low	USART_TX
	PA3	USART2_RX	Alternate Function Push Pull	No pull up pull down	Low	USART_RX
GPIO	PC13	GPIO_EXTI13	<b>External Interrupt Mode with Falling edge trigger detection</b>	No pull up pull down	n/a	B1 [Blue PushButton]
	PA5	GPIO_Output	Output Push Pull	No pull up pull down	Low	LD2 [Green Led]
	PB1	GPIO_Input	Input mode	No pull up pull down	n/a	DISP_BUSY_CN10-24
	PB11	GPIO_Output	Output Push Pull	No pull up pull down	Low	DISP_RST_CN10-18
	PB12	GPIO_Output	Output Push Pull	No pull up pull down	Low	DISP_CS_CN10-16
	PB14	GPIO_Output	Output Push Pull	No pull up pull down	Low	DISP_DC_CN10-28

### 8.2. DMA configuration

nothing configured in DMA service

### 8.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Pre-fetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	0	0
RTC wake-up interrupt through EXTI line 20	true	0	0
PVD interrupt through EXTI line 16	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
ADC1 and ADC2 interrupts	unused		
I2C1 event global interrupt / I2C1 wake-up interrupt through EXTI line 23	unused		
I2C1 error interrupt	unused		
SPI2 global interrupt	unused		
USART2 global interrupt / USART2 wake-up interrupt through EXTI line 26	unused		
EXTI line[15:10] interrupts	unused		
Floating point unit interrupt	unused		

\* User modified value

9. *Predefined Views - Category view : Current*

Middleware					
System Core	Analog	Timers	Connectivity	Multimedia	Computing
DMA	ADC1 ✓	RTC ✓	I2C1 ✓		
GPIO ✓			SPI2 ✓		
NVIC ✓			USART2 ✓		
RCC ✓					
SYS ✓					



## ***10. Software Pack Report***