



ULTRA_SONIC


```
1 int ECHOPIN = 2; // Sets ECHO channel //
2 int TRIGPIN = 3; // Sets TRIGGER channel //
3
4 void setup() {
5   Serial.begin(9600); // Sets data stream speed from the Arduino Board to the connected Serial Screen //
6   pinMode(ECHOPIN, INPUT); // Sets ECHO Channel as Digital Pin (2) for receiving data //
7   pinMode(TRIGPIN, OUTPUT); // Sets TRIGGER Channel as Digital Pin (3) for sending data //
8 }
9
10 void loop() {
11   digitalWrite(TRIGPIN, LOW); // Sets TRIGGER Channel to 0v for creating a signal //
12   delayMicroseconds(2); // 2 MicroSec time delay //
13   digitalWrite(TRIGPIN, HIGH); // Sets TRIGGER Channel to 5v for launching a signal //
14   delayMicroseconds(10); // 10 MicroSec time delay //
15   digitalWrite(TRIGPIN, LOW); // Sets TRIGGER Channel back to 0v in order to turn off the signal //
16   int distance = pulseIn(ECHOPIN, HIGH); // Sets a variable for launched signal pulse in time (MicroSec) as the distance the signal traveled //
17   distance = distance/58; // Sets again the same variable for calculating the distance (cm) //
18   Serial.println(distance); // Prints the distance (cm) measured by the Sensor on a connected Serial Screen //
19   delay(50); // 50 MicroSec time delay //
20 }
21
22 // ***** This Arduino Project uses an Ultra Sonic sensor for measuring distance (cm) ***** //
23 // ***** /\ DO NOT ACTIVATE this code if pets are nearby, dogs in particular /\ ***** //
```

Project Code

Requirements



:x4 Jumper Wires
x4 Male to Female

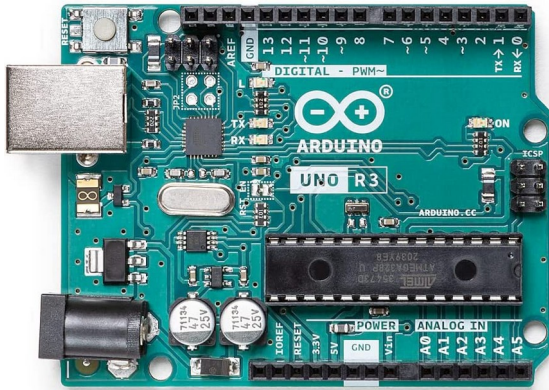


x1 Arduino UNO
Mother Board



x1 HC-SR04
Ultra Sonic Distance Sensor

Electronic Connections

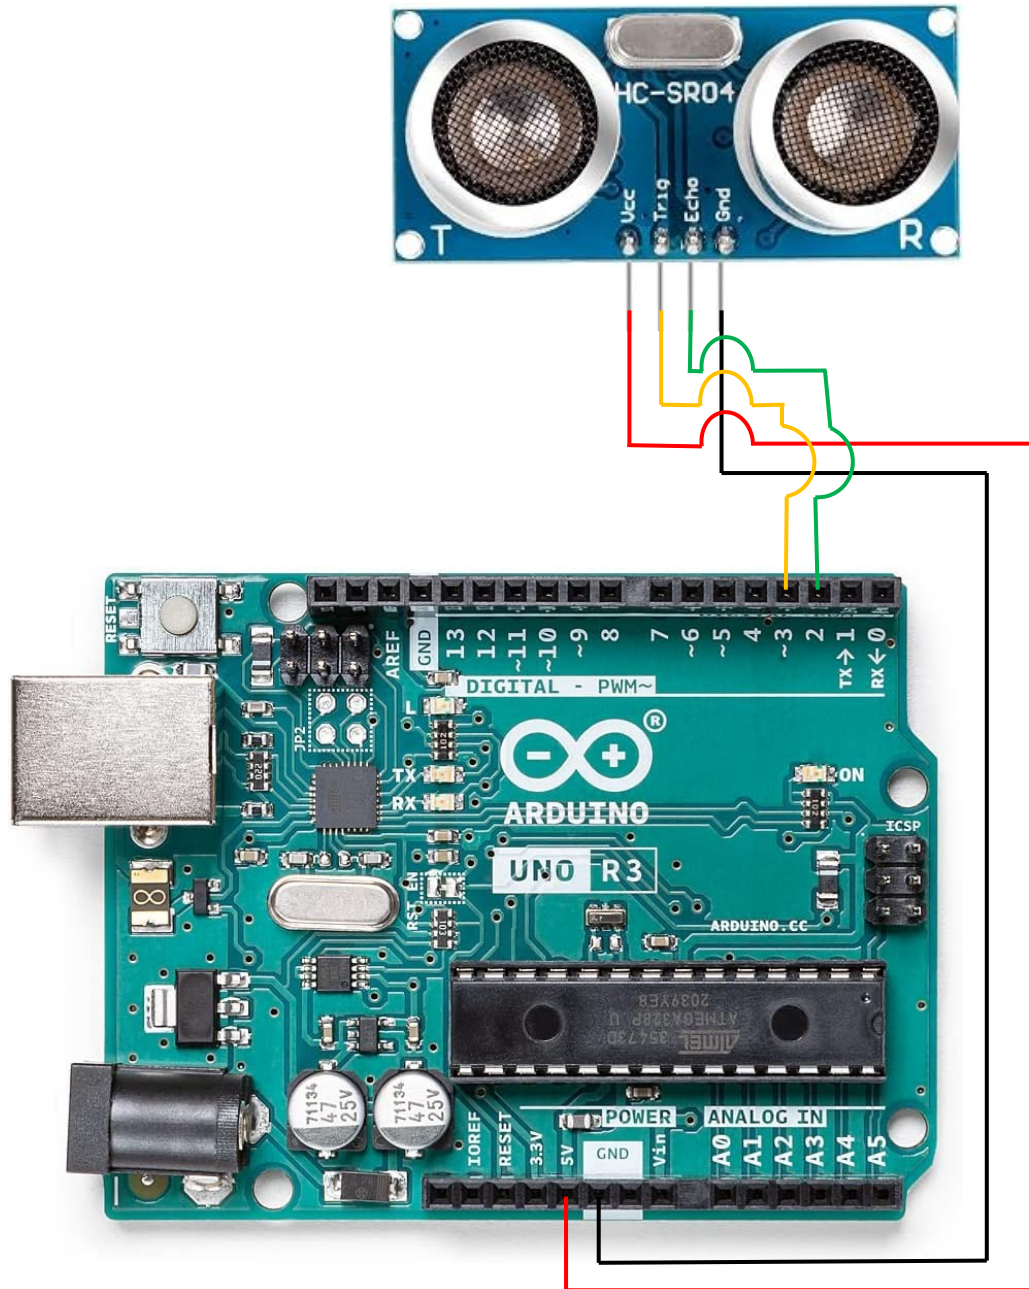

ARDUINO	>>	HC-SR04
5V		VCC
D2		ECHO
D3		TRIG
GND		GND