Cabinet schematic — Pump cabinet

Pump cabinet

Two direct-on-line motor starters, controlled and monitored by a WAGO 750 PLC through a relay interface board.

Revision	Date	Description	Created	Checked	Approved
1.1	2026-09-01	First release	SK		
1.2	2026-09-23	Overload feedback to the PLC	SK		
1.3	2026-10-02	TeSys D parts, 24V and GND rails, IEC wire colours	SK		
1.4	2026-10-05	Unit tags, links, busbars and rail bonds, energy on fed supplies	SK		
1.5	2026-10-06	Three phases on four terminals each, pump n on terminal n+2	SK		
1.6	2026-10-06	Owner ruling 2026-10-06, a cabinet is a unit: the place C1 is gone. The change list reads No changes. because the listing drops a place that holds the whole unit, baseline L2, kept by design (REL-DIFF-PLACE)	SK		


Title **Pump cabinet**			Number SKX-PC-2	Revision 1.6	Revision date 2026-10-06		
Customer	Author fransys-examples	Page title Cover	Scope Pump cabinet	Sheet	Page 1 of 8		

Notes


The upstream board protects the incoming cable with a C16 breaker. The cable lands there on terminals +EXT-X0, the only part of the upstream board in this model.

The relay interface board -U2 has its own drawing set. These pages show it only as its two headers inside a dash-dot outline.


Title **Pump cabinet**			Number SKX-PC-2	Revision 1.6	Revision date 2026-10-06	
Customer	Author fransys-examples	Page title Notes	Scope Pump cabinet	Sheet	Page 2 of 8	

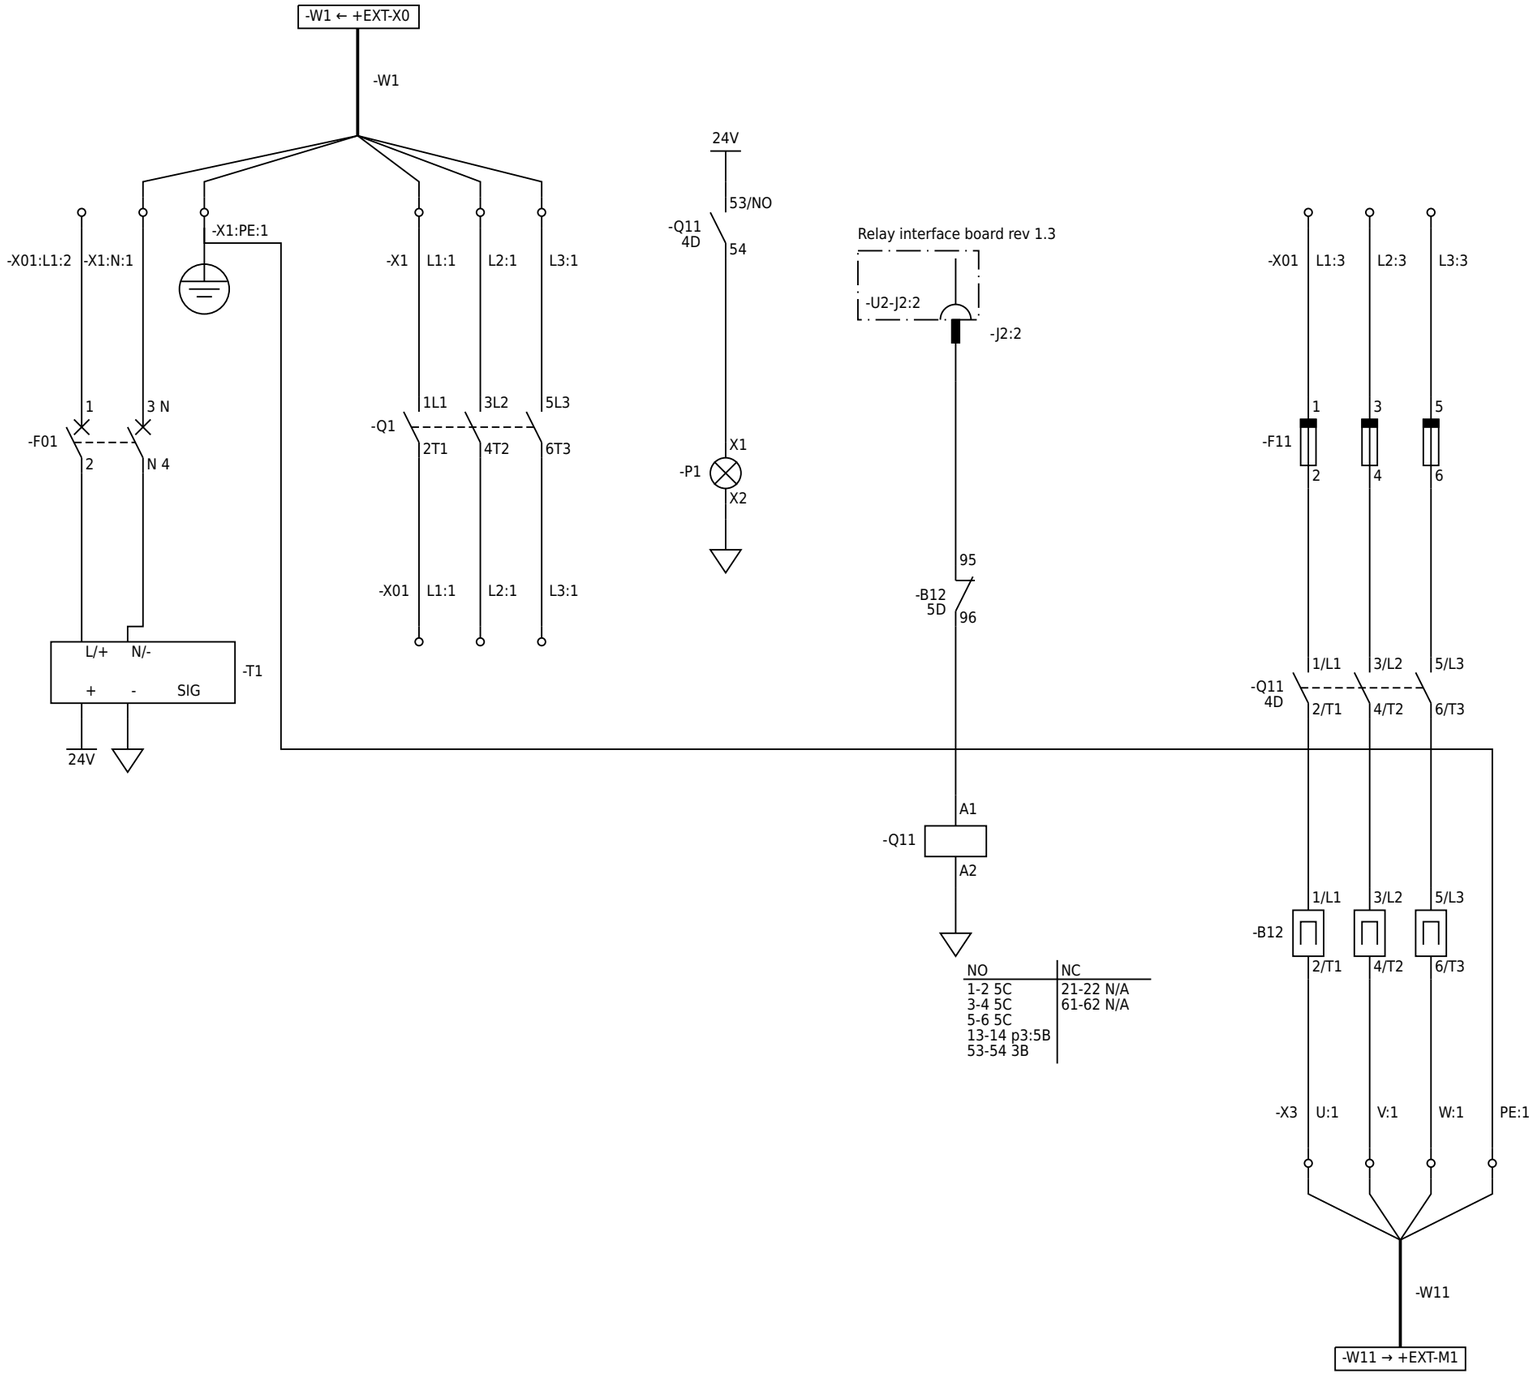

Title **Pump cabinet**			Number SKX-PC-2	Revision 1.6	Revision date 2026-10-06
Customer	Author fransys-examples	Page title Control supply, Incoming supply, Pump 1	Scope Pump cabinet	Sheet 1 / 3	Page 3 of 8

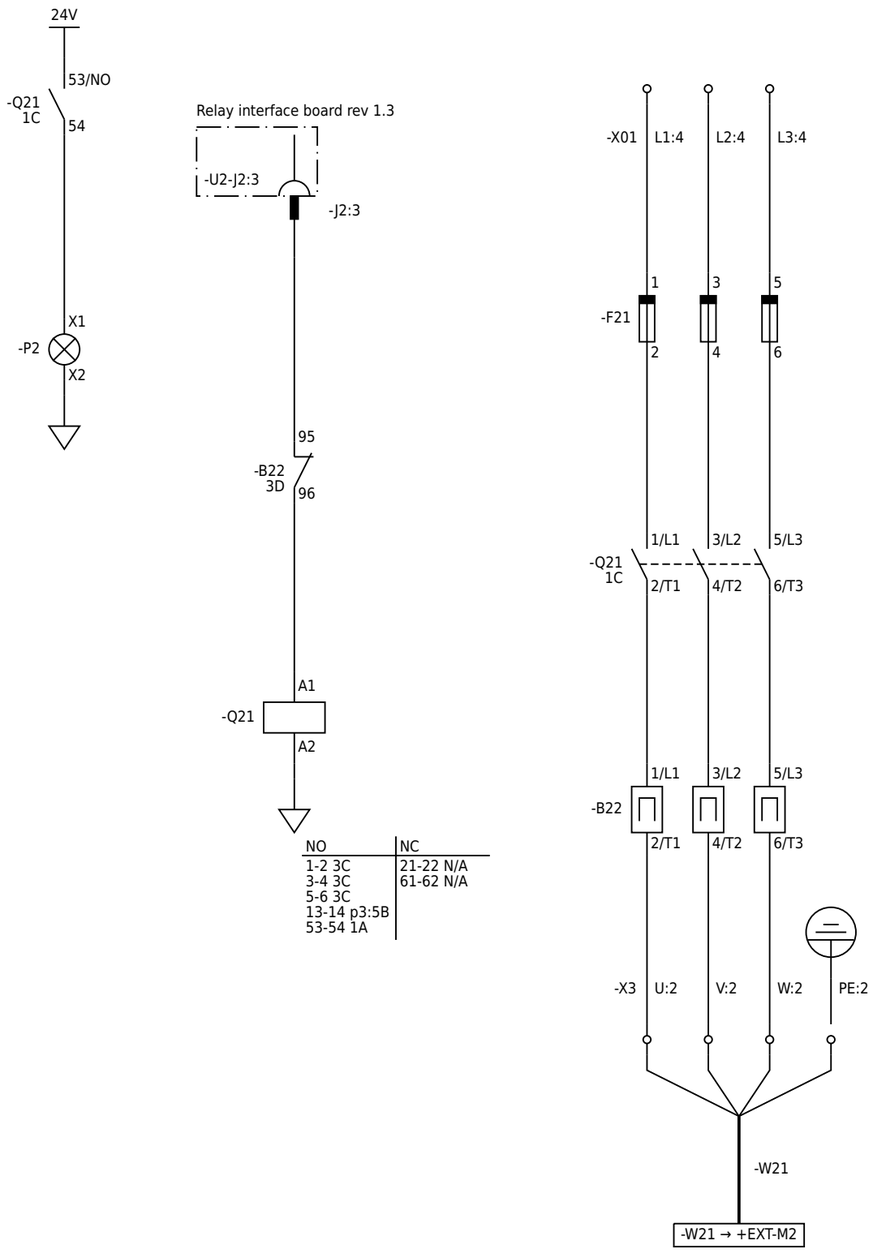

Title: **Pump cabinet**			Number: SKX-PC-2	Revision: 1.6	Revision date: 2026-10-06
Customer	Author: fransys-examples	Page title: Pump 2	Scope: Pump cabinet	Sheet: 2 / 3	Page: 4 of 8

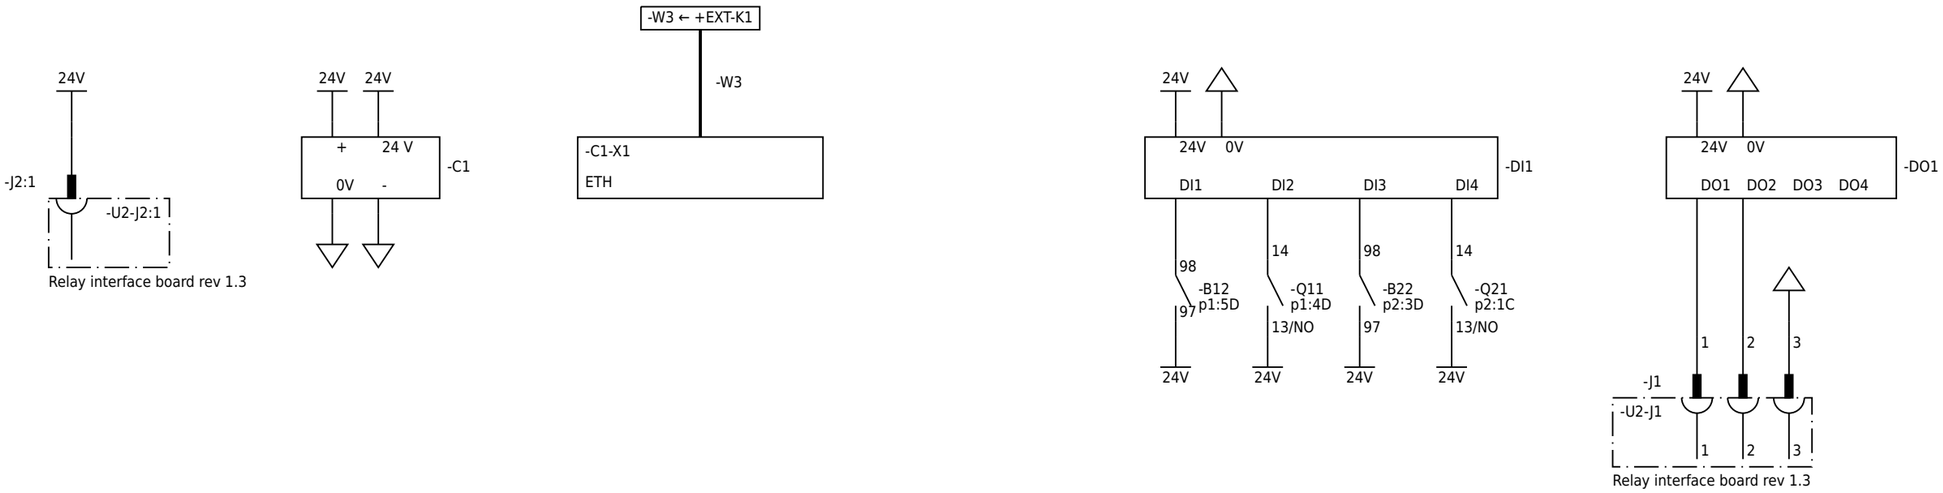

Title **Pump cabinet**			Number SKX-PC-2	Revision 1.6	Revision date 2026-10-06	
Customer	Author fransys-examples	Page title WAGO PLC	Scope Pump cabinet	Sheet 3 / 3	Page 5 of 8	

-DI1

Channel designation	Signal	Wired to	Signal name
-DI1:1	di	-B12:98	P1_OVERLOAD
-DI1:2	di	-Q11:14	P1_RUNNING
-DI1:3	di	-B22:98	P2_OVERLOAD
-DI1:4	di	-Q21:14	P2_RUNNING

-DO1

Channel designation	Signal	Wired to	Signal name
-DO1:1	do	-J1:1	P1_RUN
-DO1:2	do	-J1:2	P2_RUN
-DO1:3	do		
-DO1:4	do		

-X01

Designation	Group	Index	Side A	Bridge
-X01:L1:1	L1	1	-Q1:2T1	
-X01:L1:2	L1	2	-F01:1	
-X01:L1:3	L1	3	-F11:1	
-X01:L1:4	L1	4	-F21:1	
-X01:L2:1	L2	1	-Q1:4T2	
-X01:L2:2	L2	2		
-X01:L2:3	L2	3	-F11:3	
-X01:L2:4	L2	4	-F21:3	
-X01:L3:1	L3	1	-Q1:6T3	
-X01:L3:2	L3	2		
-X01:L3:3	L3	3	-F11:5	
-X01:L3:4	L3	4	-F21:5	

-X1

Designation	Group	Index	Side A	Side B
-X1:L1:1	L1	1	-Q1:1L1	+EXT-X0:L1:1
-X1:L2:1	L2	1	-Q1:3L2	+EXT-X0:L2:1
-X1:L3:1	L3	1	-Q1:5L3	+EXT-X0:L3:1
-X1:N:1	N	1	-F01:3 N	+EXT-X0:N:1
-X1:PE:1	PE	1	-X3:PE:1; -X3:PE:2	+EXT-X0:PE:1

-X2

Designation	Group	Index	Side A	Bridge
-X2:24V:1	24V	1	-T1:+	
-X2:24V:2	24V	2	-C1:24 V	
-X2:24V:3	24V	3	-C1:+	
-X2:24V:4	24V	4	-J2:1	
-X2:24V:5	24V	5	-Q11:53/NO	
-X2:24V:6	24V	6	-B12:97	
-X2:24V:7	24V	7	-Q11:13/NO	
-X2:24V:8	24V	8	-Q21:53/NO	
-X2:24V:9	24V	9	-B22:97	
-X2:24V:10	24V	10	-Q21:13/NO	
-X2:GND:1	GND	1	-T1:-	
-X2:GND:2	GND	2	-C1:0V	
-X2:GND:3	GND	3	-C1:-	
-X2:GND:4	GND	4	-Q11:A2	
-X2:GND:5	GND	5	-P1:X2	
-X2:GND:6	GND	6	-Q21:A2	
-X2:GND:7	GND	7	-P2:X2	

-X3

Designation	Group	Index	Side A	Side B
-X3:PE:1	PE	1	-X1:PE:1	+EXT-M1:PE
-X3:PE:2	PE	2	-X1:PE:1	+EXT-M2:PE
-X3:U:1	U	1	-B12:2/T1	+EXT-M1:U1
-X3:U:2	U	2	-B22:2/T1	+EXT-M2:U1
-X3:V:1	V	1	-B12:4/T2	+EXT-M1:V1
-X3:V:2	V	2	-B22:4/T2	+EXT-M2:V1
-X3:W:1	W	1	-B12:6/T3	+EXT-M1:W1
-X3:W:2	W	2	-B22:6/T3	+EXT-M2:W1

Mpn	Revision	Manufacturer	Description	Count	Designations
1757022		Phoenix Contact	PCB connector plug, 3-pin, 5.08 mm pitch	2	-J1; -J2
2002-1201		WAGO	TOPJOB S feed-through terminal block, 2.5 mm2, grey; 24 A; 800 V	39	-X01:L1:1; -X01:L1:2; -X01:L1:3; -X01:L1:4; -X01:L2:1; -X01:L2:2; -X01:L2:3; -X01:L2:4; -X01:L3:1; -X01:L3:2; -X01:L3:3; -X01:L3:4; -X1:L1:1; -X1:L2:1; -X1:L3:1; -X1:N:1; -X2:24V:1; -X2:24V:2; -X2:24V:3; -X2:24V:4; -X2:24V:5; -X2:24V:6; -X2:24V:7; -X2:24V:8; -X2:24V:9; -X2:24V:10; -X2:GND:1; -X2:GND:2; -X2:GND:3; -X2:GND:4; -X2:GND:5; -X2:GND:6; -X2:GND:7; -X3:U:1; -X3:U:2; -X3:V:1; -X3:V:2; -X3:W:1; -X3:W:2
2002-1207		WAGO	TOPJOB S ground terminal block, 2.5 mm2, green-yellow	3	-X1:PE:1; -X3:PE:1; -X3:PE:2
3LD2054-0TK51		Siemens	Switch-disconnector, 3-pole; 16 A	1	-Q1
3NW7033		Siemens	Fuse holder, 3-pole, 10x38 mm; 32 A	2	-F11; -F21
3NW8004-1		Siemens	SENTRON cylindrical fuse link, 10x38 mm, aM; 4 A	6	-F11; -F21
3SU1102-6AA40-1AA0		Siemens	Pilot light 22 mm, green, integrated LED 24 V AC/DC	2	-P1; -P2
5SY6506-7		Siemens	Miniature circuit breaker, 1P+N, curve C; 6 A	1	-F01
750-402		WAGO	4-channel digital input module, 24 V DC	1	-DI1
750-504		WAGO	4-channel digital output module, 24 V DC; 0.5 A	1	-DO1
750-600		WAGO	End module, terminates the internal data bus; no data contacts	1	-E1
750-8212		WAGO	PFC200 controller, 2nd generation, 2x ETHERNET, RS-232/-485	1	-C1
LADN11		Schneider Electric	TeSys D front-mount auxiliary contact block, 1 NO + 1 NC	2	-Q11; -Q21
LC1D09BD		Schneider Electric	TeSys D contactor, 3-pole, AC-3 9 A, 1 NO + 1 NC auxiliary, 24 V DC coil	2	-Q11; -Q21
LRD08		Schneider Electric	TeSys thermal overload relay, class 10A, 2.5-4 A, 1 NO + 1 NC	2	-B12; -B22
QUINT4-PS/1AC/24DC/2.5/SC		Phoenix Contact	Power supply, 1-phase, 24 V DC; 2.5 A	1	-T1
SKX-RIB-2	1.3		Relay interface board	1	-U2

Title **Pump cabinet**				Number SKX-PC-2	Revision 1.6	Revision date 2026-10-06	
Customer	Author fransys-examples	Page title BOM		Scope Pump cabinet	Sheet	Page 8 of 8	